
Form 3160-5	UNITED STATES	s 01	CD Hobb		FORM	APPROVED	
(June 2015) DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT					Expires: Ja	D. 1004-0137 muary 31, 2018	
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an					5. Lease Serial No. NMLC031740B		
abandoned we	II. Use form 3160-3 (AP	D) for such propos	als,		If Indian, Allottee o	r Tribe Name	
SUBMIT IN	tructions on page	2 3	7. If Unit or CA/Agreement, Name and/or No. 73885U4940 8. Well Name and No. EMSU 262H				
1. Type of Well S Oil Well Gas Well Oth	×.	JU-	8. Well Name and No. EMSU 262H				
2. Name of Operator XTO ENERGY INCORPORAT	CHERYL ROWELL ROWELL@XTOENER						
3a. Address 3b. Phore 6401 HOLIDAY HILL ROAD BLDG 5 Ph: 43 MIDLAND, TX 79707 Ph: 43			e area code)		10. Field and Pool or Exploratory Area EUNICE MONUMENT-GRAYBURG-SA		
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)				11.	. County or Parish, State		
Sec 3 T21S R36E SWSW 661FSL 663FWL					LEA COUNTY, NM		
12. CHECK THE AI	PROPRIATE BOX(ES)	TO INDICATE NA	TURE OF	NOTICE, RE	PORT, OR OTH	IER DATA	
TYPE OF SUBMISSION	TYPE OF SUBMISSION TYPE						
Notice of Intent	Acidize	Deepen		Production (Start/Resume)	UWater Shut-Off	
	Alter Casing	🗖 Hydraulic I	-	Reclamation	ı	Well Integrity	
Subsequent Report	Casing Repair	New Const		Recomplete		Other	
Final Abandonment Notice	Change Plans Convert to Injection	Plug and A	bandon	Temporarily Water Disponent			
XTO respectfully requests app well. I- Tag/verify current cement top 2- Fill wellbore with ~70 bbls plug 3- Spot a balanced plug across to 4- Perforate the 7? casing @ 300 5- Spot a balance plug from 304 4- Perforate the 7? casing at 151 7- RIH and set pkr at ~1000?. If cement top of ~1411? inside 7 8.75? hole annulus. WOC. PC <u>Belew gtewen</u> 14. I hereby certify that the foregoing is Comm Name (Printed/Typed) CHERYL	at ~3410. g mud. he liner top from 3393 to 36 ?. 5 to 2600? . WOC. Tag TO 7?. A/P a total of 90 sks ceme ?? casing. This should bri OH LD pkr. To <u>5</u> . <u>C (eve(d</u>) true and correct. Electronic Submission # For XTO ENE itted to AFMSS for process	3141 with 35 sxs ce DC. Perf @ Z ent and displace with ng the cement to su <u>ry hole</u> 467251 verified by th RGY INCORPORATE	ment. 740. S n 26 bbls w rface inside <u>mark</u> e BLM Well D, sent to ti CKINNEY o	Ater to SC the T? x Control System the Hobbs	CONDITIO H + o ZS z cmt + o <u>wired</u> stem pLM0342SE)		
Signature (Electronic Submission) THIS SPACE FOR FEDERA			05/31/20			· · · · · · · · · · · · · · · · · · ·	
			STATE			1010	
Approved By _ famos	/	Title	SA	57	. . .	6-8-19 Date	
Conditions of approval, if any, are attache certify that the applicant holds legal or equivalent to condu- which would entitle the applicant to condu-	itable title to those rights in the		e (40	>			
Title 18 U.S.C. Section 1001 and Title 43 States any fake, fictitious or fraudulent	U.S.C. Section 1212, make it a statements or representations as	crime for any person kn to any matter within its	owingly and jurisdiction.	willfully to make to	o any department or	agency of the United	
(Instructions on page 2) ** BLM REV	ISED ** BLM REVISEI	D ** BLM REVISE	D ** BLM	REVISED **	BLM REVISE	D **	
X2 NMOC					ECORD		

Additional data for EC transaction #467251 that would not fit on the form

32. Additional remarks, continued

RBIH and tag TOC inside 7?. Perforate the 7? casing at 281?. Spot a balanced plug from 331 to surface with 60 sacks cement. Cap well and install a marker as per NMOCD/BLM requirements. At cut. off denify cmf Sarf. all analys.

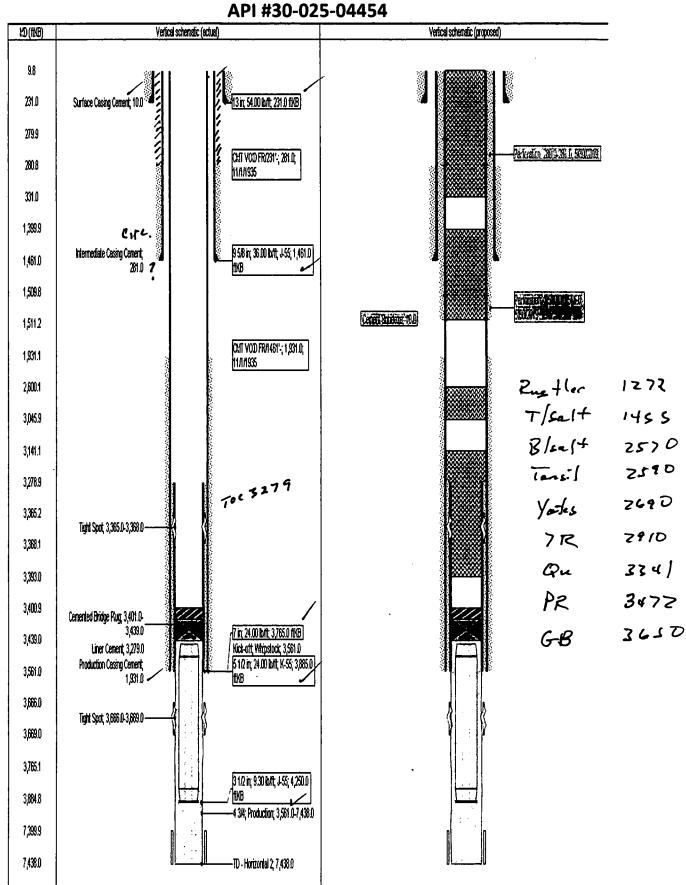

EUNICE MONUMENT SOUTH UNIT #262-H

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

.

6. <u>Below Ground Level Cap (Lesser Prairie-Chicken Habitat)</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses.** Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off. Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date well was plugged.</u>

8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

<u>Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:</u> From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted