

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

HOBBS OCD

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-34035
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator SOUTHWEST ROYALTIES, INC.		6. State Oil & Gas Lease No. NM86025
3. Address of Operator P.O. BOX 53570; MIDLAND, TEXAS 79710-3570		7. Lease Name or Unit Agreement Name THOMAS LONG A
4. Well Location Unit Letter M : 430 feet from the SOUTH line and 560 feet from the WEST line Section 11 Township 22S Range 37E NMPM LEA County		8. Well Number #3
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3661' GR		9. OGRID Number 21355
		10. Pool name or Wildcat BLINEBRY OIL AND GAS (PRO GAS)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>	OTHER: <input type="checkbox"/>	OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

**See Attached
Conditions of Approval**

NOTICE OF INTENT TO PLUG AND ABANDON

5-1/2" Csg TOC @ 1675' (Temperature Survey)

POH 2-2/8" TBG, WELL TO BE CIRCULATED W/ 10# GELLED BRINE, TEST ABOVE EXISITING RBP @ 4730' TO 500 PSI, PERF 2 SQUEEZE HOLES @ 3100', SQUEEZE 50 SXS CLASS "C" CMT, PERF 2 SQUEEZE HOLES @ 1150', SQUEEZE 50 SXS CLASS "C" CMT, PERF 2 SQUEEZE HOLES @ 400', CIRC CLASS "C" CMT TO SURFACE, REMOVE WELL HEAD, INSTALL BELOW GROUND DRY HOLE MARKER, STEEL PIT TO UTILIZED (NO EARTHEN PIT)

Spud Date:

AUGUST 23, 1997

Rig Release Date:

SEPTEMBER 3, 1997

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE **REGULATORY ANALYST**

DATE **06/27/2019**

Type or print name

LINDSAY LIVESAY

E-mail address: **llivesay@swrpermian.com**

PHONE: **(432) 207-3054**

For State Use Only

APPROVED BY:

Kerry Foster

TITLE **C.O. A**


DATE **9-6-19**

Conditions of Approval (if any):

SOUTHWEST ROYALTIES, INC.

**THOMAS LONG A #3
30-025-34035**

PLUGGED TA BLINEBRY OIL & GAS (PRO GAS) WELL

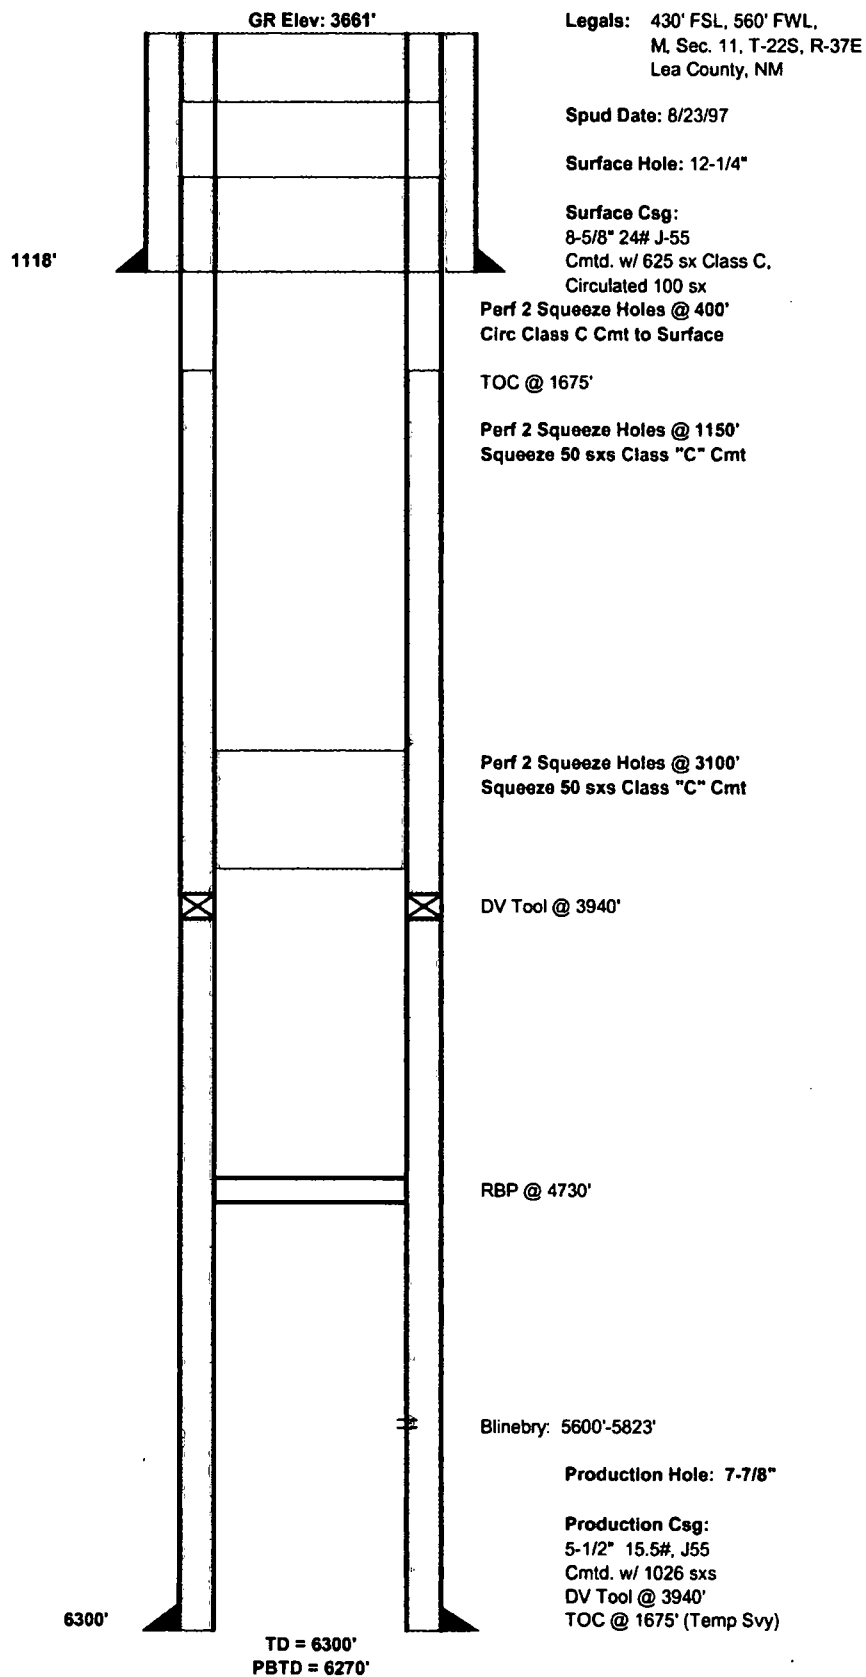

GENERAL CONDITIONS OF APPROVAL:

- 1) Insure all bradenheads have been exposed, identified, and valves are operational prior to rigging up on well.
- 2) Contact the appropriate NMOCD District Office no later than 24 hours prior to moving in and rigging up.
- 3) A copy of the approved C103 intent to P&A should be distributed to the onsite company and plugging representatives. Approved procedures are good for a period of one year from approved date, unless otherwise specified on the C103 intent. Approvals past this date will require the submission and approval of a new C103 intent.
- 4) A company representative is required to be present to witness all operations including setting CIBP's, circulation of mud laden fluids, perforating, squeezing or spotting cement plugs, tags, or any other operations approved on the C103 intent to P&A. Company representative should contact the NMOCD and report all operations.
- 5) Any changes that may be required during plugging operations should be approved by the NMOCD before proceeding.
- 6) A closed loop system is to be used for all plugging operations. Contents of the steel pits to be hauled to a NMOCD permitted disposal facility.
- 7) Mud laden fluids must be placed between all cement plugs mixed at 25 sacks of salt gel per 100 barrels of brine.
- 8) All cement plugs will be 100' or 25 sacks cement, whichever is greater. Class 'C' cement will be used above 7500' and Class 'H' below 7500'. Plugs should be no more than 3000' apart
- 9) Site remediation due within one year of well plugging completion.