

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

1a. Type of work: ☒ DRILL ☐ REENTER
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other
1c. Type of Completion: ☐ Hydraulic Fracturing ☒ Single Zone ☐ Multiple Zone

5. Lease Serial No.
NMNM139370

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No.

PURRITO 18-19 FED COM
212H (727016)

9. API Well No.

70205-

2. Name of Operator
DEVON ENERGY PRODUCTION COMPANY LP (GPR)

3a. Address
333 West Sheridan Avenue Oklahoma City OK 73102

3b. Phone No. (include area code)
(800)583-3866

10. Field and Pool, or Exploratory
SAND DUNES / BONESPRING

4. Location of Well (Report location clearly and in accordance with any State requirements. *)

At surface NENW / 525 FNL / 1820 FWL / LAT 32.3102782 / LONG -103.7170704

At proposed prod. zone SESW / 20 FNL / 2240 FWL / LAT 32.2827699 / LONG -103.7157206

11. Sec., T. R. M. or Blk. and Survey or Area
SEC 18 / T23S / R32E / NMP

14. Distance in miles and direction from nearest town or post office*

12. County or Parish
LEA

13. State
NM

15. Distance from proposed*
location to nearest
property or lease line, ft.
(Also to nearest drig. unit line, if any)
525 feet

16. No of acres in lease
40

17. Spacing Unit dedicated to this well
640

18. Distance from proposed location*
to nearest well, drilling, completed,
applied for, on this lease, ft. 698 feet

19. Proposed Depth
10371 feet / 20476 feet

20. BLM/BIA Bond No. in file
FED: NMB000801

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
3557 feet

22. Approximate date work will start*
12/01/2019

23. Estimated duration
45 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

1. Well plat certified by a registered surveyor.

2. A Drilling Plan.

3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).

5. Operator certification.

6. Such other site specific information and/or plans as may be requested by the BLM.

25. Signature
(Electronic Submission)

Name (Printed/Typed)
Jenny Harms / Ph: (405)552-6560

Date
05/30/2019

Title
Regulatory Compliance Professional

Approved by (Signature)
(Electronic Submission)

Name (Printed/Typed)
Christopher Walls / Ph: (575)234-2234

Date
01/15/2020

Title
Petroleum Engineer

Office
CARLSBAD

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

6/21/2020

APPROVED WITH CONDITIONS

Approval Date: 01/15/2020

01/15/2020

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Devon Energy Production Company LP
LEASE NO.:	NMNM139370
WELL NAME & NO.:	Purrito 18-19 Federal Com 212H
SURFACE HOLE FOOTAGE:	525'/N & 1820'/W
BOTTOM HOLE FOOTAGE:	20'/N & 2240'/W
LOCATION:	Section 18, T.23 S., R.32 E., NMPM
COUNTY:	Lea County, New Mexico

COA

H2S	<input checked="" type="radio"/> Yes	<input type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input type="radio"/> Multibowl	<input checked="" type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input checked="" type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the **Sand Dunes** formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

Primary Casing Design:

1. The 13-3/8 inch surface casing shall be set at approximately **1048** feet (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after

completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.

Operator has proposed to pump down 13-3/8" X 9-5/8" annulus. Operator must run a CBL from TD of the 9-5/8" casing to surface. Submit results to BLM.

3. The minimum required fill of cement behind the 5-1/2 inch production casing is:

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Cement excess is less than 25% and additional cement may be needed. 6.72% calculated.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **3000 (3M)** psi.

Option 2:

1. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or

certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.

- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575)
361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin

after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

01/16/2020

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Jenny Harms

Signed on: 05/24/2019

Title: Regulatory Compliance Professional

Street Address: 333 West Sheridan Avenue

City: Oklahoma City

State: OK

Zip: 73102

Phone: (405)552-6560

Email address: jennifer.harms@dnv.com

Field Representative

Representative Name:

Street Address: 333 WEST SHERIDAN AVENUE

City: OKLAHOMA CITY

State: OK

Zip: 73102-5015

Phone: (405)552-4902

Email address: ray.vaz@dnv.com



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

01/16/2020

APD ID: 10400042155

Submission Date: 05/30/2019

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - General

APD ID: 10400042155

Tie to previous NOS?

Submission Date: 05/30/2019

BLM Office: CARLSBAD

User: Jenny Harms

Title: Regulatory Compliance
Professional

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM139370

Lease Acres: 40

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: DEVON ENERGY PRODUCTION COMPANY LP

Operator letter of designation:

Operator Info

Operator Organization Name: DEVON ENERGY PRODUCTION COMPANY LP

Operator Address: 333 West Sheridan Avenue

Zip: 73102

Operator PO Box:

Operator City: Oklahoma City State: OK

Operator Phone: (800)583-3866

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: SAND DUNES

Pool Name: BONESPRING

Is the proposed well in an area containing other mineral resources? POTASH

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Is the proposed well in an area containing other mineral resources? POTASH

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO

New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:

Number: 2

Well Class: HORIZONTAL

PURRITO 18 WELLPAD

Number of Legs: 1

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town:

Distance to nearest well: 698 FT

Distance to lease line: 525 FT

Reservoir well spacing assigned acres Measurement: 640 Acres

Well plat: PURRITO_18_19_FED_COM_212H_C102_5_24_2019_20190524125209.pdf

Well work start Date: 12/01/2019

Duration: 45 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number: 7278

Reference Datum:

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	525	FNL	1820	FWL	23S	32E	18	Aliquot NENW	32.3102782	-103.7170704		NEW MEXI CO	NEW MEXI CO	F	NMNM 139370	3557	0	0	
KOP Leg #1	200	FNL	2240	FWL	23S	32E	18	Aliquot NENW	32.311165	-103.715705		NEW MEXI CO	NEW MEXI CO	F	NMNM 139370	-6241	9819	9798	
PPP Leg #1-1	100	FNL	2240	FWL	23S	32E	18	Aliquot NENW	32.3114525	-103.7157107		NEW MEXI CO	NEW MEXI CO	F	NMNM 139370	-6241	9819	9798	

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
EXIT Leg #1	100	FSL	224 0	FW L	23S	32E	19	Aliquot SESW	32.28298 98	- 103.7157 206		NEW MEXI CO	NEW MEXI CO	F	NMNM 018848	- 681 4	203 96	103 71	
BHL Leg #1	20	FNL	224 0	FW L	23S	32E	19	Aliquot SESW	32.28276 99	- 103.7157 206		NEW MEXI CO	NEW MEXI CO	F	NMNM 018848	- 681 4	204 76	103 71	



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

01/16/2020

APD ID: 10400042155

Submission Date: 05/30/2019

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Well Type: OIL WELL

Well Work Type: Drill

Show Final Text

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
463927	UNKNOWN	3557	0	0	ALLUVIUM	NONE	N
463928	RUSTLER	2533	1023	1023	SALT	NONE	N
463933	TOP SALT	2206	1350	1350		NONE	N
463930	BASE OF SALT	-866	4422	4422	SALT	NONE	N
463931	DELAWARE	-1099	4655	4665	SANDSTONE	NATURAL GAS, OIL	N
463929	BONE SPRING	-6100	9656	9656	SANDSTONE	NATURAL GAS, OIL	N
463932	BONE SPRING 2ND	-6706	10262	10262	SANDSTONE	NATURAL GAS, OIL	Y
463934	BONE SPRING 3RD	-7956	11512	11512	SANDSTONE	NATURAL GAS, OIL	N
463935	WOLFCAMP	-8355	11911	11911	SANDSTONE	NATURAL GAS, OIL	N

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 6000

Equipment: BOP/BOPE will be installed per Onshore Oil & Gas Order #2 requirements prior to drilling below surface casing, a BOP/BOPE system with the above minimum rating will be installed on the wellhead system. BOP/BOPE will be tested by an independent service company per Onshore Oil & Gas Order #2 requirements and MASP (Maximum Anticipated Surface Pressure) calculations. If the system is upgraded, all the components installed will be functional and tested.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP stack to the choke manifold. See attached for specs for hydrostatic test chart.

Testing Procedure: A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Choke Diagram Attachment:

5M_BOPE__CK_20190516140732.pdf

BOP Diagram Attachment:

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

5M_BOPE__CK_20190516140732.pdf

5M_BOPE__CK_20190516140744.pdf

Pressure Rating (PSI): 5M

Rating Depth: 10371

Equipment: BOP/BOPE will be installed per Onshore Oil &&& Gas Order #2 requirements prior to drilling below intermediate casing, a BOP/BOPE system with the above minimum rating will be installed on the wellhead system.

BOP/BOPE will be tested by an independent service company per Onshore Oil &&& Gas Order #2 requirements and MASP (Maximum Anticipated Surface Pressure) calculations. If the system is upgraded, all the components installed will be functional and tested.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP stack to the choke manifold. See attached for specs for hydrostatic test chart.

Testing Procedure: A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Choke Diagram Attachment:

5M_BOPE__CK_20190416143350.pdf

BOP Diagram Attachment:

5M_BOPE__CK_20190416143359.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1048	0	1048	-6768	-7557	1048	H-40	48	OTHER - BTC	1.125	1	BUOY	1.6	BUOY	1.6
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	6000	0	6000	-6768	-11036	6000	J-55	40	OTHER - BTC	1.125	1	BUOY	1.6	BUOY	1.6
3	PRODUCTION	8.75	5.5	NEW	API	N	0	20476	0	10371	-6768	-16768	20476	P-110	17	OTHER - BTC	1.125	1	BUOY	1.6	BUOY	1.6

Casing Attachments

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Surf_Csg_Ass_20181126124403.pdf

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Int_Csg_Ass_20181126124414.pdf

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Prod_Csg_Ass_20181126124428.pdf

Section 4 - Cement

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead					1.44					

INTERMEDIATE	Lead					3.3					
INTERMEDIATE	Tail										
PRODUCTION	Lead					3.3					
PRODUCTION	Tail										

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1048	OTHER : FW Gel	8.5	9				2			
1048	6000	OTHER : BRINE	10	10.5				2			
6000	1037 1	WATER-BASED MUD	8.5	9							

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will run GRMWD from TD to from KOP. Cement bond logs will be run in vertical to determine top of cement. Stated logs run will be in the completion report and submitted to the BLM.

List of open and cased hole logs run in the well:

CALIPER,CBL,DS,GR,MUDLOG

Coring operation description for the well:

N/A

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4854

Anticipated Surface Pressure: 2572.38

Anticipated Bottom Hole Temperature(F): 145

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Purrito_18_19_Fed_Com_212H__H2S_20190524125952.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Devon_Purrito_18_19_Fed_Com_212H_AC_Report_Permit_Plan_1_20190524130032.pdf

Devon_Purrito_18_19_Fed_Com_212H_Plot_Permit_Plan_1_20190524130033.pdf

Devon_Purrito_18_19_Fed_Com_212H_Permit_Plan_1_20190524130032.pdf

Purrito_18_19_Fed_Com_212H_Permit_Plan_1_20190524130033.pdf

Other proposed operations facets description:

Multi-Bowl Verbiage

Multi-Bowl Wellhead

Closed-Loop Design Plan

DRILL PLAN

GAS CAPTURE PLAN

SPUDDER RIG

Other proposed operations facets attachment:

Spudder_Rig_Info_20190426131159.pdf

Clsd_Loop_20181126130115.pdf

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

MB_Wellhd_5M_13.375_9.625_20190516142338.pdf


MB_Verb_5M_20190516142336.pdf

GAS_CAPTURE_PLAN_BOUNDARY_RAIDER_7_CTB_2_20190520103629.pdf


Other Variance attachment:

Co_flex_20181126130144.pdf


13-5/8" M BOPE & Closed Loop Equipment Schematic

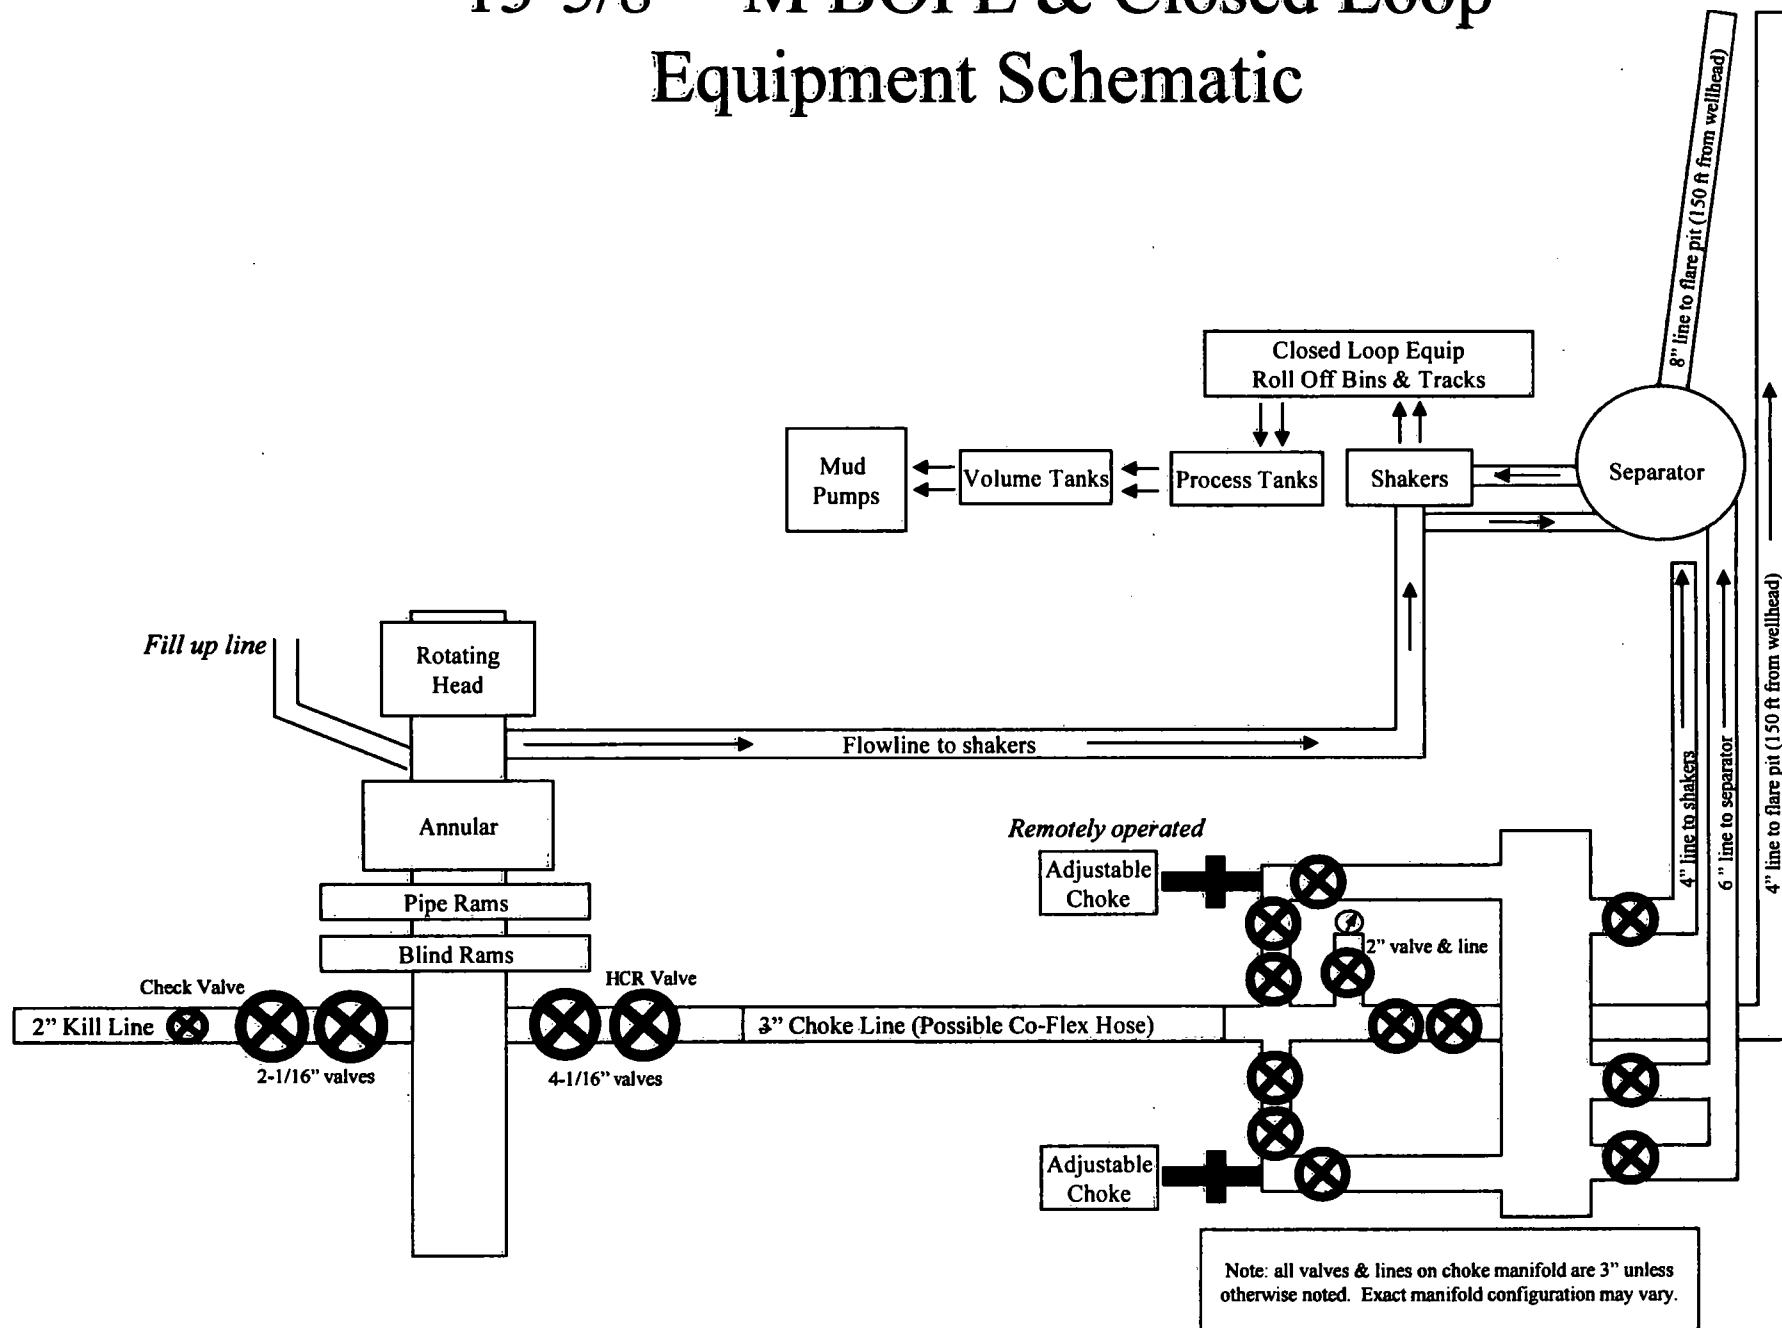


13-5/8" M BOPE & Closed Loop Equipment Schematic

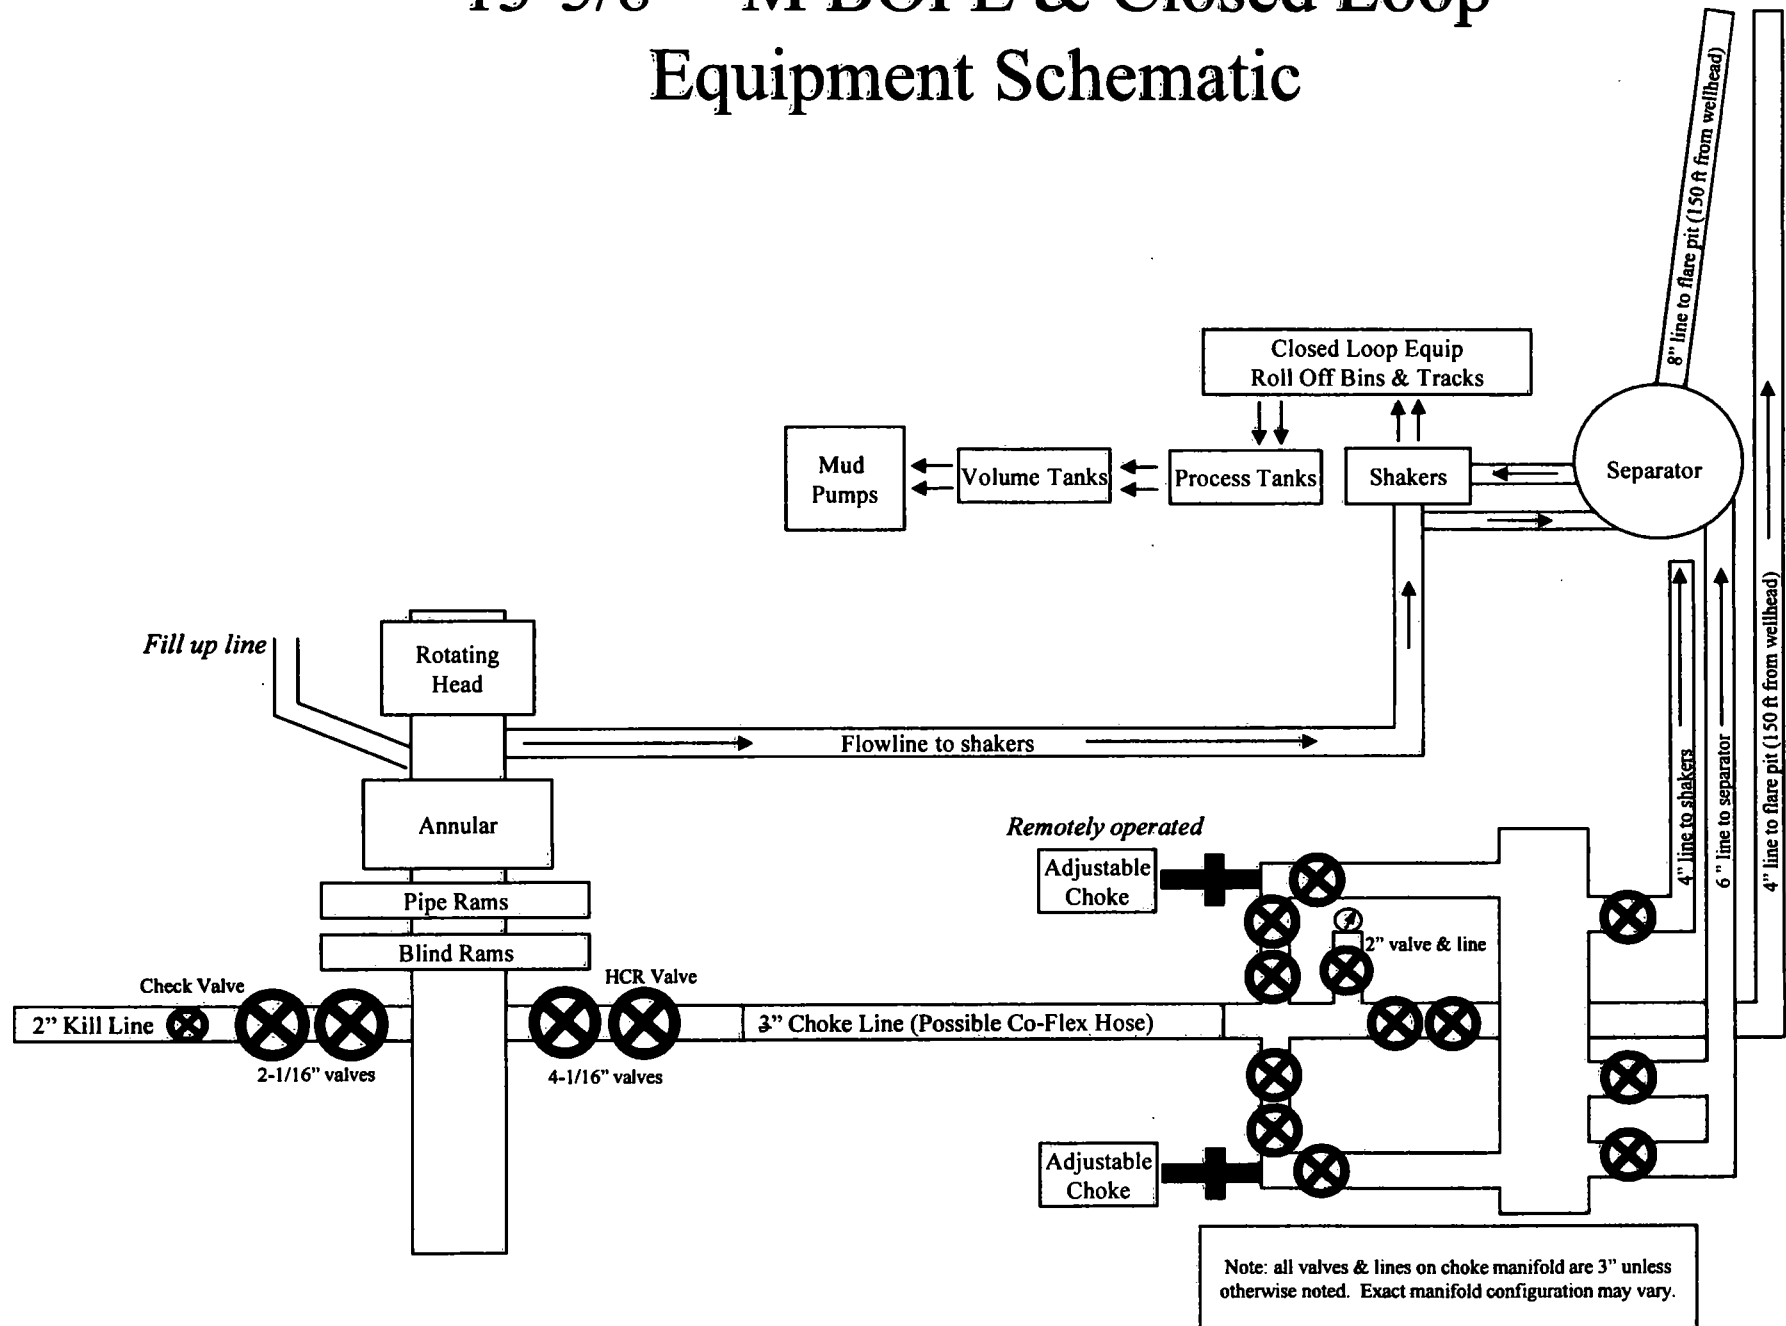

13-5/8" M BOPE & Closed Loop Equipment Schematic

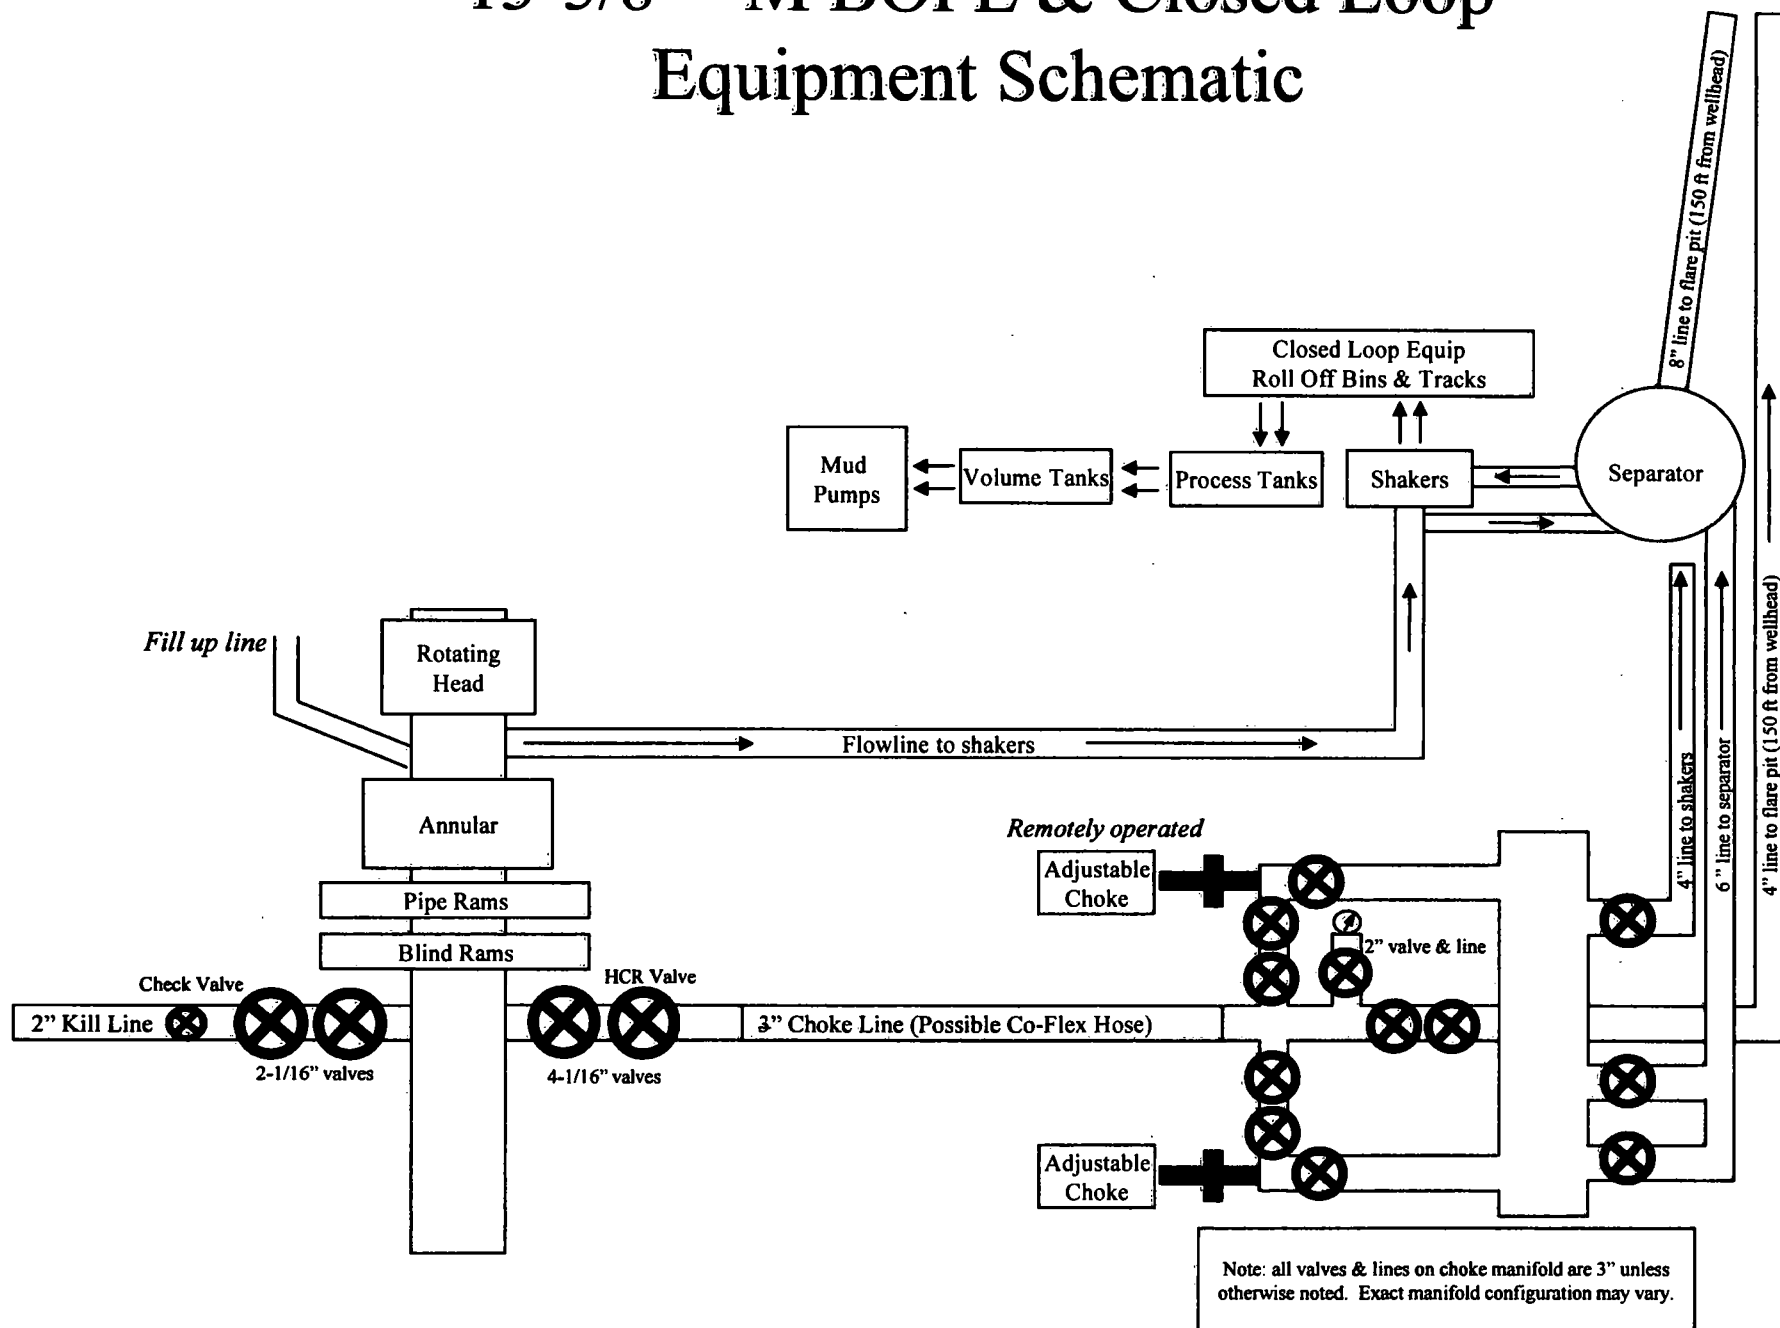

13-5/8" M BOPE & Closed Loop Equipment Schematic

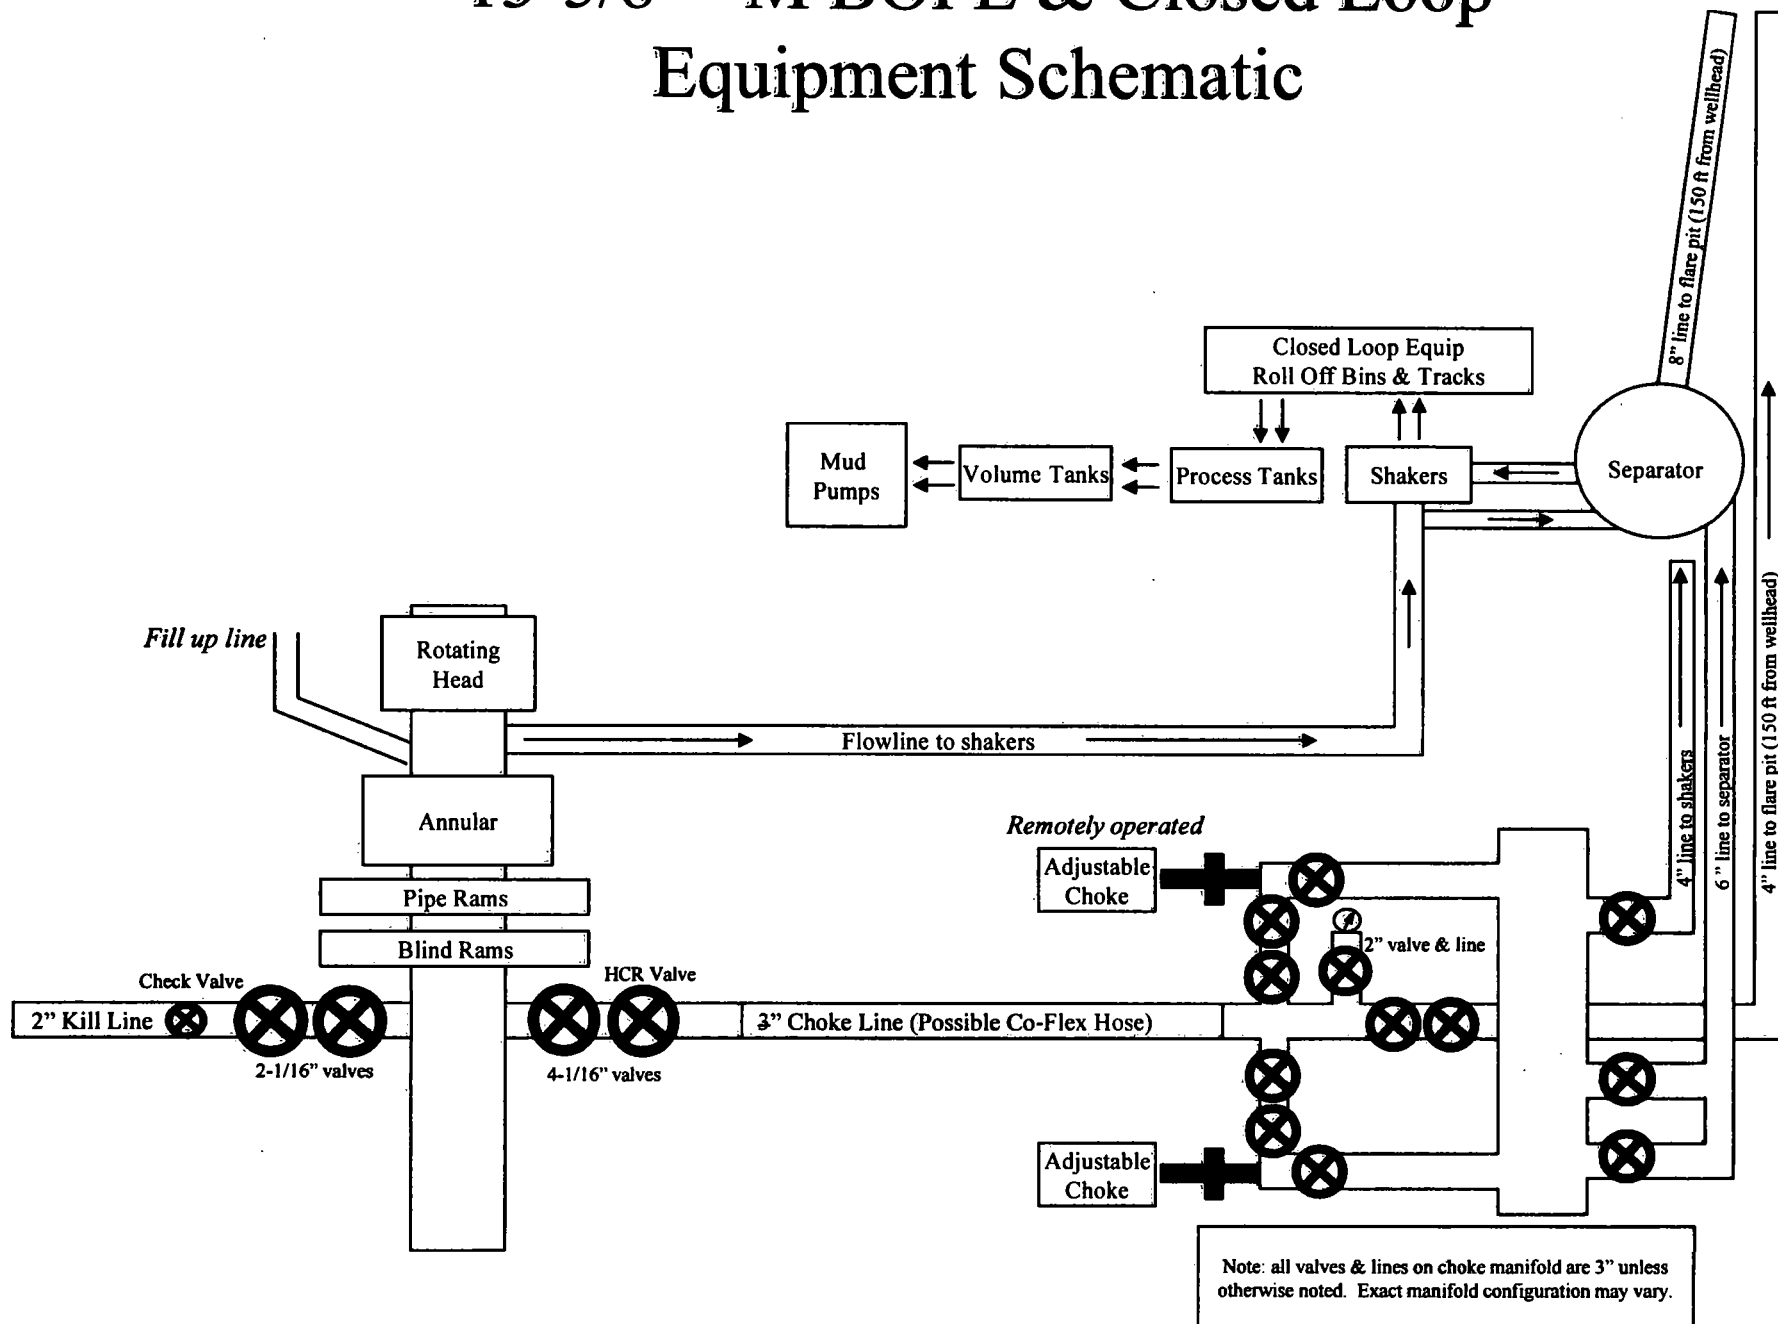



**Devon Energy Center
333 West Sheridan Avenue
Oklahoma City, Oklahoma 73102-5015**

Hydrogen Sulfide (H₂S) Contingency Plan

For



Purrito 18-19 Fed Com 212H

**Sec-18 T-23S R-32E
525' FNL & 1820' FWL
LAT. = 32.3102782' N (NAD83)
LONG = 103.7170704' W**

Lea County NM

Purrito 18-19 Fed Com 212H

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H₂S, including warning signs, wind indicators and H₂S monitor.

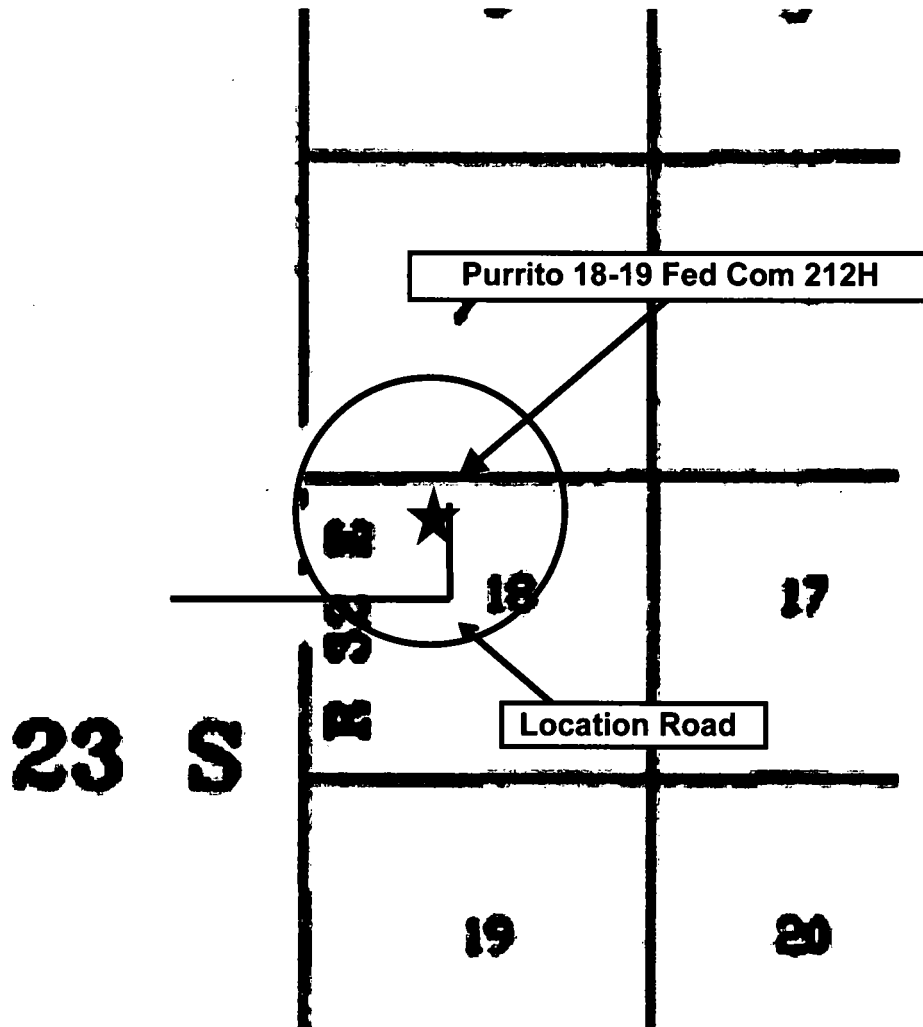

Assumed 100 ppm ROE = 3000' (Radius of Exposure)
100 ppm H₂S concentration shall trigger activation of this plan.

Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated from the location entrance road. Crews should then block the entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are no homes or buildings in or near the ROE.

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must

- **Isolate the area and prevent entry by other persons into the 100 ppm ROE.**
- **Evacuate any public places encompassed by the 100 ppm ROE.**
- **Be equipped with H₂S monitors and air packs in order to control the release.**
- **Use the "buddy system" to ensure no injuries occur during the response**
- **Take precautions to avoid personal injury during this operation.**
- **Contact operator and/or local officials to aid in operation. See list of phone numbers attached.**
- **Have received training in the**
 - **Detection of H₂S, and**
 - **Measures for protection against the gas,**
 - **Equipment used for protection and emergency response.**

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H₂S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

Devon Energy Corp. personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. Devon Energy Corp. Company response must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE (H₂S) TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

1. The hazards and characteristics of hydrogen sulfide (H₂S)
2. The proper use and maintenance of personal protective equipment and life support systems.
3. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan.

II. HYDROGEN SULFIDE TRAINING

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S.

1. Well Control Equipment

- A. Flare line
- B. Choke manifold – Remotely Operated
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer and rotating head.
- E. Mud/Gas Separator

2. Protective equipment for essential personnel:

30-minute SCBA units located at briefing areas, as indicated on well site diagram, with escape units available in the top doghouse. As it may be difficult to communicate audibly while wearing these units, hand signals shall be utilized.

3. H₂S detection and monitoring equipment:

Portable H₂S monitors positioned on location for best coverage and response. These units have warning lights which activate when H₂S levels reach 10 ppm and audible sirens which activate at 15 ppm. Sensor locations:

- Bell nipple
- Possum Belly/Shale shaker
- Rig floor
- Choke manifold
- Cellar

Visual warning systems:

- A. Wind direction indicators as shown on well site diagram
- B. Caution/ Danger signs shall be posted on roads providing direct access to locations. Signs will be painted a high visibility yellow with black lettering of sufficient size to be reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

4. Mud program:

The mud program has been designed to minimize the volume of H₂S circulated to surface. Proper mud weight, safe drilling practices and the use of H₂S scavengers will minimize hazards when penetrating H₂S bearing zones.

5. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold lines, and valves shall be H₂S trim.
- B. All elastomers used for packing and seals shall be H₂S trim.

6. Communication:

- A. Company personnel have/use cellular telephones in the field.
- B. Land line (telephone) communications at Office

7. Well testing:

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safety and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H₂S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

<u>Devon Energy Corp. Company Call List</u>		
Drilling Supervisor – Basin – Mark Kramer		405-823-4796
EHS Professional – Laura Wright		405-439-8129
<u>Agency Call List</u>		
<u>Lea County (575)</u>	<u>Hobbs</u>	
	Lea County Communication Authority	393-3981
	State Police	392-5588
	City Police	397-9265
	Sheriff's Office	393-2515
	Ambulance	911
	Fire Department	397-9308
	LEPC (Local Emergency Planning Committee)	393-2870
	NMOCD	393-6161
	US Bureau of Land Management	393-3612
<u>Eddy County (575)</u>	<u>Carlsbad</u>	
	State Police	885-3137
	City Police	885-2111
	Sheriff's Office	887-7551
	Ambulance	911
	Fire Department	885-3125
	LEPC (Local Emergency Planning Committee)	887-3798
	US Bureau of Land Management	887-6544
	NM Emergency Response Commission (Santa Fe)	(505) 476-9600
	24 HR	(505) 827-9126
	National Emergency Response Center	(800) 424-8802
	National Pollution Control Center: Direct	(703) 872-6000
	For Oil Spills	(800) 280-7118
	Emergency Services	
	Wild Well Control	(281) 784-4700
	Cudd Pressure Control	(915) 699-0139 (915) 563-3356
	Halliburton	(575) 746-2757
	B. J. Services	(575) 746-3569
<u>Give GPS position:</u>	Native Air – Emergency Helicopter – Hobbs (TX & NM)	(800) 642-7828
	Flight For Life - Lubbock, TX	(806) 743-9911
	Aerocare - Lubbock, TX	(806) 747-8923
	Med Flight Air Amb - Albuquerque, NM	(575) 842-4433
	Lifeguard Air Med Svc. Albuquerque, NM	(800) 222-1222
	Poison Control (24/7)	(575) 272-3115
	Oil & Gas Pipeline 24 Hour Service	(800) 364-4366
	NOAA – Website - www.nhc.noaa.gov	

Prepared in conjunction with
Dave Small



WCDSC Permian NM

Lea County (NAD83 New Mexico East)

Sec 18-T23S-R32E

Purrito 18-19 Fed Com 212H

Wellbore #1

Plan: Permit Plan 1

Standard Planning Report - Geographic

17 May, 2019

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Purrito 18-19 Fed Com 212H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3581.50ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3581.50ft
Site:	Sec 18-T23S-R32E	North Reference:	Grid
Well:	Purrito 18-19 Fed Com 212H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Project	Lea County (NAD83 New Mexico East)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site Sec 18-T23S-R32E

Site Position:		Northing:	477,663.17 usft	Latitude:	32.311693
From:	Map	Easting:	729,904.77 usft	Longitude:	-103.722960
Position Uncertainty:	0.00 ft	Slot Radius:	13-3/16 "	Grid Convergence:	0.33 °

Well Purrito 18-19 Fed Com 212H

Well Position	+N/-S	0.00 ft	Northing:	477,158.87 usft	Latitude:	32.310278
	+E/-W	0.00 ft	Easting:	731,727.13 usft	Longitude:	-103.717071
Position Uncertainty		0.50 ft	Wellhead Elevation:		Ground Level:	3,556.50 ft

Wellbore Wellbore #1

Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	IGRF2015	5/16/2019	6.82	60.09	47,776.31891872

Design Permit Plan 1

Audit Notes:

Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
-----------------	---------------	-----------	----------------------	------

Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(ft)	(ft)	(ft)	(°)
	0.00	0.00	0.00	177.28

Plan Survey Tool Program Date 5/17/2019

Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	20,476.21 Permit Plan 1 (Wellbore #1)	MWD+HDGM	
			OWSG MWD + HDGM	

Plan Sections

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,962.67	4.63	52.27	2,962.17	11.43	14.77	1.00	1.00	0.00	52.27	
9,160.59	4.63	52.27	9,139.89	317.38	410.16	0.00	0.00	0.00	0.00	
9,469.03	0.00	0.00	9,448.00	325.00	420.00	1.50	-1.50	0.00	180.00	
9,819.07	0.00	0.00	9,798.04	325.00	420.00	0.00	0.00	0.00	0.00	
10,719.08	90.00	179.70	10,371.00	-247.95	423.03	10.00	10.00	0.00	179.70	PBHL - Purrito 18-19
20,476.21	90.00	179.70	10,371.00	-10,004.95	474.64	0.00	0.00	0.00	0.00	PBHL - Purrito 18-19

Planning Report - Geographic

Database: EDM r5000.141_Prod US
Company: WCDSC Permian NM
Project: Lea County (NAD83 New Mexico East)
Site: Sec 18-T23S-R32E
Well: Purrito 18-19 Fed Com 212H
Wellbore: Wellbore #1
Design: Permit Plan 1

Local Co-ordinate Reference: Well Purrito 18-19 Fed Com 212H
TVD Reference: RKB @ 3581.50ft
MD Reference: RKB @ 3581.50ft
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.00	0.00	0.00	0.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
100.00	0.00	0.00	100.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
200.00	0.00	0.00	200.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
300.00	0.00	0.00	300.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
400.00	0.00	0.00	400.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
500.00	0.00	0.00	500.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
600.00	0.00	0.00	600.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
700.00	0.00	0.00	700.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
800.00	0.00	0.00	800.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
900.00	0.00	0.00	900.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
1,000.00	0.00	0.00	1,000.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
1,100.00	0.00	0.00	1,100.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
1,200.00	0.00	0.00	1,200.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
1,300.00	0.00	0.00	1,300.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
1,400.00	0.00	0.00	1,400.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
1,500.00	0.00	0.00	1,500.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
1,600.00	0.00	0.00	1,600.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
1,700.00	0.00	0.00	1,700.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
1,800.00	0.00	0.00	1,800.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
1,900.00	0.00	0.00	1,900.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
2,000.00	0.00	0.00	2,000.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
2,100.00	0.00	0.00	2,100.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
2,200.00	0.00	0.00	2,200.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
2,300.00	0.00	0.00	2,300.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
2,400.00	0.00	0.00	2,400.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
2,500.00	0.00	0.00	2,500.00	0.00	0.00	477,158.87	731,727.13	32.310278	-103.717071
2,600.00	1.00	52.27	2,599.99	0.53	0.69	477,159.40	731,727.82	32.310280	-103.717068
2,700.00	2.00	52.27	2,699.96	2.14	2.76	477,161.01	731,729.89	32.310284	-103.717062
2,800.00	3.00	52.27	2,799.86	4.81	6.21	477,163.68	731,733.34	32.310291	-103.717050
2,900.00	4.00	52.27	2,899.68	8.54	11.04	477,167.41	731,738.16	32.310302	-103.717035
2,962.67	4.63	52.27	2,962.17	11.43	14.77	477,170.30	731,741.89	32.310309	-103.717023
3,000.00	4.63	52.27	2,999.38	13.27	17.15	477,172.14	731,744.27	32.310314	-103.717015
3,100.00	4.63	52.27	3,099.05	18.21	23.53	477,177.08	731,750.65	32.310328	-103.716994
3,200.00	4.63	52.27	3,198.72	23.14	29.91	477,182.01	731,757.03	32.310341	-103.716973
3,300.00	4.63	52.27	3,298.40	28.08	36.29	477,186.95	731,763.41	32.310355	-103.716953
3,400.00	4.63	52.27	3,398.07	33.01	42.66	477,191.89	731,769.79	32.310368	-103.716932
3,500.00	4.63	52.27	3,497.75	37.95	49.04	477,196.82	731,776.17	32.310382	-103.716911
3,600.00	4.63	52.27	3,597.42	42.89	55.42	477,201.76	731,782.55	32.310395	-103.716890
3,700.00	4.63	52.27	3,697.09	47.82	61.80	477,206.69	731,788.93	32.310409	-103.716870
3,800.00	4.63	52.27	3,796.77	52.76	68.18	477,211.63	731,795.31	32.310422	-103.716849
3,900.00	4.63	52.27	3,896.44	57.70	74.56	477,216.57	731,801.69	32.310436	-103.716828
4,000.00	4.63	52.27	3,996.12	62.63	80.94	477,221.50	731,808.07	32.310449	-103.716807
4,100.00	4.63	52.27	4,095.79	67.57	87.32	477,226.44	731,814.45	32.310463	-103.716787
4,200.00	4.63	52.27	4,195.47	72.51	93.70	477,231.38	731,820.83	32.310476	-103.716766
4,300.00	4.63	52.27	4,295.14	77.44	100.08	477,236.31	731,827.21	32.310490	-103.716745
4,400.00	4.63	52.27	4,394.81	82.38	106.46	477,241.25	731,833.59	32.310503	-103.716725
4,500.00	4.63	52.27	4,494.49	87.32	112.84	477,246.19	731,839.96	32.310516	-103.716704
4,600.00	4.63	52.27	4,594.16	92.25	119.22	477,251.12	731,846.34	32.310530	-103.716683
4,700.00	4.63	52.27	4,693.84	97.19	125.60	477,256.06	731,852.72	32.310543	-103.716662
4,800.00	4.63	52.27	4,793.51	102.12	131.98	477,261.00	731,859.10	32.310557	-103.716642
4,900.00	4.63	52.27	4,893.18	107.06	138.36	477,265.93	731,865.48	32.310570	-103.716621
5,000.00	4.63	52.27	4,992.86	112.00	144.74	477,270.87	731,871.86	32.310584	-103.716600
5,100.00	4.63	52.27	5,092.53	116.93	151.11	477,275.80	731,878.24	32.310597	-103.716579
5,200.00	4.63	52.27	5,192.21	121.87	157.49	477,280.74	731,884.62	32.310611	-103.716559
5,300.00	4.63	52.27	5,291.88	126.81	163.87	477,285.68	731,891.00	32.310624	-103.716538

Planning Report - Geographic

Database: EDM r5000.141_Prod US
Company: WCDSC Permian NM
Project: Lea County (NAD83 New Mexico East)
Site: Sec 18-T23S-R32E
Well: Purrito 18-19 Fed Com 212H
Wellbore: Wellbore #1
Design: Permit Plan 1

Local Co-ordinate Reference: Well Purrito 18-19 Fed Com 212H
TVD Reference: RKB @ 3581.50ft
MD Reference: RKB @ 3581.50ft
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
5,400.00	4.63	52.27	5,391.56	131.74	170.25	477,290.61	731,897.38	32.310638	-103.716517
5,500.00	4.63	52.27	5,491.23	136.68	176.63	477,295.55	731,903.76	32.310651	-103.716496
5,600.00	4.63	52.27	5,590.90	141.62	183.01	477,300.49	731,910.14	32.310665	-103.716476
5,700.00	4.63	52.27	5,690.58	146.55	189.39	477,305.42	731,916.52	32.310678	-103.716455
5,800.00	4.63	52.27	5,790.25	151.49	195.77	477,310.36	731,922.90	32.310692	-103.716434
5,900.00	4.63	52.27	5,889.93	156.43	202.15	477,315.30	731,929.28	32.310705	-103.716413
6,000.00	4.63	52.27	5,989.60	161.36	208.53	477,320.23	731,935.66	32.310718	-103.716393
6,100.00	4.63	52.27	6,089.27	166.30	214.91	477,325.17	731,942.03	32.310732	-103.716372
6,200.00	4.63	52.27	6,188.95	171.23	221.29	477,330.11	731,948.41	32.310745	-103.716351
6,300.00	4.63	52.27	6,288.62	176.17	227.67	477,335.04	731,954.79	32.310759	-103.716330
6,400.00	4.63	52.27	6,388.30	181.11	234.05	477,339.98	731,961.17	32.310772	-103.716310
6,500.00	4.63	52.27	6,487.97	186.04	240.43	477,344.91	731,967.55	32.310786	-103.716289
6,600.00	4.63	52.27	6,587.64	190.98	246.81	477,349.85	731,973.93	32.310799	-103.716268
6,700.00	4.63	52.27	6,687.32	195.92	253.19	477,354.79	731,980.31	32.310813	-103.716247
6,800.00	4.63	52.27	6,786.99	200.85	259.56	477,359.72	731,986.69	32.310826	-103.716227
6,900.00	4.63	52.27	6,886.67	205.79	265.94	477,364.66	731,993.07	32.310840	-103.716206
7,000.00	4.63	52.27	6,986.34	210.73	272.32	477,369.60	731,999.45	32.310853	-103.716185
7,100.00	4.63	52.27	7,086.02	215.66	278.70	477,374.53	732,005.83	32.310867	-103.716165
7,200.00	4.63	52.27	7,185.69	220.60	285.08	477,379.47	732,012.21	32.310880	-103.716144
7,300.00	4.63	52.27	7,285.36	225.54	291.46	477,384.41	732,018.59	32.310894	-103.716123
7,400.00	4.63	52.27	7,385.04	230.47	297.84	477,389.34	732,024.97	32.310907	-103.716102
7,500.00	4.63	52.27	7,484.71	235.41	304.22	477,394.28	732,031.35	32.310920	-103.716082
7,600.00	4.63	52.27	7,584.39	240.35	310.60	477,399.22	732,037.73	32.310934	-103.716061
7,700.00	4.63	52.27	7,684.06	245.28	316.98	477,404.15	732,044.11	32.310947	-103.716040
7,800.00	4.63	52.27	7,783.73	250.22	323.36	477,409.09	732,050.48	32.310961	-103.716019
7,900.00	4.63	52.27	7,883.41	255.15	329.74	477,414.02	732,056.86	32.310974	-103.715999
8,000.00	4.63	52.27	7,983.08	260.09	336.12	477,418.96	732,063.24	32.310988	-103.715978
8,100.00	4.63	52.27	8,082.76	265.03	342.50	477,423.90	732,069.62	32.311001	-103.715957
8,200.00	4.63	52.27	8,182.43	269.96	348.88	477,428.83	732,076.00	32.311015	-103.715936
8,300.00	4.63	52.27	8,282.11	274.90	355.26	477,433.77	732,082.38	32.311028	-103.715916
8,400.00	4.63	52.27	8,381.78	279.84	361.64	477,438.71	732,088.76	32.311042	-103.715895
8,500.00	4.63	52.27	8,481.45	284.77	368.01	477,443.64	732,095.14	32.311055	-103.715874
8,600.00	4.63	52.27	8,581.13	289.71	374.39	477,448.58	732,101.52	32.311069	-103.715853
8,700.00	4.63	52.27	8,680.80	294.65	380.77	477,453.52	732,107.90	32.311082	-103.715833
8,800.00	4.63	52.27	8,780.48	299.58	387.15	477,458.45	732,114.28	32.311096	-103.715812
8,900.00	4.63	52.27	8,880.15	304.52	393.53	477,463.39	732,120.66	32.311109	-103.715791
9,000.00	4.63	52.27	8,979.82	309.46	399.91	477,468.33	732,127.04	32.311122	-103.715770
9,100.00	4.63	52.27	9,079.50	314.39	406.29	477,473.26	732,133.42	32.311136	-103.715750
9,160.59	4.63	52.27	9,139.89	317.38	410.16	477,476.25	732,137.28	32.311144	-103.715737
9,200.00	4.04	52.27	9,179.19	319.20	412.51	477,478.07	732,139.64	32.311149	-103.715730
9,300.00	2.54	52.27	9,279.02	322.71	417.04	477,481.58	732,144.17	32.311159	-103.715715
9,400.00	1.04	52.27	9,378.97	324.62	419.51	477,483.49	732,146.63	32.311164	-103.715707
9,469.03	0.00	0.00	9,448.00	325.00	420.00	477,483.87	732,147.13	32.311165	-103.715705
9,500.00	0.00	0.00	9,478.97	325.00	420.00	477,483.87	732,147.13	32.311165	-103.715705
9,600.00	0.00	0.00	9,578.97	325.00	420.00	477,483.87	732,147.13	32.311165	-103.715705
9,700.00	0.00	0.00	9,678.97	325.00	420.00	477,483.87	732,147.13	32.311165	-103.715705
9,800.00	0.00	0.00	9,778.97	325.00	420.00	477,483.87	732,147.13	32.311165	-103.715705
9,819.07	0.00	0.00	9,798.04	325.00	420.00	477,483.87	732,147.13	32.311165	-103.715705
KOP & FTP @ 9819' MD, 200' FNL, 2240' FWL									
9,900.00	8.09	179.70	9,878.70	319.29	420.03	477,478.16	732,147.16	32.311149	-103.715705
10,000.00	18.09	179.70	9,975.97	296.67	420.15	477,455.54	732,147.28	32.311087	-103.715705
10,100.00	28.09	179.70	10,067.84	257.50	420.36	477,416.37	732,147.48	32.310979	-103.715705
10,200.00	38.09	179.70	10,151.52	202.97	420.65	477,361.84	732,147.77	32.310829	-103.715705
10,300.00	48.09	179.70	10,224.45	134.74	421.01	477,293.61	732,148.13	32.310642	-103.715705

Planning Report - Geographic

Database: EDM r5000.141_Prod US
Company: WCDSC Permian NM
Project: Lea County (NAD83 New Mexico East)
Site: Sec 18-T23S-R32E
Well: Purrito 18-19 Fed Com 212H
Wellbore: Wellbore #1
Design: Permit Plan 1

Local Co-ordinate Reference: Well Purrito 18-19 Fed Com 212H
TVD Reference: RKB @ 3581.50ft
MD Reference: RKB @ 3581.50ft
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
10,400.00	58.09	179.70	10,284.43	54.88	421.43	477,213.75	732,148.55	32.310422	-103.715706
10,500.00	68.09	179.70	10,329.62	-34.18	421.90	477,124.69	732,149.03	32.310178	-103.715706
10,600.00	78.09	179.70	10,358.67	-129.73	422.41	477,029.14	732,149.53	32.309915	-103.715706
10,700.00	88.09	179.70	10,370.68	-228.88	422.93	476,929.99	732,150.06	32.309642	-103.715706
10,719.08	90.00	179.70	10,371.00	-247.95	423.03	476,910.92	732,150.16	32.309590	-103.715706
10,800.00	90.00	179.70	10,371.00	-328.87	423.46	476,830.00	732,150.58	32.309368	-103.715706
10,900.00	90.00	179.70	10,371.00	-428.87	423.99	476,730.00	732,151.11	32.309093	-103.715706
11,000.00	90.00	179.70	10,371.00	-528.87	424.52	476,630.00	732,151.64	32.308818	-103.715706
11,100.00	90.00	179.70	10,371.00	-628.87	425.05	476,530.00	732,152.17	32.308543	-103.715707
11,200.00	90.00	179.70	10,371.00	-728.87	425.57	476,430.00	732,152.70	32.308268	-103.715707
11,300.00	90.00	179.70	10,371.00	-828.87	426.10	476,330.01	732,153.23	32.307993	-103.715707
11,400.00	90.00	179.70	10,371.00	-928.87	426.63	476,230.01	732,153.76	32.307718	-103.715707
11,500.00	90.00	179.70	10,371.00	-1,028.86	427.16	476,130.01	732,154.29	32.307443	-103.715707
11,600.00	90.00	179.70	10,371.00	-1,128.86	427.69	476,030.01	732,154.82	32.307169	-103.715707
11,700.00	90.00	179.70	10,371.00	-1,228.86	428.22	475,930.01	732,155.34	32.306894	-103.715708
11,800.00	90.00	179.70	10,371.00	-1,328.86	428.75	475,830.01	732,155.87	32.306619	-103.715708
11,900.00	90.00	179.70	10,371.00	-1,428.86	429.28	475,730.02	732,156.40	32.306344	-103.715708
12,000.00	90.00	179.70	10,371.00	-1,528.86	429.81	475,630.02	732,156.93	32.306069	-103.715708
12,100.00	90.00	179.70	10,371.00	-1,628.86	430.34	475,530.02	732,157.46	32.305794	-103.715708
12,200.00	90.00	179.70	10,371.00	-1,728.85	430.86	475,430.02	732,157.99	32.305519	-103.715708
12,300.00	90.00	179.70	10,371.00	-1,828.85	431.39	475,330.02	732,158.52	32.305244	-103.715708
12,400.00	90.00	179.70	10,371.00	-1,928.85	431.92	475,230.02	732,159.05	32.304970	-103.715709
12,500.00	90.00	179.70	10,371.00	-2,028.85	432.45	475,130.02	732,159.58	32.304695	-103.715709
12,600.00	90.00	179.70	10,371.00	-2,128.85	432.98	475,030.03	732,160.11	32.304420	-103.715709
12,700.00	90.00	179.70	10,371.00	-2,228.85	433.51	474,930.03	732,160.63	32.304145	-103.715709
12,800.00	90.00	179.70	10,371.00	-2,328.85	434.04	474,830.03	732,161.16	32.303870	-103.715709
12,900.00	90.00	179.70	10,371.00	-2,428.84	434.57	474,730.03	732,161.69	32.303595	-103.715709
13,000.00	90.00	179.70	10,371.00	-2,528.84	435.10	474,630.03	732,162.22	32.303320	-103.715710
13,100.00	90.00	179.70	10,371.00	-2,628.84	435.62	474,530.03	732,162.75	32.303045	-103.715710
13,200.00	90.00	179.70	10,371.00	-2,728.84	436.15	474,430.04	732,163.28	32.302771	-103.715710
13,300.00	90.00	179.70	10,371.00	-2,828.84	436.68	474,330.04	732,163.81	32.302496	-103.715710
13,400.00	90.00	179.70	10,371.00	-2,928.84	437.21	474,230.04	732,164.34	32.302221	-103.715710
13,500.00	90.00	179.70	10,371.00	-3,028.84	437.74	474,130.04	732,164.87	32.301946	-103.715710
13,600.00	90.00	179.70	10,371.00	-3,128.83	438.27	474,030.04	732,165.39	32.301671	-103.715710
13,700.00	90.00	179.70	10,371.00	-3,228.83	438.80	473,930.04	732,165.92	32.301396	-103.715711
13,800.00	90.00	179.70	10,371.00	-3,328.83	439.33	473,830.05	732,166.45	32.301121	-103.715711
13,900.00	90.00	179.70	10,371.00	-3,428.83	439.86	473,730.05	732,166.98	32.300846	-103.715711
14,000.00	90.00	179.70	10,371.00	-3,528.83	440.39	473,630.05	732,167.51	32.300572	-103.715711
14,100.00	90.00	179.70	10,371.00	-3,628.83	440.91	473,530.05	732,168.04	32.300297	-103.715711
14,200.00	90.00	179.70	10,371.00	-3,728.83	441.44	473,430.05	732,168.57	32.300022	-103.715711
14,300.00	90.00	179.70	10,371.00	-3,828.82	441.97	473,330.05	732,169.10	32.299747	-103.715711
14,400.00	90.00	179.70	10,371.00	-3,928.82	442.50	473,230.05	732,169.63	32.299472	-103.715712
14,500.00	90.00	179.70	10,371.00	-4,028.82	443.03	473,130.06	732,170.16	32.299197	-103.715712
14,600.00	90.00	179.70	10,371.00	-4,128.82	443.56	473,030.06	732,170.68	32.298922	-103.715712
14,700.00	90.00	179.70	10,371.00	-4,228.82	444.09	472,930.06	732,171.21	32.298647	-103.715712
14,800.00	90.00	179.70	10,371.00	-4,328.82	444.62	472,830.06	732,171.74	32.298373	-103.715712
14,900.00	90.00	179.70	10,371.00	-4,428.82	445.15	472,730.06	732,172.27	32.298098	-103.715712
15,000.00	90.00	179.70	10,371.00	-4,528.82	445.67	472,630.06	732,172.80	32.297823	-103.715713
15,100.00	90.00	179.70	10,371.00	-4,628.81	446.20	472,530.07	732,173.33	32.297548	-103.715713
15,200.00	90.00	179.70	10,371.00	-4,728.81	446.73	472,430.07	732,173.86	32.297273	-103.715713
15,226.00	90.00	179.70	10,371.00	-4,754.81	446.87	472,404.07	732,174.00	32.297202	-103.715713
Cross Section @ 15226' MD, 0' FNL, 2240' FWL									
15,300.00	90.00	179.70	10,371.00	-4,828.81	447.26	472,330.07	732,174.39	32.296998	-103.715713
15,400.00	90.00	179.70	10,371.00	-4,928.81	447.79	472,230.07	732,174.92	32.296723	-103.715713

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Purrito 18-19 Fed Com 212H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3581.50ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3581.50ft
Site:	Sec 18-T23S-R32E	North Reference:	Grid
Well:	Purrito 18-19 Fed Com 212H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
15,500.00	90.00	179.70	10,371.00	-5,028.81	448.32	472,130.07	732,175.44	32.296448	-103.715713
15,600.00	90.00	179.70	10,371.00	-5,128.81	448.85	472,030.07	732,175.97	32.296174	-103.715713
15,700.00	90.00	179.70	10,371.00	-5,228.81	449.38	471,930.08	732,176.50	32.295899	-103.715714
15,800.00	90.00	179.70	10,371.00	-5,328.80	449.91	471,830.08	732,177.03	32.295624	-103.715714
15,900.00	90.00	179.70	10,371.00	-5,428.80	450.44	471,730.08	732,177.56	32.295349	-103.715714
16,000.00	90.00	179.70	10,371.00	-5,528.80	450.96	471,630.08	732,178.09	32.295074	-103.715714
16,100.00	90.00	179.70	10,371.00	-5,628.80	451.49	471,530.08	732,178.62	32.294799	-103.715714
16,200.00	90.00	179.70	10,371.00	-5,728.80	452.02	471,430.08	732,179.15	32.294524	-103.715714
16,300.00	90.00	179.70	10,371.00	-5,828.80	452.55	471,330.09	732,179.68	32.294249	-103.715715
16,400.00	90.00	179.70	10,371.00	-5,928.80	453.08	471,230.09	732,180.21	32.293975	-103.715715
16,500.00	90.00	179.70	10,371.00	-6,028.79	453.61	471,130.09	732,180.73	32.293700	-103.715715
16,600.00	90.00	179.70	10,371.00	-6,128.79	454.14	471,030.09	732,181.26	32.293425	-103.715715
16,700.00	90.00	179.70	10,371.00	-6,228.79	454.67	470,930.09	732,181.79	32.293150	-103.715715
16,800.00	90.00	179.70	10,371.00	-6,328.79	455.20	470,830.09	732,182.32	32.292875	-103.715715
16,900.00	90.00	179.70	10,371.00	-6,428.79	455.72	470,730.09	732,182.85	32.292600	-103.715715
17,000.00	90.00	179.70	10,371.00	-6,528.79	456.25	470,630.10	732,183.38	32.292325	-103.715716
17,100.00	90.00	179.70	10,371.00	-6,628.79	456.78	470,530.10	732,183.91	32.292050	-103.715716
17,200.00	90.00	179.70	10,371.00	-6,728.78	457.31	470,430.10	732,184.44	32.291776	-103.715716
17,300.00	90.00	179.70	10,371.00	-6,828.78	457.84	470,330.10	732,184.97	32.291501	-103.715716
17,400.00	90.00	179.70	10,371.00	-6,928.78	458.37	470,230.10	732,185.49	32.291226	-103.715716
17,500.00	90.00	179.70	10,371.00	-7,028.78	458.90	470,130.10	732,186.02	32.290951	-103.715716
17,600.00	90.00	179.70	10,371.00	-7,128.78	459.43	470,030.11	732,186.55	32.290676	-103.715717
17,700.00	90.00	179.70	10,371.00	-7,228.78	459.96	469,930.11	732,187.08	32.290401	-103.715717
17,800.00	90.00	179.70	10,371.00	-7,328.78	460.49	469,830.11	732,187.61	32.290126	-103.715717
17,900.00	90.00	179.70	10,371.00	-7,428.77	461.01	469,730.11	732,188.14	32.289851	-103.715717
18,000.00	90.00	179.70	10,371.00	-7,528.77	461.54	469,630.11	732,188.67	32.289577	-103.715717
18,100.00	90.00	179.70	10,371.00	-7,628.77	462.07	469,530.11	732,189.20	32.289302	-103.715717
18,200.00	90.00	179.70	10,371.00	-7,728.77	462.60	469,430.12	732,189.73	32.289027	-103.715717
18,300.00	90.00	179.70	10,371.00	-7,828.77	463.13	469,330.12	732,190.26	32.288752	-103.715718
18,400.00	90.00	179.70	10,371.00	-7,928.77	463.66	469,230.12	732,190.78	32.288477	-103.715718
18,500.00	90.00	179.70	10,371.00	-8,028.77	464.19	469,130.12	732,191.31	32.288202	-103.715718
18,600.00	90.00	179.70	10,371.00	-8,128.76	464.72	469,030.12	732,191.84	32.287927	-103.715718
18,700.00	90.00	179.70	10,371.00	-8,228.76	465.25	468,930.12	732,192.37	32.287652	-103.715718
18,800.00	90.00	179.70	10,371.00	-8,328.76	465.77	468,830.13	732,192.90	32.287378	-103.715718
18,900.00	90.00	179.70	10,371.00	-8,428.76	466.30	468,730.13	732,193.43	32.287103	-103.715718
19,000.00	90.00	179.70	10,371.00	-8,528.76	466.83	468,630.13	732,193.96	32.286828	-103.715719
19,100.00	90.00	179.70	10,371.00	-8,628.76	467.36	468,530.13	732,194.49	32.286553	-103.715719
19,200.00	90.00	179.70	10,371.00	-8,728.76	467.89	468,430.13	732,195.02	32.286278	-103.715719
19,300.00	90.00	179.70	10,371.00	-8,828.76	468.42	468,330.13	732,195.54	32.286003	-103.715719
19,400.00	90.00	179.70	10,371.00	-8,928.75	468.95	468,230.13	732,196.07	32.285728	-103.715719
19,500.00	90.00	179.70	10,371.00	-9,028.75	469.48	468,130.14	732,196.60	32.285453	-103.715719
19,600.00	90.00	179.70	10,371.00	-9,128.75	470.01	468,030.14	732,197.13	32.285179	-103.715720
19,700.00	90.00	179.70	10,371.00	-9,228.75	470.54	467,930.14	732,197.66	32.284904	-103.715720
19,800.00	90.00	179.70	10,371.00	-9,328.75	471.06	467,830.14	732,198.19	32.284629	-103.715720
19,900.00	90.00	179.70	10,371.00	-9,428.75	471.59	467,730.14	732,198.72	32.284354	-103.715720
20,000.00	90.00	179.70	10,371.00	-9,528.75	472.12	467,630.14	732,199.25	32.284079	-103.715720
20,100.00	90.00	179.70	10,371.00	-9,628.74	472.65	467,530.15	732,199.78	32.283804	-103.715720
20,200.00	90.00	179.70	10,371.00	-9,728.74	473.18	467,430.15	732,200.31	32.283529	-103.715720
20,300.00	90.00	179.70	10,371.00	-9,828.74	473.71	467,330.15	732,200.83	32.283254	-103.715721
20,396.22	90.00	179.70	10,371.00	-9,924.96	474.22	467,233.93	732,201.34	32.282990	-103.715721
LTP @ 20396' MD, 100' FSL, 2240' FWL									
20,400.00	90.00	179.70	10,371.00	-9,928.74	474.24	467,230.15	732,201.36	32.282979	-103.715721
20,476.20	90.00	179.70	10,371.00	-10,004.94	474.64	467,153.95	732,201.77	32.282770	-103.715721
PBHL; 20' FSL, 2240' FWL									

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Purrito 18-19 Fed Com 212H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3581.50ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3581.50ft
Site:	Sec 18-T23S-R32E	North Reference:	Grid
Well:	Purrito 18-19 Fed Com 212H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
20,476.21	90.00	179.70	10,371.00	-10,004.95	474.64	467,153.94	732,201.77	32.282770	-103.715721

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
PBHL - Purrito 18-19 Fe	0.00	0.00	0.00	-10,004.95	474.64	467,153.94	732,201.77	32.282770	-103.715721
- plan misses target center by 10016.20ft at 0.00ft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Point									

Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
9,819.07	9,798.04	325.00	420.00	KOP & FTP @ 9819' MD, 200' FNL, 2240' FWL
15,226.00	10,371.00	-4,754.81	446.87	Cross Section @ 15226' MD, 0' FNL, 2240' FWL
20,396.22	10,371.00	-9,924.96	474.22	LTP @ 20396' MD, 100' FSL, 2240' FWL
20,476.20	10,371.00	-10,004.94	474.64	PBHL; 20' FSL, 2240' FWL

1. Geologic Formations

TVD of target	10371	Pilot hole depth	N/A
MD at TD:	20476	Deepest expected fresh water	

Basin

[illegible]

*H₂S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Wt (PPF)	Grade	Conn	Min SF Collapse	Min SF Burst	Min SF Tension
	From	To							
17 1/2	0	1048 TVD	13 3/8	48.0	H40	BTC	1.125	1.25	1.6
12 1/4	0	6000 TVD	9 5/8	40.0	J-55	BTC	1.125	1.25	1.6
8 3/4	0	TD	5 1/2	17.0	P110	BTC	1.125	1.25	1.6
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

- All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 IILB.1.h Must have table for contingency casing.
- Rustler top will be validated via drilling parameters (i.e. reduction in ROP) and surface casing setting depth revised accordingly if needed.
- A variance is requested for collapse rating on intermediate casing. Operator will keep pipe full while running casing.
- Int casing shoe will be selected based on drilling data, gamma, and flows experienced while drilling. Setting depth with be revised accordingly if needed.
- A variance is requested to wave the centralizer requirement for the Intermediate casing and production casing.

Purrito 18-19 Fed Com 212H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

3. Cementing Program (3-String Primary Design)

Casing	# Sks	TOC	Wt. (lb/gal)	Yld (ft3/sack)	Slurry Description
Surface	797	Surf	13.2	1.4	Lead: Class C Cement + additives
Int	675	Surf	9.0	3.3	Lead: Class C Cement + additives
	154	500' above shoe	13.2	1.4	Tail: Class H / C + additives
Int 1 Two Stage w/ DV @ TVD of Delaware	658	Surf	9.0	3.3	1st stage Lead: Class C Cement + additives
	136	500' above shoe	13.2	1.4	1st stage Tail: Class H / C + additives
	494	Surf	9.0	3.3	2nd stage Lead: Class C Cement + additives
	136	500' above DV	13.2	1.4	2nd stage Tail: Class H / C + additives
Int 1 Intermediate Squeeze	As Needed	Surf	9.0	3.3	Squeeze Lead: Class C Cement + additives
	675	Surf	9.0	3.3	Lead: Class C Cement + additives
	154	500' above shoe	13.2	1.4	Tail: Class H / C + additives
Production	368	500' tieback	9.0	3.3	Lead: Class H / C + additives
	2056	KOP	13.2	1.4	Tail: Class H / C + additives

If a DV tool is ran the depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. Slurry weights will be adjusted based on estimated fracture gradient of the formation. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. If cement is not returned to surface during the primary cement job on the surface casing string, a planned top job will be conducted immediately after completion of the primary job.

Casing String	% Excess
Surface	50%
Intermediate	30%
Production	10%

4. Pressure Control Equipment (Three String Design)

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
Int 1	13-58"	5M	Annular	X	50% of rated working pressure
			Blind Ram	X	5M
			Pipe Ram		
			Double Ram	X	
			Other*		
Production	13-5/8"	5M	Annular	X	50% of rated working pressure
			Blind Ram	X	5M
			Pipe Ram		
			Double Ram	X	
			Other*		
			Annular (5M)		
			Blind Ram		
			Pipe Ram		
			Double Ram		
			Other*		

5. Mud Program (Three String Design)

Section	Type	Weight (ppg)
Surface	FW Gel	8.5-9
Intermediate	Brine	10-10.5
Production	WBM	8.5-9

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing

X	Will run GR/CNL from TD to surface (horizontal well - vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain.
	Coring? If yes, explain.

Additional logs planned	Interval
Resistivity	
Density	
X CBL	Production casing
X Mud log	KOP to TD
PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH pressure at deepest TVD	4854
Abnormal temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered measured values and formations will be provided to the BLM.

N	H ₂ S is present
Y	H ₂ S plan attached.

8. Other facets of operation

Is this a walking operation? Potentially

- 1 If operator elects, drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
- 2 The drilling rig will then batch drill the intermediate sections and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
- 3 The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Potentially

- 1 Spudder rig will move in and batch drill surface hole.
 - a. Rig will utilize fresh water based mud to drill surface hole to TD. Solids control will be handled entirely on a closed loop basis.
- 2 After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
- 3 The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
- 4 A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
- 5 Spudder rig operations is expected to take 4-5 days per well on a multi-well pad.
- 6 The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 7 Drilling operations will be performed with drilling rig. At that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments

X Directional Plan
 Other, describe

Devon Energy
APD VARIANCE DATA

OPERATOR NAME: Devon Energy

1. SUMMARY OF Variance:

Devon Energy respectfully requests approval for the following additions to the drilling plan:

1. Potential utilization of a spudder rig to pre-set surface casing.

2. Description of Operations

1. A spudder rig contractor may move in their rig to drill the surface hole section and pre-set surface casing on this well.
 - a. After drilling the surface hole section, the rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
 - b. Rig will utilize fresh water based mud to drill surface hole to TD.
2. The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
3. A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on two wingvalves.
 - a. A means for intervention will be maintained while the drilling rig is not over the well.
4. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
5. Drilling operation will be performed with the big rig. At that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The BLM will be contacted / notified 24 hours before the big rig moves back on to the pad with the pre-set surface casing.
6. Devon Energy will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
7. Once the rig is removed, Devon Energy will secure the wellhead area by placing a guard rail around the cellar area.



Commitment Runs Deep



Design Plan
Operation and Maintenance Plan
Closure Plan

SENM - Closed Loop Systems
June 2010

I. Design Plan

Devon uses MI SWACO closed loop system (CLS). The MI SWACO CLS is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This insures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.

A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.

Prior to installing a closed-loop system on site, the topsoil, if present, will be stripped and stockpiled for use as the final cover or fill at the time of closure.

Signs will be posted on the fence surrounding the closed-loop system unless the closed-loop system is located on a site where there is an existing well, that is operated by Devon.


II. Operations and Maintenance Plan

Primary Shakers: The primary shakers make the first removal of drill solids from the drilling mud as it leaves the well bore. The shakers are sized to handle maximum drilling rate at optimal screen size. The shakers normally remove solids down to 74 microns.

Mud Cleaner: The Mud Cleaner cleans the fluid after it leaves the shakers. A set of hydrocyclones are sized to handle 1.25 to 1.5 times the maximum circulating rate. This ensures all the fluid is being processed to an average cut point of 25 microns. The wet discharged is dewatered on a shaker equipped with ultra fine mesh screens and generally cut at 40 microns.



Closed Loop Schematic

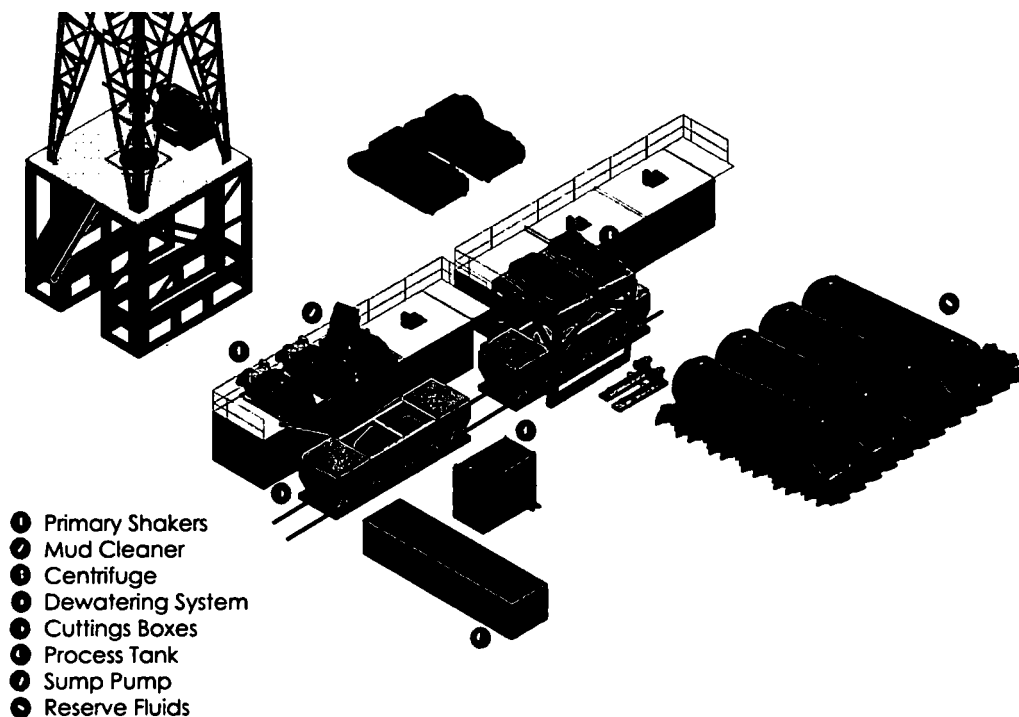

Centrifuges: The centrifuges can be one or two in number depending on the well geometry or depth of well. The centrifuges are sized to maintain low gravity solids at 5% or below. They may or may not need a dewatering system to enhance the removal rates. The centrifuges can make a cut point of 8-10 microns depending on bowl speed, feed rate, solids loading and other factors.

The centrifuge system is designed to work on the active system and be flexible to process incoming fluids from other locations. This set-up is also dependant on well factors.

Dewatering System: The dewatering system is a chemical mixing and dosing system designed to enhance the solids removal of the centrifuge. Not commonly used in shallow wells. It may contain pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing. Chemical flocculation binds ultra fine solids into a mass that is within the centrifuge operating design. The

dewatering system improves the centrifuge cut point to infinity or allows for the return of clear water or brine fluid. This ability allows for the ultimate control of low gravity solids.

Cuttings Boxes: Cuttings boxes are utilized to capture drill solids that are discarded from the solids control equipment. These boxes are set upon a rail system that allows for the removal and replacement of a full box of cuttings with an empty one. They are equipped with a cover that insures no product is spilled into the environment during the transportation phase.

Process Tank: (Optional) The process tank allows for the holding and process of fluids that are being transferred into the mud system. Additionally, during times of lost circulation the process tank may hold active fluids that are removed for additional treatment. It can further be used as a mixing tank during well control conditions.

Sump and Sump Pump: The sump is used to collect storm water and the pump is used to transfer this fluid to the active system or to the tank for to hold in reserve. It can also be used to collect fluids that may escape during spills. The location contains drainage ditches that allow the location fluids to drain to the sump.

Reserve Fluids (Tank Farm): A series of frac tanks are used to replace the reserve pit. These are steel tanks that are equipped with a manifold system and a transfer pump. These tanks can contain any number of fluids used during the drilling process. These can include fresh water, cut brine, and saturated salt fluid. The fluid can be from the active well or reclaimed fluid from other locations. A 20 ml liner and berm system is employed to ensure the fluids do not migrate to the environment during a spill.

If a leak develops, the appropriate division district office will be notified within 48 hours of the discovery and the leak will be addressed. Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and testing will be performed to determine if a release has occurred.

All trash is kept in a wire mesh enclosure and removed to an approved landfill when full. All spent motor oils are kept in separate containers and they are removed and sent to an approved recycling center. Any spilled lubricants, pipe


dope, or regulated chemicals are removed from soil and sent to landfills approved for these products.

These operations are monitored by Mi Swaco service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.

A MI SWACO field supervisor manages from 3-5 wells. They are responsible for training personnel, supervising installations, and inspecting sites for compliance of MI SWACO safety and operational policy.

III. Closure Plan

A maximum 340' X 340' caliche pad is built per well. All of the trucks and steel tanks fit on this pad. All fluid cuttings go to the steel tanks to be hauled by various trucking companies to an agency approved disposal.

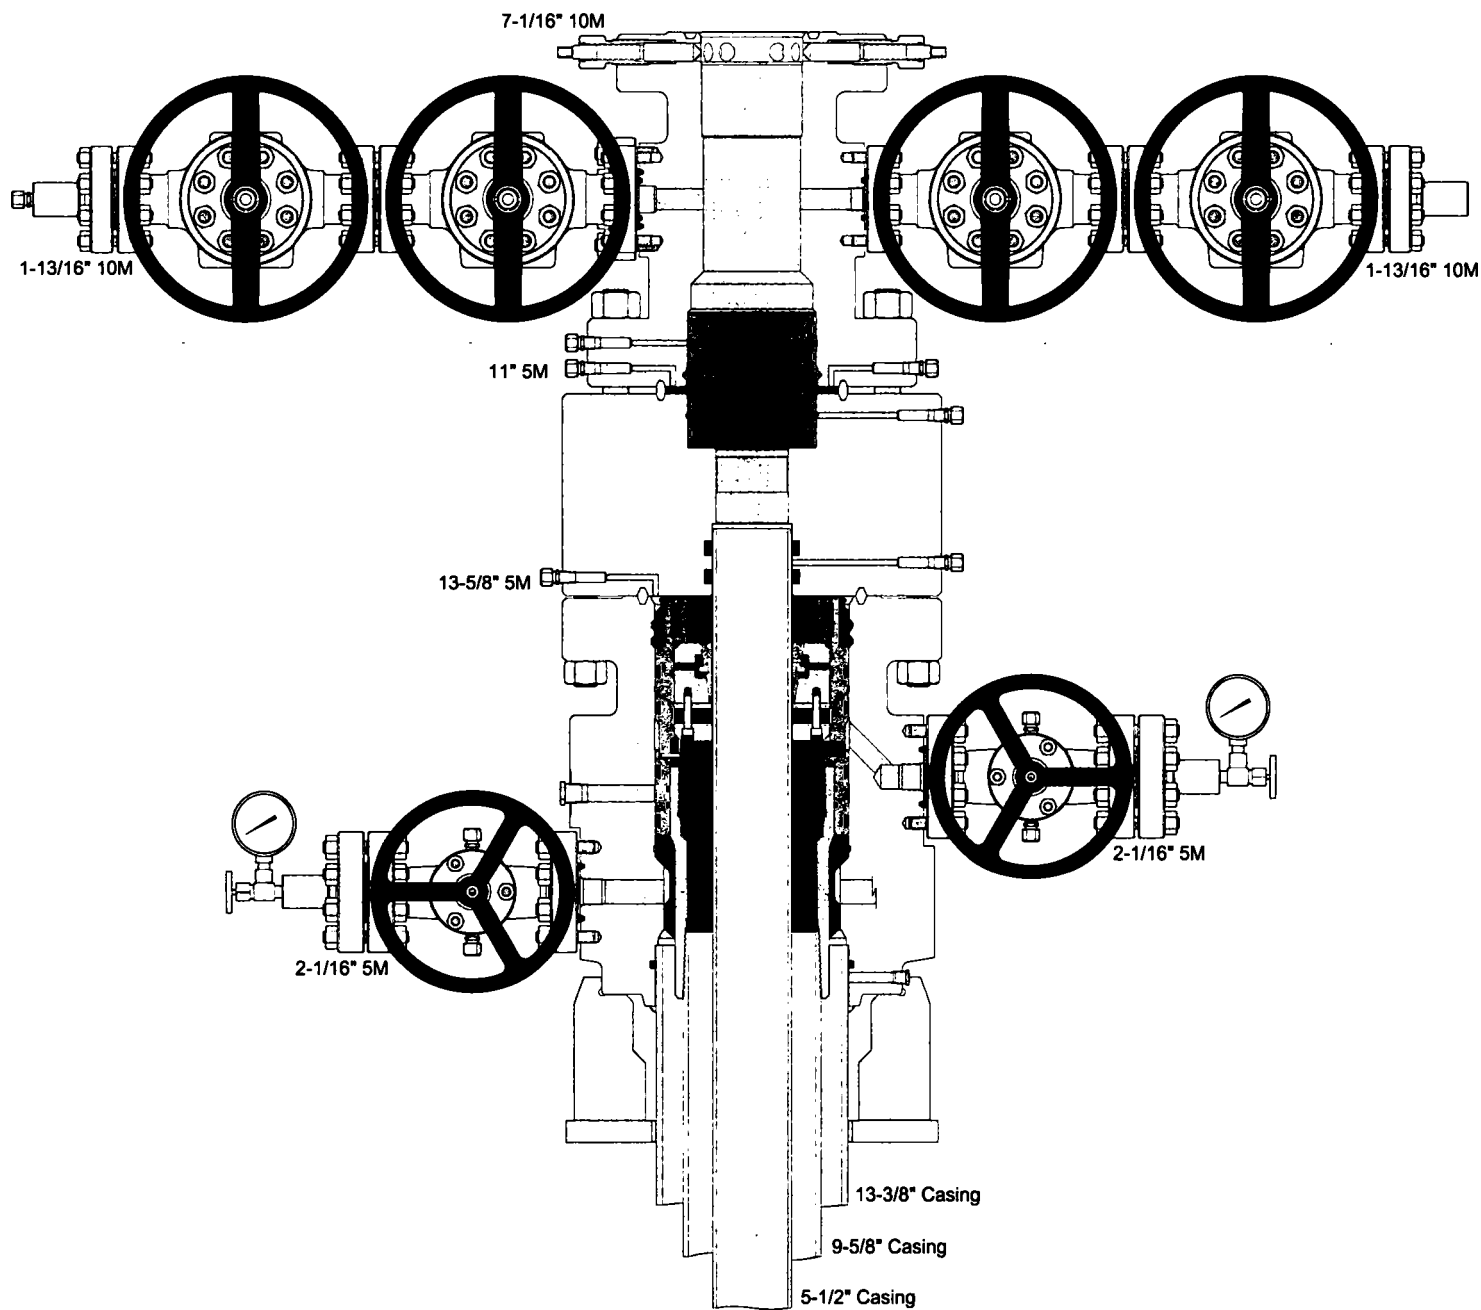

A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Devon proposes using a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi.

- Wellhead will be installed by wellhead representatives.
- If the welding is performed by a third party, the wellhead representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- Wellhead representative will install the test plug for the initial BOP test.
- Wellhead company will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the pack-off, the pack-off and the lower flange will be tested to 5M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple up. Therefore the BOP components will not be retested at that time.
- If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted.
- Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating.
- Devon will test the casing to 0.22 psi/ft or 1500 psi, whichever is greater, as per Onshore Order #2.

After running the surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 5M will be installed on the wellhead system and will undergo a 250 psi low pressure test followed by a 5,000 psi high pressure test. The 5,000 psi high and 250 psi low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2. If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2.

After running the intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 5M will already be installed on the wellhead.

The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 5,000 psi WP.

Devon's proposed wellhead manufactures will be FMC Technologies, Cactus Wellhead, or Cameron.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

01/16/2020

APD ID: 10400042155

Submission Date: 05/30/2019

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

01/16/2020

APD ID: 10400042155

Submission Date: 05/30/2019

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: PURRITO 18-19 FED COM

Well Number: 212H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB000801

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment: