

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

1a. Type of work: ☒ DRILL ☐ REENTER
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other
1c. Type of Completion: ☐ Hydraulic Fracturing ☒ Single Zone ☐ Multiple Zone

2. Name of Operator
DEVON ENERGY PRODUCTION COMPANY LP

3a. Address
333 West Sheridan Avenue Oklahoma City OK 73102

3b. Phone No. (include area code)
(800)583-3866

4. Location of Well (Report location clearly and in accordance with any State requirements. *)

At surface SWSW / 245 FSL / 950 FWL / LAT 32.196523 / LONG -103.548572

At proposed prod. zone NWNW / 20 FNL / 380 FWL / LAT 32.224806 / LONG -103.550429

14. Distance in miles and direction from nearest town or post office*

12. County or Parish
LEA

13. State
NM

15. Distance from proposed*
location to nearest
property or lease line, ft.
(Also to nearest drig. unit line, if any)

245 feet

16. No of acres in lease
2480

17. Spacing Unit dedicated to this well
320

18. Distance from proposed location*
to nearest well, drilling, completed,
applied for, on this lease, ft.

8 feet

19. Proposed Depth
12475 feet / 22738 feet

20. BLM/BIA Bond No. in file
FED: CO1104

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
3555 feet

22. Approximate date work will start*
08/25/2019

23. Estimated duration
45 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM.

25. Signature
(Electronic Submission)

Name (Printed/Typed)
Rebecca Deal / Ph: (405)228-8429

Date
01/28/2019

Title
Regulatory Compliance Professional

Approved by (Signature)
(Electronic Submission)

Name (Printed/Typed)
Cody Layton / Ph: (575)234-5959

Date
01/29/2020

Title
Assistant Field Manager Lands & Minerals

Office
CARLSBAD

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

BCP Rec 01/31/2020

APPROVED WITH CONDITIONS

Approval Date: 01/29/2020

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Devon Energy Production Company LP
LEASE NO.:	NMLC0063798
WELL NAME & NO.:	BLUE KRAIT 23-14 FED / 35H
SURFACE HOLE FOOTAGE:	245'/S & 950'/W
BOTTOM HOLE FOOTAGE:	20'/N & 380'/W
LOCATION:	Section 23, T.24 S., R.33 E., NMPM
COUNTY:	Lea County, New Mexico

COA

H2S	<input checked="" type="radio"/> Yes	<input type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input type="radio"/> Multibowl	<input checked="" type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input checked="" type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the **Pitchfork Ranch Pool**. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

Primary Casing Design:

1. The 10-3/4 inch surface casing shall be set at approximately **1350 feet** (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after

- completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the 7-5/8 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.

Operator has proposed to pump down 10-3/4" X 7-5/8" annulus. Operator must run a CBL from TD of the 7-5/8" casing to surface. Submit results to BLM.

3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
Cement excess is less than 25%, more cement might be required.

Alternate Casing Design:

4. The 13-3/8 inch surface casing shall be set at approximately 1350 feet (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - e. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - f. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - g. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - h. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

5. The minimum required fill of cement behind the 8-5/8 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Cement excess is less than 25%, more cement might be required.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- c. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- d. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
Cement excess is less than 25%, more cement might be required.

Operator has proposed to pump down 13-3/8" X 8-5/8" annulus. Operator must run a CBL from TD of the 8-5/8" casing to surface. Submit results to BLM.

Operator is approved to drill 9.875" hole with a TLW connection.

Production casing must be kept fluid filled to meet BLM minimum collapse requirement.

6. The minimum required fill of cement behind the 5-1/2 inch production casing is:

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
Cement excess is less than 25%, more cement might be required.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'

2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi**.
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **10,000 (10M) psi**. **Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**

Option 2:

1. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi**. **Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.

- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not

hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.



**U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT**

Operator Certification Data Report

01/30/2020

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Rebecca Deal

Signed on: 01/24/2019

Title: Regulatory Compliance Professional

Street Address: 333 West Sheridan Avenue

City: Oklahoma City

State: OK

Zip: 73102

Phone: (405)228-8429

Email address: Rebecca.Deal@dvn.com

Field Representative

Representative Name:

Street Address: 333 W SHERIDAN AVE

City: OKC

State: OK

Zip: 73102

Phone: (405)552-6556

Email address: blake.richardson@dvn.com



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

01/30/2020

APD ID: 10400038395

Submission Date: 01/28/2019

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - General

APD ID: 10400038395

Tie to previous NOS? N

Submission Date: 01/28/2019

BLM Office: CARLSBAD

User: Rebecca Deal

Title: Regulatory Compliance
Professional

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMLC0063798

Lease Acres: 2480

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: DEVON ENERGY PRODUCTION COMPANY LP

Operator letter of designation:

Operator Info

Operator Organization Name: DEVON ENERGY PRODUCTION COMPANY LP

Operator Address: 333 West Sheridan Avenue

Zip: 73102

Operator PO Box:

Operator City: Oklahoma City

State: OK

Operator Phone: (800)583-3866

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WC-025 G-09
S263504N

Pool Name: WOLFCAMP

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Is the proposed well in an area containing other mineral resources? NATURAL GAS,OIL

Is the proposed well in a Helium production area? N **Use Existing Well Pad?** NO **New surface disturbance?**

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: BLUE **Number:** 5

Well Class: HORIZONTAL

KRAIT 23 FED WELLPAD

Number of Legs: 1

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town:

Distance to nearest well: 8 FT

Distance to lease line: 245 FT

Reservoir well spacing assigned acres Measurement: 320 Acres

Well plat: BLUE_KRAIT_23_14_FED_35H_C_102_20190124092817.pdf

Well work start Date: 08/25/2019

Duration: 45 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

Reference Datum:

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	245	FSL	950	FW L	24S	33E	23	Aliquot SWS W	32.196523	- 103.548572	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 063798	3555	0	0	
KOP Leg #1	50	FSL	480	FW L	24S	33E	23	Aliquot SWS W	32.195997	- 103.550096	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 063798	- 8270	11845	11825	
PPP Leg #1-1	100	FSL	436	FW L	24S	33E	23	Aliquot SWS W	32.196134	- 103.550239	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 063798	- 8584	12170	12139	

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
EXIT Leg #1	100	FNL	380	FW L	24S	33E	14	Aliquot NWN W	32.22458 6	- 103.5504 27	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 063798	- 892 0	226 57	124 75	
BHL Leg #1	20	FNL	380	FW L	24S	33E	14	Aliquot NWN W	32.22480 6	- 103.5504 29	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 063798	- 892 0	227 38	124 75	



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

01/30/2020

APD ID: 10400038395

Submission Date: 01/28/2019

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
381161	---	3555	0	0	OTHER : Surface	NONE	N
381162	RUSTLER	2454	1101	1101	SANDSTONE	NONE	N
381163	TOP SALT	1933	1622	1622	SALT	NONE	N
381171	BASE OF SALT	-1493	5048	5048	LIMESTONE	NONE	N
381165	BELL CANYON	-1712	5267	5267	SANDSTONE	NATURAL GAS, OIL	N
381166	CHERRY CANYON	-2986	6301	6301	SANDSTONE	NATURAL GAS, OIL	N
381158	BRUSHY CANYON	-4616	7931	7931	SANDSTONE	NATURAL GAS, OIL	N
381159	BONE SPRING	-6126	9441	9441	SHALE	NATURAL GAS, OIL	N
381160	BONE SPRING 1ST	-6645	10200	10200	SANDSTONE	NATURAL GAS, OIL	N
381169	BONE SPRING 2ND	-7305	10860	10860	SANDSTONE	NATURAL GAS, OIL	N
381167	BONE SPRING 3RD	-8641	12196	12196	SANDSTONE	NATURAL GAS, OIL	N
381170	WOLFCAMP	-8702	12257	12257	SHALE	NATURAL GAS, OIL	Y
381168	STRAWN	-10245	13800	13800	LIMESTONE	NATURAL GAS, OIL	N

Section 2 - Blowout Prevention

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Pressure Rating (PSI): 10M

Rating Depth: 12475

Equipment: BOP/BOPE will be installed per Onshore Oil & Gas Order #2 requirements prior to drilling below intermediate casing, a BOP/BOPE system with the above minimum rating will be installed on the wellhead system. BOP/BOPE will be tested by an independent service company per Onshore Oil & Gas Order #2 requirements and MASP (Maximum Anticipated Surface Pressure) calculations. If the system is upgraded, all the components installed will be functional and tested.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP stack to the choke manifold. See attached for specs for hydrostatic test chart. Devon requests a variance to run a 5M annular on a 10M BOP system. See separately attached variance request and support documents in AFMSS.

Testing Procedure: A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. 5M annular on 10M system will be tested to 100% of rated working pressure.

Choke Diagram Attachment:

10M_BOPE_CHK_DR_CLS_RKL_20190124094056.pdf

BOP Diagram Attachment:

10M_BOPE_CHK_DR_CLS_RKL_20190124094339.pdf

Pressure Rating (PSI): 5M

Rating Depth: 11965

Equipment: BOP/BOPE will be installed per Onshore Oil & Gas Order #2 requirements prior to drilling below surface casing, a BOP/BOPE system with the above minimum rating will be installed on the wellhead system. BOP/BOPE will be tested by an independent service company per Onshore Oil & Gas Order #2 requirements and MASP (Maximum Anticipated Surface Pressure) calculations. If the system is upgraded, all the components installed will be functional and tested.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP stack to the choke manifold. See attached for specs for hydrostatic test chart.

Testing Procedure: A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Choke Diagram Attachment:

5M_BOPE__CK_20190124094439.pdf

BOP Diagram Attachment:

5M_BOPE__CK_20190124094446.pdf

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	1350	0	1350			1350	J-55	40.5	ST&C	1.125	1.25	BUOY	1.6	BUOY	1.6
2	INTERMEDIATE	9.875	7.625	NEW	API	N	0	11965	0	11965			11965	P-110	29.7	OTHER - BTC	1.125	1.25	BUOY	1.6	BUOY	1.6
3	PRODUCTION	6.75	5.5	NEW	API	N	0	22737	0	12475			22737	P-110	20	OTHER - VAM SG	1.125	1.25	BUOY	1.6	BUOY	1.6

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Surf_Csg_Ass_20190124094641.pdf

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Casing Attachments

Casing ID: 2 String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Int_Csg_Ass_20190124094716.pdf

Casing ID: 3 String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Prod_Csg_Ass_20190124094802.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead					1.33					

INTERMEDIATE	Lead					1.85					
INTERMEDIATE	Tail										

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Lead					1.33					

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1350	WATER-BASED MUD	8.5	9				2			
0	1196 5	SALT SATURATED	9	10				2			
1196 5	2273 7	OIL-BASED MUD	10	10.5				12			

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will run GRMWD from TD to from KOP. Cement bond logs will be run in vertical to determine top of cement. Stated logs run will be in the Completion Report and submitted to the BLM.

List of open and cased hole logs run in the well:

CALIPER,CBL,DS,GR,MUDLOG

Coring operation description for the well:

N/A

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 6811

Anticipated Surface Pressure: 4066.5

Anticipated Bottom Hole Temperature(F): 181

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Blue_Krait_23_14_Fed_35H_H2S_Plan_20190124101306.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Blue_Krait_23_14_Fed_35H_DIR_SVY_20190124102338.pdf

Blue_Krait_23_14_Fed_35H_Plot_20190124102338.pdf

Other proposed operations facets description:

DIRECTIONAL SURVEY

PLOT

DRILLING PLAN

MULTI-BOWL VERBIAGE

MULTI-BOWL WELLHEAD - 2 VARIATIONS OF 10M

10M ANNULAR VARIANCE DOC & SCHEMATIC

CLOSED LOOP DESIGN PLAN

CO-FLEX HOSE

SPUDDER RIG REQUEST

GCP FORM

SPEC SHEETS - 6

Other proposed operations facets attachment:

7.625_29.70_P110_Flushmax_20180802151741.pdf

5.5_x_20_P110_EC_VAMSG_20180802151740.pdf

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

8.625_32__P110EC___7.875_SD_20180802151742.pdf
10.750_40.50__J55_USS_20190124102537.PDF
13.375_48__H40_20190124102551.pdf
5_500in_17_00__P110RY_DWC_C_20190124102614.pdf
Blue_Krait_23_Fed_WP_5_GCP_20190124102726.pdf
MB_Verb_10M_20190124102727.pdf
Cisd_Loop_20190124102727.pdf
Spudder_Rig_Info_20190124102728.pdf
MB_Wellhd_10M_2_20190124102943.PDF
MB_Wellhd_10M_20190124102944.pdf
Blue_Krait_23_14_Fed_35H_Drlg_Doc_Rev_20200102095158.pdf


Other Variance attachment:



Annular_Variance___Preventer_Summary_20190124102747.pdf
Co_flex_20190124102748.pdf
10M_BOPE_CHK_DR_CLS_RKL_20190124102805.pdf

10M BOPE & Closed Loop Equipment Schematic


10M Remote
Kill Line Schematic

Outside
Remote Kill
Line Valve

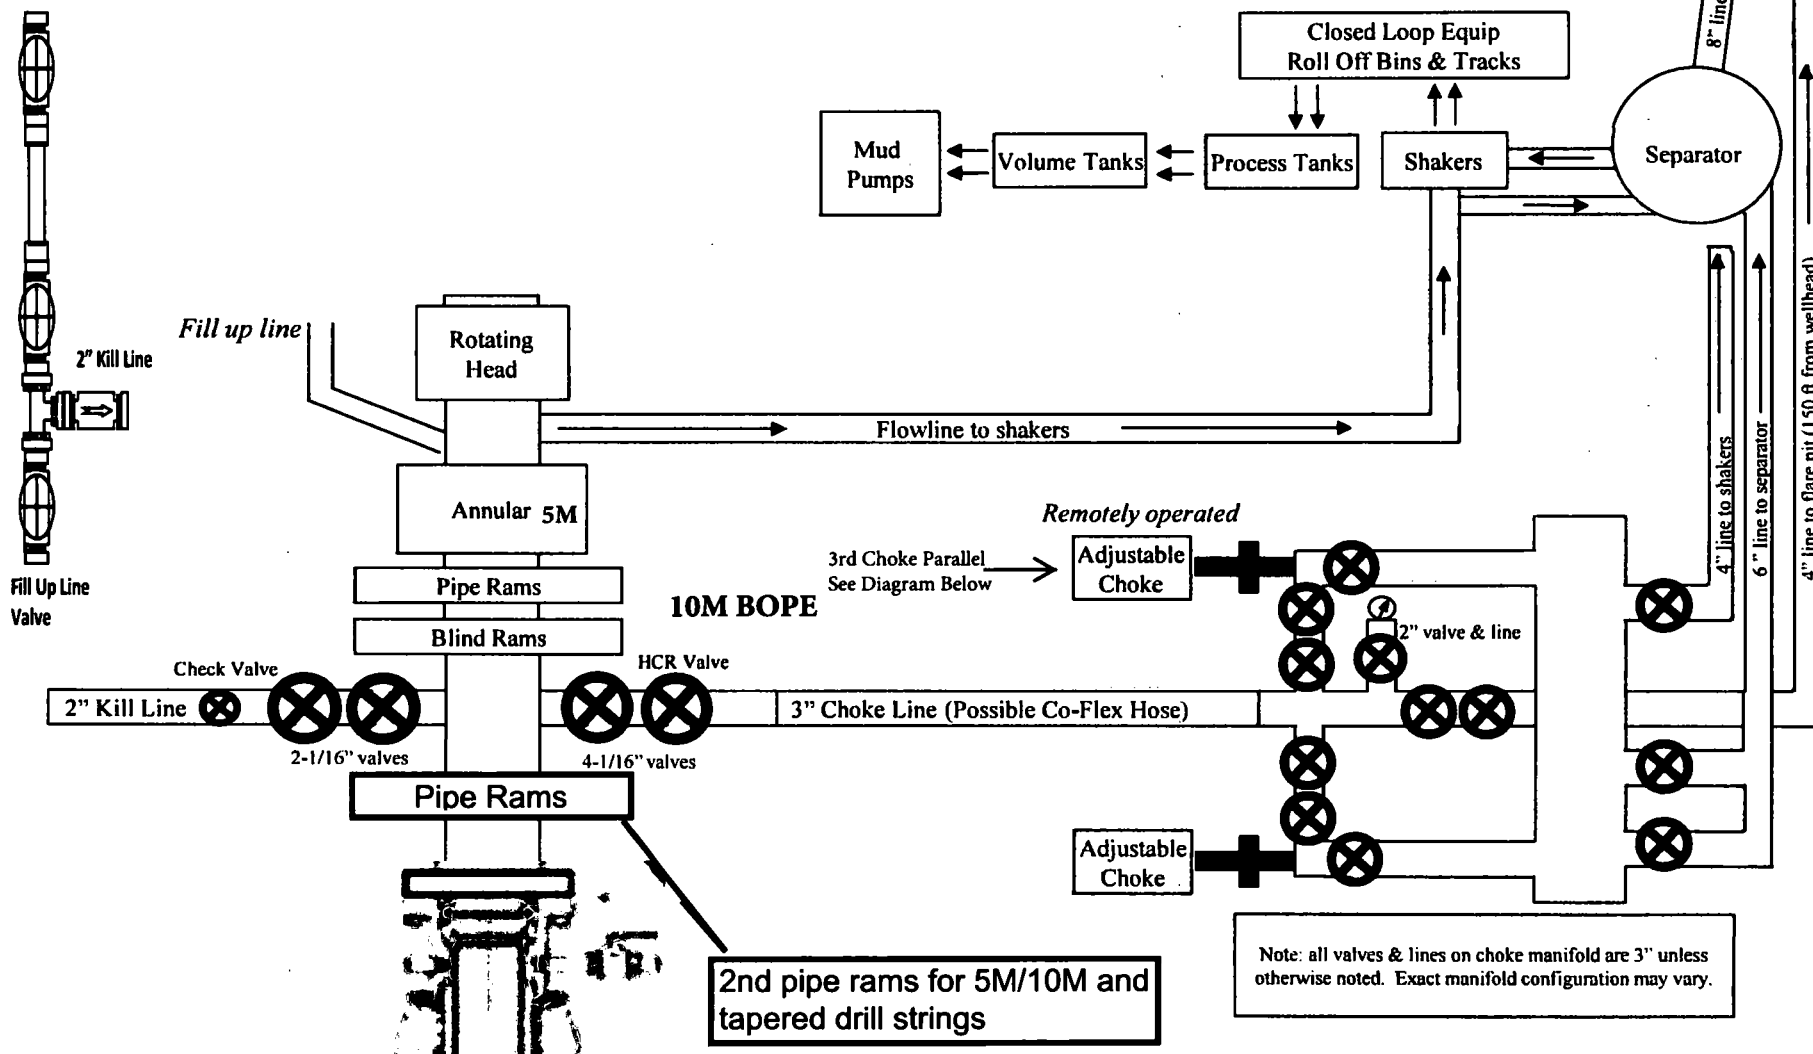

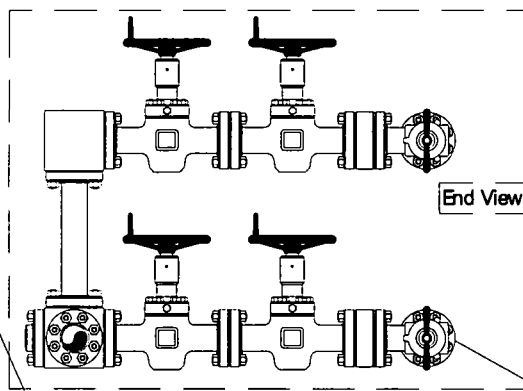


End View

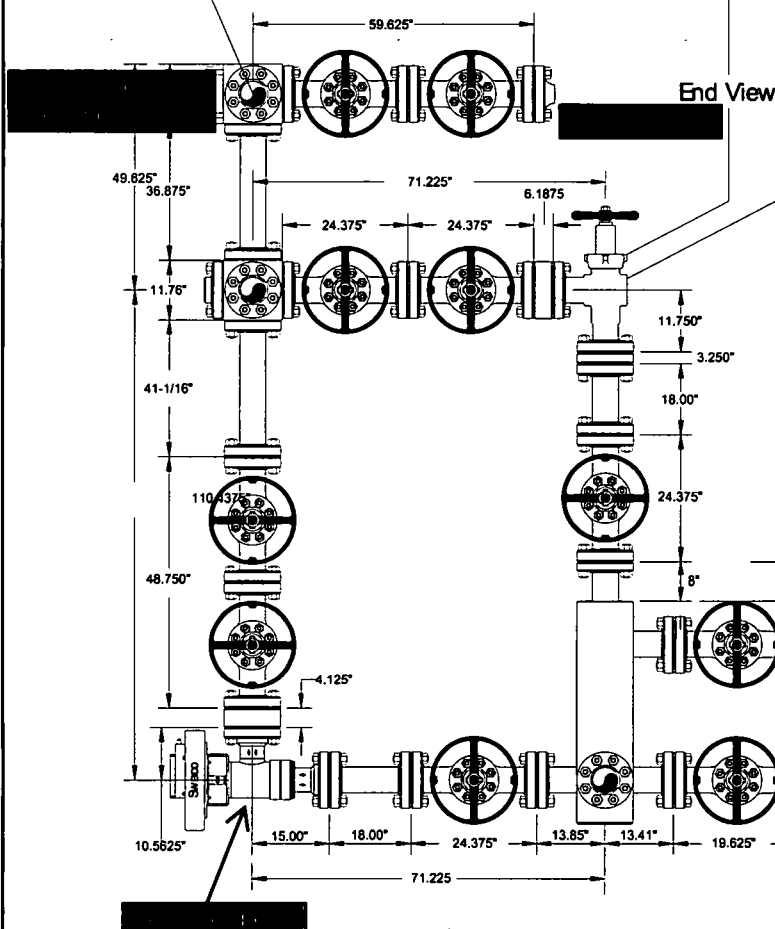

End View

Side View

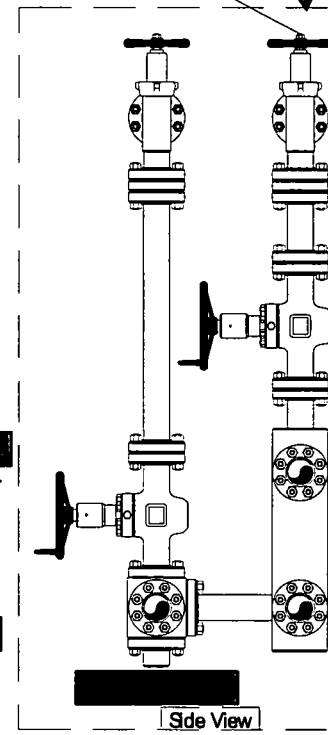


Side View

Helmerich & Payne
Flex 3 Rig w/ 3 Chokes



Name: Mike Potts	Date: 6-23-2010	Working Pressure: 10M	J-5132-E
------------------	-----------------	-----------------------	----------



13-5/8" 5M BOPE & Closed Loop Equipment Schematic

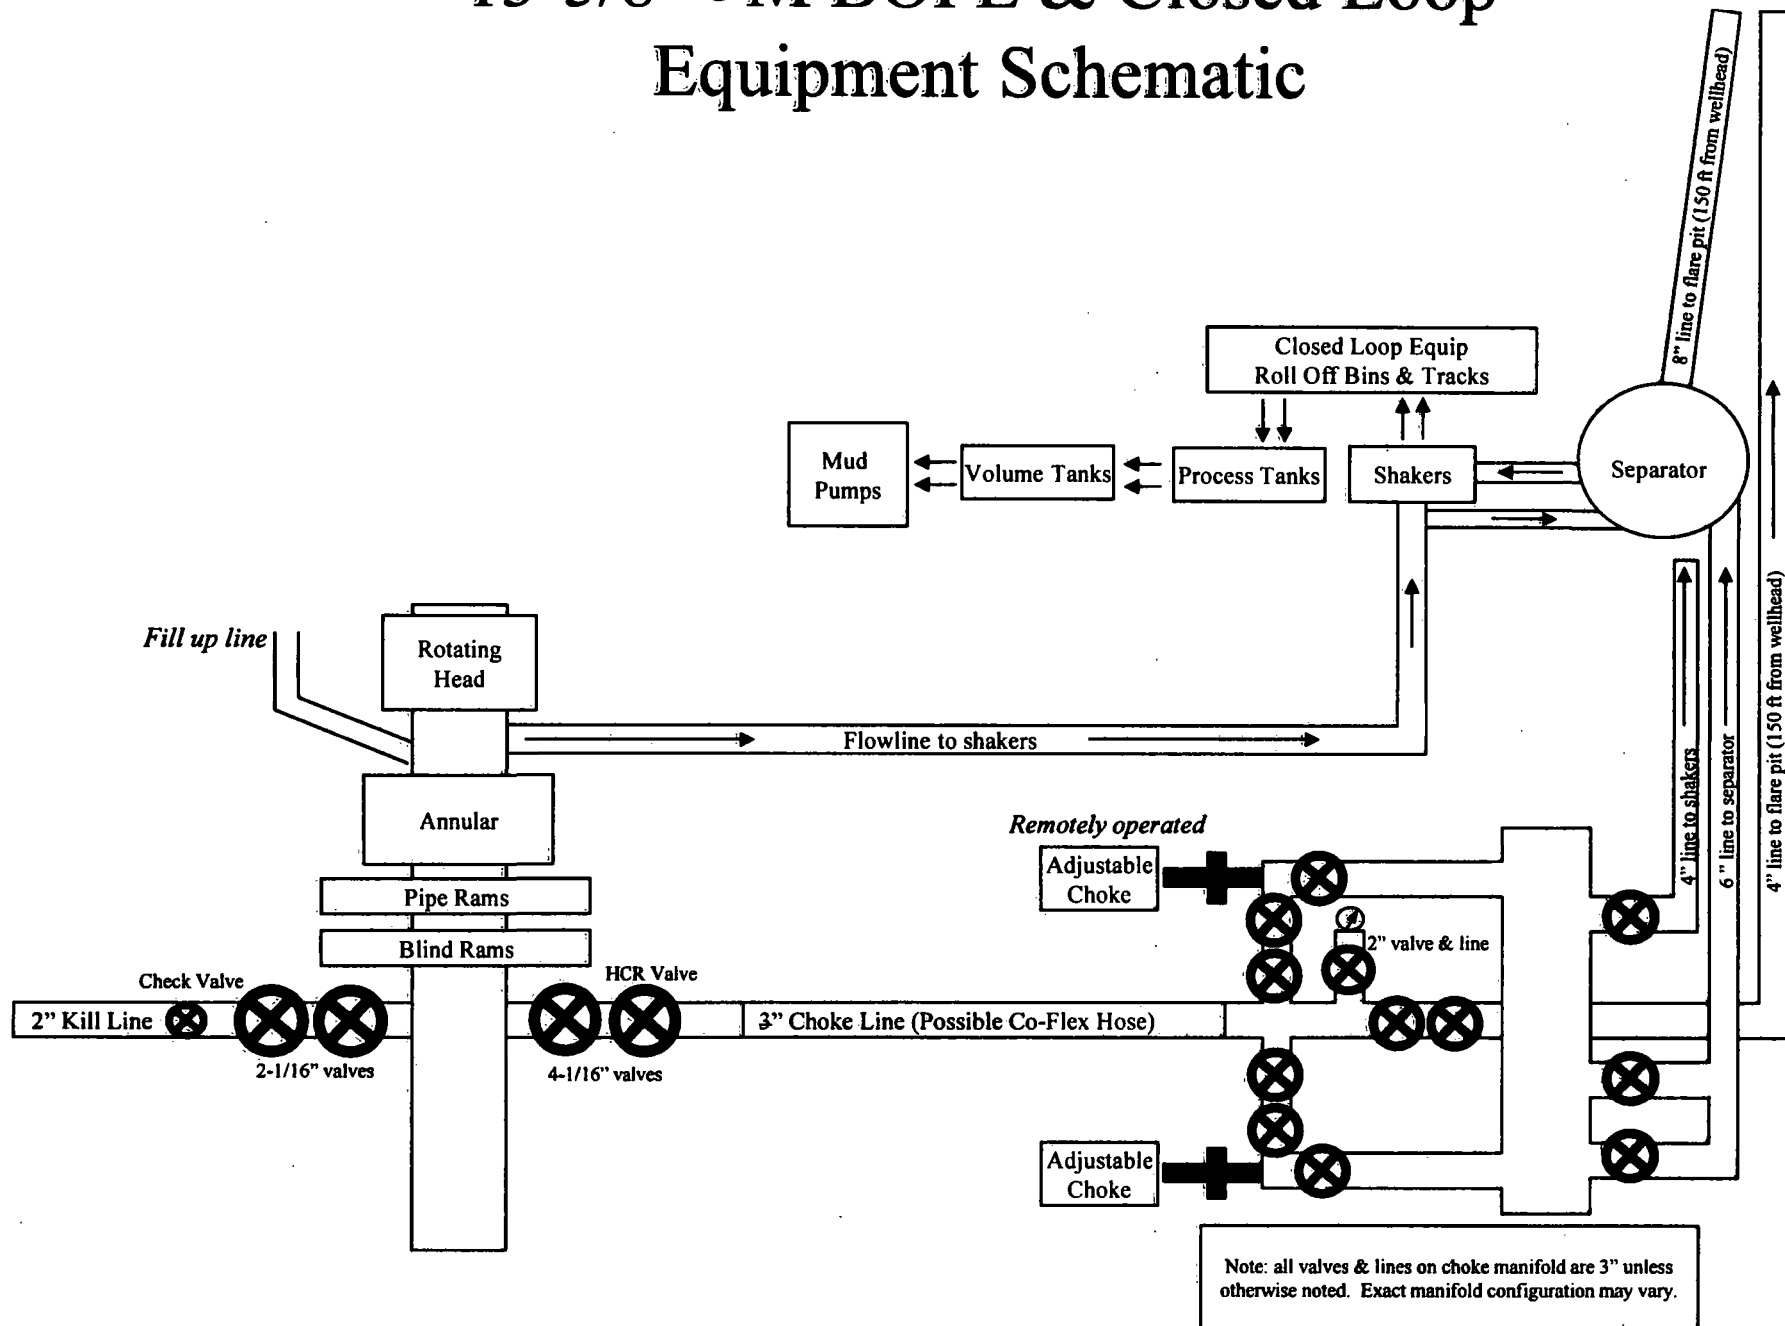



10M BOPE & Closed Loop Equipment Schematic

10M Remote
Kill Line Schematic


Outside
Remote Kill
Line Valve

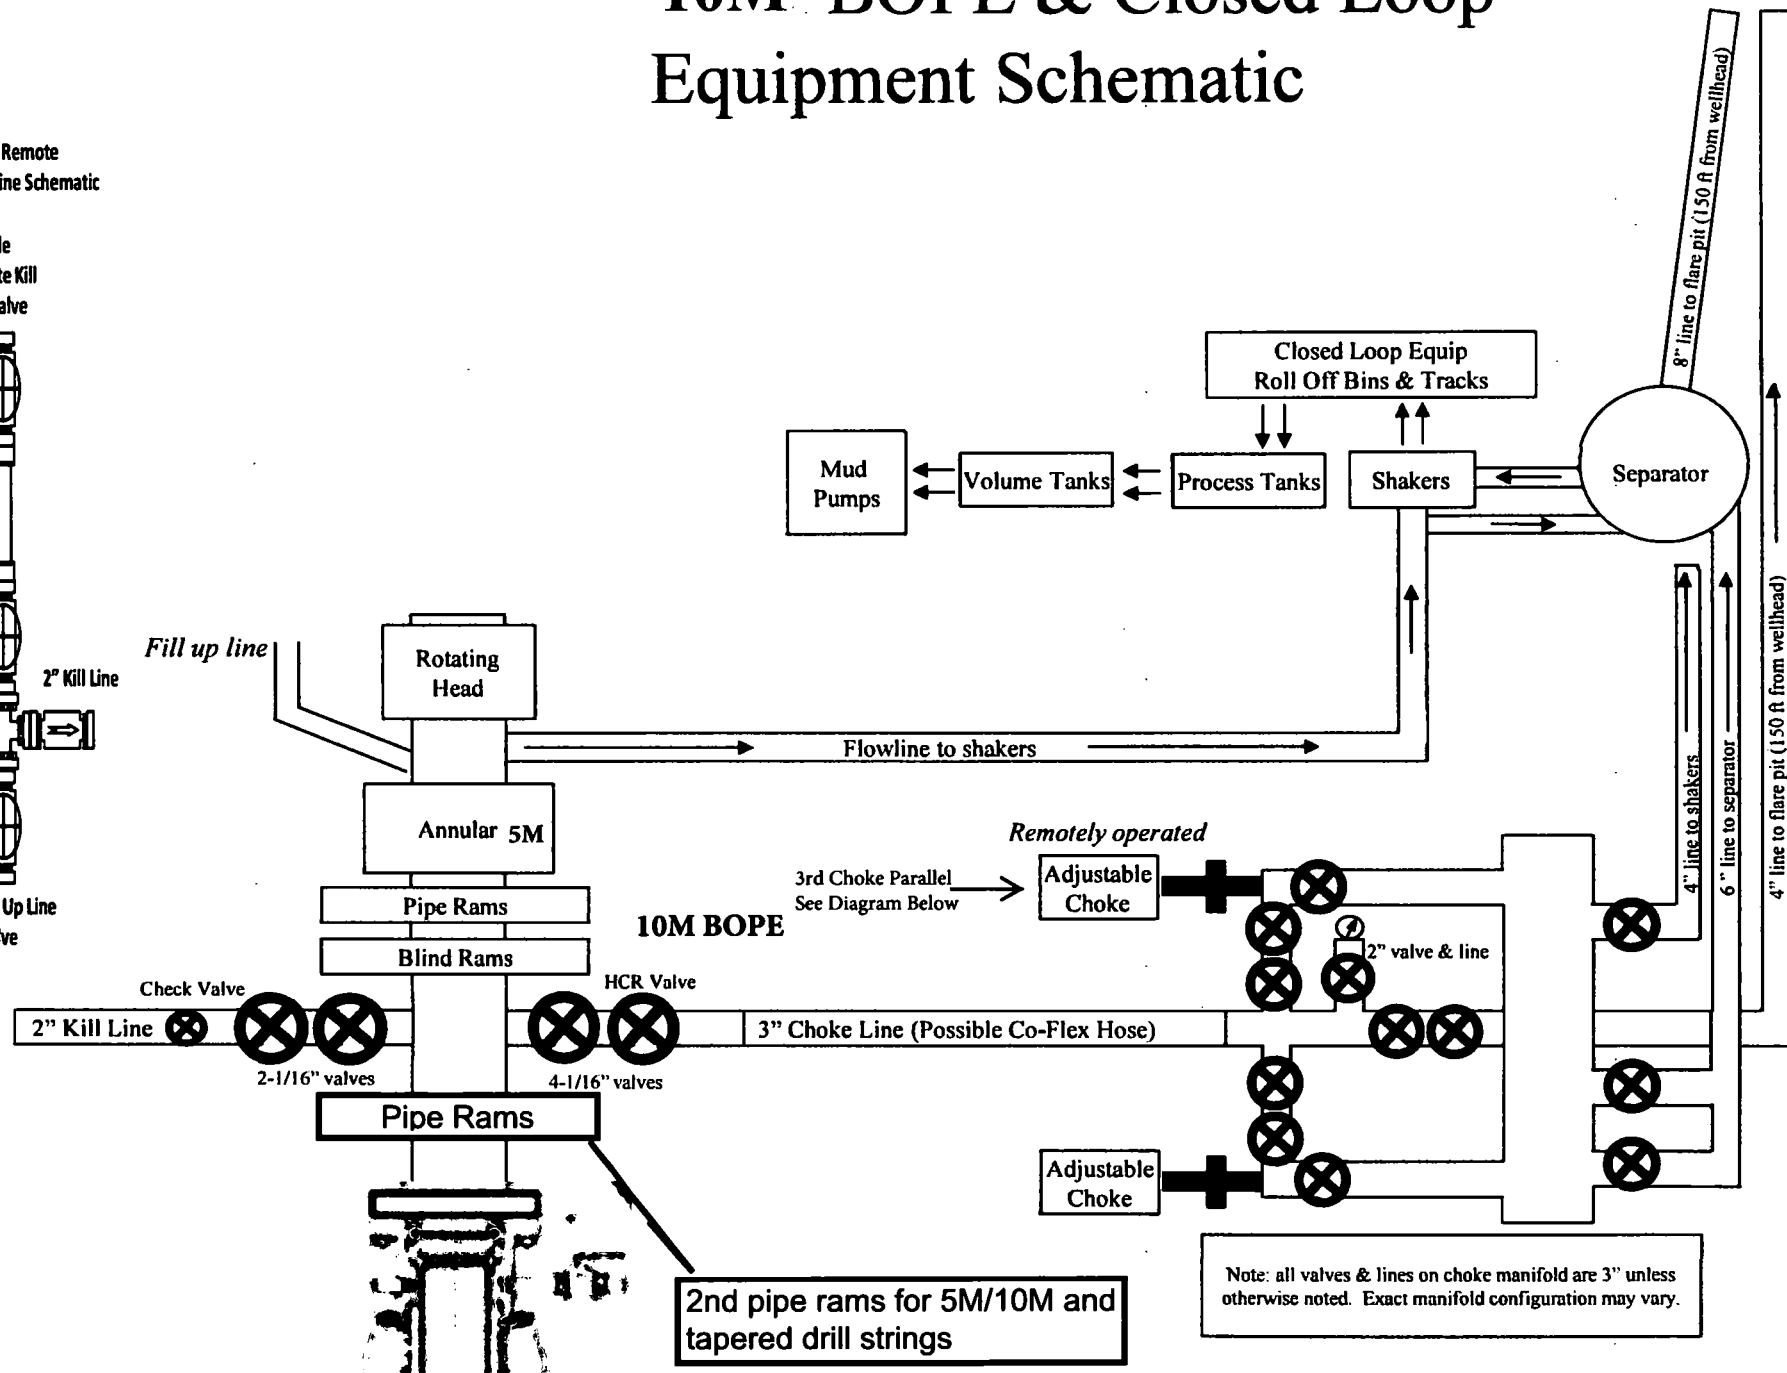


Note: all valves & lines on choke manifold are 3" unless otherwise noted. Exact manifold configuration may vary.

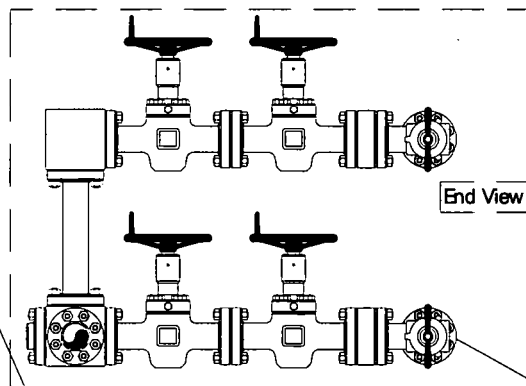

End View

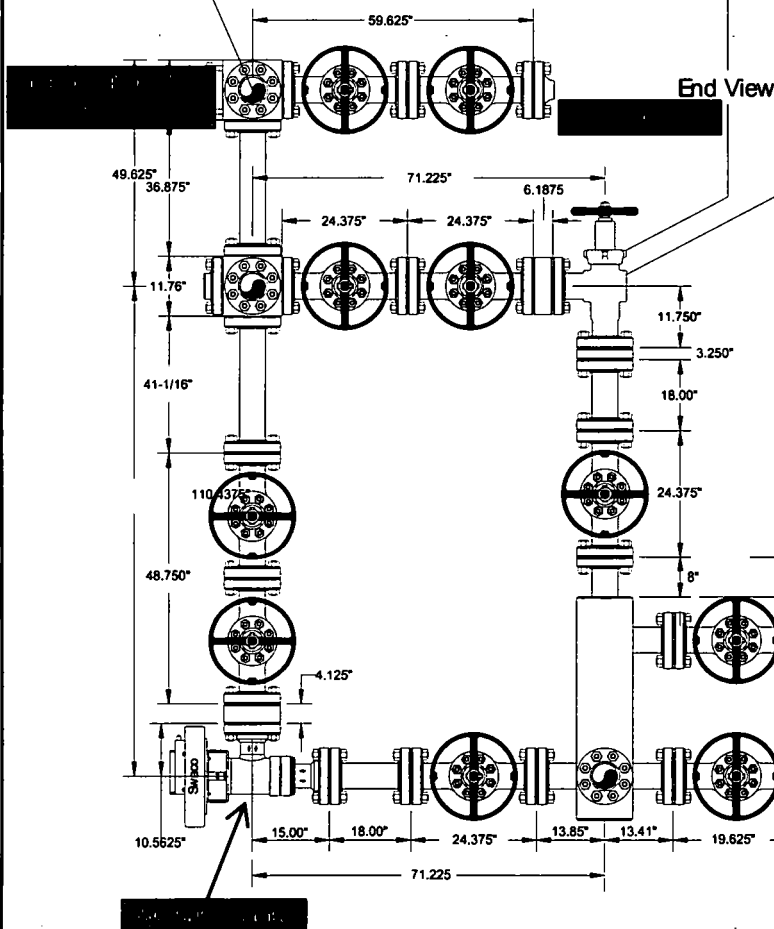

Side View

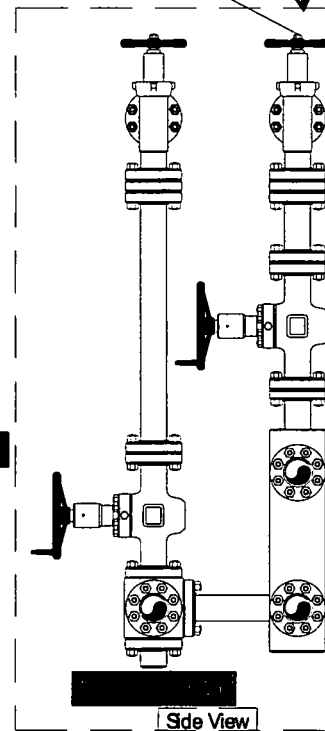

Side View

Helmerich & Payne
Flex 3 Rig w/ 3 Chokes

devon

Name: Mike Potts	Date: 6-23-2010	Working Pressure: 10M	J-5132-E
------------------	-----------------	-----------------------	----------



**Devon Energy Center
333 West Sheridan Avenue
Oklahoma City, Oklahoma 73102-5015**

Hydrogen Sulfide (H₂S) Contingency Plan

For



Blue Krait 23-14 Fed 35H

**Sec-23 T-24S R-33E
245' FSL & 950' FWL
LAT. = 32.196523' N (NAD83)
LONG = 103.548572' W**

Lea County NM

Blue Krait 23-14 Fed 35H

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H₂S, including warning signs, wind indicators and H₂S monitor.

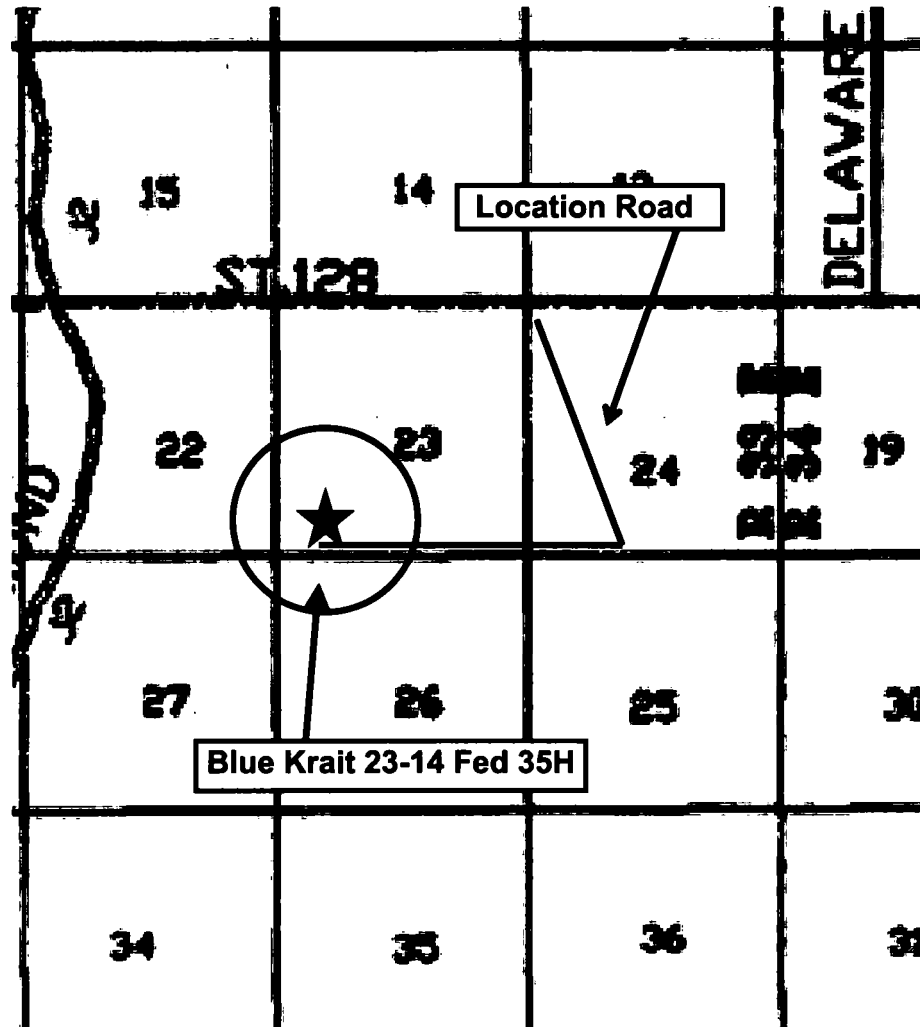

Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated from the location entrance road. Crews should then block the entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are no homes or buildings in or near the ROE.

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must:

- **Isolate the area and prevent entry by other persons into the 100 ppm ROE.**
- **Evacuate any public places encompassed by the 100 ppm ROE.**
- **Be equipped with H₂S monitors and air packs in order to control the release.**
- **Use the "buddy system" to ensure no injuries occur during the response**
- **Take precautions to avoid personal injury during this operation.**
- **Contact operator and/or local officials to aid in operation. See list of phone numbers attached.**
- **Have received training in the**
 - **Detection of H₂S, and**
 - **Measures for protection against the gas,**
 - **Equipment used for protection and emergency response.**

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H₂S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

Devon Energy Corp. personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. Devon Energy Corp. Company response must be in coordination with

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE (H₂S) TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

1. The hazards and characteristics of hydrogen sulfide (H₂S)
2. The proper use and maintenance of personal protective equipment and life support systems.
3. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan.

II. HYDROGEN SULFIDE TRAINING

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S.

1. Well Control Equipment

- A. Flare line
- B. Choke manifold – Remotely Operated
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer and rotating head.
- E. Mud/Gas Separator

2. Protective equipment for essential personnel:

30-minute SCBA units located at briefing areas, as indicated on well site diagram, with escape units available in the top doghouse. As it may be difficult to communicate audibly while wearing these units, hand signals shall be utilized.

3. H₂S detection and monitoring equipment:

Portable H₂S monitors positioned on location for best coverage and response. These units have warning lights which activate when H₂S levels reach 10 ppm and audible sirens which activate at 15 ppm. Sensor locations:

- Bell nipple
- Possum Belly/Shale shaker
- Rig floor
- Choke manifold
- Cellar

Visual warning systems:

- A. Wind direction indicators as shown on well site diagram
- B. Caution/ Danger signs shall be posted on roads providing direct access to locations. Signs will be painted a high visibility yellow with black lettering of sufficient size to be reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

4. Mud program:

The mud program has been designed to minimize the volume of H₂S circulated to surface. Proper mud weight, safe drilling practices and the use of H₂S scavengers will minimize hazards when penetrating H₂S bearing zones.

5. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold lines, and valves shall be H₂S trim.
- B. All elastomers used for packing and seals shall be H₂S trim.

6. Communication:

- A. Company personnel have/use cellular telephones in the field.
- B. Land line (telephone) communications at Office

7. Well testing:

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safety and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H₂S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.


<u>Devon Energy Corp. Company Call List</u>		
Drilling Supervisor – Basin – Mark Kramer		405-823-4796
EHS Professional – Laura Wright		405-439-8129
<u>Agency Call List</u>		
<u>Lea County (575)</u>	Hobbs	
	Lea County Communication Authority	393-3981
	State Police	392-5588
	City Police	397-9265
	Sheriff's Office	393-2515
	Ambulance	911
	Fire Department	397-9308
	LEPC (Local Emergency Planning Committee)	393-2870
	NMOCD	393-6161
	US Bureau of Land Management	393-3612
<u>Eddy County (575)</u>	Carlsbad	
	State Police	885-3137
	City Police	885-2111
	Sheriff's Office	887-7551
	Ambulance	911
	Fire Department	885-3125
	LEPC (Local Emergency Planning Committee)	887-3798
	US Bureau of Land Management	887-6544
	NM Emergency Response Commission (Santa Fe)	(505) 476-9600
	24 HR	(505) 827-9126
	National Emergency Response Center	(800) 424-8802
	National Pollution Control Center: Direct	(703) 872-6000
	For Oil Spills	(800) 280-7118
	Emergency Services	
	Wild Well Control	(281) 784-4700
	Cudd Pressure Control	(915) 699-0139 (915) 563-3356
	Halliburton	(575) 746-2757
	B. J. Services	(575) 746-3569
<u>Give GPS position:</u>	Native Air – Emergency Helicopter – Hobbs	(575) 392-6429
	Flight For Life - Lubbock, TX	(806) 743-9911
	Aerocare - Lubbock, TX	(806) 747-8923
	Med Flight Air Amb - Albuquerque, NM	(575) 842-4433
	Lifeguard Air Med Svc. Albuquerque, NM	(800) 222-1222
	Poison Control (24/7)	(575) 272-3115
	Oil & Gas Pipeline 24 Hour Service	(800) 364-4366
	NOAA – Website - www.nhc.noaa.gov	

Prepared in conjunction with
Dave Small





Devon Energy - Well Pad Rig Location Layout Safety Equipment Location

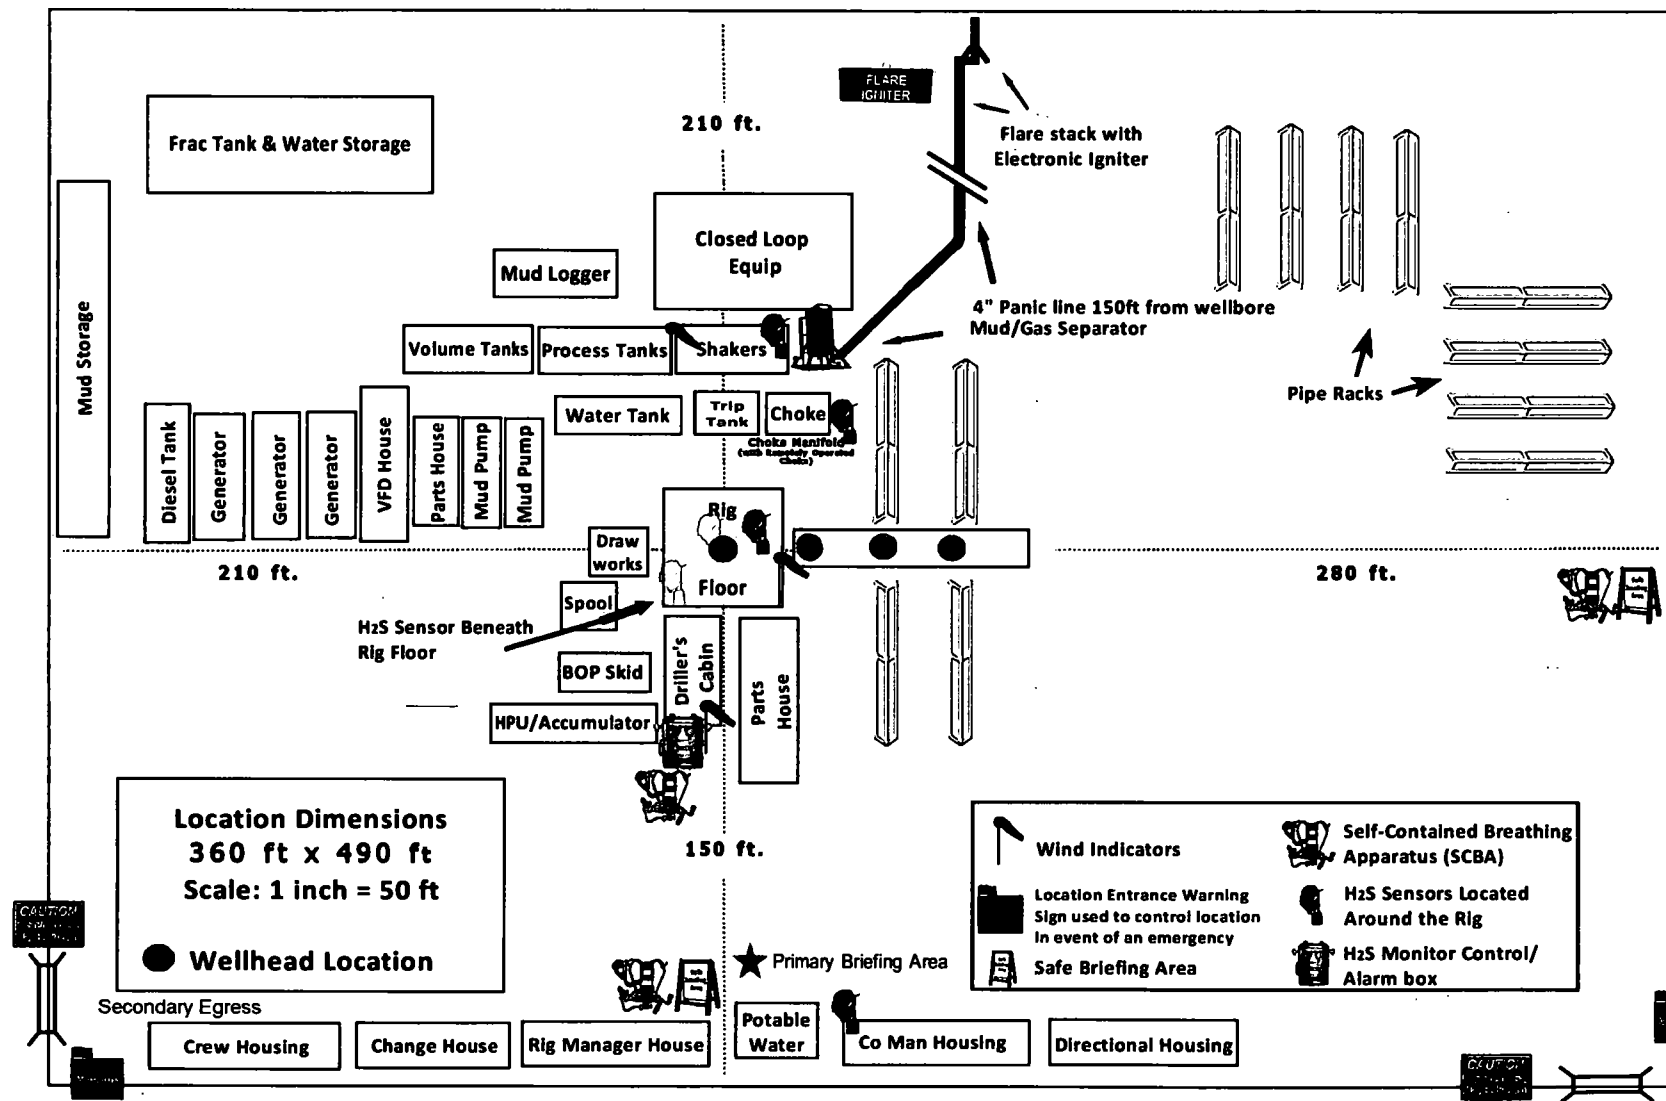

WCDSC Permian NM

Lea County (NAD83 New Mexico East)

Sec 23-T24S-R33E

Blue Krait 23-14 Fed 35H

Wellbore #1

Plan: Permit Plan 1

Standard Planning Report - Geographic

27 December, 2018

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Blue Krait 23-14 Fed 35H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3580.10ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3580.10ft
Site:	Sec 23-T24S-R33E	North Reference:	Grid
Well:	Blue Krait 23-14 Fed 35H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Project	Lea County (NAD83 New Mexico East)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Sec 23-T24S-R33E				
Site Position:		Northing:	446,417.68 usft	Latitude:	32.224862	
From:	Map	Easting:	783,057.71 usft	Longitude:	-103.551658	
Position Uncertainty:		0.00 ft	Slot Radius:	13-3/16 "	Grid Convergence:	0.42 °

Well	Blue Krait 23-14 Fed 35H					
Well Position	+N/-S	0.00 ft	Northing:	436,115.25 usft	Latitude:	32.196523
	+E/-W	0.00 ft	Easting:	784,087.18 usft	Longitude:	-103.548572
Position Uncertainty		0.50 ft	Wellhead Elevation:		Ground Level:	3,555.10 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	12/26/2018	6.78	60.02	47,766.36268545

Design	Permit Plan 1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	356.39

Plan Survey Tool Program	Date	12/27/2018		
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	22,737.53 Permit Plan 1 (Wellbore #1)	MWD+HDGM OWSG MWD + HDGM	

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,262.55	4.63	247.47	5,262.05	-7.15	-17.24	1.00	1.00	0.00	247.47	
11,186.76	4.63	247.47	11,166.97	-190.23	-458.51	0.00	0.00	0.00	0.00	
11,495.13	0.00	0.00	11,475.00	-195.00	-470.00	1.50	-1.50	0.00	180.00	
11,845.17	0.00	0.00	11,825.04	-195.00	-470.00	0.00	0.00	0.00	0.00	
11,939.94	9.48	275.50	11,919.38	-194.25	-477.78	10.00	10.00	0.00	275.50	
12,830.22	90.00	359.57	12,475.00	377.94	-574.33	10.00	9.04	9.44	84.15	
22,737.60	90.00	359.57	12,475.00	10,285.04	-648.68	0.00	0.00	0.00	0.00	PBHL - Blue Krait 23-

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Blue Krait 23-14 Fed 35H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3580.10ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3580.10ft
Site:	Sec 23-T24S-R33E	North Reference:	Grid
Well:	Blue Krait 23-14 Fed 35H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.00	0.00	0.00	0.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
100.00	0.00	0.00	100.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
200.00	0.00	0.00	200.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
300.00	0.00	0.00	300.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
400.00	0.00	0.00	400.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
500.00	0.00	0.00	500.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
600.00	0.00	0.00	600.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
700.00	0.00	0.00	700.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
800.00	0.00	0.00	800.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
900.00	0.00	0.00	900.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
1,000.00	0.00	0.00	1,000.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
1,100.00	0.00	0.00	1,100.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
1,200.00	0.00	0.00	1,200.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
1,300.00	0.00	0.00	1,300.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
1,400.00	0.00	0.00	1,400.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
1,500.00	0.00	0.00	1,500.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
1,600.00	0.00	0.00	1,600.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
1,700.00	0.00	0.00	1,700.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
1,800.00	0.00	0.00	1,800.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
1,900.00	0.00	0.00	1,900.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
2,000.00	0.00	0.00	2,000.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
2,100.00	0.00	0.00	2,100.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
2,200.00	0.00	0.00	2,200.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
2,300.00	0.00	0.00	2,300.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
2,400.00	0.00	0.00	2,400.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
2,500.00	0.00	0.00	2,500.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
2,600.00	0.00	0.00	2,600.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
2,700.00	0.00	0.00	2,700.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
2,800.00	0.00	0.00	2,800.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
2,900.00	0.00	0.00	2,900.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
3,000.00	0.00	0.00	3,000.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
3,100.00	0.00	0.00	3,100.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
3,200.00	0.00	0.00	3,200.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
3,300.00	0.00	0.00	3,300.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
3,400.00	0.00	0.00	3,400.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
3,500.00	0.00	0.00	3,500.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
3,600.00	0.00	0.00	3,600.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
3,700.00	0.00	0.00	3,700.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
3,800.00	0.00	0.00	3,800.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
3,900.00	0.00	0.00	3,900.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
4,000.00	0.00	0.00	4,000.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
4,100.00	0.00	0.00	4,100.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
4,200.00	0.00	0.00	4,200.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
4,300.00	0.00	0.00	4,300.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
4,400.00	0.00	0.00	4,400.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
4,500.00	0.00	0.00	4,500.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
4,600.00	0.00	0.00	4,600.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
4,700.00	0.00	0.00	4,700.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
4,800.00	0.00	0.00	4,800.00	0.00	0.00	436,115.25	784,087.18	32.196523	-103.548572
4,900.00	1.00	247.47	4,900.00	-0.33	-0.81	436,114.92	784,086.37	32.196522	-103.548575
5,000.00	2.00	247.47	4,999.96	-1.34	-3.22	436,113.91	784,083.95	32.196519	-103.548583
5,100.00	3.00	247.47	5,099.86	-3.01	-7.25	436,112.24	784,079.92	32.196515	-103.548596
5,200.00	4.00	247.47	5,199.68	-5.35	-12.89	436,109.90	784,074.29	32.196509	-103.548614
5,262.55	4.63	247.47	5,262.05	-7.15	-17.24	436,108.10	784,069.94	32.196504	-103.548628
5,300.00	4.63	247.47	5,299.38	-8.31	-20.03	436,106.94	784,067.15	32.196501	-103.548637

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Blue Krait 23-14 Fed 35H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3580.10ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3580.10ft
Site:	Sec 23-T24S-R33E	North Reference:	Grid
Well:	Blue Krait 23-14 Fed 35H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
5,400.00	4.63	247.47	5,399.05	-11.40	-27.47	436,103.85	784,059.70	32.196492	-103.548661
5,500.00	4.63	247.47	5,498.72	-14.49	-34.92	436,100.76	784,052.25	32.196484	-103.548685
5,600.00	4.63	247.47	5,598.40	-17.58	-42.37	436,097.67	784,044.81	32.196476	-103.548710
5,700.00	4.63	247.47	5,698.07	-20.67	-49.82	436,094.58	784,037.36	32.196467	-103.548734
5,800.00	4.63	247.47	5,797.75	-23.76	-57.27	436,091.49	784,029.91	32.196459	-103.548758
5,900.00	4.63	247.47	5,897.42	-26.85	-64.72	436,088.40	784,022.46	32.196451	-103.548782
6,000.00	4.63	247.47	5,997.10	-29.94	-72.17	436,085.31	784,015.01	32.196442	-103.548806
6,100.00	4.63	247.47	6,096.77	-33.03	-79.61	436,082.22	784,007.56	32.196434	-103.548830
6,200.00	4.63	247.47	6,196.44	-36.12	-87.06	436,079.13	784,000.11	32.196426	-103.548854
6,300.00	4.63	247.47	6,296.12	-39.21	-94.51	436,076.04	783,992.67	32.196417	-103.548879
6,400.00	4.63	247.47	6,395.79	-42.30	-101.96	436,072.95	783,985.22	32.196409	-103.548903
6,500.00	4.63	247.47	6,495.47	-45.39	-109.41	436,069.86	783,977.77	32.196400	-103.548927
6,600.00	4.63	247.47	6,595.14	-48.48	-116.86	436,066.77	783,970.32	32.196392	-103.548951
6,700.00	4.63	247.47	6,694.82	-51.57	-124.31	436,063.68	783,962.87	32.196384	-103.548975
6,800.00	4.63	247.47	6,794.49	-54.66	-131.76	436,060.59	783,955.42	32.196375	-103.548999
6,900.00	4.63	247.47	6,894.16	-57.75	-139.20	436,057.50	783,947.97	32.196367	-103.549024
7,000.00	4.63	247.47	6,993.84	-60.85	-146.65	436,054.40	783,940.53	32.196359	-103.549048
7,100.00	4.63	247.47	7,093.51	-63.94	-154.10	436,051.31	783,933.08	32.196350	-103.549072
7,200.00	4.63	247.47	7,193.19	-67.03	-161.55	436,048.22	783,925.63	32.196342	-103.549096
7,300.00	4.63	247.47	7,292.86	-70.12	-169.00	436,045.13	783,918.18	32.196334	-103.549120
7,400.00	4.63	247.47	7,392.54	-73.21	-176.45	436,042.04	783,910.73	32.196325	-103.549144
7,500.00	4.63	247.47	7,492.21	-76.30	-183.90	436,038.95	783,903.28	32.196317	-103.549168
7,600.00	4.63	247.47	7,591.88	-79.39	-191.34	436,035.86	783,895.83	32.196309	-103.549193
7,700.00	4.63	247.47	7,691.56	-82.48	-198.79	436,032.77	783,888.39	32.196300	-103.549217
7,800.00	4.63	247.47	7,791.23	-85.57	-206.24	436,029.68	783,880.94	32.196292	-103.549241
7,900.00	4.63	247.47	7,890.91	-88.66	-213.69	436,026.59	783,873.49	32.196284	-103.549265
8,000.00	4.63	247.47	7,990.58	-91.75	-221.14	436,023.50	783,866.04	32.196275	-103.549289
8,100.00	4.63	247.47	8,090.26	-94.84	-228.59	436,020.41	783,858.59	32.196267	-103.549313
8,200.00	4.63	247.47	8,189.93	-97.93	-236.04	436,017.32	783,851.14	32.196259	-103.549337
8,300.00	4.63	247.47	8,289.61	-101.02	-243.48	436,014.23	783,843.69	32.196250	-103.549362
8,400.00	4.63	247.47	8,389.28	-104.11	-250.93	436,011.14	783,836.24	32.196242	-103.549386
8,500.00	4.63	247.47	8,488.95	-107.20	-258.38	436,008.05	783,828.80	32.196234	-103.549410
8,600.00	4.63	247.47	8,588.63	-110.29	-265.83	436,004.96	783,821.35	32.196225	-103.549434
8,700.00	4.63	247.47	8,688.30	-113.38	-273.28	436,001.87	783,813.90	32.196217	-103.549458
8,800.00	4.63	247.47	8,787.98	-116.47	-280.73	435,998.78	783,806.45	32.196209	-103.549482
8,900.00	4.63	247.47	8,887.65	-119.56	-288.18	435,995.69	783,799.00	32.196200	-103.549507
9,000.00	4.63	247.47	8,987.33	-122.65	-295.63	435,992.60	783,791.55	32.196192	-103.549531
9,100.00	4.63	247.47	9,087.00	-125.74	-303.07	435,989.51	783,784.10	32.196184	-103.549555
9,200.00	4.63	247.47	9,186.67	-128.83	-310.52	435,986.42	783,776.66	32.196175	-103.549579
9,300.00	4.63	247.47	9,286.35	-131.92	-317.97	435,983.33	783,769.21	32.196167	-103.549603
9,400.00	4.63	247.47	9,386.02	-135.01	-325.42	435,980.24	783,761.76	32.196158	-103.549627
9,500.00	4.63	247.47	9,485.70	-138.10	-332.87	435,977.15	783,754.31	32.196150	-103.549651
9,600.00	4.63	247.47	9,585.37	-141.20	-340.32	435,974.05	783,746.86	32.196142	-103.549676
9,700.00	4.63	247.47	9,685.05	-144.29	-347.77	435,970.96	783,739.41	32.196133	-103.549700
9,800.00	4.63	247.47	9,784.72	-147.38	-355.21	435,967.87	783,731.96	32.196125	-103.549724
9,900.00	4.63	247.47	9,884.39	-150.47	-362.66	435,964.78	783,724.52	32.196117	-103.549748
10,000.00	4.63	247.47	9,984.07	-153.56	-370.11	435,961.69	783,717.07	32.196108	-103.549772
10,100.00	4.63	247.47	10,083.74	-156.65	-377.56	435,958.60	783,709.62	32.196100	-103.549796
10,200.00	4.63	247.47	10,183.42	-159.74	-385.01	435,955.51	783,702.17	32.196092	-103.549820
10,300.00	4.63	247.47	10,283.09	-162.83	-392.46	435,952.42	783,694.72	32.196083	-103.549845
10,400.00	4.63	247.47	10,382.77	-165.92	-399.91	435,949.33	783,687.27	32.196075	-103.549869
10,500.00	4.63	247.47	10,482.44	-169.01	-407.35	435,946.24	783,679.82	32.196067	-103.549893
10,600.00	4.63	247.47	10,582.11	-172.10	-414.80	435,943.15	783,672.38	32.196058	-103.549917
10,700.00	4.63	247.47	10,681.79	-175.19	-422.25	435,940.06	783,664.93	32.196050	-103.549941
10,800.00	4.63	247.47	10,781.46	-178.28	-429.70	435,936.97	783,657.48	32.196042	-103.549965

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Blue Krait 23-14 Fed 35H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3580.10ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3580.10ft
Site:	Sec 23-T24S-R33E	North Reference:	Grid
Well:	Blue Krait 23-14 Fed 35H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
10,900.00	4.63	247.47	10,881.14	-181.37	-437.15	435,933.88	783,650.03	32.196033	-103.549990
11,000.00	4.63	247.47	10,980.81	-184.46	-444.60	435,930.79	783,642.58	32.196025	-103.550014
11,100.00	4.63	247.47	11,080.49	-187.55	-452.05	435,927.70	783,635.13	32.196017	-103.550038
11,186.76	4.63	247.47	11,166.97	-190.23	-458.51	435,925.02	783,628.67	32.196009	-103.550059
11,200.00	4.43	247.47	11,180.16	-190.63	-459.47	435,924.62	783,627.70	32.196008	-103.550062
11,300.00	2.93	247.47	11,279.95	-193.09	-465.40	435,922.16	783,621.78	32.196002	-103.550081
11,400.00	1.43	247.47	11,379.88	-194.55	-468.91	435,920.70	783,618.27	32.195998	-103.550092
11,495.13	0.00	0.00	11,475.00	-195.00	-470.00	435,920.25	783,617.18	32.195997	-103.550096
11,500.00	0.00	0.00	11,479.87	-195.00	-470.00	435,920.25	783,617.18	32.195997	-103.550096
11,600.00	0.00	0.00	11,579.87	-195.00	-470.00	435,920.25	783,617.18	32.195997	-103.550096
11,700.00	0.00	0.00	11,679.87	-195.00	-470.00	435,920.25	783,617.18	32.195997	-103.550096
11,800.00	0.00	0.00	11,779.87	-195.00	-470.00	435,920.25	783,617.18	32.195997	-103.550096
11,845.17	0.00	0.00	11,825.04	-195.00	-470.00	435,920.25	783,617.18	32.195997	-103.550096
KOP @ 11845' MD, 50' FSL, 480' FWL									
11,900.00	5.48	275.50	11,879.78	-194.75	-472.61	435,920.50	783,614.57	32.195997	-103.550104
11,939.94	9.48	275.50	11,919.38	-194.25	-477.78	435,921.00	783,609.39	32.195999	-103.550121
12,000.00	11.71	306.35	11,978.46	-190.16	-487.62	435,925.09	783,599.56	32.196010	-103.550153
12,100.00	19.35	331.36	12,074.83	-169.55	-503.78	435,945.70	783,583.40	32.196067	-103.550205
12,170.00	25.66	339.36	12,139.48	-145.15	-514.70	435,970.10	783,572.48	32.196134	-103.550239
FTP @ 12170' MD, 100' FSL, 436' FWL									
12,200.00	28.46	341.74	12,166.20	-132.28	-519.23	435,982.97	783,567.95	32.196170	-103.550254
12,300.00	38.00	347.30	12,249.77	-79.49	-533.50	436,035.76	783,553.68	32.196315	-103.550299
12,400.00	47.70	350.88	12,323.01	-12.78	-546.16	436,102.47	783,541.02	32.196499	-103.550338
12,500.00	57.48	353.49	12,383.70	65.82	-556.83	436,181.07	783,530.35	32.196715	-103.550371
12,600.00	67.31	355.59	12,429.98	153.92	-565.17	436,269.17	783,522.00	32.196957	-103.550395
12,700.00	77.16	357.40	12,460.46	248.86	-570.95	436,364.10	783,516.23	32.197219	-103.550412
12,800.00	87.02	359.07	12,474.21	347.73	-573.97	436,462.98	783,513.21	32.197490	-103.550419
12,830.22	90.00	359.57	12,475.00	377.94	-574.33	436,493.19	783,512.85	32.197573	-103.550420
12,900.00	90.00	359.57	12,475.00	447.71	-574.85	436,562.96	783,512.33	32.197765	-103.550420
13,000.00	90.00	359.57	12,475.00	547.71	-575.60	436,662.96	783,511.57	32.198040	-103.550420
13,100.00	90.00	359.57	12,475.00	647.71	-576.35	436,762.96	783,510.82	32.198315	-103.550420
13,200.00	90.00	359.57	12,475.00	747.70	-577.11	436,862.95	783,510.07	32.198590	-103.550420
13,300.00	90.00	359.57	12,475.00	847.70	-577.86	436,962.95	783,509.32	32.198865	-103.550420
13,400.00	90.00	359.57	12,475.00	947.70	-578.61	437,062.95	783,508.57	32.199140	-103.550420
13,500.00	90.00	359.57	12,475.00	1,047.70	-579.36	437,162.94	783,507.82	32.199414	-103.550420
13,600.00	90.00	359.57	12,475.00	1,147.69	-580.11	437,262.94	783,507.07	32.199689	-103.550420
13,700.00	90.00	359.57	12,475.00	1,247.69	-580.86	437,362.94	783,506.32	32.199964	-103.550420
13,800.00	90.00	359.57	12,475.00	1,347.69	-581.61	437,462.94	783,505.57	32.200239	-103.550421
13,900.00	90.00	359.57	12,475.00	1,447.69	-582.36	437,562.93	783,504.82	32.200514	-103.550421
14,000.00	90.00	359.57	12,475.00	1,547.68	-583.11	437,662.93	783,504.07	32.200789	-103.550421
14,100.00	90.00	359.57	12,475.00	1,647.68	-583.86	437,762.93	783,503.32	32.201064	-103.550421
14,200.00	90.00	359.57	12,475.00	1,747.68	-584.61	437,862.92	783,502.57	32.201339	-103.550421
14,300.00	90.00	359.57	12,475.00	1,847.67	-585.36	437,962.92	783,501.82	32.201613	-103.550421
14,400.00	90.00	359.57	12,475.00	1,947.67	-586.11	438,062.92	783,501.07	32.201888	-103.550421
14,500.00	90.00	359.57	12,475.00	2,047.67	-586.86	438,162.91	783,500.32	32.202163	-103.550421
14,600.00	90.00	359.57	12,475.00	2,147.67	-587.61	438,262.91	783,499.57	32.202438	-103.550421
14,700.00	90.00	359.57	12,475.00	2,247.66	-588.36	438,362.91	783,498.82	32.202713	-103.550421
14,800.00	90.00	359.57	12,475.00	2,347.66	-589.11	438,462.90	783,498.07	32.202988	-103.550421
14,900.00	90.00	359.57	12,475.00	2,447.66	-589.86	438,562.90	783,497.32	32.203263	-103.550421
15,000.00	90.00	359.57	12,475.00	2,547.65	-590.61	438,662.90	783,496.56	32.203538	-103.550421
15,100.00	90.00	359.57	12,475.00	2,647.65	-591.36	438,762.90	783,495.81	32.203812	-103.550421
15,200.00	90.00	359.57	12,475.00	2,747.65	-592.11	438,862.89	783,495.06	32.204087	-103.550422
15,300.00	90.00	359.57	12,475.00	2,847.65	-592.87	438,962.89	783,494.31	32.204362	-103.550422
15,400.00	90.00	359.57	12,475.00	2,947.64	-593.62	439,062.89	783,493.56	32.204637	-103.550422

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Blue Krait 23-14 Fed 35H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3580.10ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3580.10ft
Site:	Sec 23-T24S-R33E	North Reference:	Grid
Well:	Blue Krait 23-14 Fed 35H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
15,500.00	90.00	359.57	12,475.00	3,047.64	-594.37	439,162.88	783,492.81	32.204912	-103.550422
15,600.00	90.00	359.57	12,475.00	3,147.64	-595.12	439,262.88	783,492.06	32.205187	-103.550422
15,700.00	90.00	359.57	12,475.00	3,247.63	-595.87	439,362.88	783,491.31	32.205462	-103.550422
15,800.00	90.00	359.57	12,475.00	3,347.63	-596.62	439,462.87	783,490.56	32.205737	-103.550422
15,900.00	90.00	359.57	12,475.00	3,447.63	-597.37	439,562.87	783,489.81	32.206011	-103.550422
16,000.00	90.00	359.57	12,475.00	3,547.63	-598.12	439,662.87	783,489.06	32.206286	-103.550422
16,100.00	90.00	359.57	12,475.00	3,647.62	-598.87	439,762.87	783,488.31	32.206561	-103.550422
16,200.00	90.00	359.57	12,475.00	3,747.62	-599.62	439,862.86	783,487.56	32.206836	-103.550422
16,300.00	90.00	359.57	12,475.00	3,847.62	-600.37	439,962.86	783,486.81	32.207111	-103.550422
16,400.00	90.00	359.57	12,475.00	3,947.61	-601.12	440,062.86	783,486.06	32.207386	-103.550422
16,500.00	90.00	359.57	12,475.00	4,047.61	-601.87	440,162.85	783,485.31	32.207661	-103.550422
16,600.00	90.00	359.57	12,475.00	4,147.61	-602.62	440,262.85	783,484.56	32.207935	-103.550423
16,700.00	90.00	359.57	12,475.00	4,247.61	-603.37	440,362.85	783,483.81	32.208210	-103.550423
16,800.00	90.00	359.57	12,475.00	4,347.60	-604.12	440,462.84	783,483.06	32.208485	-103.550423
16,900.00	90.00	359.57	12,475.00	4,447.60	-604.87	440,562.84	783,482.31	32.208760	-103.550423
17,000.00	90.00	359.57	12,475.00	4,547.60	-605.62	440,662.84	783,481.56	32.209035	-103.550423
17,100.00	90.00	359.57	12,475.00	4,647.60	-606.37	440,762.84	783,480.80	32.209310	-103.550423
17,200.00	90.00	359.57	12,475.00	4,747.59	-607.12	440,862.83	783,480.05	32.209585	-103.550423
17,300.00	90.00	359.57	12,475.00	4,847.59	-607.87	440,962.83	783,479.30	32.209860	-103.550423
17,400.00	90.00	359.57	12,475.00	4,947.59	-608.63	441,062.83	783,478.55	32.210134	-103.550423
17,487.00	90.00	359.57	12,475.00	5,034.58	-609.28	441,149.82	783,477.90	32.210374	-103.550423
Cross Section @ 17487' MD, 0' FSL, 380' FWL									
17,500.00	90.00	359.57	12,475.00	5,047.58	-609.38	441,162.82	783,477.80	32.210409	-103.550423
17,600.00	90.00	359.57	12,475.00	5,147.58	-610.13	441,262.82	783,477.05	32.210684	-103.550423
17,700.00	90.00	359.57	12,475.00	5,247.58	-610.88	441,362.82	783,476.30	32.210959	-103.550423
17,800.00	90.00	359.57	12,475.00	5,347.58	-611.63	441,462.81	783,475.55	32.211234	-103.550423
17,900.00	90.00	359.57	12,475.00	5,447.57	-612.38	441,562.81	783,474.80	32.211509	-103.550423
18,000.00	90.00	359.57	12,475.00	5,547.57	-613.13	441,662.81	783,474.05	32.211784	-103.550424
18,100.00	90.00	359.57	12,475.00	5,647.57	-613.88	441,762.81	783,473.30	32.212059	-103.550424
18,200.00	90.00	359.57	12,475.00	5,747.56	-614.63	441,862.80	783,472.55	32.212333	-103.550424
18,300.00	90.00	359.57	12,475.00	5,847.56	-615.38	441,962.80	783,471.80	32.212608	-103.550424
18,400.00	90.00	359.57	12,475.00	5,947.56	-616.13	442,062.80	783,471.05	32.212883	-103.550424
18,500.00	90.00	359.57	12,475.00	6,047.56	-616.88	442,162.79	783,470.30	32.213158	-103.550424
18,600.00	90.00	359.57	12,475.00	6,147.55	-617.63	442,262.79	783,469.55	32.213433	-103.550424
18,700.00	90.00	359.57	12,475.00	6,247.55	-618.38	442,362.79	783,468.80	32.213708	-103.550424
18,800.00	90.00	359.57	12,475.00	6,347.55	-619.13	442,462.78	783,468.05	32.213983	-103.550424
18,900.00	90.00	359.57	12,475.00	6,447.54	-619.88	442,562.78	783,467.30	32.214258	-103.550424
19,000.00	90.00	359.57	12,475.00	6,547.54	-620.63	442,662.78	783,466.55	32.214532	-103.550424
19,100.00	90.00	359.57	12,475.00	6,647.54	-621.38	442,762.78	783,465.80	32.214807	-103.550424
19,200.00	90.00	359.57	12,475.00	6,747.54	-622.13	442,862.77	783,465.04	32.215082	-103.550424
19,300.00	90.00	359.57	12,475.00	6,847.53	-622.88	442,962.77	783,464.29	32.215357	-103.550424
19,400.00	90.00	359.57	12,475.00	6,947.53	-623.64	443,062.77	783,463.54	32.215632	-103.550425
19,500.00	90.00	359.57	12,475.00	7,047.53	-624.39	443,162.76	783,462.79	32.215907	-103.550425
19,600.00	90.00	359.57	12,475.00	7,147.52	-625.14	443,262.76	783,462.04	32.216182	-103.550425
19,700.00	90.00	359.57	12,475.00	7,247.52	-625.89	443,362.76	783,461.29	32.216457	-103.550425
19,800.00	90.00	359.57	12,475.00	7,347.52	-626.64	443,462.75	783,460.54	32.216731	-103.550425
19,900.00	90.00	359.57	12,475.00	7,447.52	-627.39	443,562.75	783,459.79	32.217006	-103.550425
20,000.00	90.00	359.57	12,475.00	7,547.51	-628.14	443,662.75	783,459.04	32.217281	-103.550425
20,100.00	90.00	359.57	12,475.00	7,647.51	-628.89	443,762.75	783,458.29	32.217556	-103.550425
20,200.00	90.00	359.57	12,475.00	7,747.51	-629.64	443,862.74	783,457.54	32.217831	-103.550425
20,300.00	90.00	359.57	12,475.00	7,847.51	-630.39	443,962.74	783,456.79	32.218106	-103.550425
20,400.00	90.00	359.57	12,475.00	7,947.50	-631.14	444,062.74	783,456.04	32.218381	-103.550425
20,500.00	90.00	359.57	12,475.00	8,047.50	-631.89	444,162.73	783,455.29	32.218656	-103.550425
20,600.00	90.00	359.57	12,475.00	8,147.50	-632.64	444,262.73	783,454.54	32.218930	-103.550425

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Blue Krait 23-14 Fed 35H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3580.10ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3580.10ft
Site:	Sec 23-T24S-R33E	North Reference:	Grid
Well:	Blue Krait 23-14 Fed 35H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
20,700.00	90.00	359.57	12,475.00	8,247.49	-633.39	444,362.73	783,453.79	32.219205	-103.550425	
20,800.00	90.00	359.57	12,475.00	8,347.49	-634.14	444,462.72	783,453.04	32.219480	-103.550426	
20,900.00	90.00	359.57	12,475.00	8,447.49	-634.89	444,562.72	783,452.29	32.219755	-103.550426	
21,000.00	90.00	359.57	12,475.00	8,547.49	-635.64	444,662.72	783,451.54	32.220030	-103.550426	
21,100.00	90.00	359.57	12,475.00	8,647.48	-636.39	444,762.72	783,450.79	32.220305	-103.550426	
21,200.00	90.00	359.57	12,475.00	8,747.48	-637.14	444,862.71	783,450.03	32.220580	-103.550426	
21,300.00	90.00	359.57	12,475.00	8,847.48	-637.89	444,962.71	783,449.28	32.220854	-103.550426	
21,400.00	90.00	359.57	12,475.00	8,947.47	-638.64	445,062.71	783,448.53	32.221129	-103.550426	
21,500.00	90.00	359.57	12,475.00	9,047.47	-639.40	445,162.70	783,447.78	32.221404	-103.550426	
21,600.00	90.00	359.57	12,475.00	9,147.47	-640.15	445,262.70	783,447.03	32.221679	-103.550426	
21,700.00	90.00	359.57	12,475.00	9,247.47	-640.90	445,362.70	783,446.28	32.221954	-103.550426	
21,800.00	90.00	359.57	12,475.00	9,347.46	-641.65	445,462.69	783,445.53	32.222229	-103.550426	
21,900.00	90.00	359.57	12,475.00	9,447.46	-642.40	445,562.69	783,444.78	32.222504	-103.550426	
22,000.00	90.00	359.57	12,475.00	9,547.46	-643.15	445,662.69	783,444.03	32.222779	-103.550426	
22,100.00	90.00	359.57	12,475.00	9,647.45	-643.90	445,762.68	783,443.28	32.223053	-103.550426	
22,200.00	90.00	359.57	12,475.00	9,747.45	-644.65	445,862.68	783,442.53	32.223328	-103.550427	
22,300.00	90.00	359.57	12,475.00	9,847.45	-645.40	445,962.68	783,441.78	32.223603	-103.550427	
22,400.00	90.00	359.57	12,475.00	9,947.45	-646.15	446,062.68	783,441.03	32.223878	-103.550427	
22,500.00	90.00	359.57	12,475.00	10,047.44	-646.90	446,162.67	783,440.28	32.224153	-103.550427	
22,600.00	90.00	359.57	12,475.00	10,147.44	-647.65	446,262.67	783,439.53	32.224428	-103.550427	
22,657.59	90.00	359.57	12,475.00	10,205.03	-648.08	446,320.26	783,439.10	32.224586	-103.550427	
LTP @ 22658' MD, 100' FNL, 380' FWL										
22,700.00	90.00	359.57	12,475.00	10,247.44	-648.40	446,362.67	783,438.78	32.224703	-103.550427	
22,737.59	90.00	359.57	12,475.00	10,285.03	-648.68	446,400.26	783,438.50	32.224806	-103.550427	
PBHL; 20' FNL, 380' FWL										
22,737.60	90.00	359.57	12,475.00	10,285.04	-648.68	446,400.27	783,438.50	32.224806	-103.550427	

Design Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting		
- Shape	(°)	(°)	(ft)	(ft)	(ft)	(usft)	(usft)	Latitude	Longitude
PBHL - Blue Krait 23-14	0.00	0.00	0.00	10,285.00	-649.28	446,400.23	783,437.90	32.224806	-103.550429
- plan misses target center by 10305.47ft at 0.00ft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Point									

Plan Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates			
		+N/-S (ft)	+E/-W (ft)	Comment	
11,845.17	11,825.04	-195.00	-470.00	KOP @ 11845' MD, 50' FSL, 480' FWL	
12,170.00	12,139.48	-145.15	-514.70	FTP @ 12170' MD, 100' FSL, 436' FWL	
17,487.00	12,475.00	5,034.58	-609.28	Cross Section @ 17487' MD, 0' FSL, 380' FWL	
22,657.59	12,475.00	10,205.03	-648.08	LTP @ 22658' MD, 100' FNL, 380' FWL	
22,737.59	12,475.00	10,285.03	-648.68	PBHL; 20' FNL, 380' FWL	

WELL DETAILS: Blue Krait 23-14 Fed 35H

RKB @ 3580.10m

3555.10

North	436115.25	East	784087.18
-------	-----------	------	-----------



Easting
784087.18

Latitude
32.196523

Longitude
-103.548572

SECTION DETAILS Permit Plan 1

	MD	Inc	Azi	TVD	+N/-S	+E/-W	Ddeg	Vsect	Annotation
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	4800.00	0.00	0.00	4800.00	0.00	0.00	0.00	0.00	
	5262.55	4.63	247.47	5262.05	-7.15	-17.24	1.00	-6.05	
	11185.76	4.63	247.47	11185.87	-190.23	-458.51	0.00	-150.99	
5	11845.13	0.00	0.00	11475.00	-185.00	-470.00	1.50	-165.03	
8	11845.17	0.00	0.00	11825.04	-185.00	-470.00	0.00	-165.03	KOP @ 11845' MD, 50' FSL, 480' FWL
7	11939.84	9.48	275.50	11919.38	-194.25	-477.78	10.00	-163.79	
8	12830.22	90.00	359.57	12475.00	377.94	-574.33	10.00	413.34	
9	22737.60	90.00	359.57	12475.00	10285.04	-648.68	0.00	10305.47	PBHL: 20' FNL, 380' FWL

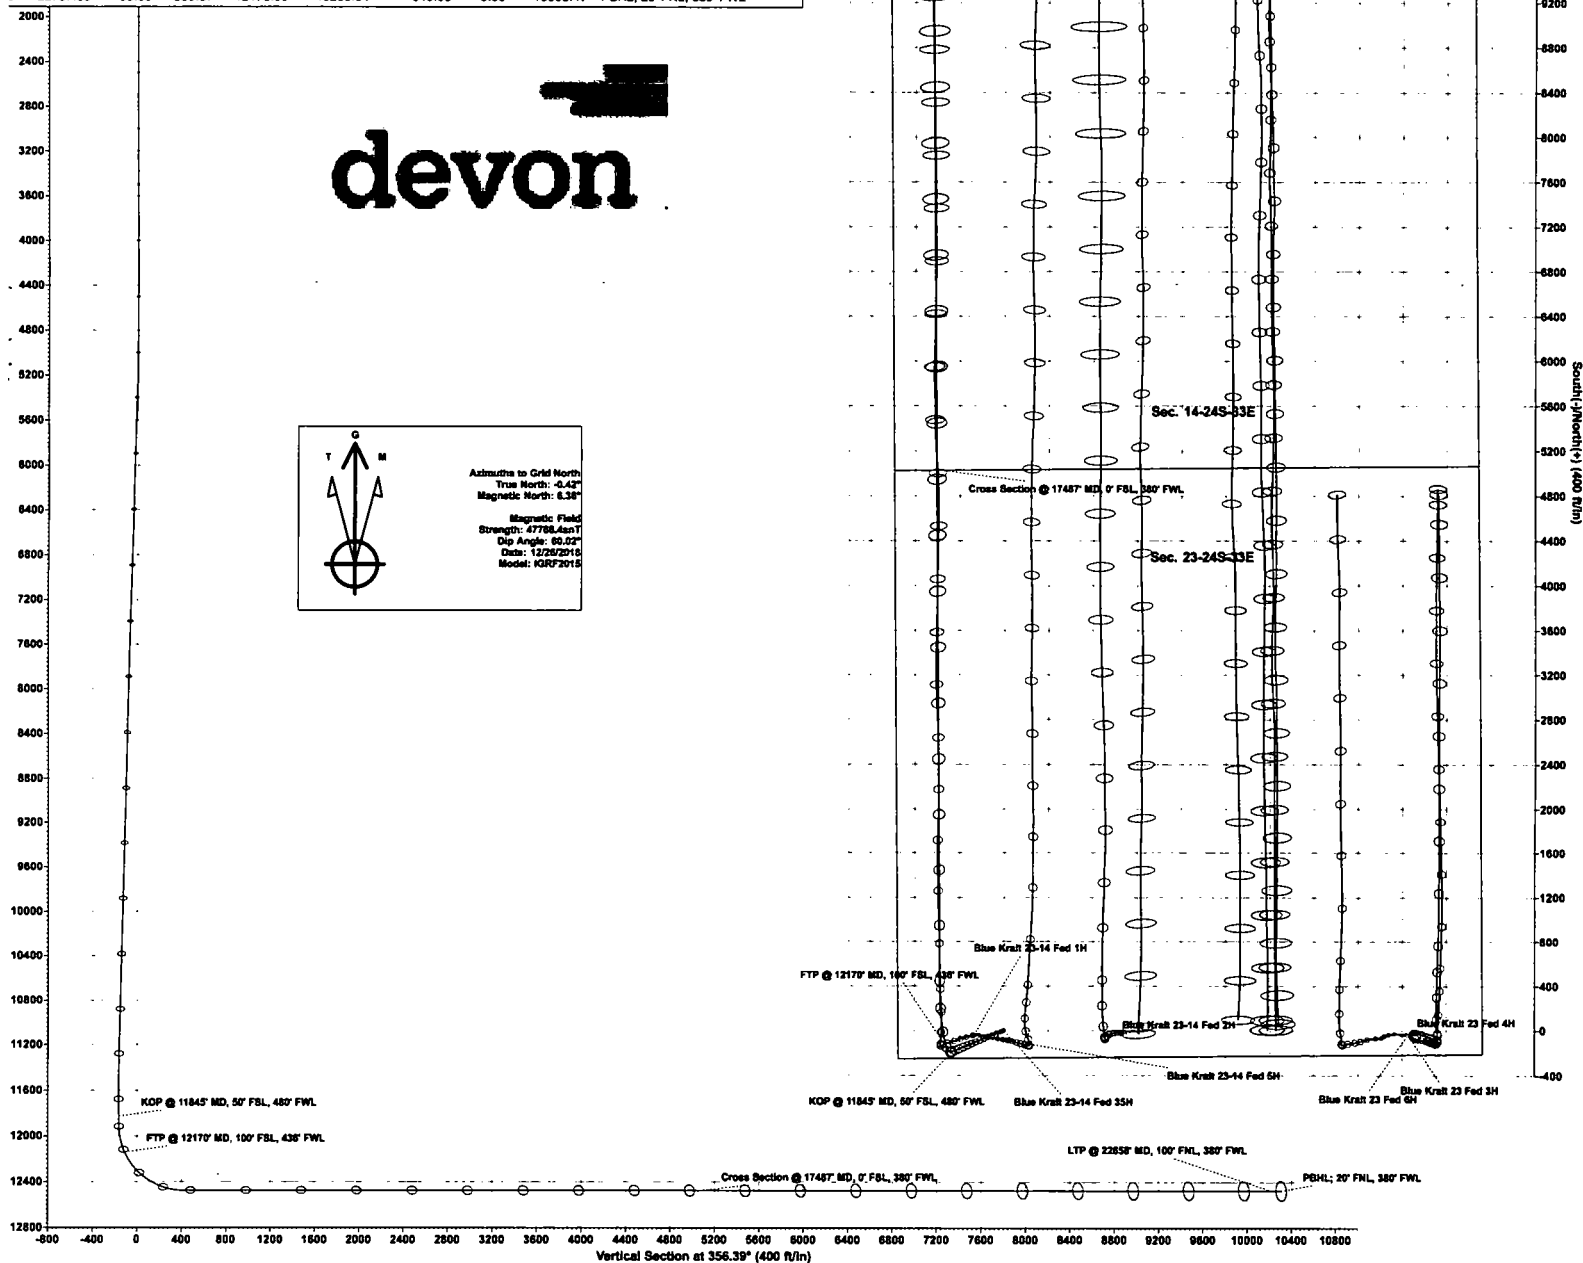



Commitment Runs Deep



Design Plan
Operation and Maintenance Plan
Closure Plan

SENM - Closed Loop Systems
June 2010

I. Design Plan

Devon uses MI SWACO closed loop system (CLS). The MI SWACO CLS is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This insures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.

A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.

Prior to installing a closed-loop system on site, the topsoil, if present, will be stripped and stockpiled for use as the final cover or fill at the time of closure.

Signs will be posted on the fence surrounding the closed-loop system unless the closed-loop system is located on a site where there is an existing well, that is operated by Devon.


II. Operations and Maintenance Plan

Primary Shakers: The primary shakers make the first removal of drill solids from the drilling mud as it leaves the well bore. The shakers are sized to handle maximum drilling rate at optimal screen size. The shakers normally remove solids down to 74 microns.

Mud Cleaner: The Mud Cleaner cleans the fluid after it leaves the shakers. A set of hydrocyclones are sized to handle 1.25 to 1.5 times the maximum circulating rate. This ensures all the fluid is being processed to an average cut point of 25 microns. The wet discharged is dewatered on a shaker equipped with ultra fine mesh screens and generally cut at 40 microns.



Closed Loop Schematic

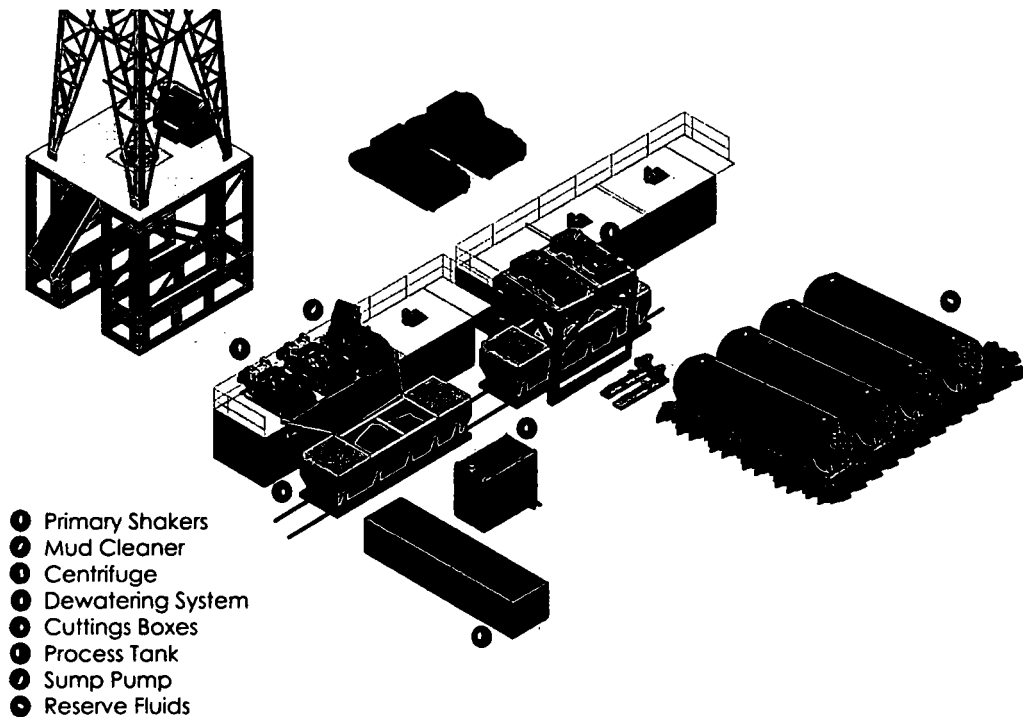

Centrifuges: The centrifuges can be one or two in number depending on the well geometry or depth of well. The centrifuges are sized to maintain low gravity solids at 5% or below. They may or may not need a dewatering system to enhance the removal rates. The centrifuges can make a cut point of 8-10 microns depending on bowl speed, feed rate, solids loading and other factors.

The centrifuge system is designed to work on the active system and be flexible to process incoming fluids from other locations. This set-up is also dependant on well factors.

Dewatering System: The dewatering system is a chemical mixing and dosing system designed to enhance the solids removal of the centrifuge. Not commonly used in shallow wells. It may contain pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing. Chemical flocculation binds ultra fine solids into a mass that is within the centrifuge operating design. The

dewatering system improves the centrifuge cut point to infinity or allows for the return of clear water or brine fluid. This ability allows for the ultimate control of low gravity solids.

Cuttings Boxes: Cuttings boxes are utilized to capture drill solids that are discarded from the solids control equipment. These boxes are set upon a rail system that allows for the removal and replacement of a full box of cuttings with an empty one. They are equipped with a cover that insures no product is spilled into the environment during the transportation phase.

Process Tank: (Optional) The process tank allows for the holding and process of fluids that are being transferred into the mud system. Additionally, during times of lost circulation the process tank may hold active fluids that are removed for additional treatment. It can further be used as a mixing tank during well control conditions.

Sump and Sump Pump: The sump is used to collect storm water and the pump is used to transfer this fluid to the active system or to the tank for to hold in reserve. It can also be used to collect fluids that may escape during spills. The location contains drainage ditches that allow the location fluids to drain to the sump.

Reserve Fluids (Tank Farm): A series of frac tanks are used to replace the reserve pit. These are steel tanks that are equipped with a manifold system and a transfer pump. These tanks can contain any number of fluids used during the drilling process. These can include fresh water, cut brine, and saturated salt fluid. The fluid can be from the active well or reclaimed fluid from other locations. A 20 ml liner and berm system is employed to ensure the fluids do not migrate to the environment during a spill.

If a leak develops, the appropriate division district office will be notified within 48 hours of the discovery and the leak will be addressed. Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and testing will be performed to determine if a release has occurred.

All trash is kept in a wire mesh enclosure and removed to an approved landfill when full. All spent motor oils are kept in separate containers and they are removed and sent to an approved recycling center. Any spilled lubricants, pipe

dope, or regulated chemicals are removed from soil and sent to landfills approved for these products.

These operations are monitored by Mi Swaco service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.

A MI SWACO field supervisor manages from 3-5 wells. They are responsible for training personnel, supervising installations, and inspecting sites for compliance of MI SWACO safety and operational policy.

III. Closure Plan

A maximum 340' X 340' caliche pad is built per well. All of the trucks and steel tanks fit on this pad. All fluid cuttings go to the steel tanks to be hauled by various trucking companies to an agency approved disposal.

Blue Krait 23-14 Fed 35H

1. Geologic Formations

TVD of target	12475	Pilot hole depth	N/A
MD at TD:	22737	Deepest expected fresh water:	

Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Rustler	1101		
Top of Salt	1622		
Base of Salt	5048		
Delaware	5267		
Lower Brushy Canyon	9010		
1st BSPG Lime	9196		
Leonard A	9274		
Leonard B	9617		
Leonard C	9895		
1st BSPG Sand	10200		
2nd BSPG Lime	10447		
2nd BSPG Sand	10860		
2BSSS Target Top	11127		
2BSSS Target Base	11211		
3rd BSPG Lime	11360		
3BSSS	11940		
WLFMP	12350		
WLFMP 100	12505		
WLFMP 120	12640		

*H2S, water flows, loss of circulation, abnormal pressures, etc.

Blue Krait 23-14 Fed 35H

2. Casing Program (Primary Design)

Hole Size	Casing Interval		Csg. Size	Wt (PPF)	Grade	Conn	Min SF Collapse	Min SF Burst	Min SF Tension
	From	To							
14.75"	0	1350	10.75"	40.5	J-55	STC	1.125	1.25	1.6
9.875"	0	11965 TVD	7.625"	29.7	P110	BTC	1.125	1.25	1.6
6.75"	0	TD	5.5"	20	P110	Vam SG	1.125	1.25	1.6
BLM Minimum Safety Factor							1.125	1.00	1.6 Dry 1.8 Wet

- All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h Must have table for contingency casing
- Rustler top will be validated via drilling parameters (i.e. reduction in ROP) and surface casing setting depth revised accordingly if needed.
- Int casing shoe will be selected based on drilling data / gamma, setting depth with be revised accordingly if needed.
- A variance is requested to wave the centralizer requirement for the Intermediate casing and production casing.

Casing Program (Alternate Design)

Hole Size	Casing Interval		Csg. Size	Wt. (PPF)	Grade	Conn	Min SF Collapse	Min SF Burst	Min SF Tension
	From	To							
17.5"	0	Same as above	13.375"	48	H-40	STC	1.125	1.25	1.6
10.625"	0	Same as above	8.625"	32	P110EC	BTC	1.125	1.25	1.6
7.875"	0	TD	5.5"	17	P110	BTC	1.125	1.25	1.6
BLM Minimum Safety Factor							1.125	1.00	1.6 Dry 1.8 Wet

- All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h Must have table for contingency casing
- Rustler top will be validated via drilling parameters (i.e. reduction in ROP) and surface casing setting depth revised accordingly if needed.
- Int 1 casing shoe will be selected based on drilling data / gamma, setting depth with be revised accordingly if needed.
- Option to drill change intermediate 1 hole size to 9.875, (8.625" connection will change from BTC to TLW)
- Option to run 8.625" TLW connection for intermediate 1
- A variance is requested to wave the centralizer requirement for the Intermediate casing and production casing.
- Variance is requested for collapse rating on intermediate casing. Operator will keep pipe full while running casing. No losses are expected in subsequent hole section.

Blue Krait 23-14 Fed 35H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Blue Krait 23-14 Fed 35H

3. Cementing Program (Primary Design)

Casing	# Sk	TOC	Wt. (lb/gal)	Yld (ft ³ /sack)	Slurry Description
Surface	864	Surf	13.2	1.33	Lead: Class C Cement + additives
Int 1	1160	Surf	9	1.85	Lead: Class C Cement + additives
	847	4000' above shoe	13.2	1.33	Tail: Class H / C + additives
Int 1 Two Stage w DV @ ~4500	580	Surf	9	1.85	1 st stage Lead: Class C Cement + additives
	55	500' above shoe	13.2	1.33	1 st stage Tail: Class H / C + additives
	600	Surf	9	1.85	2 nd stage Lead: Class C Cement + additives
	55	500' above DV	13.2	1.33	2 nd stage Tail: Class H / C + additives
Int 1 Intermediate Squeeze	As Needed	Surf	13.2	1.33	Squeeze Lead: Class C Cement + additives
	1160	Surf	9	1.85	Lead: Class C Cement + additives
	847	4000' above shoe	13.2	1.33	Tail: Class H / C + additives
Production	787	500' tieback	13.2	1.33	Lead: Class H / C + additives

If a DV tool is ran the depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. Slurry weights will be adjusted based on estimated fracture gradient of the formation. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. If cement is not returned to surface during the primary cement job on the surface casing string, a planned top job will be conducted immediately after completion of the primary job.

Casing String	% Excess
Surface	50%
Intermediate 1	30%
Intermediate 1 (Two Stage)	25%
Prod	10%

Blue Krait 23-14 Fed 35H

Cementing Program (Alternate Design)

Casing	# Sks	TOC	Wt. (lb/gal)	Yld (ft3/sack)	Slurry Description
Surface	1098	Surf	13.2	1.33	Lead: Class C Cement + additives
Int 1	1313	Surf	9	1.85	Lead: Class C Cement + additives
	831	4000' above shoe	13.2	1.33	Tail: Class H / C + additives
Int 1 Two Stage w DV @ ~4500	650	Surf	9	1.85	1 st stage Lead: Class C Cement + additives
	55	500' above shoe	13.2	1.33	1 st stage Tail: Class H / C + additives
	670	Surf	9	1.85	2 nd stage Lead: Class C Cement + additives
	55	500' above DV	13.2	1.33	2 nd stage Tail: Class H / C + additives
Int 1 Intermediate Squeeze	As Needed	Surf	13.2	1.33	Squeeze Lead: Class C Cement + additives
	1313	Surf	9	1.85	Lead: Class C Cement + additives
	831	4000' above shoe	13.2	1.33	Tail: Class H / C + additives
Production	1603	500' tieback	13.2	1.33	Lead: Class H / C + additives

If a DV tool is ran the depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. Slurry weights will be adjusted based on estimated fracture gradient of the formation. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. If cement is not returned to surface during the primary cement job on the surface casing string, a planned top job will be conducted immediately after completion of the primary job.

Casing String	% Excess
Surface	50%
Intermediate 1	30%
Intermediate 1 (Two Stage)	25%
Prod	10%

Blue Krait 23-14 Fed 35H

4. Pressure Control Equipment (Three String Design)

BOP installed and tested before drilling which hole?		Size?	Min. Required WP	Type	✓	Tested to:
Int 1	13-5/8"	5M	Annular		X	50% of rated working pressure
			Blind Ram		X	5M
			Pipe Ram			
			Double Ram		X	
			Other*			
Production	13-5/8"	10M	Annular (5M)		X	100% of rated working pressure
			Blind Ram		X	10M
			Pipe Ram			
			Double Ram		X	
			Other *			
			Annular			
			Blind Ram			
			Pipe Ram			
			Double Ram			
			Other *			
N		A variance is requested for the use of a diverter on the surface casing. See attached for schematic.				

Blue Krait 23-14 Fed 35H

5. Mud Program (3 String Design)

Section	Type	Weight (ppg)	Vis	Water Loss
Surface	FW Gel	8.5 - 9	28-34	N/C
Intermediate	DBE / Cut Brine	9 - 10	28-34	N/C
Production	OBM	10-10.5	28-34	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.

x	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No Logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain
	Coring? If yes, explain

Additional logs planned	Interval
Resistivity	Int. shoe to KOP
Density	Int. shoe to KOP
X CBL	Production casing
X Mud log	Intermediate shoe to TD
PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	6811 psi
Abnormal Temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N	H ₂ S is present
Y	H ₂ S Plan attached

Blue Krait 23-14 Fed 35H

8. Other facets of operation

Is this a walking operation? Potentially

1. If operator elects, drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
2. The drilling rig will then batch drill the intermediate sections and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
3. The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Potentially

1. Spudder rig will move in and drill surface hole.
 - a. Rig will utilize fresh water based mud to drill surface hole to TD. Solids control will be handled entirely on a closed loop basis.
2. After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
3. The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
4. A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
5. Spudder rig operations is expected to take 4-5 days per well on a multi well pad.
6. The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
7. Drilling operations will be performed with the drilling rig. At that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments

- ☒ Directional Plan
☐ Other, describe

Devon Energy Annular Preventer Summary

1. Component and Preventer Compatibility Table

The table below, which covers the drilling and casing of the 10M MASP portion of the well, outlines the tubulars and the compatible preventers in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the rating of the annular preventer.

6-3/4" Production hole section, 10M requirement

Component	OD	Preventer	RWP
Drillpipe	4.5"	Fixed lower 4.5" Upper 4.5-7" VBR	10M
HWDP	4.5"	Fixed lower 4.5" Upper 4.5-7" VBR	10M
Drill collars and MWD tools	4.75"	Upper 4.5-7" VBR	10M
Mud Motor	4.75"	Upper 4.5-7" VBR	10M
Production casing	5.5"	Upper 4.5-7" VBR	10M
ALL	0-13-5/8"	Annular	5M
Open-hole	-	Blind Rams	10M

VBR = Variable Bore Ram. Compatible range listed in chart.

2. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the BHA through the BOPs. The pressure at which control is swapped from the annular to another compatible ram is variable, but the operator will document in the submission their operating pressure limit. The operator may chose an operating pressure less than or equal to RWP, but in no case will it exceed the RWP of the annular preventer.

General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to the upper pipe ram.

Devon Energy Annular Preventer Summary

General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to the upper pipe ram.

General Procedure While Running Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to compatible pipe ram.

General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Shut-in with blind rams or BSR. (HCR and choke will already be in the closed position.)
3. Confirm shut-in
4. Notify toolpusher/company representative
5. Read and record the following:
 - a. SICP
 - b. Pit gain
 - c. Time
6. Regroup and identify forward plan

Devon Energy Annular Preventer Summary

General Procedures While Pulling BHA thru Stack

1. PRIOR to pulling last joint of drillpipe thru the stack.
 - a. Perform flowcheck, if flowing:
 - b. Sound alarm (alert crew)
 - c. Stab full opening safety valve and close
 - d. Space out drill string with tool joint just beneath the upper pipe ram.
 - e. Shut-in using upper pipe ram. (HCR and choke will already be in the closed position.)
 - f. Confirm shut-in
 - g. Notify toolpusher/company representative
 - h. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - i. Regroup and identify forward plan
2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. Stab crossover and full opening safety valve and close
 - c. Space out drill string with upset just beneath the compatible pipe ram.
 - d. Shut-in using compatible pipe ram. (HCR and choke will already be in the closed position.)
 - e. Confirm shut-in
 - f. Notify toolpusher/company representative
 - g. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - h. Regroup and identify forward plan
3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. If possible to pick up high enough, pull string clear of the stack and follow "Open Hole" scenario.
 - c. If impossible to pick up high enough to pull the string clear of the stack:
 - d. Stab crossover, make up one joint/stand of drillpipe, and full opening safety valve and close
 - e. Space out drill string with tooljoint just beneath the upper pipe ram.
 - f. Shut-in using upper pipe ram. (HCR and choke will already be in the closed position.)
 - g. Confirm shut-in
 - h. Notify toolpusher/company representative
 - i. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - j. Regroup and identify forward plan



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

01/30/2020

APD ID: 10400038395

Submission Date: 01/28/2019

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

01/30/2020

APD ID: 10400038395

Submission Date: 01/28/2019

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BLUE KRAIT 23-14 FED

Well Number: 35H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Bond Information

Federal/Indian APD: FED

BLM Bond number: CO1104

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment: