

Submit 1 Copy To Appropriate District  
Office  
District I - (575) 393-6161  
1625 N. French Dr., Hobbs, NM 88240  
District II - (575) 748-1283  
811 S. First St., Artesia, NM 88210  
District III - (505) 334-6178  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV - (505) 476-3460  
1220 S. St. Francis Dr., Santa Fe, NM  
87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
Revised August 1, 2011

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. 30-025-35450
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name North Hobbs (G/SA) Unit
8. Well Number: 612
9. OGRID Number: 157984
10. Pool name or Wildcat Hobbs (G/SA)

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other: Temp. Abandonment	
2. Name of Operator Occidental Permian Ltd.	
3. Address of Operator HCR 1 Box 90 Denver City, TX 79323	
4. Well Location Unit Letter <u>E</u> : <u>2220</u> feet from the <u>North</u> line and <u>406</u> feet from the <u>West</u> line Section <u>24</u> Township <u>18S</u> Range <u>37E</u> NMPM Lea County	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3676' (KB)	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐

OTHER:

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU PU,
2. RIH with open ended tbg, Tag capped CIBP @ 4060'.
3. Circulate 12# Plug mud, Spot 25 sx class C 4060
4. Pressure test casing to 500 psi
5. Spot 40sx (100') of cmt at ~ 2700', TAG TOC @ 2800' or higher  
(Yates plug)
6. Spot 40 sx (100') of cmt at 1560', TAG TOC @ 1560' or higher  
(Surface Csg Shoe plug / Rustler plug)
7. Spot 50 sx of cmt from 300' and circulate to surface.
8. Top-off as necessary  
(Surface plug)
9. Cut off wellhead and install dry hole marker (verify cement to surface all string) with labeling
10. Clean up location, remove anchors

During this procedure we plan to use  
the closed-loop system with a steel  
tank and haul contents to the required  
disposal per ODC Rule 19.15.17

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE Production Engineer

DATE 03/03/2020

Type or print name Carlos Restrepo E-mail address: carlos\_restrepo@oxy.com PHONE: 713-366-5147  
For State Use Only

APPROVED BY:

TITLE

C O

A

DATE

3-6-20

Conditions of Approval (if any)



## NHU 24-612 Current Wellbore Diagram

\*Note: Diagram not to scale

API (10):

30-025-35450

Elevation: KB: 3686'  
GL: 3676'

8 5/8", 24#, @ 1507'. Cemented  
with 850 sacks class, circulated  
88 sxs

TOF @ 4156'

32.7 ft Motor 4.5" OD  
(450XP)

174 ft 2-3/8" FG Tail

5.5", 15.5# @ 4,434'.  
(4.95" ID, 4.825" DD)  
Cemented with 900 sxs. Circ  
145 sxs.

TD - 4,490'

PBTD ~ Current: 4490'

### San Andres Plug

CIBP set @ 4080' capped with 20' of cement  
TOC tagged @ 4060' (Already Set)

### Perforation Summary:

Open: 4250'-54', 4260'-65', 4270'-72', 4292'-  
4300', 4305'-08', 4312'-16', 4317'-22', 4323'-27',  
4328'-35', 4346'-53', 4358'-67', Open Hole from  
4435'-4490'

Squeezed: 4179'-93', 4216'-22', 4228'-32', 4238'-  
42'

### Additional Info

ECP @ 1391' - 1400'



## NHU 24-612 Current Wellbore Diagram

\*Note: Diagram not to scale

API (10):

30-025-35450

Elevation: KB: 3686'

GL: 3676'

### Surface Plug

Spot ~ 50 sx (300') of class C cement @ ~ 300'  
WOC and Tag (1457' or higher)

### Rustler / Surface Csg shoe Plug

Spot ~ 40 sxs of class C cement @ ~ 1560'  
WOC and Tag (1457' or higher)

### Yates Plug

Spot ~ 40 sxs of class C cement @ ~ 2800'  
WOC and Tag (2700' or higher)

### San Andres Plug

CIBP set @ 4080' capped with 20' of cement  
TOC tagged @ 4060' (Already Set)


### Perforation Summary:

Open: 4250'-54', 4260'-65', 4270'-72', 4292'-  
4300', 4305'-08', 4312'-16', 4317'-22', 4323'-27',  
4328'-35', 4346'-53', 4358'-67', Open Hole from  
4435'-4490'

Squeezed: 4179'-93', 4216'-22', 4228'-32', 4238'-  
42'

### Additional Info

ECP @ 1391' - 1400'

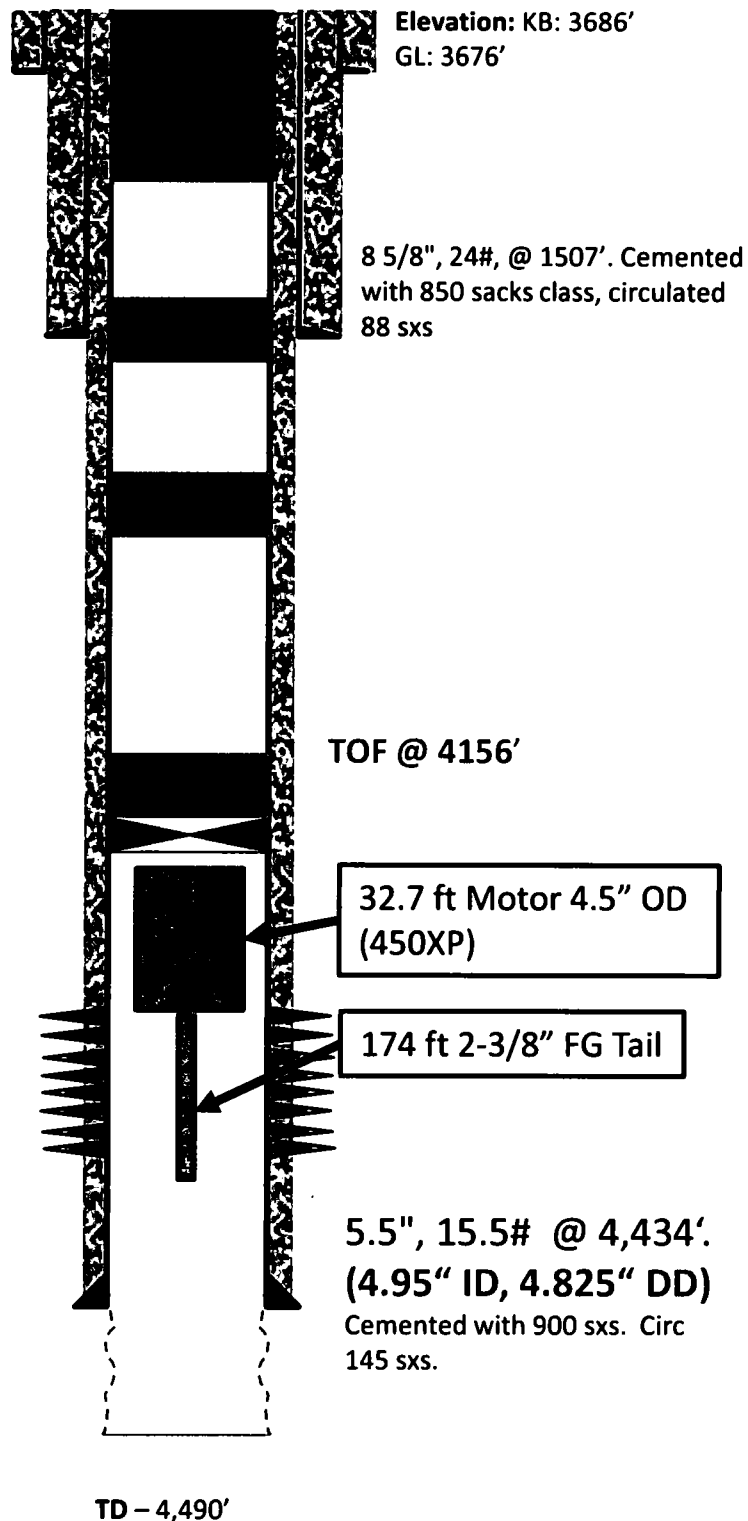

PBTD ~ Current: 4490'