

Submit 3 Copies To Appropriate District Office
 District I
 1625 N. French Dr., Hobbs, NM 87401
 District II
 1301 W. Grand Ave., Artesia, NM 88210
 District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources
RECEIVED
OIL CONSERVATION DIVISION
 220 South St. Francis Dr.
 Santa Fe, NM 87505

Form C-103
 May 27, 2004

HOBBSOCD

WELL API NO. 30-025-09365
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name: J.F. Janda NCT E
8. Well Number 3
9. OGRID Number 16696
10: Pool name or Wildcat Jalmat Gas
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3432' GR
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
 Oil Well Gas Well Other

2. Name of Operator
 OXY USA Inc.

3. Address of Operator
 P.O. Box 50250 Midland, TX 79710-0250

4. Well Location
 Unit Letter A ; 360 feet from the north line and 330 feet from the east line
 Section 21 Township 23S Range 36E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
 3432' GR

Pit or Below-grade Tank Application or Closure
 Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____
 Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK PLUG AND ABANDON
 TEMPORARILY ABANDON CHANGE PLANS
 PULL OR ALTER CASING MULTIPLE COMPLETION
 OTHER:

SUBSEQUENT REPORT OF:

- REMEDIAL WORK ALTERING CASING
 COMMENCE DRILLING OPNS. PLUG AND ABANDONMENT
 CASING TEST AND CEMENT JOB
 OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-3300' PBDT-2990' OH-3079-3300' CIBP-3000'
 9-5/8" 36# csg @ 329' w/500sx, 13-3/4" hole, TOC-Surface-Circ
 7" 23# csg @ 3079', DVT @ 1294' w/750sx, 8-3/4" hole, TOC-400'-TS
 1. RIH & Tag Cmt/CIBP @ 2990' M&P 25sx cmt to 2870'
 2. M&P 40sx cmt @ 1344-1200' WOC-Tag
 3. Perf @ 379'sqz 170sx cmt to surface
 10# MLF between plugs

The Oil Conservation Division **Must be notified 24 hours prior** to the beginning of plugging operations

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines , a general permit or an (attached) alternative OCD-approved plan

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 7/22/10
 Type or print name David Stewart E-mail address: david_stewart@oxy.com
 Telephone No. 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE STAFF DIR DATE 7-22-10
 Conditions of Approval, if any: COH


OXY USA Inc. - Proposed
J.F. Janda NCT E #3
API No. 30-025-09365

170sx @ 379'-Surface

40sx @ 1344-1200' WOC-Tag

25sx @ 2980-2870'

9/97-CIBP @ 3000' w/ 2sx

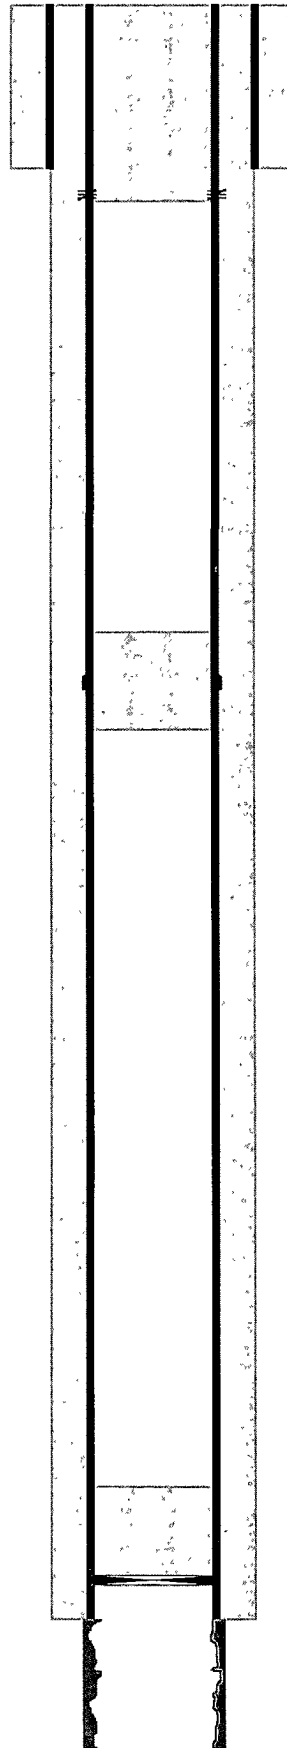

13-3/4" hole @ 329'
9-5/8" csg @ 329'
w/ 500sx-TOC-Surf-Circ


Perf @ 379'

8-3/4" hole @ 3079'
7" csg @ 3079'
DVT @ 1294' ✓
1st w/ 500sx-TOC-1290'-Calc
2nd w/ 250sx-TOC-400'-TS

OH @ 3079-3300'

TD-3300'

OXY USA Inc. - Current
J.F. Janda NCT E #3
API No. 30-025-09365

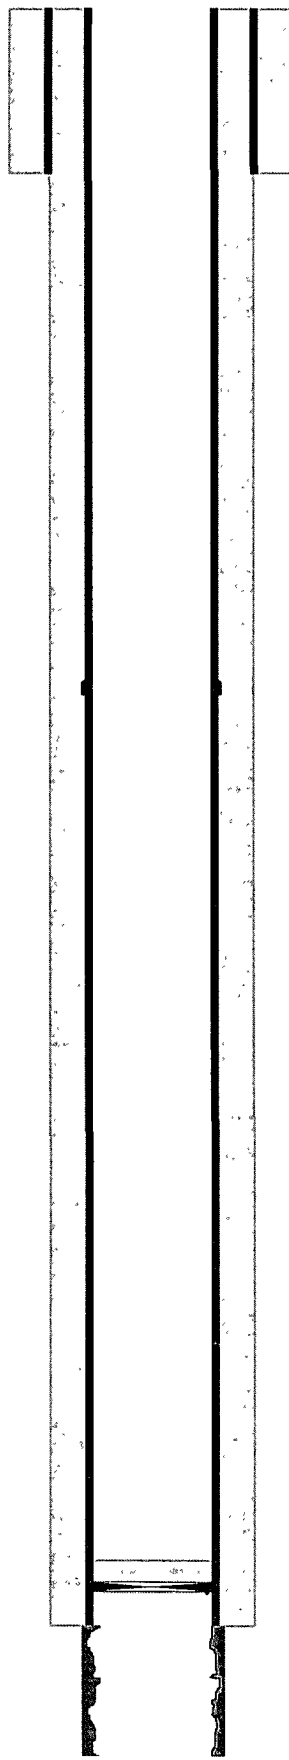

13-3/4" hole @ 329'
9-5/8" csg @ 329'
w/ 500sx-TOC-Surf-Circ

9/97-CIBP @ 3000' w/ 2sx

8-3/4" hole @ 3079'
7" csg @ 3079'
DVT @ 1294'
1st w/ 500sx-TOC-1290'-Calc-
2nd w/ 250sx-TOC-400'-TS

OH @ 3079-3300'

TD-3300'