


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

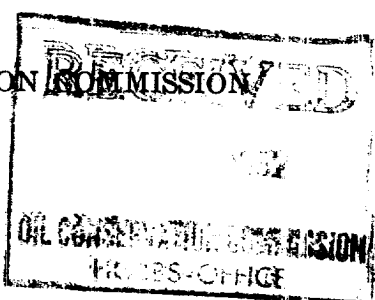

WELL RECORD

Grid for well location plotting

AREA 640 ACRES LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well.

Well information fields: Neuman de Vegvar, Santa Fe, New Mexico, Well No. 1, Lease 26, T. 12S, R. 32E, N. M. P. M., Hildart, Lea, County. Well is 660 feet south of the North line and 660 feet east of the East line of 1/4 Sec. 26.

OIL SANDS OR ZONES

No. 1, from None to No. 4, from No. 2, from No. 3, from No. 5, from No. 6, from

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole. No. 1, from No. 2, from No. 3, from No. 4, from

CASING RECORD

Table with columns: SIZE, WEIGHT PER FOOT, THREADS PER INCH, MAKE, AMOUNT, KIND OF SHOE, CUT & FILLED FROM, PERFORATED TO, PURPOSE. Includes entries for 13-3/8" and 8-5/8" casings.

MUDDING AND CEMENTING RECORD

Table with columns: SIZE OF HOLE, SIZE OF CASING, WHERE SET, NO. SACKS OF CEMENT, METHOD USED, MUD GRAVITY, AMOUNT OF MUD USED. Includes entries for 17-1/4" and 11" holes.

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set. Adapters—Material Size.

RECORD OF SHOOTING OR CHEMICAL TREATMENT

Table with columns: SIZE, SHELL USED, EXPLOSIVE OR CHEMICAL USED, QUANTITY, DATE, DEPTH SHOT OR TREATED, DEPTH CLEANED OUT.

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 11467 feet, and from Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to producing, 19 The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas. Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 1st day of February 1, 1952. Notary Public

Hobbs, New Mexico 2-1-52. Name: [Signature] Dist. Chief Clerk. Position: Phillips Petroleum Co. Representing: Box 2105 Hobbs, N.M. Address:

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	325	325	Caliche & Red Bed
325	2247	1922	Red Bed
2247	2952	105	Red Bed & Salt
2352	3103	751	Red Bed, Shale & Anhydrite
3103	3465	362	Anhydrite & Gyp
3465	3712	247	Anhydrite
3712	4312	600	Dolomite & Anhydrite
4312	4566	254	Dolomite, Shale & Gyp
4566	6852	2286	Lime & Dolomite
6852	7997	745	Shale
7997	7998	361	Dolomite & Shale
7998	8310	352	Dolomite
8310	8494	184	Dolomite & Lime
8494	8556	62	Dolomite & Shale
8556	8601	45	Dolomite & chert
8601	8745	144	Lime, Dolomite & chert
8745	9991	846	Lime & shale
9991	9614	123	Lime & chert
9614	9895	281	Lime & Shale
9895	10196	301	Lime, shale, & chert
10196	10290	94	Shale
10290	10597	267	Lime & shale
10597	10622	65	Lime
10622	10869	245	Lime & shale
10869	11129	262	Lime & chert
11129	11408	279	Lime & shale
11408	11467	59	Dolomite & chert