

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

New Mexico Oil Conservation Act, N.M.S.A. § 72-1-1
1935
Hobby, 1935

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☐ Oil Well ☐ Gas Well ☒ Other **Injection Well**

2. Name of Operator
Conoco Inc

3. Address and Telephone No.
10 DESTA DR. STE. 100W, MIDLAND, TX 79705-4500 (915) 686-5580

4. Location of Well (Footage, Sec., T. R. M. or Survey Description)
660' FSL & 660' FWL, Sec. 29, T17S, R32E, D

5. Lease Designation and Serial No.

LC 029410A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

MCA Unit #109

9. API Well No.

30-025-00759

10. Field and Pool, or Exploratory Area

Maljamar Grayburg/SA

11. County or Parish, State

Lea, NM

CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other **Change Out Tubing**
- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

9/11/02 Safety Meeting: MIRU - NDWH - NUBOP - Lay Down Pipe
MIRU. NDWH. NUBOP. Test BOP to 2500 psi; test O.K. Unjap off packer, POOH & lay down 100 jts. 2 3/8" J-55 IPC tubing. RIH w/exchange on/off tool 100 jts. 2 3/8" yellow band IPC tubing. Will pump packer fluid in AM. SD.
9/12/02 Safety Meeting: Pump Packer Fluid - Test Casing - Rig Down
RU pump truck, pump packer fluid. NDBOP. NUWH. Test casing to 500 psi for 30 min. Test O.K. (chart attached). RDMO

ACCEPTED FOR RECORD

SEP 30 2002

GARY GOURLEY
PETROLEUM ENGINEER

14. I hereby certify that the foregoing is true and correct

Signed Reesa R. Wilkes

Title Regulatory Specialist

Date 9/26/02

(This space for Federal or State office use)

Approved by Gary W. Wink Title _____

Date OCT 11 2002

Conditions of approval if any:


ORIGINAL SIGNED BY

GARY W. WINK

BLM(6), NMOCD(3), SHEAR, PONCA, COST ASST, FIELD, FILE ROOM

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

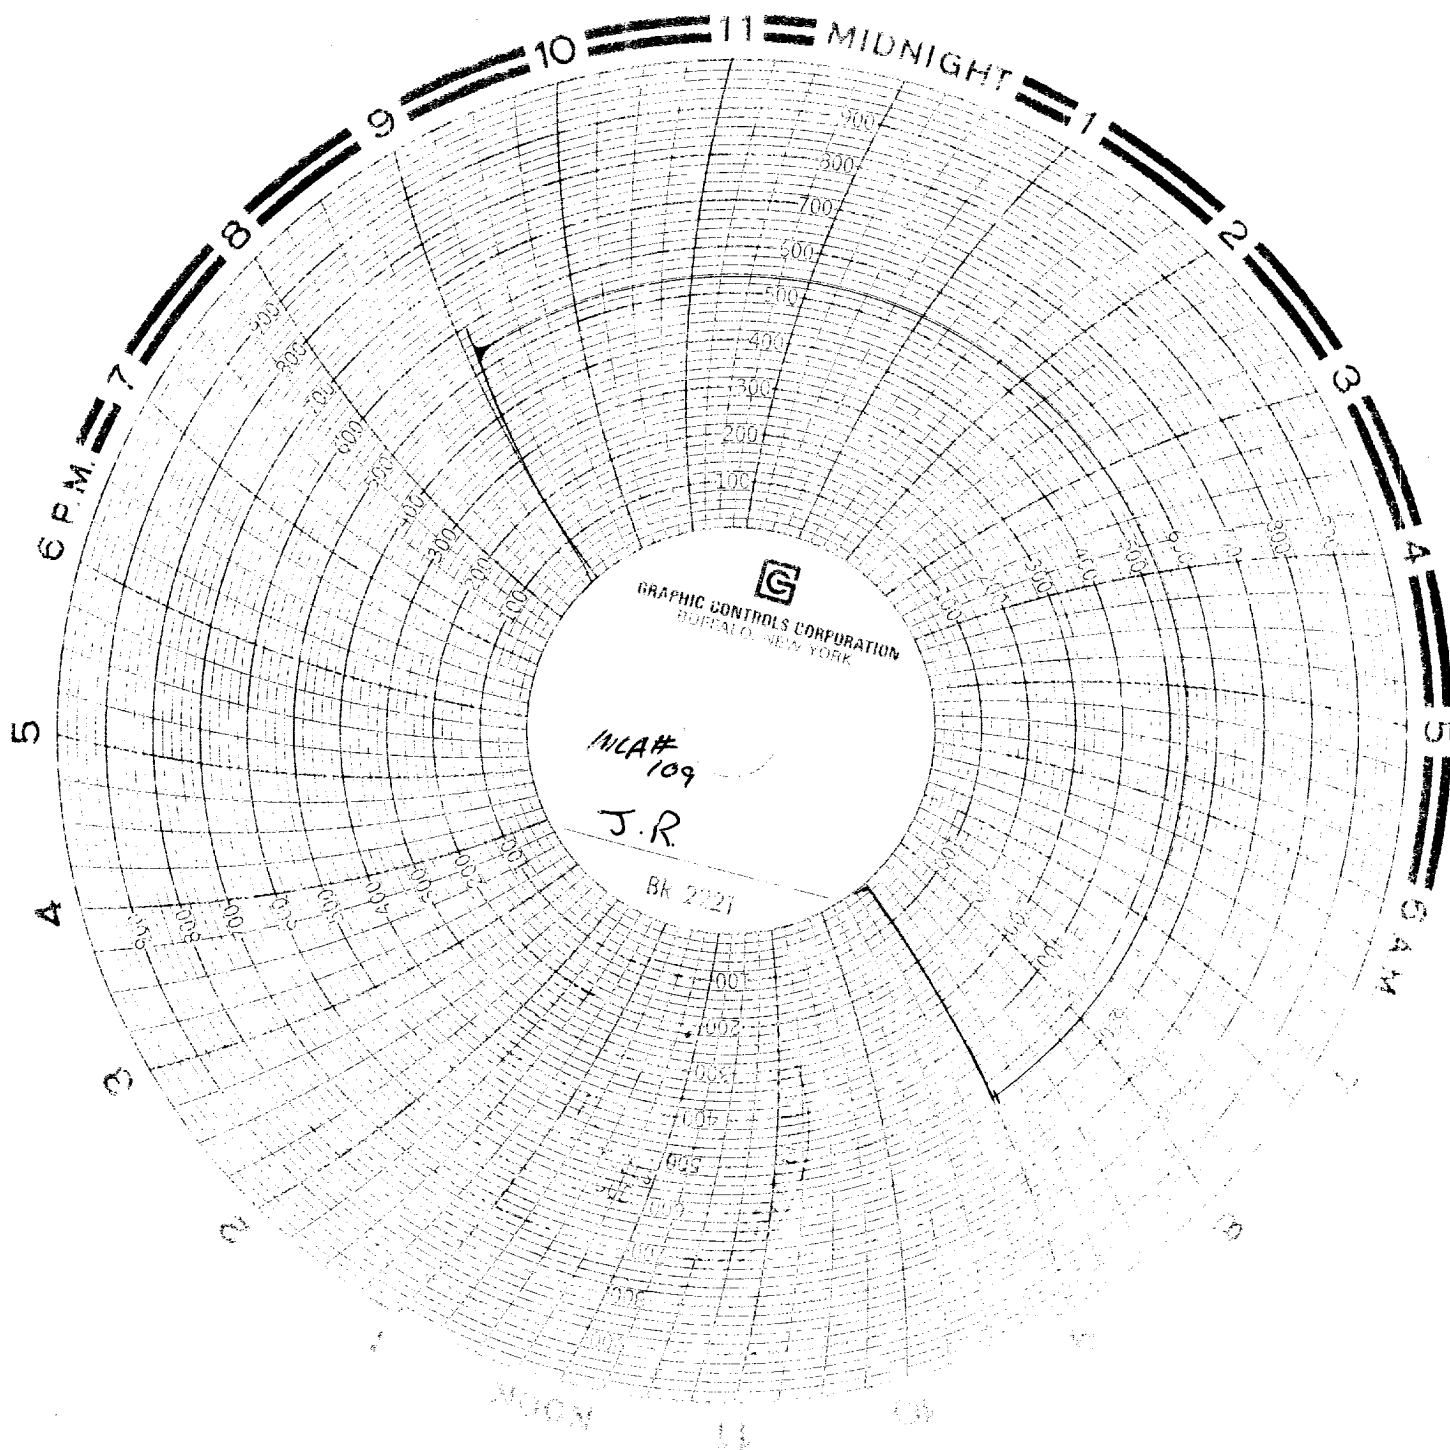

inc A
#109

unit Letter "D"

Sec. 29 - T 17 S - R 32 E

Fed. LSE. NO. LC - 029416A