


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

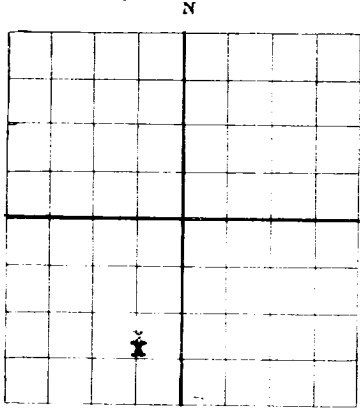

AREA 640 ACRES  
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE.

L. H. Wentz (Oil Division)

Ponca City, Oklahoma

Company or Operator

Address

State "B"

Well No. 3

in C SE SW of Sec. 5

T. 17S

Lease

36E

N. M. P. M. West Lovington

Field, Lea

County.

Well is 1980' feet south of the North line and 660 feet west of the East line of SW/4

If State land the oil and gas lease is No. B-4119 Assignment No. 5

If patented land the owner is \_\_\_\_\_ Address \_\_\_\_\_

If Government land the permittee is \_\_\_\_\_ Address \_\_\_\_\_

The Lessee is L. H. Wentz (Oil Division) Address Ponca City, Oklahoma

Drilling commenced December 20 1944 Drilling was completed February 22 1945

Name of drilling contractor Arrow Drilling Company Address Tulsa, Oklahoma

Elevation above sea level at top of casing 3896 feet.

The information given is to be kept confidential until \_\_\_\_\_ 19 \_\_\_\_\_

OIL SANDS OR ZONES

No. 1, from 4784 to 4797	No. 4, from 5010 to 5018
No. 2, from 4871 to 4878	No. 5, from 5020 to 5036
No. 3, from 4936 to 4949	No. 6, from 5038 to 5055

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 65' to 160 feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8	48#	8 Rd	Seam	296	Baker				
8-5/8	28#	8 Thd-V	Lapweld	1965	Baker				
5-1/2	17#	8 Rd	Seam	4723	Baker				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	12-7/8	296	190	Halliburton		
11 1/2"	8-5/8	1965	150	"		
7-7/8	5-1/2	4723	150	"		

PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment \_\_\_\_\_

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5077 TD feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet  
Cable tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

PRODUCTION

Put to producing February 24 1945  
The production of the first 24 hours was 364 Bbl. barrels of fluid of which 100% was oil; None% emulsion; None% water; and None% sediment. Gravity, Be. 38  
If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
Rock pressure, lbs. per sq. in. \_\_\_\_\_

EMPLOYEES

E. L. Wilber \_\_\_\_\_ Driller Roy Plester \_\_\_\_\_ Driller  
C. V. Winford \_\_\_\_\_ Driller \_\_\_\_\_ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this \_\_\_\_\_

day of February 1945

*W. M. Pfeffer*  
Notary Public

My Commission expires August 6, 1946

Ponca City, Oklahoma 28th

Name *W. W. Davis*

Position *Prod. Supt.*

Representing L. H. Wentz (Oil Division)

Address Ponca City, Oklahoma.

**FORMATION RECORD**

FROM	TO	THICKNESS IN FEET	FORMATION
0	40	40	Caliche
40	280	140	Sand and shells
280	335	55	Red Bed and shells
335	415	80	Red Bed
415	535	120	Red Bed & Sand & Shells
535	740	205	Red Bed
740	846	106	Red Bed & Shells
846	1030	184	Red Bed
1030	1596	566	Red Bed and Shells
1596	1660	64	Red Bed
1660	1776	116	Red Bed and Shells
1776	1824	48	Red Bed
1824	1905	81	Red Bed and Shells
1905	1945	40	Red Bed and Blue Shale
1945	2060	115	Anhydrite
2060	3170	1110	Salt and Anhy.
3170	3208	38	Sand & Shale
3208	4016	808	Anhy and Gyp.
4016	4050	44	Anhy
4050	4142	92	Gyp.
4142	4557	415	Anhy and Gyp.
4557	4591	34	Lime
4591	4697	106	Anhy & Gyp.
4697	5077 TD	380	Lime