

**N.M. OIL CONS. COMMISSION**  
OTHER INST. INSTRUCTIONS ON REVERSE  
**UNITED STATES DEPARTMENT OF THE INTERIOR**  
**HOBBS, NEW MEXICO 88240**  
**BUREAU OF LAND MANAGEMENT**

FORM APPROVED  
 OMB NO. 1004-0136  
 Expires: February 28, 1995

**APPLICATION FOR PERMIT TO DRILL OR DEEPEN**

1a. TYPE OF WORK  
 DRILL  DEEPEN

b. TYPE OF WELL  
 OIL WELL  GAS WELL  OTHER   
 SINGLE ZONE  MULTIPLE ZONE

2. NAME OF OPERATOR  
 Mallon Oil Company

3. ADDRESS AND TELEPHONE NO.  
 999 18th Street, Denver Colorado 80202 (303)293-2333

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)\*  
 At surface  
 660' FNL & 990' FWL (NW/NW)  
 At proposed prod. zone  
 660' FNL & 990' FWL (NW/NW) *Unit D*

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*  
 35 Miles S.W. of Hobbs N.M.

15. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drig. unit line, if any) 660'

16. NO. OF ACRES IN LEASE 660

17. NO. OF ACRES ASSIGNED TO THIS WELL 40

18. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST WELL, DRILLING COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 1450'

19. PROPOSED DEPTH 6200'

20. ROTARY OR CABLE TOOLS Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)  
 3699 GR

22. APPROX. DATE WORK WILL START\*  
 July 24th 1994

5. LEASE DESIGNATION AND SERIAL NO.  
 NM -052

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
 NA

7. UNIT AGREEMENT NAME  
 NA

8. FARM OR LEASE NAME, WELL NO.  
 Mallon 34 Federal

9. API WELL NO.  
 1

10. FIELD AND POOL, OR WILDCAT AND SURVEY OR AREA  
 NE Lea Delaware

11. SEC., T., R., M., OR BLEK. AND SURVEY OR AREA  
 Sec 34, T19S, R-34E

12. COUNTY OR PARISH  
 LEA

13. STATE  
 N.M.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
25"	20"	0.3 wall	40'	Redi - Mix to Surface
13 3/4"	9 5/8"	36#	1500' CIRCULATE	700 SX Lite, 200 SX Class C
7 7/8"	5 1/2"	14 & 15.5#	TD (NE BACK)	710 SX Lite, 200 SX Class C

The operator proposes to drill to a depth sufficient to test the Delaware formation for Oil. If productive, 5 1/2" csg will be cemented. If nonproductive, The well will be plugged and abandoned in a manner consistent with Federal regulations. Specific programs as per Onshore Oil & Gas order #1 are outlined in the following attachments:

Drilling Program

Surface Use & Operating Plan

- Exhibit #1 - Blow Out Preventer Equip.
- Exhibit "A" - Location & Elevation Plat
- Exhibit "B" - Existing Roads
- Exhibit "C" - Planned Access Roads

- Exhibit "D" - One Mile Radius Map
- Exhibit "E" - Well site Layout
- Exhibit "F" - Production Facility

OPER. OGRID NO. 3925  
 PROPERTY NO. 15308  
 POOL CODE 37584  
 EFF. DATE 7-22-94  
 API NO. 307025-32605

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED *Duane C. Winkler* TITLE Production Superintendent DATE 6/21/94

(This space for Federal or State office use)

PERMIT NO. \_\_\_\_\_ APPROVAL DATE \_\_\_\_\_

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY:

APPROVAL SUBJECT TO  
 GENERAL REQUIREMENTS AND  
 SPECIAL STIPULATIONS  
 ATTACHED

APPROVED BY *Richard C. Manes* TITLE Area Manager DATE 7-22-94

\*See Instructions On Reverse Side

DISTRICT I RECEIVED  
 P.O. Box 2000, Santa Fe, NM 87500

State of New Mexico  
 Energy, Minerals and Natural Resources Department

Form C-102  
 Revised February 10, 1994  
 Instruction on back  
 Submit to Appropriate District Office  
 State Lease - 4 Copies  
 Fee Lease - 3 Copies

DISTRICT II  
 P.O. Drawer DD, Artesia, NM 88210  
 18 38 33 AM '94  
 DISTRICT III  
 1000 Rio Brazos Rd., Artesia, NM 87410  
 CARRIZO AREA

OIL CONSERVATION DIVISION  
 P.O. Box 2088  
 Santa Fe, New Mexico 87504-2088

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 32-225-32605	Pool Code 37584	Pool Name NE Lea Delaware
Property Code 15398	Property Name MALLON "34" FEDERAL	Well Number 1
OCRD No. 13925	Operator Name MALLON OIL COMPANY	Elevation 3699'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	34	19S	34E		660	NORTH	990	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.
-----------------------	-----------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	<p><b>OPERATOR CERTIFICATION</b></p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</p> <p><i>Paul Winkler</i>        Signature</p> <p>Duane C Winkler        Printed Name</p> <p>Production Superintendent        Title</p> <p>6-22-94        Date</p>
	<p><b>SURVEYOR CERTIFICATION</b></p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>JUNE 6, 1994        Date Surveyed</p> <p><i>[Signature]</i>        Signature &amp; Seal of Professional Surveyor</p> <p>W.O. Num. 94-11-0984</p> <p>Certificate No. JOHN W. WEST, 676        RONALD J. EIDSON, 3239        GARY L. JONES, 7977</p>

## DRILLING PROGRAM

Attached to Form 3160-3  
Mallon Oil Company  
Mallon "34" Federal No.1  
660 FNL, 990 FWL, Sec.34 T19S R34E  
Lea County, New Mexico

Lease Number: NM-052

1. Geologic Name of Surface Formation is :  
Quaternary Alluvium

2. Estimated Tops of Important Geologic Markers

Quaternary Alluvium	Surface
Rustler	1590
Top of Salt	1720
Base of Salt	3326
Yates	3513
Seven Rivers	3821
Queen	4516
Delaware	5800
Total Depth	6200

3. The Estimated Depths of Anticipated Fresh water, Oil or Gas:

Quaternary Alluvium	300'	Fresh Water.
Yates	3513'	Oil
Queen	4516'	Oil
Delaware	5800'	Oil

No other formations are expected to give up Oil, Gas, or Fresh Water in measurable quantities. The surface fresh water sands will be protected by setting 9 5/8" csg at 1500' and circulating cement back to surface. Potash will be protected by setting 5 1/2" csg at total depth and circulating cement back to 1300' from surface.

4. Proposed Casing Program:

<u>Hole Size</u>	<u>Interval</u>	<u>Csg OD</u>	<u>Csg weight grade, Jt., Type Cond</u>
25"	0-40'	20"	Conductor, 0.30" wall thickness
13 3/4"	0-1500'	9 5/8"	36# K-55 STC
7 7/8"	0-5300 5300-TD	5 1/2" 5 1/2"	14# K-55 STC 15.5# K-55 STC

Cement Program:

20" Conductor csg:	Cemented with ready-mix to surface
9 5/8" Surface csg:	Cemented to Surface with 700 sx Pacesetter Lite 6.00% Gel (Bentonite)+0.25 lb/sk Cello-Seal 105.% Fresh Water
5 1/2" Production csg.	Cemented with 710 sacks Pacesetter Lite (C) 6.00% Gel (Bentonite)+0.25 lb/sk Cello-Seal 5.00% Salt+105.00% Fresh Water, This cement slurry is designed to bring TOC to 1300'.

5. Minimum Specifications for Pressure Control:

The blowout preventer equipment (BOP) shown in Exhibit #1 will consist of a double ram type (3000psi WP) preventer. The unit will be hydraulically operated and the ram type preventer will be equipped with blind rams on top and drill pipe rams on bottom. The BOP will be nipped up on the 9-5/8" surface csg and used continuously until TD is reached. BOP and accessory equipment will be tested to 1000 psi before drilling out of surface casing. Pipe rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. A 2" kill line and 2" choke line will be included in the drilling spool located below the ram-type BOP. Other accessories to the BOP equipment will include a kelly cock and floor safety valve and choke lines and choke manifold with 3000 psi WVP rating.

**6. Types and Characteristics of the Proposed Mud System:**

The well will be drilled to TD with a combination of brine, cut brine, and polymer/KCL mud system. The applicable depths and properties of this system are as follows:

Depth	Type	Weight (ppg)	Viscosity (sec)	Waterloss (cc)
0-40	Fresh Water (spud)	8.5	40-45	N.C.
0-1500	F.W. (Gel/Lime)	8.5-9.0	32-36	N.C.
1500-TD	Brine Water	10.0	32-34	10-12cc

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

**7. Auxiliary Well Control and Monitoring Equipment:**

- (A) A Kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) The drilling fluids systems will be visually monitored at all times.

**8. Testing, Logging and Coring Program:**

Drill Stem Tests: None Anticipated  
Logging: TD to Surface casing, GR, CNL-FDC, DLL, MSFL  
Coring: None Planned

9. **Abnormal Conditions, Pressures, Temperatures, & Potential Hazards:**

**No abnormal pressures or temperatures are anticipated. The proposed mud program will be modified to control excess pressure if abnormal pressures are encountered. The estimated bottom hole temperature (BHT) at TD is 150 F and estimated maximum bottom-hole pressure (BHP) is 2800 psig. No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. No major loss circulation zones have been reported in offsetting wells.**

10. **Anticipated starting date: August 1, 1994**

**Anticipated completion of Drilling operations: Expected duration of 3 weeks.**

MINIMUM BLOWOUT PREVENTER REQUIREMENTS

3,000 psi Working Pressure

3 MWP


STACK REQUIREMENTS

No.	Item	Min. I.D.	Min. Nominal
1	Flowline		
2	Fill up line		2"
3	Drilling nipple		
5	Two single or one dual hydraulically operated rams		
6a	Drilling spool with 2" min. kill line and 3" min choke line outlets		
6b	2" min. kill line and 3" min. choke line outlets in ram. (Alternate to 6a above.)		
7	Valve Gate <input type="checkbox"/> Plug <input type="checkbox"/>	3-1/8"	
8	Gate valve—power operated	3-1/8"	
9	Line to choke manifold		3"
10	Valves Gate <input type="checkbox"/> Plug <input type="checkbox"/>	2-1/16"	
11	Check valve	2-1/16"	
12	Casing head		
13	Valve Gate <input type="checkbox"/> Plug <input type="checkbox"/>	1-13/16"	
14	Pressure gauge with needle valve		
15	Kill line to rig mud pump manifold		2"

OPTIONAL

16	Flanged valve	1-13/16"	
----	---------------	----------	--

CONFIGURATION A

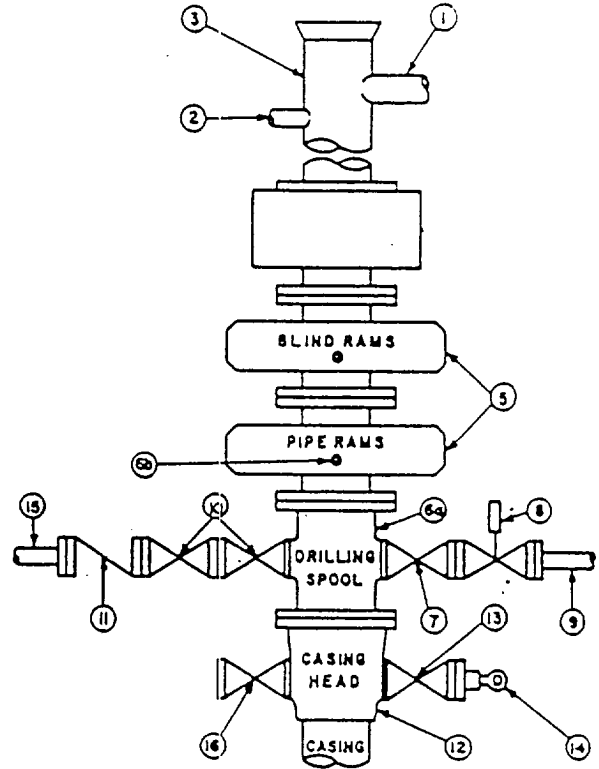

CONTRACTOR'S OPTION TO FURNISH:

1. All equipment and connections above bradenhead or casinghead. Working pressure of preventers to be 3,000 psi, minimum.
2. Automatic accumulator (80 gallon, minimum) capable of closing BOP in 30 seconds or less and, holding them closed against full rated working pressure.
3. BOP controls, to be located near drillers position.
4. Kelly equipped with Kelly cock.
5. Inside blowout preventer or its equivalent on derrick floor at all times with proper threads to fit pipe being used.
6. Kelly saver-sub equipped with rubber casing protector at all times.
7. Plug type blowout preventer tester.
8. Extra set pipe rams to fit drill pipe in use on location at all times.
9. Type RX ring gaskets in place of Type R.

MEC TO FURNISH:

1. Bradenhead or casinghead and side valves.
2. Wear bushing, if required.

GENERAL NOTES:

1. Deviations from this drawing may be made only with the express permission of MEC's Drilling Manager.
2. All connections, valves, fittings; piping, etc., subject to well or pump pressure must be flanged (suitable clamp connections acceptable) and have minimum working pressure equal to rated working pressure of preventers up through choke. Valves must be full opening and suitable for high pressure mud service.
3. Controls to be of standard design and each marked, showing opening and closing position.
4. Chokes will be positioned so as not to hamper or delay changing of choke beans. Replaceable parts for adjustable choke, other bean sizes, retainers, and choke wrenches to be conveniently located for immediate use.
5. All valves to be equipped with handwheels or handles ready for immediate use.
6. Choke lines must be suitably anchored.

7. Handwheels and extensions to be connected and ready for use.
8. Valves adjacent to drilling spool to be kept open. Use outside valves except for emergency.
9. All seamless steel control piping (3000 psi working pressure) to have flexible joints to avoid stress. Hoses will be permitted.
10. Casinghead connections shall not be used except in case of emergency.
11. Do not use kill line for routine fill-up operations.

Mallon "34" Federal No.1  
Lea County New Mexico  
Exhibit "1"

RECEIVED

JUL 2 1964

COMMUNICATIONS  
OFFICE

46-2-0

JUL 2 1964