


C. J. Saunders No. 3  
Site C, Section J, T-22S, R-36E  
Lea County, New Mexico

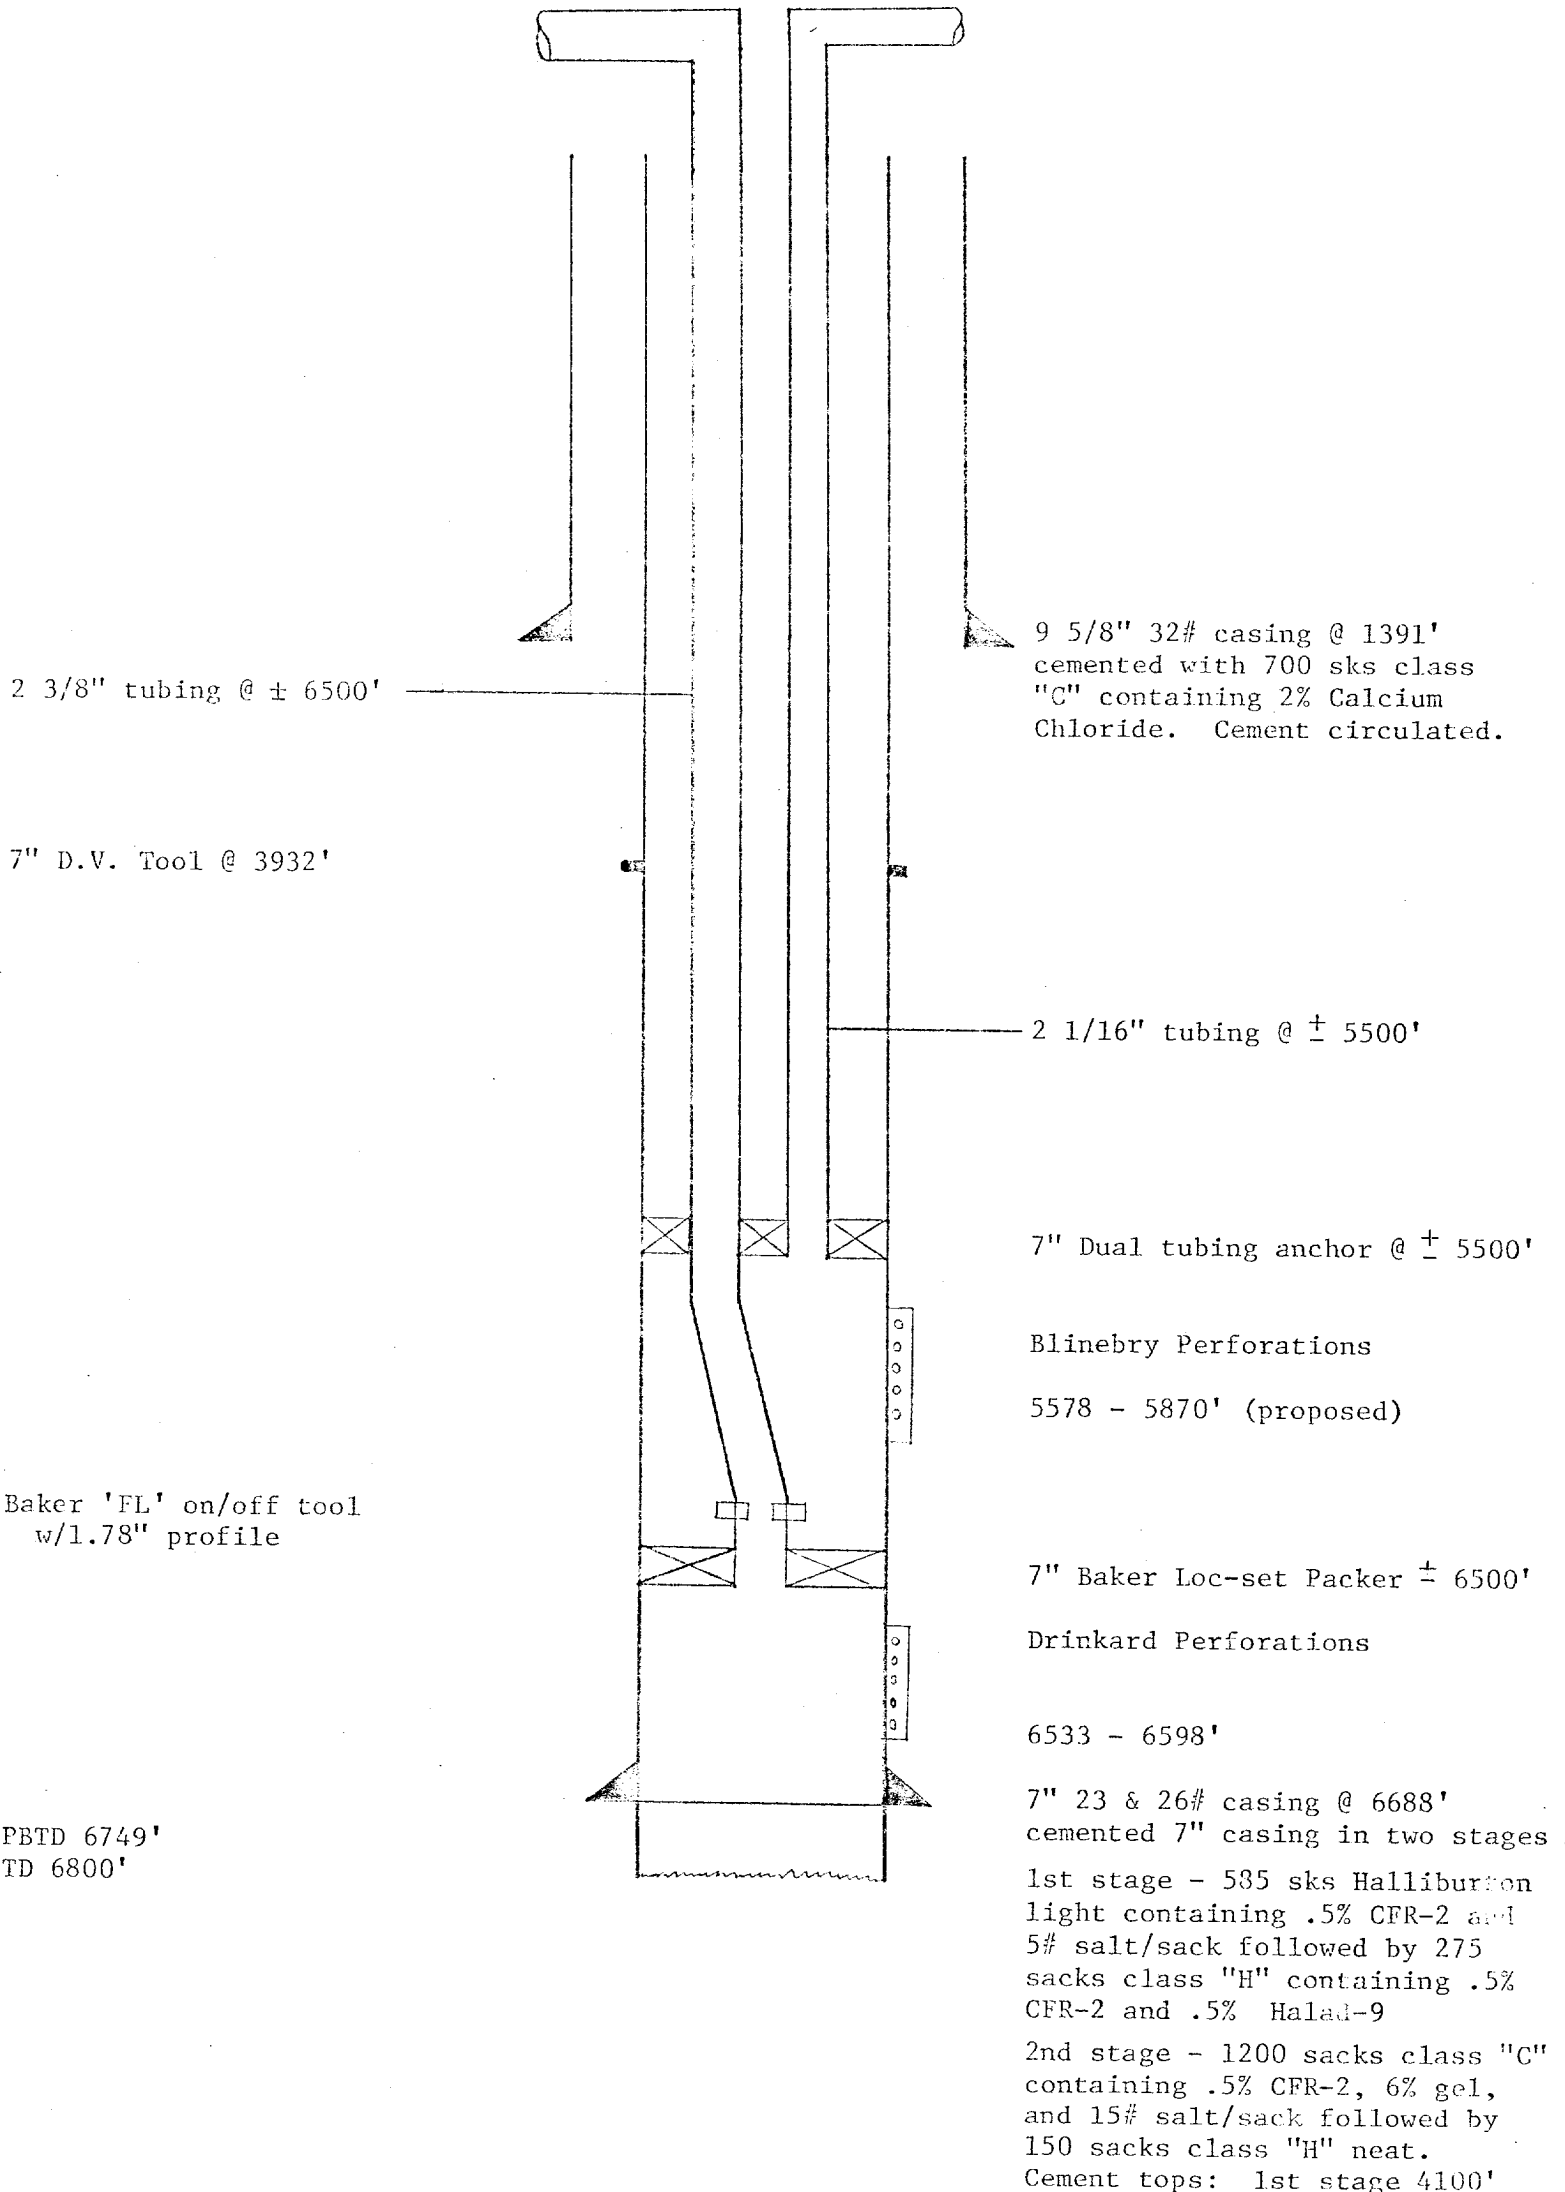

2 3/8" tubing @ ± 6500'

7" D.V. Tool @ 3932'

9 5/8" 32# casing @ 1391'  
cemented with 700 sks class  
"C" containing 2% Calcium  
Chloride. Cement circulated.

2 1/16" tubing @ ± 5500'

7" Dual tubing anchor @ ± 5500'

Blinebry Perforations  
5578 - 5870' (proposed)

Baker 'FL' on/off tool  
w/1.78" profile

7" Baker Loc-set Packer ± 6500'

Drinkard Perforations

6533 - 6598'

PBTD 6749'  
TD 6800'

7" 23 & 26# casing @ 6688'  
cemented 7" casing in two stages

1st stage - 585 sks Halliburton  
light containing .5% CFR-2 and  
5# salt/sack followed by 275  
sacks class "H" containing .5%  
CFR-2 and .5% Halad-9

2nd stage - 1200 sacks class "C"  
containing .5% CFR-2, 6% gel,  
and 15# salt/sack followed by  
150 sacks class "H" neat.  
Cement tops: 1st stage 4100'