Additional


Information

C-108 - Item XIV

Proof of Notice (Certified Mail Receipts)

Additional Notice Provided for Spur Energy and Production, LLC's **Big George SWD No.3**

(Omitted from original notice list in April, 2022) Notice letters sent 3/24/2023

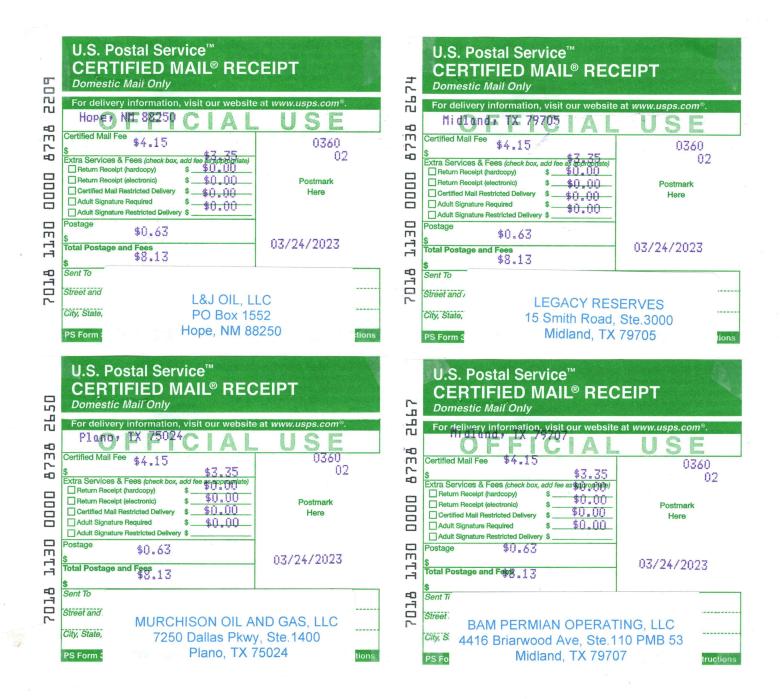

C-108 Injection Well Data - Packer Specs for Typical SEP, LLC SWD

Spur's packer company nickel plates all injection well packers as standard procedure. Data tables below show typical 5-1/2" and 7" specifications.



We Know Downhole.

(800) 441-3504 • www.dloiltools.com

Mechanical Set Packers

ASI-X PACKER

The ASI-X Single String Double-Grip Production Packer is the most versatile of the mechanically set retrievable packers and may be used in any production application. This packer is suited for treating, testing, or injection applications, in pumping or flowing wells, either deep or shallow. This packer can be left in tension or compression depending on well conditions and the required application.

A large internal by-pass reduces swabbing when running and retrieving. The by-pass closes when the packer is set and opens prior to releasing the upper slips when retrieving to allow pressure equalization. The J-slot design allows easy setting and releasing: 1/4 turn right-hand set, 1/4 turn right-hand release.

The standard ASI-X Packer is designed for differential pressures up to 7,000 PSI (unless noted otherwise). This packer is also available in an HT version which is designed for differential pressures up to 10,000 PSI (unless noted otherwise). The HT version allows this packer to be utilized in completions where high pressure treating operations are performed and it is desirable to leave the tool in the well for production.

Special Features

- > By-pass below upper slips to wash debris when valve is opened
- By-pass is opened before upper slips are released
- > Can be set with tension for shallow well applications
- Can be left in tension, compression or neutral
- 1/4 turn right-hand set, 1/4 turn right-hand release
- Additional J-Slot arrangements available

Product Specifications

		asing	Recommended	0 00	M 00	Tarring	Through Commentions	60358 60355 ² 60356 ² 60356 ² 60359 ² 60372-625 60374-625 60374 60370 ²	Part Number	
	Size (inches)	Weight (lbs/ft)	Hole Size (inches)	Gage OD (inches)	Max OD (inches)	Tool ID (inches)	Thread Connections Box Up / Pin Down		HT	
		13.0 - 14.0	5.012	4.813	s	2.38	2-7/8 EUE	60358	60358HT	
Big George SWD —	5-1/2	14.0 - 20.0	4.778 - 5.012	4.625	9	2.00	2-3/8 EUE	603552	60355HT ²	
					-	2.38	2-7/8 EUE	60356 ²	60356HT ²	
		20.0 - 23.0	4.670 - 4.778	4.500	2	2.00	2-3/8 EUE	603572	60357HT ²	
					-	2.38	2-7/8 EUE	60359 ²	60359HT ²	
	7	17.0 - 20.0	6.456 - 6.538	6.250	6.2811	2.50	2-7/8 EUE	60372-625	-	
					-	3.00	3-1/2 EUE	60374-625	2:	
		17.0 - 26.0	6.276 - 6.538	6.000	6.0621	2.50	2-7/8 EUE	60372 ²	60372HT ²	
					6.1251	3.00	3-1/2 EUE	60374	60374HT	
		26.0 - 32.0	6.094 - 6.276	5.875	- 2	2.50	2-7/8 EUE	60370 ²	60370HT ²	
					5.9361	3.00	3-1/2 EUE	60373	60373HT	
		29.0 - 35.0	6.004 - 6.184	5.812	-	2.50	2-7/8 EUE	603712	60371HT ²	

Maximum OD is across retracted drag blocks.

²Drilled for wireline.

* Designed for differential pressures up to 10,000 PSI.

Rubber Trim Upgrade Options (additional cost, inquire with a D&L sales associate). HSN, Viton, ECNER/Afias, ECNER/HSN, EPDM WOTE: All pricing includes standard Nitrile trim. Other sizes, connections, and rubber options available upon request.

D&L OIL TOOLS Product Catalog

Made in the U.S.A.

Rev. 10/16

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 232630

CONDITIONS

Operator:	OGRID:	
Spur Energy Partners LLC	328947	
9655 Katy Freeway	Action Number:	
Houston, TX 77024	232630	
	Action Type:	
	[IM-SD] Admin Order Support Doc (ENG) (IM-AAO)	

CONDITIONS

Created By		Condition Date
pgoetze	None	6/26/2023