

**STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION**

**APPLICATION FOR DOWNHOLE COMMINGLING
SUBMITTED BY HILCORP ENERGY COMPANY**

ORDER NO. DHC-5508

ORDER

The Director of the New Mexico Oil Conservation Division (“OCD”), having considered the application and the recommendation of the Engineering Bureau, issues the following Order.

FINDINGS OF FACT

1. Hilcorp Energy Company (“Applicant”) submitted a complete application (“Application”) to downhole commingle the pools described in Exhibit A (“the Pools”) within the well bore of the well identified in Exhibit A (“the Well”).
2. Applicant proposed a method to allocate the oil and gas production from the Well to each of the Pools that is satisfactory to the OCD and protective of correlative rights.
3. Applicant has certified that all produced fluids from all the Pools are compatible with each other.
4. Applicant has certified that downhole commingling the Pools will not decrease the value of the oil and gas production.
5. An exception to the notification requirements within 19.15.12.11(C)(1)(b) NMAC was granted by the Division within Order R-10696.
6. Applicant provided notice of the Application to the Bureau of Land Management (“BLM”) or New Mexico State Land Office (“NMSLO”), as applicable.

CONCLUSIONS OF LAW

7. OCD has jurisdiction to issue this Order pursuant to the Oil and Gas Act, NMSA 1978, Sections 70-2-6, 70-2-11, 70-2-12, 70-2-16, 70-2-17, and 19.15.12 NMAC.
8. The downhole commingling of the Pools is common, or Applicant has provided evidence that the fluids are compatible and will not damage the Pools in accordance with 19.15.12.11(A)(1) NMAC.
9. The bottom perforation of the lower zone is within one hundred fifty percent (150%) of the depth of the top perforation in the upper zone or Applicant has provided evidence that the proposed commingling of the Pools shall not result in shut-in or flowing well bore pressure in excess of the commingled pool’s fracture parting pressure in accordance with 19.15.12.11(A)(3) NMAC.

10. Applicant's proposed method of allocation, as modified herein, complies with 19.15.12.11(A)(8) NMAC.
11. By granting the Application with the conditions specified below, this Order prevents waste and protects correlative rights, public health, and the environment.

ORDER

1. Applicant is authorized to downhole commingle the Pools described in Exhibit A within the well bore of the well identified in Exhibit A.
2. This Order supersedes Order DHC-1521.
3. Applicant shall allocate a fixed percentage of the oil production from the Well to each of the Pools until a different plan to allocate oil production is approved by OCD. Of the oil production from the Well:
 - a. zero percent (0.0%) shall be allocated to the BASIN FRUITLAND COAL pool (pool ID: 71629);
 - b. twenty-five percent (25%) shall be allocated to the BLANCO P.C. SOUTH pool (pool ID: 72439);
 - c. thirty-eight percent (38%) shall be allocated to the BLANCO MESAVERDE pool (pool ID: 72319); and
 - d. thirty-seven percent (37%) shall be allocated to the BASIN DAKOTA pool (pool ID: 71599).

Applicant shall allocate gas production to the new pool(s) equal to the total gas production from the Well minus the projected gas production from the current pool(s) until a different plan to allocate gas production is approved by OCD. The new pool(s) are:

- a. the BASIN FRUITLAND COAL pool (pool ID: 71629); and
- b. the BLANCO P.C. SOUTH pool (pool ID: 72439).

The current pool(s) are:

- a. the BLANCO MESAVERDE pool (pool ID: 72319); and
- b. the BASIN DAKOTA pool (pool ID: 71599).

Applicant shall calculate the oil and gas production average during the fourth year after the commencement of commingling, which shall be used to establish a fixed percentage of the total oil and gas production that shall be allocated to each of the Pools ("fixed percentage allocation plan"). No later than ninety (90) days after the fourth year, Applicant shall submit a Form C-103 to the OCD Engineering Bureau that includes the fixed percentage allocation plan and all data used to determine it. If Applicant fails to do so, this Order shall terminate on the following day. If OCD denies the fixed percentage allocation plan, this Order shall terminate on the date of such action. If OCD approves the percentage allocation plan with or without modifications, then the approved percentage allocation plan shall be used to determine oil and gas allocation starting on the date of such action until the Well is plugged and abandoned.

4. If an alteration is made to the Well or a condition within the Well changes which may cause the allocation of production to the Pools as approved within this Order to become inaccurate, then no later than sixty (60) days after that event, Applicant shall submit Form C-103 to the OCD Engineering Bureau describing the event and include a revised allocation plan. If OCD denies the revised allocation plan, this Order shall terminate on the date of such action.
5. If any of the pools being commingled is prorated, or the Well's production has been restricted by an OCD order in any manner, the allocated production from each producing pool in the commingled well bore shall not exceed the top oil or gas allowable rate for a well in that pool or rate restriction applicable to the well.
6. If the Well is deepened, then no later than forty-five (45) days after the Well is deepened, Applicant shall conduct and provide logs to OCD that are sufficient for OCD to determine which pool(s) each new completed interval of the Well will produce from.
7. If the downhole commingling of the Pools reduces the value of the oil and gas production to less than if it had remained segregated, no later than sixty (60) days after the decrease in value has occurred Applicant shall submit a new downhole commingling application to OCD to amend this Order to remove the pool that caused the decrease in value. If Applicant fails to submit a new application, this Order shall terminate on the following day, and if OCD denies the application, this Order shall terminate on the date of such action.
8. If a completed interval of the Well is altered from what is submitted within the Application as identified in Exhibit A, then no later than sixty (60) days after the alteration, Applicant shall submit Form C-103 to the OCD Engineering Bureau detailing the alteration and completed interval.
9. If OCD determines that Applicant has failed to comply with any provision of this Order, OCD may take any action authorized by the Oil and Gas Act or the New Mexico Administrative Code (NMAC).
10. OCD retains jurisdiction of this matter and reserves the right to modify or revoke this Order as it deems necessary.

**STATE OF NEW MEXICO
OIL CONSERVATION DIVISION**



**ALBERT CHANG
DIRECTOR**

DATE: 7/18/2025

State of New Mexico
Energy, Minerals and Natural Resources Department

Exhibit A

Order: **DHC-5508**

Operator: **Hilcorp Energy Company**

Well Name: **SAN JUAN 28 6 UNIT WELL NO. 113M**

Well API: **30-039-25653**

Upper Zone	Pool Name: Basin Fruitland Coal		
	Pool ID: 71629	Current:	New: X
	Allocation: Fixed Percent	Oil: 0.0%	Gas: 45.0%
		Top: 3,028	Bottom: 3,359

Intermediate Zone	Pool Name: Blanco P.C. South		
	Pool ID: 72439	Current:	New: X
	Allocation: Fixed Percent	Oil: 25.0%	Gas: 55.0%
		Top: 3,360	Bottom: 3,461

Bottom of Interval within 150% of Upper Zone's Top of Interval: **YES**

Intermediate Zone 2	Pool Name: Blanco Mesaverde		
	Pool ID: 72319	Current: X	New:
	Allocation:	Oil: 38.0%	Gas: SUBT
		Top: 4,118	Bottom: 5,961

Bottom of Interval within 150% of Upper Zone's Top of Interval: **NO**

Lower Zone	Pool Name: Basin Dakota		
	Pool ID: 71599	Current: X	New:
	Allocation:	Oil: 37.0%	Gas: SUBT
		Top: 7,611	Bottom: 7,810

Bottom of Interval within 150% of Upper Zone's Top of Interval: **NO**

Top of Queen Formation:

ID NO. 470449

DHC-5508

Revised March 23, 2017

RECEIVED: 06/03/25	REVIEWER:	TYPE:	APP NO:
---------------------------	-----------	-------	---------

ABOVE THIS TABLE FOR OCD DIVISION USE ONLY

NEW MEXICO OIL CONSERVATION DIVISION
 - Geological & Engineering Bureau -
 1220 South St. Francis Drive, Santa Fe, NM 87505

**ADMINISTRATIVE APPLICATION CHECKLIST**

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND
 REGULATIONS WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

Applicant: Hilcorp Energy Company **OGRID Number:** 372171
Well Name: SAN JUAN 28-6 UNIT 113M **API:** 30-039-25653
Pool: BASIN FRUITLAND COAL, SOUTH BLANCO PICTURED CLIFFS **Pool Code:** 71629,72439

**SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION
 INDICATED BELOW**

1) TYPE OF APPLICATION: Check those which apply for [A]

A. Location – Spacing Unit – Simultaneous Dedication

☐ NSL☐ NSP (PROJECT AREA)☐ NSP (PRORATION UNIT)☐ SD

B. Check one only for [I] or [II]

[I] Commingling – Storage – Measurement

☒ DHC ☐ CTB ☐ PLC ☐ PC ☐ OLS ☐ OLM

[II] Injection – Disposal – Pressure Increase – Enhanced Oil Recovery

☐ WFX ☐ PMX ☐ SWD ☐ IPI ☐ EOR ☐ PPR**2) NOTIFICATION REQUIRED TO:** Check those which apply.A. ☐ Offset operators or lease holdersB. ☐ Royalty, overriding royalty owners, revenue ownersC. ☐ Application requires published noticeD. ☐ Notification and/or concurrent approval by SLOE. ☒ Notification and/or concurrent approval by BLMF. ☐ Surface ownerG. ☐ For all of the above, proof of notification or publication is attached, and/or,H. ☒ No notice required**FOR OCD ONLY**☐ Notice Complete☐ Application
Content
Complete

- 3) CERTIFICATION:** I hereby certify that the information submitted with this application for administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

6/3/2025

Date

DAWN NASH-DEAL

Print or Type Name

505-324-5132

Phone Number

Dawnnash Deal

Signature

DNASH@HILCORP.COM

e-mail Address

District I
1625 N. French Drive, Hobbs, NM 88240

District II
811 S. First St., Artesia, NM 88210

District III
1000 Rio Brazos Road, Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-107A
Revised August 1, 2011

APPLICATION TYPE
____Single Well
____Establish Pre-Approved Pools
EXISTING WELLBORE
____Yes ____No

APPLICATION FOR DOWNHOLE COMMINGLING

Hilcorp Energy Company
Operator

382 Road 3100, Aztec, NM 87410
Address

SAN JUAN 28-6 UNIT
Lease

113M
Well No.

C.26,28N.06W
Unit Letter-Section-Township-Range

RIO ARRIBA
County

OGRID No. 372171 Property Code 318710 API No. 30-039-25653 Lease Type: ____ Federal ☒ State ____ Fee

DATA ELEMENT	UPPER ZONE	INTERMEDIATE ZONE	INTERMEDIATE ZONE	LOWER ZONE
Pool Name	BASIN FRUITLAND COAL	BLANCO SOUTH PICTURED CLIFFS	BLANCO MESAVERDE	BASIN DAKOTA
Pool Code	71629	72439	72319	71599
Top and Bottom of Pay Section (Perforated or Open-Hole Interval)	~3028'-3359'	~3360'-3461'	4118'-5961'	7611'-7810'
Method of Production (Flowing or Artificial Lift)	ARTIFICIAL LIFT	ARTIFICIAL LIFT	ARTIFICIAL LIFT	ARTIFICIAL LIFT
Bottomhole Pressure (Note: Pressure data will not be required if the bottom perforation in the lower zone is within 150% of the depth of the top perforation in the upper zone)	66 BHP	90 BHP	405 BHP	769 BHP
Oil Gravity or Gas BTU (Degree API or Gas BTU)	1102 BTU	1163 BTU	1256 BTU	1072 BTU
Producing, Shut-In or New Zone	NEW ZONE	NEW ZONE	PRODUCING	PRODUCING
Date and Oil/Gas/Water Rates of Last Production. (Note: For new zones with no production history, applicant shall be required to attach production estimates and supporting data.)	Date: Rates: Oil: Gas: Water:	Date: Rates: Oil: Gas: Water:	Date: 3/1/2025 Rates: Oil: 0 BBL Gas: 1229 MCF Water: 0 BBL	Date: 3/1/2025 Rates: Oil: 0 BBL Gas: 786 MCF Water: 0 BBL
Fixed Allocation Percentage (Note: If allocation is based upon something other than current or past production, supporting data or explanation will be required.)	Oil Gas %	Oil Gas %	Oil Gas %	Oil Gas %

ADDITIONAL DATA

Are all working, royalty and overriding royalty interests identical in all commingled zones?
If not, have all working, royalty and overriding royalty interest owners been notified by certified mail?

Yes____ No ☒
Yes____ No ☒

Are all produced fluids from all commingled zones compatible with each other?

Yes ☒ No____

Will commingling decrease the value of production?

Yes____ No ☒

If this well is on, or communitized with, state or federal lands, has either the Commissioner of Public Lands or the United States Bureau of Land Management been notified in writing of this application?

Yes ☒ No____

NMOCD Reference Case No. applicable to this well: R-10696

- Attachments:
- C-102 for each zone to be commingled showing its spacing unit and acreage dedication.
 - Production curve for each zone for at least one year. (If not available, attach explanation.)
 - For zones with no production history, estimated production rates and supporting data.
 - Data to support allocation method or formula.
 - Notification list of working, royalty and overriding royalty interests for uncommon interest cases.
 - Any additional statements, data or documents required to support commingling.

PRE-APPROVED POOLS

If application is to establish Pre-Approved Pools, the following additional information will be required:

- List of other orders approving downhole commingling within the proposed Pre-Approved Pools
- List of all operators within the proposed Pre-Approved Pools
- Proof that all operators within the proposed Pre-Approved Pools were provided notice of this application.
- Bottomhole pressure data.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Dawnash Deal

TITLE Operations/Regulatory Technician DATE 06/03/2025

TYPE OR PRINT NAME DAWN NASH-DEAL

TELEPHONE NO. (505) 324-5132

E-MAIL ADDRESS DNASH@HILCORP.COM

District I
PO Box 1988, Hobbs, NM 88241-1988
District II
PO Drawer DD, Artesia, NM 88211-0719
District III
1000 Mile Branch Rd., Aztec, NM 87410
District IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

PO Box 2088
Santa Fe, NM 87504-2088

Form C-102

Revised February 21, 1994

Instructions on back

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

070 FARMINGTON, NM

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-039-25653	Pool Code 72319/21599	Pool Name Blanco Mesaverde/Basin Dakota
Property Code 7462	Property Name San Juan 28-6 Unit	Well Number 113M
OGRID No. 14538	Operator Name BURLINGTON RESOURCES OIL & GAS COMPANY	Elevation 6575'

10 Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	26	28-N	6-W		1190	North	1730	West	R.A.

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

12 Dedicated Acres W/320-W/320	13 Joint or Infill	14 Consolidation Code	15 Order No.
-----------------------------------	--------------------	-----------------------	--------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

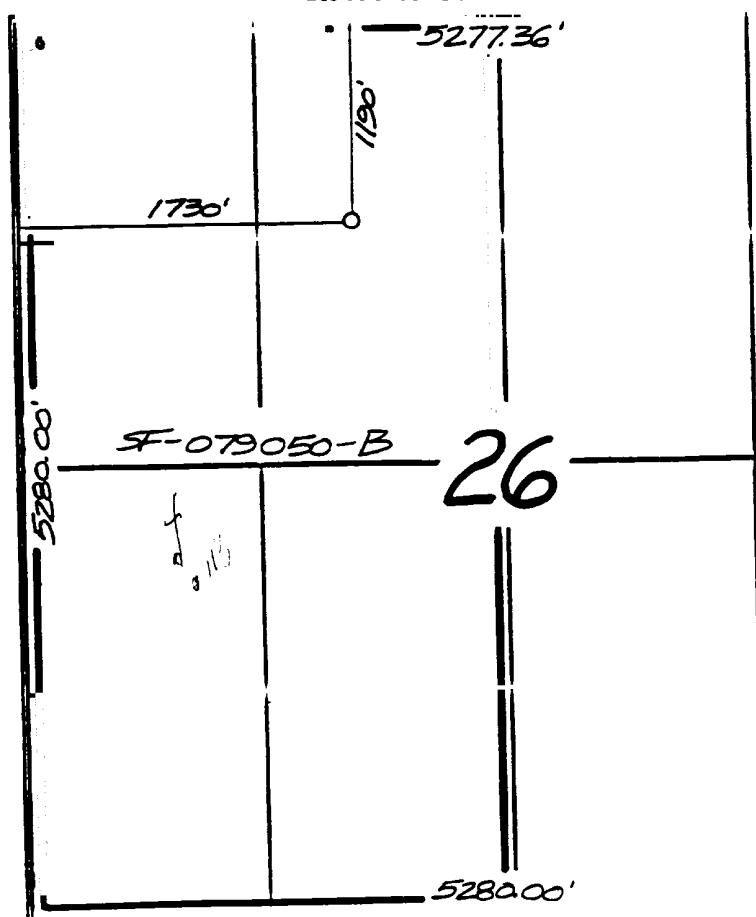

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief

Peggy Bradfield
Signature
Peggy Bradfield
Printed Name
Regulatory Administrator
Title
12-30-96
Date

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

10/17/96

Date of Survey
Signature and Title of Professional Surveyor
NEALE C. EDWARDS
8857
6857
Certificate #

Water Compatibility in the San Juan Basin

- The San Juan basin has productive siliciclastic reservoirs (Pictured Cliffs, Blanco Mesaverde, Basin Dakota, etc.) and a productive coalbed methane reservoir (Basin Fruitland Coal).

- These siliciclastic and coalbed methane reservoirs are commingled extensively throughout the basin in many different combinations with no observed damage from clay swelling due to differing formation waters.

- The samples below all show fresh water with low TDS.

- Data taken from standalone completions in the zone of interest within a 2 mile radius of the well. A farther radius is used if there is not enough data for a proper statistical analysis.

Well Name	API
San Juan 28-6 Unit 113M	3003925653

FRC Offset (3.97 MILES)		MV Offset (4.49 MILES)		DK Offset (4.01 MILES)		PC Offset (7.94 MILES)	
API	3003924961	API	3003907331	API	3003907309	API	3003925897
Property	SAN JUAN 28-6 UNIT 414	Property	SAN JUAN 28-5 UNIT 23	Property	SAN JUAN 28-5 UNIT 65	Property	SAN JUAN 29-7 UNIT 166
CationBarium	0.14	CationBarium	0.00	CationBarium	0.00	CationBarium	0.00
CationBoron	0	CationBoron	0	CationBoron	0	CationBoron	0
CationCalcium	4.29	CationCalcium	16.08	CationCalcium	5.39	CationCalcium	80.00
CationIron	83.23	CationIron	73.85	CationIron	79.30	CationIron	62.10
CationMagnesium	1.17	CationMagnesium	6.83	CationMagnesium	1.12	CationMagnesium	19.50
CationManganese	0.80	CationManganese	0.80	CationManganese	0.56	CationManganese	1.98
CationPhosphorus	0	CationPhosphorus	0	CationPhosphorus	0	CationPhosphorus	0
CationPotassium	0	CationPotassium	0	CationPotassium	0	CationPotassium	0
CationStrontium	0.05	CationStrontium	2.36	CationStrontium	0.17	CationStrontium	0.00
CationSodium	161.54	CationSodium	87.21	CationSodium	106.92	CationSodium	762.80
CationSilica	0	CationSilica	0	CationSilica	0	CationSilica	0
CationZinc	0	CationZinc	0	CationZinc	0	CationZinc	0
CationAluminum	0	CationAluminum	0	CationAluminum	0	CationAluminum	0
CationCopper	0	CationCopper	0	CationCopper	0	CationCopper	0
CationLead	0	CationLead	0	CationLead	0	CationLead	0
CationLithium	0	CationLithium	0	CationLithium	0	CationLithium	0
CationNickel	0	CationNickel	0	CationNickel	0	CationNickel	0
CationCobalt	0	CationCobalt	0	CationCobalt	0	CationCobalt	0
CationChromium	0	CationChromium	0	CationChromium	0	CationChromium	0
CationSilicon	0	CationSilicon	0	CationSilicon	0	CationSilicon	0
CationMolybdenum	0	CationMolybdenum	0	CationMolybdenum	0	CationMolybdenum	0
AnionChloride	3.87	AnionChloride	114.13	AnionChloride	80.09	AnionChloride	1200.00
AnionCarbonate	0.00	AnionCarbonate	0.00	AnionCarbonate	0.00	AnionCarbonate	0.00
AnionBicarbonate	439.20	AnionBicarbonate	0	AnionBicarbonate	0	AnionBicarbonate	427.00
AnionBromide	0	AnionBromide	0	AnionBromide	0	AnionBromide	0
AnionFluoride	0	AnionFluoride	0	AnionFluoride	0	AnionFluoride	0
AnionHydroxyl	0.00	AnionHydroxyl	0.00	AnionHydroxyl	0.00	AnionHydroxyl	0
AnionNitrate	0	AnionNitrate	0	AnionNitrate	0	AnionNitrate	0
AnionPhosphate	0	AnionPhosphate	0	AnionPhosphate	0	AnionPhosphate	0
AnionSulfate	1.61	AnionSulfate	0.00	AnionSulfate	0.00	AnionSulfate	80.00
phField	7.00	phField	6.23	phField	6.40	phField	0
phCalculated	0	phCalculated	0	phCalculated	0	phCalculated	6.83
TempField	78.00	TempField	84.50	TempField	97.00	TempField	0
TempLab	0	TempLab	0	TempLab	0	TempLab	0
OtherFieldAlkalinity	0	OtherFieldAlkalinity	0	OtherFieldAlkalinity	0	OtherFieldAlkalinity	342.16
OtherSpecificGravity	1.00	OtherSpecificGravity	1.00	OtherSpecificGravity	1.00	OtherSpecificGravity	0
OtherTDS	695.90	OtherTDS	520.23	OtherTDS	483.44	OtherTDS	2435.00
OtherCaCO3	0	OtherCaCO3	0	OtherCaCO3	0	OtherCaCO3	0
OtherConductivity	1087.35	OtherConductivity	812.86	OtherConductivity	755.38	OtherConductivity	0
DissolvedCO2	96.00	DissolvedCO2	80.00	DissolvedCO2	124.00	DissolvedCO2	0
DissolvedO2	0	DissolvedO2	0	DissolvedO2	0	DissolvedO2	0
DissolvedH2S	0.85	DissolvedH2S	0.80	DissolvedH2S	0.53	DissolvedH2S	13.00
GasPressure	157.10	GasPressure	185.00	GasPressure	160.00	GasPressure	0
GasCO2	0.00	GasCO2	1.00	GasCO2	1.00	GasCO2	4.00
GasCO2PP	0.00	GasCO2PP	1.85	GasCO2PP	1.60	GasCO2PP	0
GasH2S	0.00	GasH2S	0.00	GasH2S	0.00	GasH2S	0.00
GasH2SPP	0.00	GasH2SPP	0.00	GasH2SPP	0.00	GasH2SPP	0
PitzerCaCO3_70	-1.40	PitzerCaCO3_70	0	PitzerCaCO3_70	0	PitzerCaCO3_70	0
PitzerBaSO4_70	-1.15	PitzerBaSO4_70	0	PitzerBaSO4_70	0	PitzerBaSO4_70	0
PitzerCaSO4_70	-4.51	PitzerCaSO4_70	0	PitzerCaSO4_70	0	PitzerCaSO4_70	0
PitzerSrSO4_70	-4.80	PitzerSrSO4_70	0	PitzerSrSO4_70	0	PitzerSrSO4_70	0
PitzerFeCO3_70	0	PitzerFeCO3_70	0	PitzerFeCO3_70	0	PitzerFeCO3_70	0
PitzerCaCO3_220	-0.58	PitzerCaCO3_220	0	PitzerCaCO3_220	0	PitzerCaCO3_220	0
PitzerBaSO4_220	-1.69	PitzerBaSO4_220	0	PitzerBaSO4_220	0	PitzerBaSO4_220	0
PitzerCaSO4_220	-4.38	PitzerCaSO4_220	0	PitzerCaSO4_220	0	PitzerCaSO4_220	0
PitzerSrSO4_220	-4.58	PitzerSrSO4_220	0	PitzerSrSO4_220	0	PitzerSrSO4_220	0
PitzerFeCO3_220	0	PitzerFeCO3_220	0	PitzerFeCO3_220	0	PitzerFeCO3_220	0

Gas Compatibility in the San Juan Basin

- The San Juan basin has productive siliciclastic reservoirs (Pictured Cliffs, Blanco Mesaverde, Basin Dakota, etc.) and a productive coalbed methane reservoir (Basin Fruitland Coal).
- These siliciclastic and coalbed methane reservoirs are commingled extensively throughout the basin in many different combinations with no observed damage from clay swelling due to differing formation waters or gas composition.
- The samples below all show offset gas analysis variability by formation is low.
- Data taken from standalone completions in the zone of interest within a 2 mile radius of the well. A farther radius is used if there is not enough data for a proper statistical analysis.

Well Name	API
San Juan 28-6 Unit 113M	3003925653

FRC Offset (1.85 MILES)		MV Offset (1.85 MILES)		DK Offset (4.02 MILES)		PC Offset (4.68 MILES)	
AssetCode	3003925006	AssetCode	3003907237	AssetCode	3003920846	AssetCode	3003907043
AssetName	SAN JUAN 28-6 UNIT 467	AssetName	SAN JUAN 28-6 UNIT 42	AssetName	SAN JUAN 28-6 UNIT 204	AssetName	SAN JUAN 28-6 UNIT 95
CO2	0.00	CO2	0.01	CO2	0.01	CO2	0.00
N2	0.00	N2	0.00	N2	0.00	N2	0.01
C1	0.91	C1	0.76	C1	0.87	C1	0.85
C2	0.04	C2	0.12	C2	0.07	C2	0.07
C3	0.02	C3	0.06	C3	0.02	C3	0.04
ISOC4	0.00	ISOC4	0.01	ISOC4	0.01	ISOC4	0.01
NC4	0.01	NC4	0.02	NC4	0.00	NC4	0.01
ISOC5	0.00	ISOC5	0.01	ISOC5	0.00	ISOC5	0.00
NC5	0.00	NC5	0.00	NC5	0.00	NC5	0.00
NEOC5	0	NEOC5	0	NEOC5	0	NEOC5	0
C6	0.00	C6	0.01	C6	0	C6	0
C6_PLUS	0	C6_PLUS	0	C6_PLUS	0.01	C6_PLUS	0.01
C7	0	C7	0	C7	0	C7	0
C8	0	C8	0	C8	0	C8	0
C9	0	C9	0	C9	0	C9	0
C10	0	C10	0	C10	0	C10	0
AR	0	AR	0	AR	0	AR	0
CO	0	CO	0	CO	0	CO	0
H2	0	H2	0	H2	0	H2	0
O2	0	O2	0	O2	0	O2	0
H2O	0	H2O	0	H2O	0	H2O	0
H2S	0	H2S	0	H2S	0	H2S	0
HE	0	HE	0	HE	0	HE	0
C_O_S	0	C_O_S	0	C_O_S	0	C_O_S	0
CH3SH	0	CH3SH	0	CH3SH	0	CH3SH	0
C2H5SH	0	C2H5SH	0	C2H5SH	0	C2H5SH	0
CH2S3_2CH3S	0	CH2S3_2CH3S	0	CH2S3_2CH3S	0	CH2S3_2CH3S	0
CH2S	0	CH2S	0	CH2S	0	CH2S	0
C6HV	0	C6HV	0	C6HV	0	C6HV	0
CO2GPM	0	CO2GPM	0	CO2GPM	0.00	CO2GPM	0.00
N2GPM	0	N2GPM	0	N2GPM	0.00	N2GPM	0.00
C1GPM	0	C1GPM	0	C1GPM	0.00	C1GPM	0.00
C2GPM	0	C2GPM	0	C2GPM	1.99	C2GPM	1.78
C3GPM	0	C3GPM	0	C3GPM	0.57	C3GPM	1.15
ISOC4GPM	0	ISOC4GPM	0	ISOC4GPM	0.17	ISOC4GPM	0.26
NC4GPM	0	NC4GPM	0	NC4GPM	0.15	NC4GPM	0.37
ISOC5GPM	0	ISOC5GPM	0	ISOC5GPM	0.11	ISOC5GPM	0.15
NC5GPM	0	NC5GPM	0	NC5GPM	0.05	NC5GPM	0.11
C6_PLUSGPM	0	C6_PLUSGPM	0	C6_PLUSGPM	0.23	C6_PLUSGPM	0.37

The near wellbore shut-in bottom hole pressures of the above reservoirs are much lower than the calculated far-field stabilized reservoir pressured due to the low permeability of the reservoirs. Based on pressure transient analysis performed in the San Juan Basin, it would take 7-25 years for shut-in bottom hole pressures to build up to the calculated far-field reservoir pressure. Our observation is that even for areas of high static reservoir pressures, the low permeability of the reservoir rock results in rapid depletion of the near-fracture region, quickly enough that the wells are unable to produce without the aid of a plunger. Given low permeabilities and low wellbore flowing pressures in the above reservoirs, loss of reserves due to cross-flow is not an issue during producing or shut-in periods. Given low shut-in bottom hole pressures, commingling the above reservoirs in this well will not result in shut-in or flowing wellbore pressures in excess of any commingled pool's fracture parting pressure. The pressures provided in the C-107A are based on shut-in bottom hole pressures of offset standalone wells which match expected near-wellbore shut-in bottom hole pressures of this proposed commingled completion.


Shut in pressures were calculated for operated offset standalone wells in each of the zones being commingled in the well in question via the following process:


- 1) Wells were shut in for 24 hours
- 2) Echometer was used to obtain a fluid level
- 3) Shut in BHP was calculated for the proposed commingled completion

API	Well Name	Formation
List of wells used to calculate BHPs for the Project:		
3003923052	San Juan 27-5 Unit 199	PC
3003925814	San Juan 27-5 Unit 21B	MV
3003907157	San Juan 27-5 Unit NP 84	DK
3003924923	San Juan 27-5 Unit NP 223	FRC
I believe each of the reservoirs to be continuous and in a similar state of depletion at this well and at each of the wells from which the pressures are being derived.		

Note: BTU Data taken from standalone completions in the zone of interest within a 2 mile radius of the well.

A farther radius is used if there is not enough data for a proper statistical analysis.

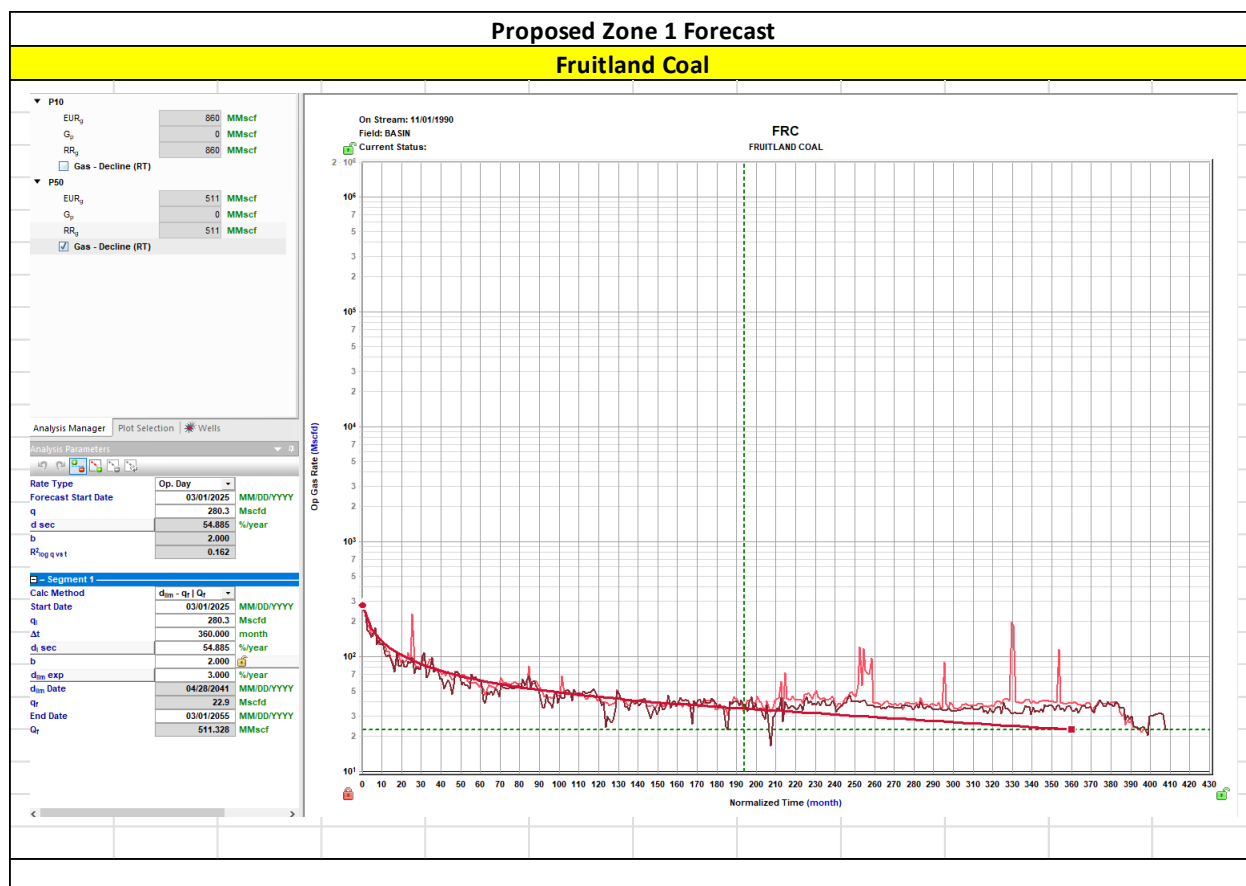

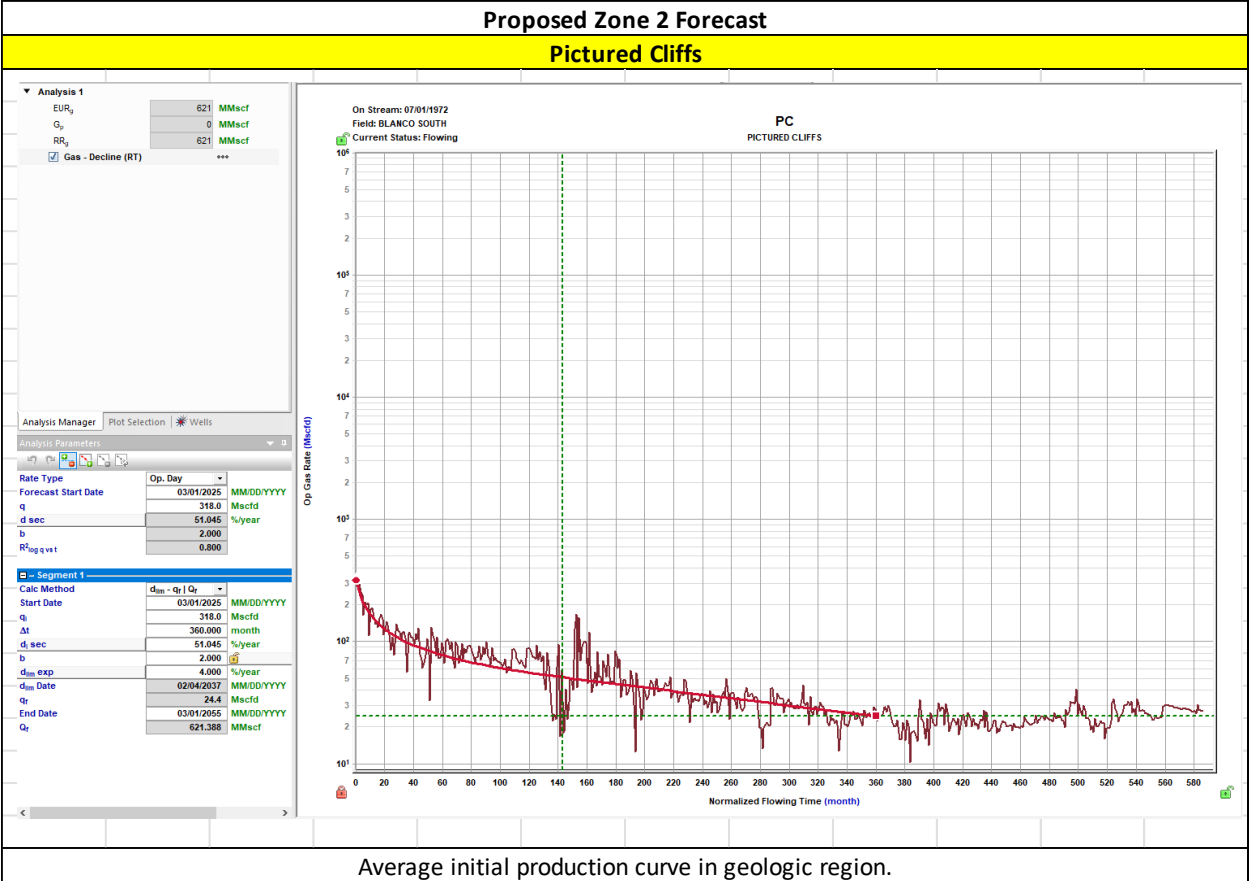

HEC Comments


The production forecasts have been generated using type curves of production in the surrounding trend.


These zones are proposed to be commingled because the application of dual completions impedes the ability to produce the shallow zone without artificial lift and the deeper zones with reduced artificial lift efficiency. All horizons will require artificial lift due to low bottomhole pressure (BHP) and permeability.

The BHPs of all zones, producing and non-producing, were estimated based upon basinwide Moving-Domain Material Balance models that have proven to approximate the pressure in the given reservoirs well in this portion of the basin. These models were constructed incorporating reservoir dynamics and physics, historic production, and observed pressure data. Historic commingling operations have proven reservoir fluids are compatible.


Production Allocation Method - Subtraction	
Gas Allocation:	
Production for the downhole commingle will be allocated using the subtraction method in agreement with local agencies. The base formation is the Dakota and the Mesaverde and the added formations to be commingled are the Pictured Cliffs and Fruitland Coal. The subtraction method applies an average monthly production forecast to the base formation using historic production. All production from this well exceeding the forecast will be allocated to the new formation. After 3 years production will stabilize. A production average will be gathered during the 4th year and will be utilized to create a fixed percentage based allocation.	


Formation	Remaining Reserves (MMcf)	% Gas Allocation
FRC	511	45%
PC	621	55%

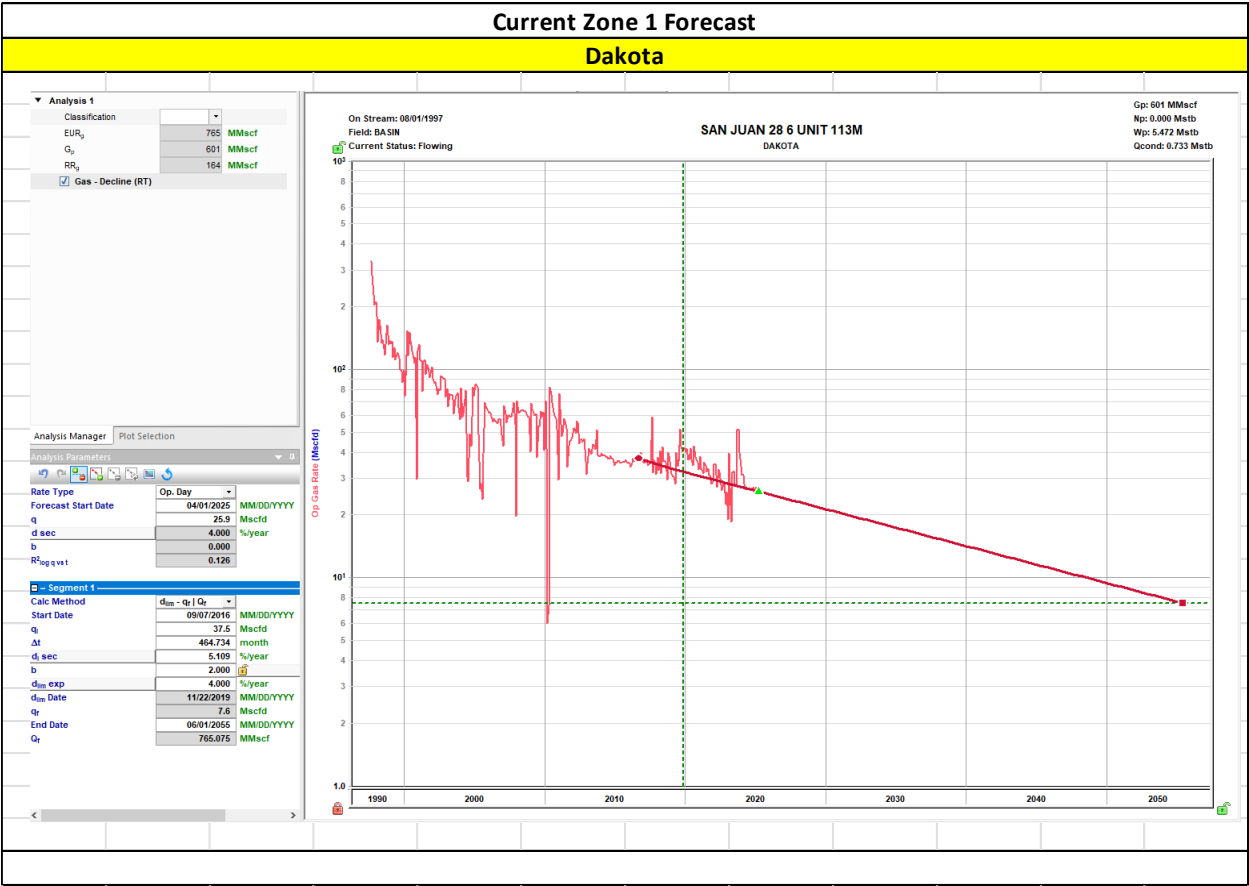


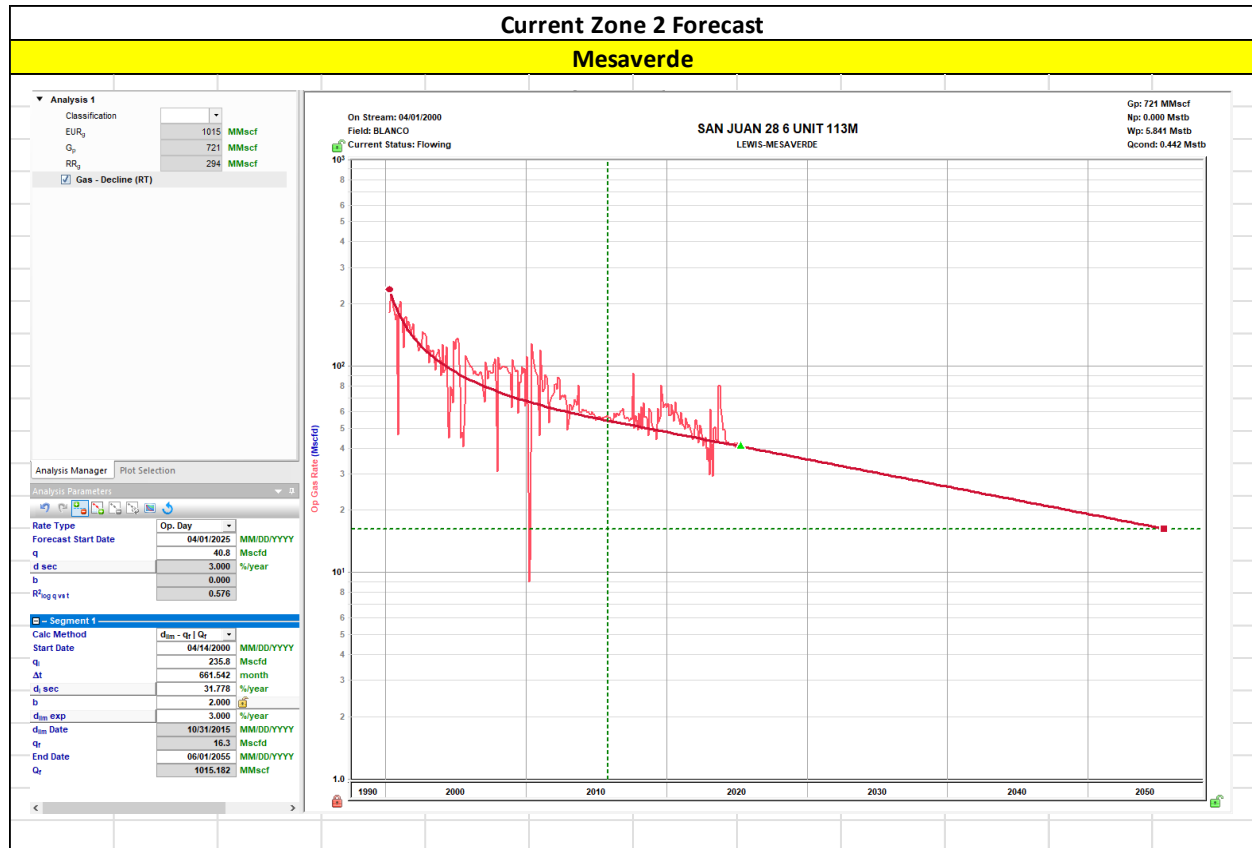


Formation	Yield (bbl/MM)	Remaining Reserves (MMcf)	% Oil Allocation
DK	1.40	164	37%
MV	0.80	294	38%
FRC	0.00	511	0%
PC	0.25	621	25%
			100%

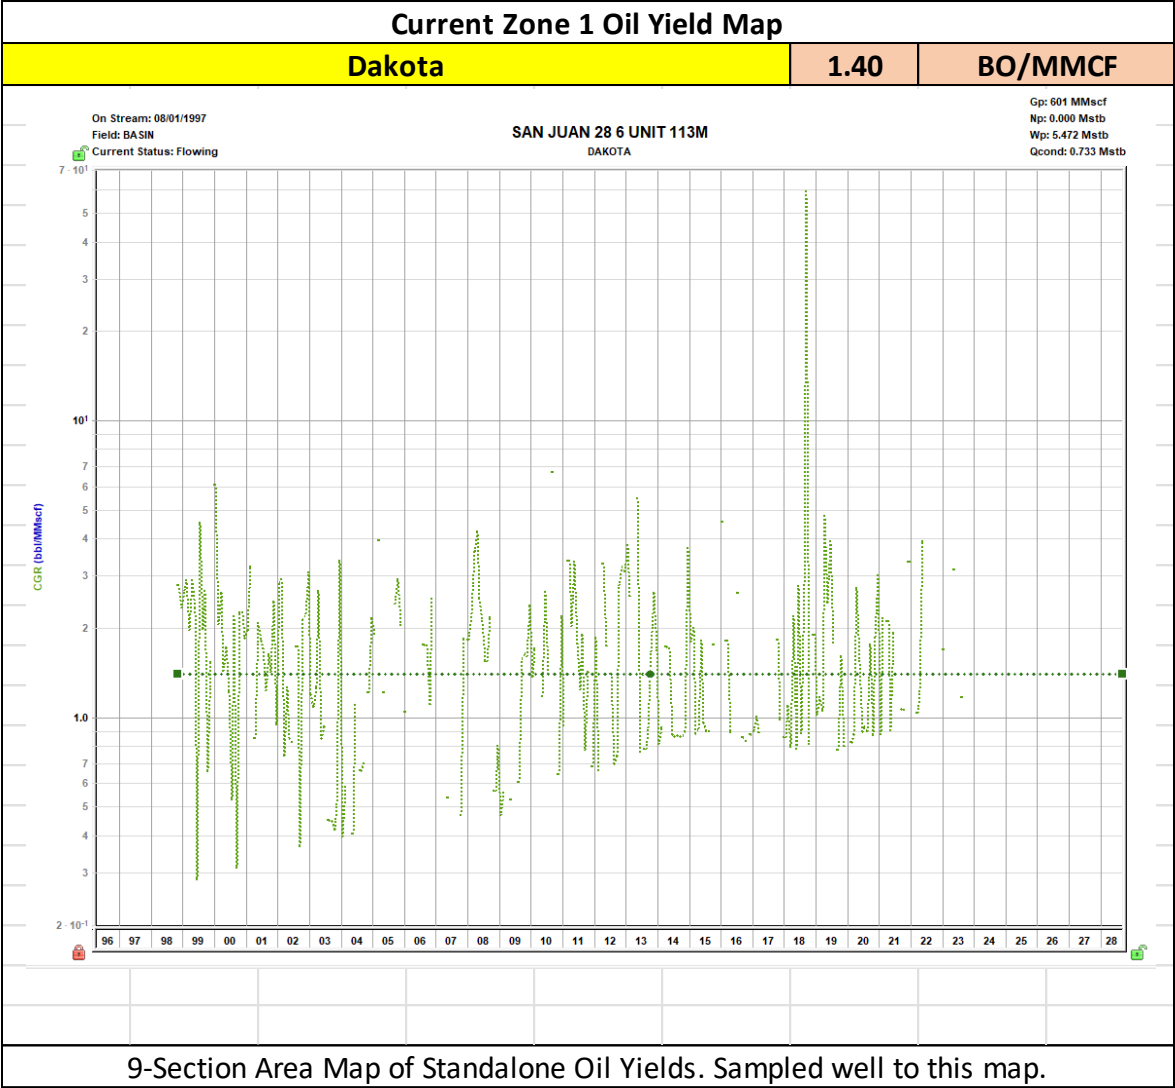

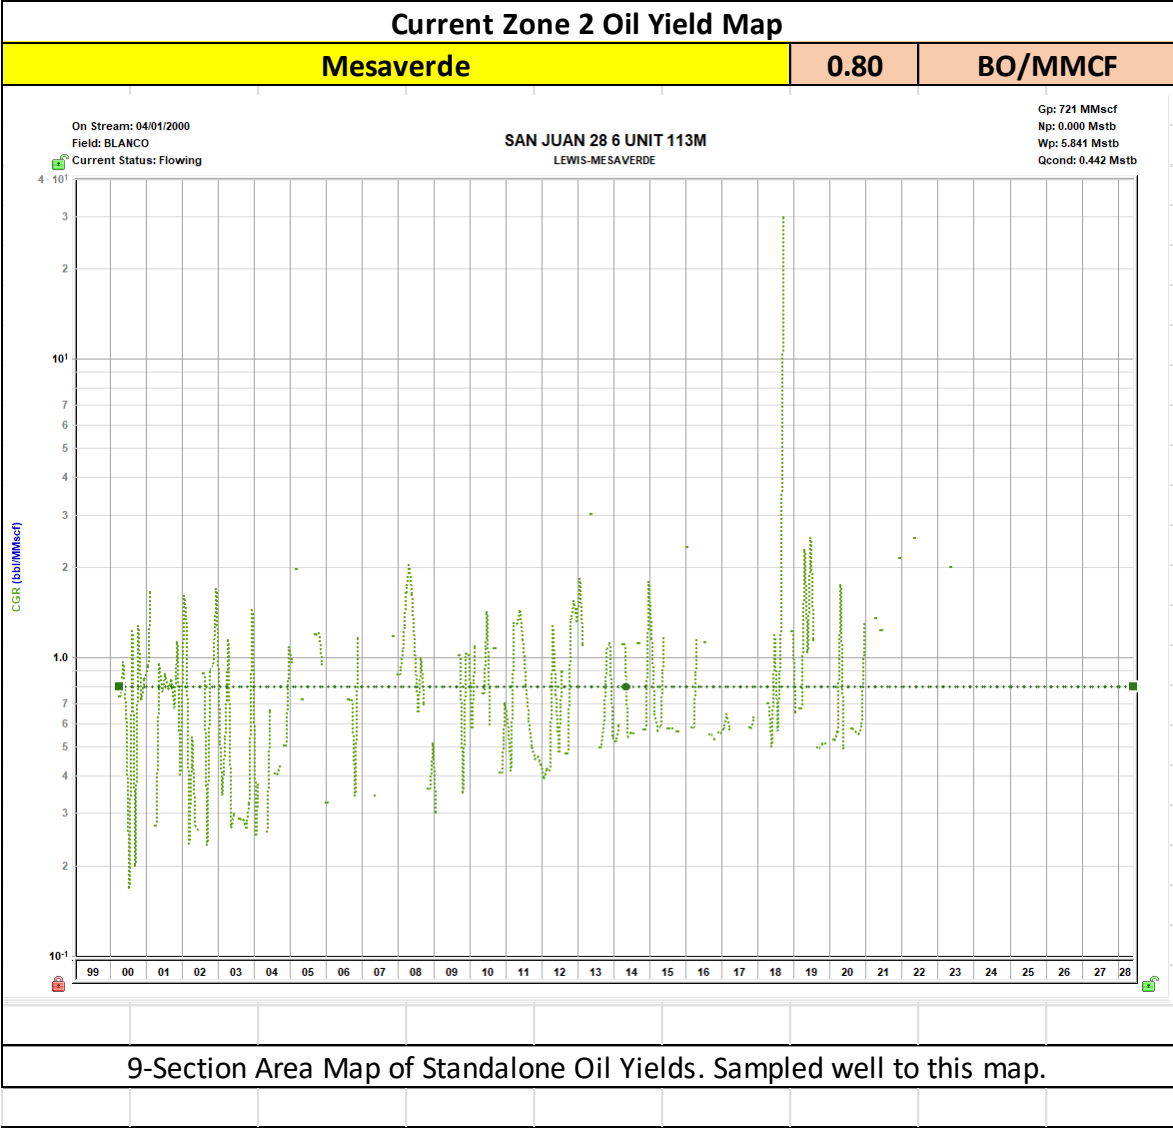

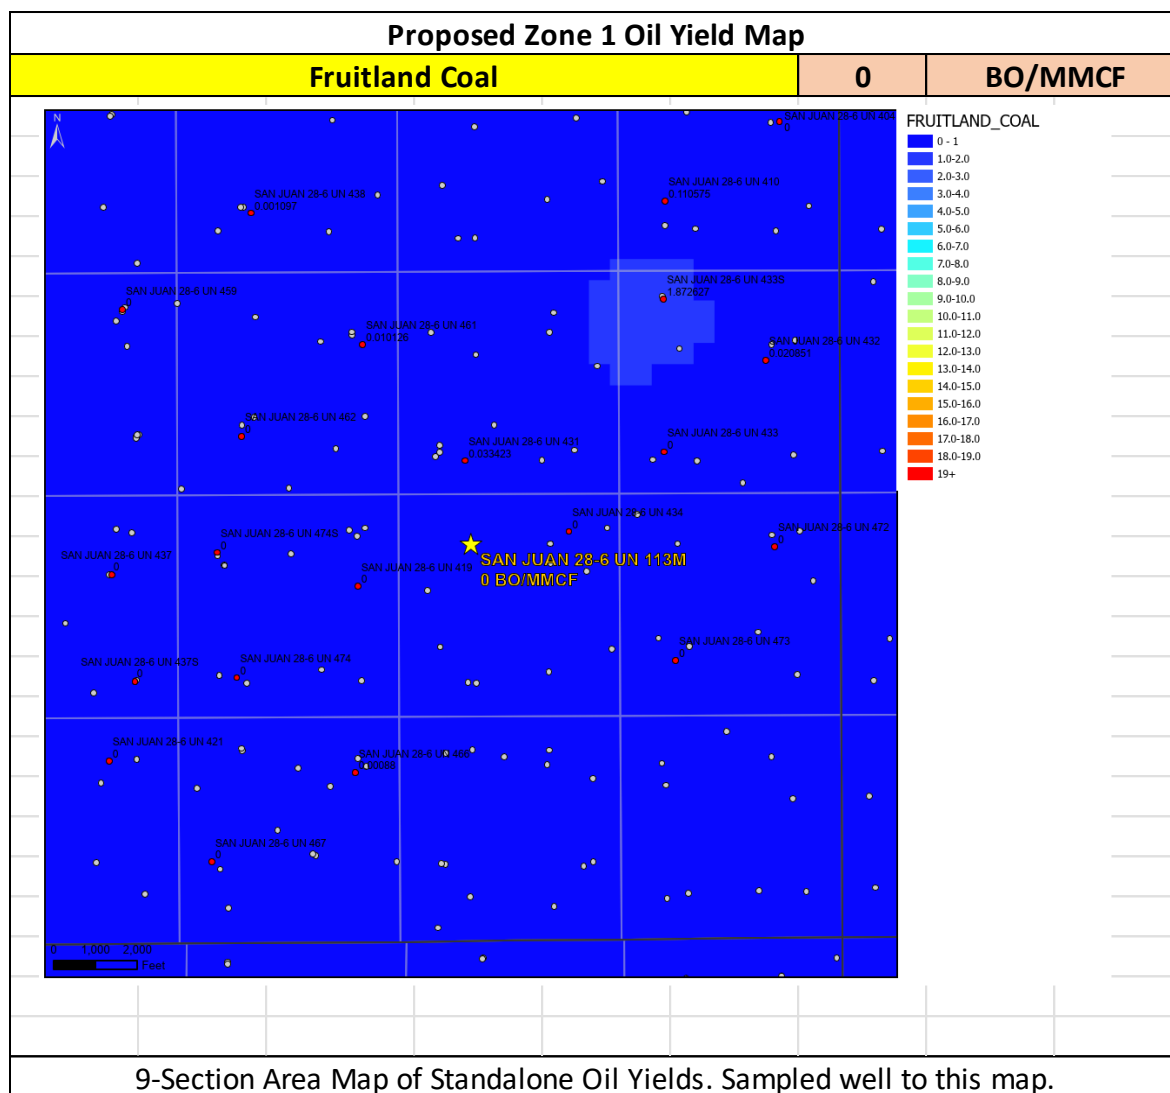

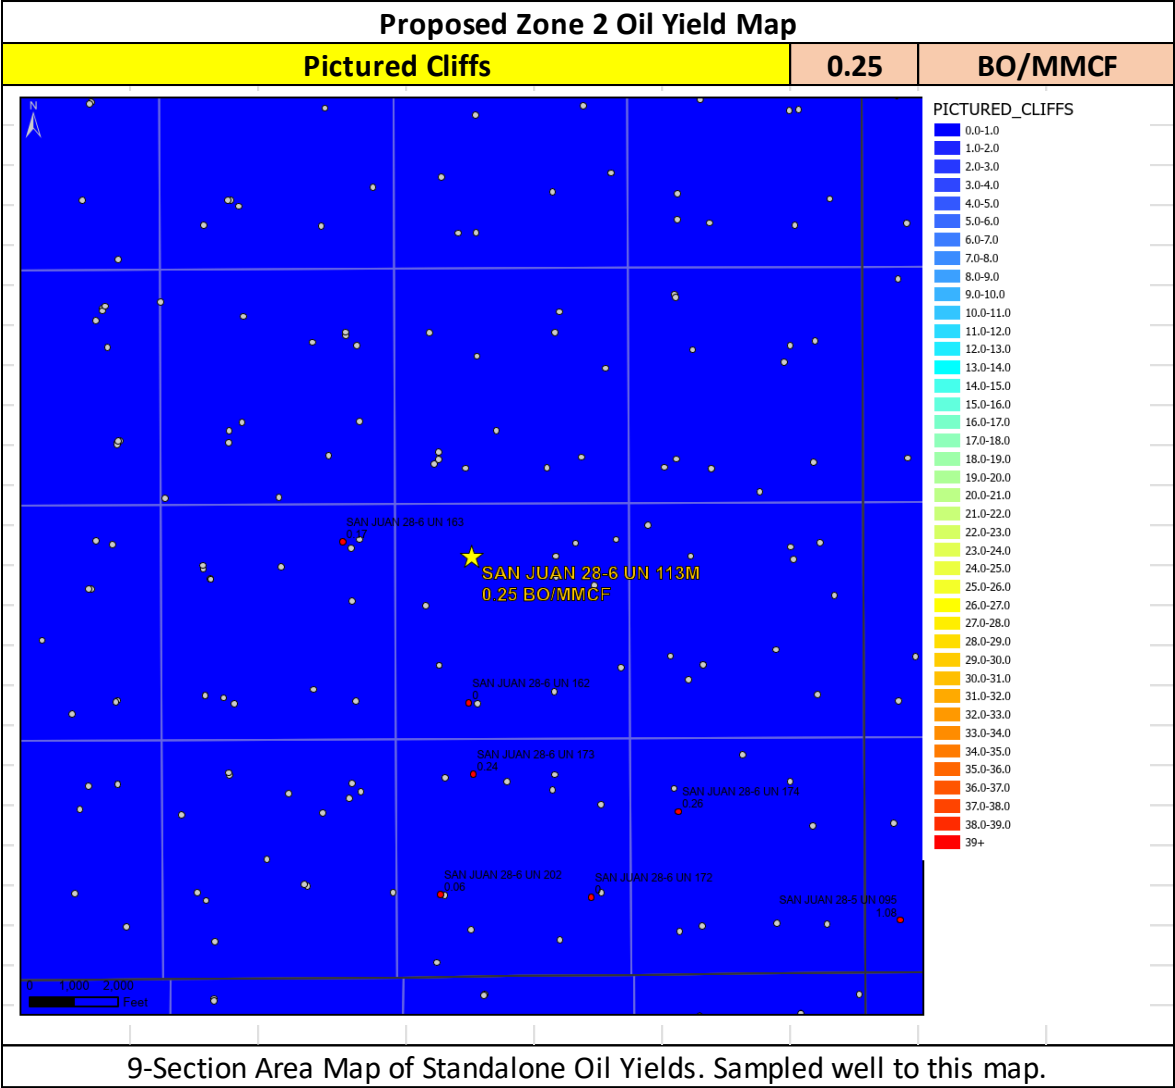

Well Name: SAN JUAN 28-6 UNIT	Well Location: T28N / R6W / SEC 26 / NENW / 36.6362 / -107.43892	County or Parish/State: RIO ARRIBA / NM
Well Number: 113M	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMSF079050B	Unit or CA Name: SAN JUAN 28-6 UNIT--DK, SAN JUAN 28-6 UNIT--MV	Unit or CA Number: NMNM78412A, NMNM78412C
US Well Number: 3003925653	Operator: HILCORP ENERGY COMPANY	

Notice of Intent

Sundry ID: 2855345

Type of Submission: Notice of Intent	Type of Action: Recompletion
Date Sundry Submitted: 05/29/2025	Time Sundry Submitted: 08:44
Date proposed operation will begin: 06/05/2025	

Procedure Description: Hilcorp Energy Company requests permission to recompleate the subject well in the Fruitland Coal/Pictured Cliffs and downhole commingle with the existing Mesaverde and Dakota. Please see the attached procedure, current and proposed wellbore diagram, plat and natural gas management plan. A closed loop system will be used. Hilcorp will contact the FFO Surface group within 90 days after the well has been recompleted, before any interim reclamation work, to conduct the onsite. A reclamation plan will be submitted after the onsite.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

San_Juan_28_6_UNIT_113M_RC_NOI_20250529204355.pdf

Received by OCD: 6/3/2025 2:56:36 PM

Page 20 of 38

Well Name: SAN JUAN 28-6 UNIT	Well Location: T28N / R6W / SEC 26 / NENW / 36.6362 / -107.43892	County or Parish/State: RIO ARRIBA / NM
Well Number: 113M	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMSF079050B	Unit or CA Name: SAN JUAN 28-6 UNIT--DK, SAN JUAN 28-6 UNIT--MV	Unit or CA Number: NMNM78412A, NMNM78412C
US Well Number: 3003925653	Operator: HILCORP ENERGY COMPANY	

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: DAWN NASH-DEAL	Signed on: MAY 31, 2025 04:17 PM
Name: HILCORP ENERGY COMPANY	
Title: Operations Regulatory Tech	
Street Address: 1111 TRAVIS ST	
City: HOUSTON	State: TX
Phone: (505) 324-5132	
Email address: DNASH@HILCORP.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5055647742	BLM POC Email Address: krennick@blm.gov
Disposition: Approved	Disposition Date: 06/02/2025
Signature: Kenneth Rennick	

Form 3160-5
(June 2019)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021**SUNDRY NOTICES AND REPORTS ON WELLS**
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

NMSF079050B

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

HILCORP ENERGY COMPANY

3a. Address

DNASH@HILCORP.COM

3b. Phone No. (include area code)

(713) 209-2400

7. If Unit of CA/Agreement, Name and/or No.

SAN JUAN 28-6 UNIT--DK, SAN JUAN 28-6 UNIT--MV/NMNM78412A, NMNM78412

8. Well Name and No.

Hilcorp Energy Company

9. API Well No. 3003925653

10. Field and Pool or Exploratory Area

BLANCO MESAVERDE/BASIN DAKOTA

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEC 26/T28N/R6W/NMP

11. Country or Parish, State

RIO ARRIBA/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity	
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☒ Recomplete	☐ Other	
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon		
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Hilcorp Energy Company requests permission to recomplete the subject well in the Fruitland Coal/Pictured Cliffs and downhole commingle with the existing Mesaverde and Dakota. Please see the attached procedure, current and proposed wellbore diagram, plat and natural gas management plan. A closed loop system will be used. Hilcorp will contact the FFO Surface group within 90 days after the well has been recompleted, before any interim reclamation work, to conduct the onsite. A reclamation plan will be submitted after the onsite.

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)

DAWN NASH-DEAL / Ph: (505) 324-5132

Title

Operations Regulatory Tech

(Electronic Submission)
Signature

Date

6/3/2025

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

KENNETH G RENNICK / Ph: (505) 564-7742 / Approved

Title Petroleum Engineer

Date

06/02/2025

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office FARMINGTON

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NENW / 1190 FNL / 1730 FWL / TWSP: 28N / RANGE: 6W / SECTION: 26 / LAT: 36.6362 / LONG: -107.43892 (TVD: 0 feet, MD: 0 feet)

BHL: NENW / 1190 FNL / 1730 FWL / TWSP: 28N / SECTION: / LAT: 36.6362 / LONG: 107.43892 (TVD: 0 feet, MD: 0 feet)



HILCORP ENERGY COMPANY
San Juan 28-6 Unit 113M
RECOMPLETION SUNDRY

Prepared by:	Greg Gandler
Preparation Date:	May 29, 2025

WELL INFORMATION			
Well Name:	San Juan 28-6 Unit 113M	State:	NM
API #:	3003925653	County:	
Area:	13	Location:	
Route:	1303	Latitude:	
Spud Date:	March 15, 1997	Longitude:	

PROJECT DESCRIPTION
Perforate, fracture, and comingle the Fruitland Coal and Picture Cliffs with the existing Mesa Verde and Dakota zones.

CONTACTS			
Title	Name	Office Phone #	Cell Phone #
Engineer	Matthew Esz		770-843-9226
Area Foreman			
Lead			
Artificial Lift Tech			
Operator			



HILCORP ENERGY COMPANY
San Juan 28-6 Unit 113M
RECOMPLETION SUNDRY

JOB PROCEDURES
- MIRU service rig and associated equipment; test BOP. - TOOH with 2-3/8" tubing set at 7,779'. - Set a 4-1/2" plug at +/- 4,093' to isolate the Mesa Verde. - No CBL required - Load the hole and pressure test the casing. - N/D BOP, N/U frac stack and pressure test frac stack. - Perforate and frac the Fruitland Coal from 3028'-3359' and Picture Cliffs from 3360'-3461' - Nipple down frac stack, nipple up BOP and test. - TIH with a mill and drill out top isolation plug and Fruitland Coal and Picture Cliff frac plugs. - Clean out to Mesa Verde isolation plug. - Drill out Mesa Verde isolation plug and cleanout to PBTD of 7,842'. TOOH. - TIH and land production tubing. Get a commingled Fruitland Coal/Picture Cliffs/Mesa Verde/Dakota flow rate.



HILCORP ENERGY COMPANY **San Juan 28-6 Unit 113M** **RECOMPLETION SUNDRY**




Current Schematic - Version 3

Well Name: SAN JUAN 28-6 UNIT #113M

API / UWI 3003925653	Surface Legal Location 026-028N-006W-C	Field Name BASIN DAKOTA (PRIORATED G #0066)	Route 1303	State/Province NEW MEXICO	Well Configuration Type Vertical
Ground Elevation (ft) 6,575.00	Original KB/RT Elevation (ft) 6,586.00	Tubing Hanger Elevation (ft) 11.00	RKB to GL (ft) 11.00	KB-Casing Flange Distance (ft)	KB-Tubing Hanger Distance (ft)
Tubing Strings					
Run Date 3/9/2000 00:00	Set Depth (ftKB) 7,780.10	String Max Nominal OD (in) 2 3/8	String Min Nominal ID (in) 2.00	Weight/Length (lb/ft) 4.70	Original Spud Date 3/15/1997 20:15

Original Hole, 30039256530000 [Vertical]

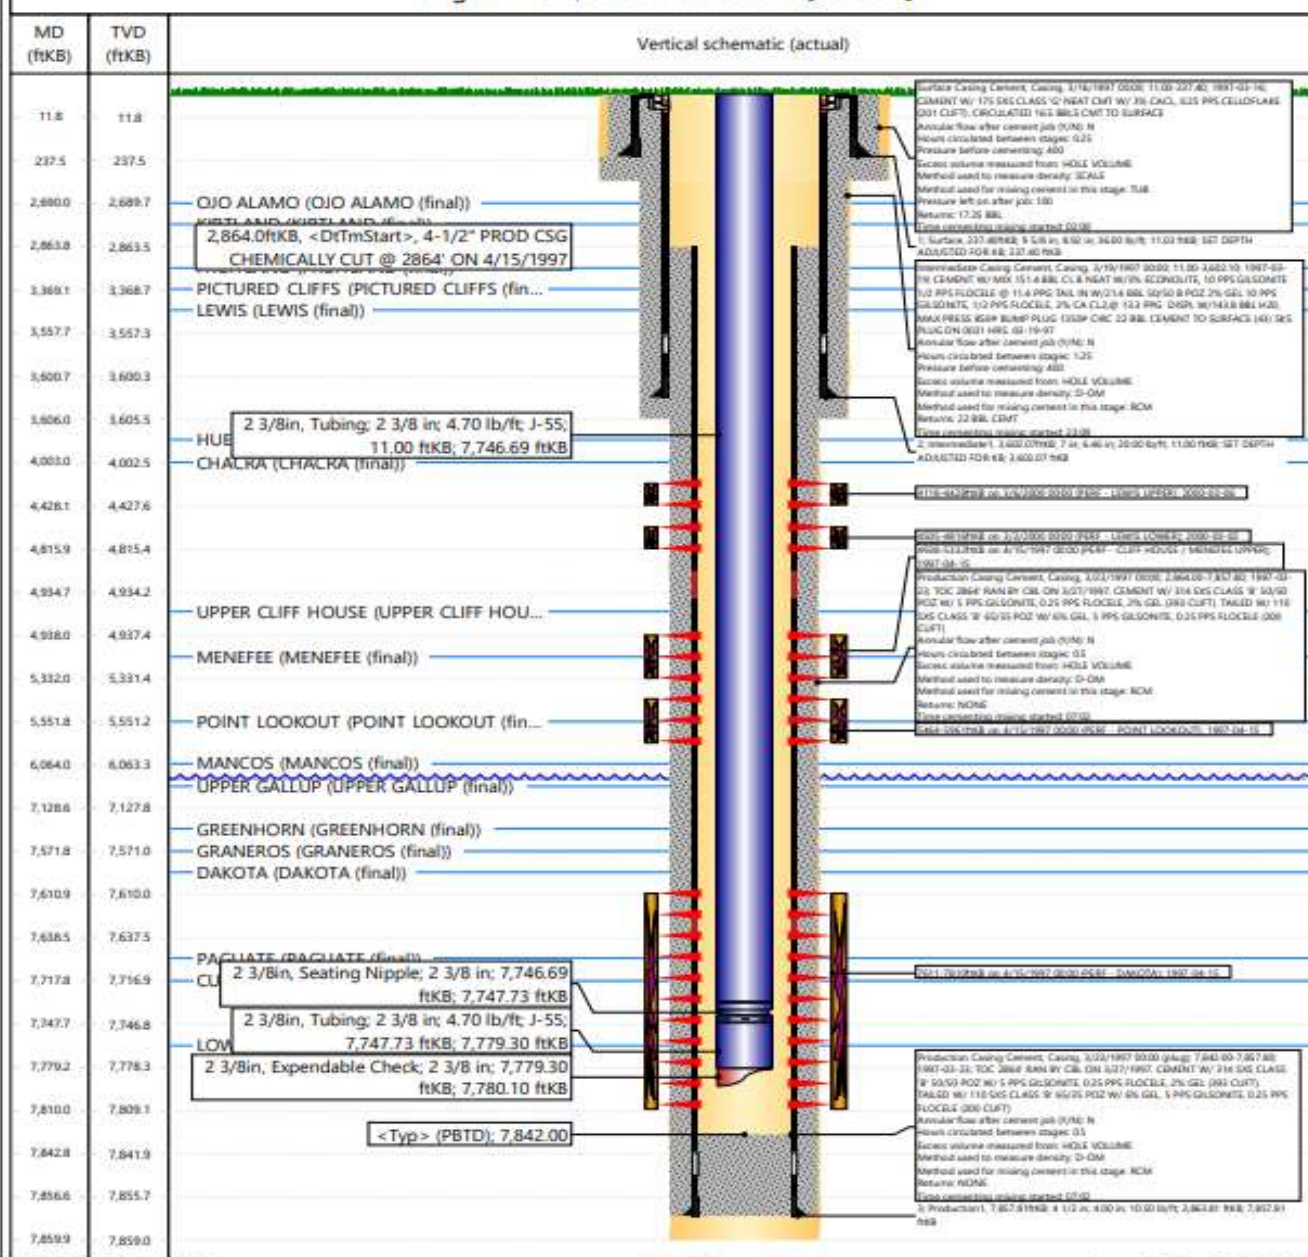



HILCORP ENERGY COMPANY
San Juan 28-6 Unit 113M
RECOMPLETION SUNDRY

San Juan 28-6 Unit 113M - Proposed Schematic



Current Schematic - Version 3

Well Name: SAN JUAN 28-6 UNIT #113M

API / UWI 3003925653	Surface Legal Location 026-028N-006W-C	Field Name BASIN DAKOTA (PRORATED G #0066)	Route 1303	State/Province NEW MEXICO	Well Configuration Type Vertical
Ground Elevation (ft) 6,575.00	Original KBT Elevation (ft) 6,586.00	Tubing Hanger Elevation (ft)	RKB to CL (ft) 11.00	KB-Casing Flange Distance (ft)	KB-Tubing Hanger Distance (ft)
Tubing Strings					
Run Date 3/9/2000 00:00	Set Depth (ft/B)	String Max Nominal OD (in)	String Min Nominal ID (in)	Weight/Length (lb/ft)	Original Spud Date
	7,780.10	2 3/8	2.00	4.70	3/15/1997 20:15

Original Hole, 30039256530000 [Vertical]

MD (ftKB)	TVD (ftKB)	Vertical schematic (actual)
11.8	11.8	Surface Casing Cement, Casing, 4 1/4" 1987 0000, 11.00-227.40, 1987-03-16, Cement W/ 175 GALS CLASS 10 NEAT CMT W/ 3% CMC, 0.25 PPS GILSONITE, 0.01 CUTT, CIRCULATED 14.5 BBLS CMT TO SURFACE
237.5	237.5	Annular flow after cement job (D/M): N Hours circulated between stages: 0.25 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: SCALS Method used for mixing cement in this stage: TUB Pressure left on after job: 100 Returns: 12.36 BBL Time cementing stage started: 07:00 Test: 237.40 ftKB, 9.5 ft/in, 8.50 to 36.00 ft/in, 11.00 ftKB, SET DEPTH ADJUSTED FOR 4.8, 237.40 ftKB
2,680.0	2,689.7	Intermediate Casing Cement, Casing, 4 1/4" 1987 0000, 11.00-2682.10, 1987-03-16, Cement W/ 185 GALS CLASS 10 NEAT CMT W/ 3% CMC, 0.25 PPS GILSONITE, 0.01 PPS FLOCCLE @ 11.4 PPS DIL IN W/ 1.4 BBL 50/50 & 50/50 2% GEL 2% GEL 10 PPS GILSONITE, 1/2 PPS FLOCCLE, 2% CA CL2 @ 13.2 PPS, DENSE W/ 14.8 BBL 50/50, MAX PRESS 4500 BUMP PLUG (3500 CMC 22 BBL CEMENT TO SURFACE 140) 50/50 PROUD ON 0001 HRS 03-19-97
2,863.8	2,863.5	Annular flow after cement job (D/M): N Hours circulated between stages: 1.25 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: 22.98, CMT Time cementing stage started: 21:00 Test: 2863.5 ftKB, 4.880 07/00, 7 ft/in, 6.46 to 20.00 ft/in, 11.00 ftKB, SET DEPTH ADJUSTED FOR 4.8, 2863.50 ftKB
3,369.1	3,368.7	Production Casing Cement, Casing, 4 1/4" 1987 0000, 2,864.00-3,368.70, 1987-03-16, Cement W/ 185 GALS CLASS 10 NEAT CMT W/ 3% CMC, 0.25 PPS GILSONITE, 0.01 PPS FLOCCLE @ 11.4 PPS DIL IN W/ 1.4 BBL 50/50 & 50/50 2% GEL 2% GEL 10 PPS GILSONITE, 1/2 PPS FLOCCLE, 2% CA CL2 @ 13.2 PPS, DENSE W/ 14.8 BBL 50/50, MAX PRESS 4500 BUMP PLUG (3500 CMC 22 BBL CEMENT TO SURFACE 140) 50/50 PROUD ON 0001 HRS 03-19-97
3,557.7	3,557.3	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 3557.3 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
3,600.7	3,600.3	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 3600.3 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
3,606.0	3,605.3	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 3605.3 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
4,003.0	4,002.5	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 4002.5 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
4,428.1	4,427.6	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 4427.6 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
4,815.9	4,815.4	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 4815.4 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
4,934.7	4,934.2	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 4934.2 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
4,938.0	4,937.4	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 4937.4 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
5,332.0	5,331.4	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 5331.4 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
5,551.8	5,551.2	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 5551.2 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
6,064.0	6,063.3	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 6063.3 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
7,128.6	7,127.8	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 7127.8 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
7,571.8	7,571.0	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 7571.0 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
7,610.9	7,610.0	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 7610.0 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
7,638.5	7,637.5	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 7637.5 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
7,717.8	7,716.9	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 7716.9 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT, 1987-04-15
7,747.7	7,746.8	Annular flow after cement job (D/M): N Hours circulated between stages: 0.5 Pressure before cementing: ASD Sector volume measured from: HOLE VOLUME Method used to measure density: D-CM Method used for mixing cement in this stage: RCM Returns: NCMG Time cementing stage started: 07:00 Test: 7746.8 ftKB, 4.11-1987 0000 05/00, POINT LOOKOUT

District I
PO Box 1988, Hobbs, NM 88241-1988
District II
PO Drawer DD, Artesia, NM 88211-0719
District III
1000 Mile Branch Rd., Aztec, NM 87410
District IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

PO Box 2088
Santa Fe, NM 87504-2088

Form C-102

Revised February 21, 1994

Instructions on back

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

070 FARMINGTON, NM

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-039-25653	Pool Code 72319/21599	Pool Name Blanco Mesaverde/Basin Dakota
Property Code 7462	Property Name San Juan 28-6 Unit	Well Number 113M
OGRID No. 14538	Operator Name BURLINGTON RESOURCES OIL & GAS COMPANY	Elevation 6575'

10 Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	26	28-N	6-W		1190	North	1730	West	R.A.

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

12 Dedicated Acres W/320-W/320	13 Joint or Infill	14 Consolidation Code	15 Order No.
-----------------------------------	--------------------	-----------------------	--------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

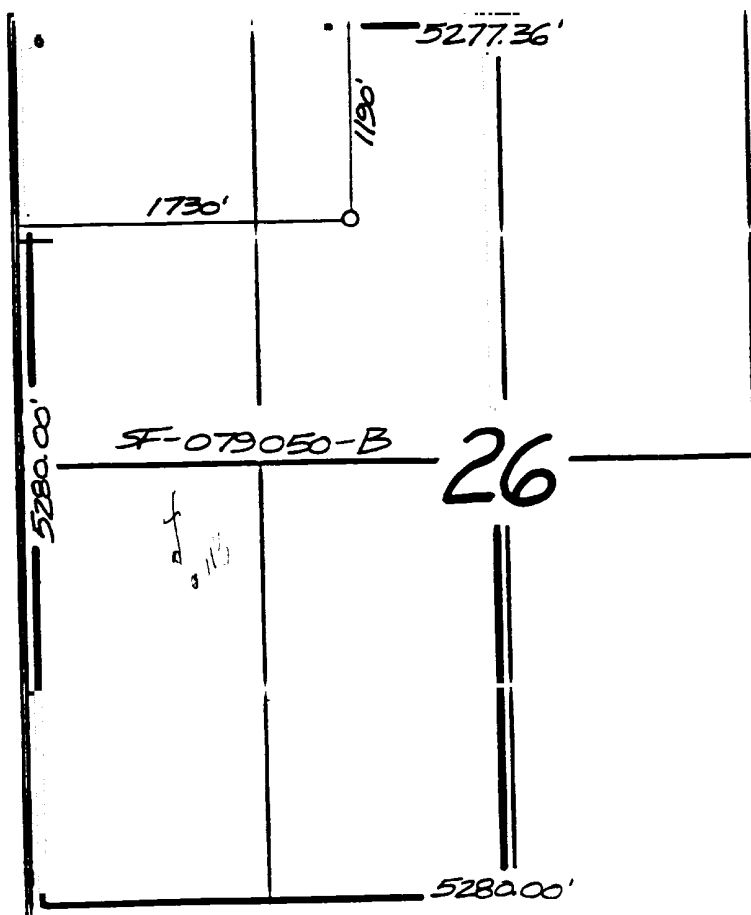

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief

Peggy Bradfield
Signature
Peggy Bradfield
Printed Name
Regulatory Administrator
Title
12-30-96
Date

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

10/17/96

Date of Survey

Signature and Title of Professional Surveyor



Certificate #

Santa Fe Main Office Phone: (505) 476-3441 Fax: (55) 476-3462 General Information Phone: (505) 629-6116 Online Phone Directory Visit: https://www.emnrd.nm.gov/ocd/contact-us/	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	C-102 Revised July 9, 2024 Submit Electronically via OCD Permitting
		Submittal Type: ☐ Initial Submittal ☐ Amended Report ☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-039-25653	Pool Code 71629	Pool Name BASIN FRUITLAND COAL
Property Code 318710	Property Name SAN JUAN 28-6 UNIT	Well Number 113M
OGRID No. 372171	Operator Name Hilcorp Energy Company	Ground Level Elevation 6575'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL C	Section 26	Township 28N	Range 06W	Lot	Ft. from N/S 1190' FNL	Ft. from E/W 1730' FWL	Latitude 36.6362305	Longitude -107.4395905	County RIO ARRIBA
---------	---------------	-----------------	--------------	-----	---------------------------	---------------------------	------------------------	---------------------------	----------------------

Bottom Hole Location

UL C	Section 26	Township 28N	Range 06W	Lot	Ft. from N/S 1190' FNL	Ft. from E/W 1730' FWL	Latitude 36.6362305	Longitude -107.4395905	County RIO ARRIBA
---------	---------------	-----------------	--------------	-----	---------------------------	---------------------------	------------------------	---------------------------	----------------------

Dedicated Acres	Infill or Defining Well DEFINING	Defining Well API	Overlapping Spacing Unit (Y/N) N	Consolidation Code UNIT
Order Numbers.			Well setbacks are under Common Ownership: ☒ Yes ☐ No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
----	---------	----------	-------	-----	--------------	--------------	----------	-----------	--------

First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
----	---------	----------	-------	-----	--------------	--------------	----------	-----------	--------

Last Take Point (LTP)


UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
----	---------	----------	-------	-----	--------------	--------------	----------	-----------	--------

Unitized Area or Area of Uniform Interest	Spacing Unit Type ☐ Horizontal ☒ Vertical	Ground Floor Elevation: 6575'
---	--	----------------------------------

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.



05/29/2025

Signature

Date

DAWN NASH-DEAL

Printed Name

DNASH@HILCORP.COM

Email Address

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

NEALE EDWARDS

Signature and Seal of Professional Surveyor

6857

Certificate Number


10/17/96

Date of Survey

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

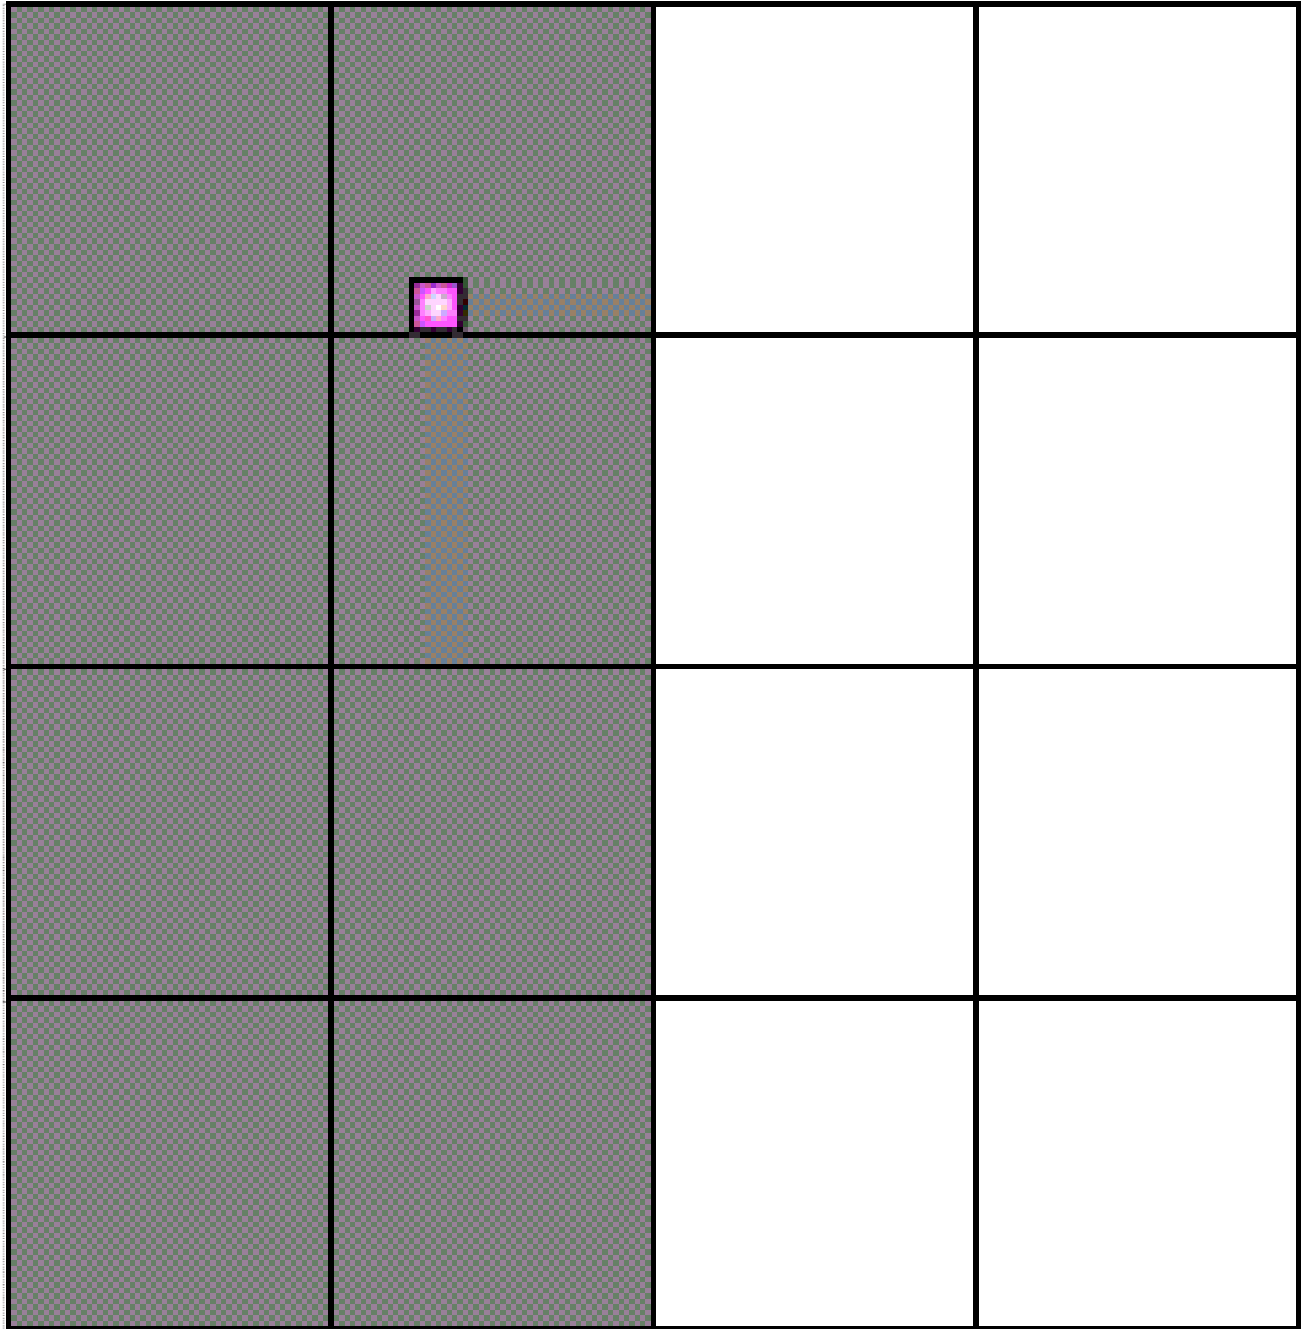

Santa Fe Main Office Phone: (505) 476-3441 Fax: (55) 476-3462 General Information Phone: (505) 629-6116 Online Phone Directory Visit: https://www.emnrd.nm.gov/ocd/contact-us/	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	C-102 Revised July 9, 2024 Submit Electronically via OCD Permitting
		Submittal Type: ☐ Initial Submittal ☐ Amended Report ☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-039-25653	Pool Code 72439	Pool Name SOUTH BLANCO PICTURED CLIFFS
Property Code 318710	Property Name SAN JUAN 28-6 UNIT	Well Number 113M
OGRID No. 372171	Operator Name Hilcorp Energy Company	Ground Level Elevation 6575'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL C	Section 26	Township 28N	Range 06W	Lot	Ft. from N/S 1190' FNL	Ft. from E/W 1730' FWL	Latitude 36.6362305	Longitude -107.4395905	County RIO ARRIBA
---------	---------------	-----------------	--------------	-----	---------------------------	---------------------------	------------------------	---------------------------	----------------------

Bottom Hole Location

UL C	Section 26	Township 28N	Range 06W	Lot	Ft. from N/S 1190' FNL	Ft. from E/W 1730' FWL	Latitude 36.6362305	Longitude -107.4395905	County RIO ARRIBA
---------	---------------	-----------------	--------------	-----	---------------------------	---------------------------	------------------------	---------------------------	----------------------

Dedicated Acres	Infill or Defining Well INFILL	Defining Well API 3003907043	Overlapping Spacing Unit (Y/N) N	Consolidation Code UNIT
Order Numbers.			Well setbacks are under Common Ownership: ☒ Yes ☐ No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
----	---------	----------	-------	-----	--------------	--------------	----------	-----------	--------


First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
----	---------	----------	-------	-----	--------------	--------------	----------	-----------	--------

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
----	---------	----------	-------	-----	--------------	--------------	----------	-----------	--------


Unitized Area or Area of Uniform Interest	Spacing Unit Type ☐ Horizontal ☒ Vertical	Ground Floor Elevation: 6575'
---	--	----------------------------------

OPERATOR CERTIFICATIONS <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i> <i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i>  05/29/2025 Signature Date DAWN NASH-DEAL Printed Name DNASH@HILCORP.COM Email Address	SURVEYOR CERTIFICATIONS <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i> NEALE EDWARDS Signature and Seal of Professional Surveyor 6857 10/17/96 Certificate Number Date of Survey
--	--

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

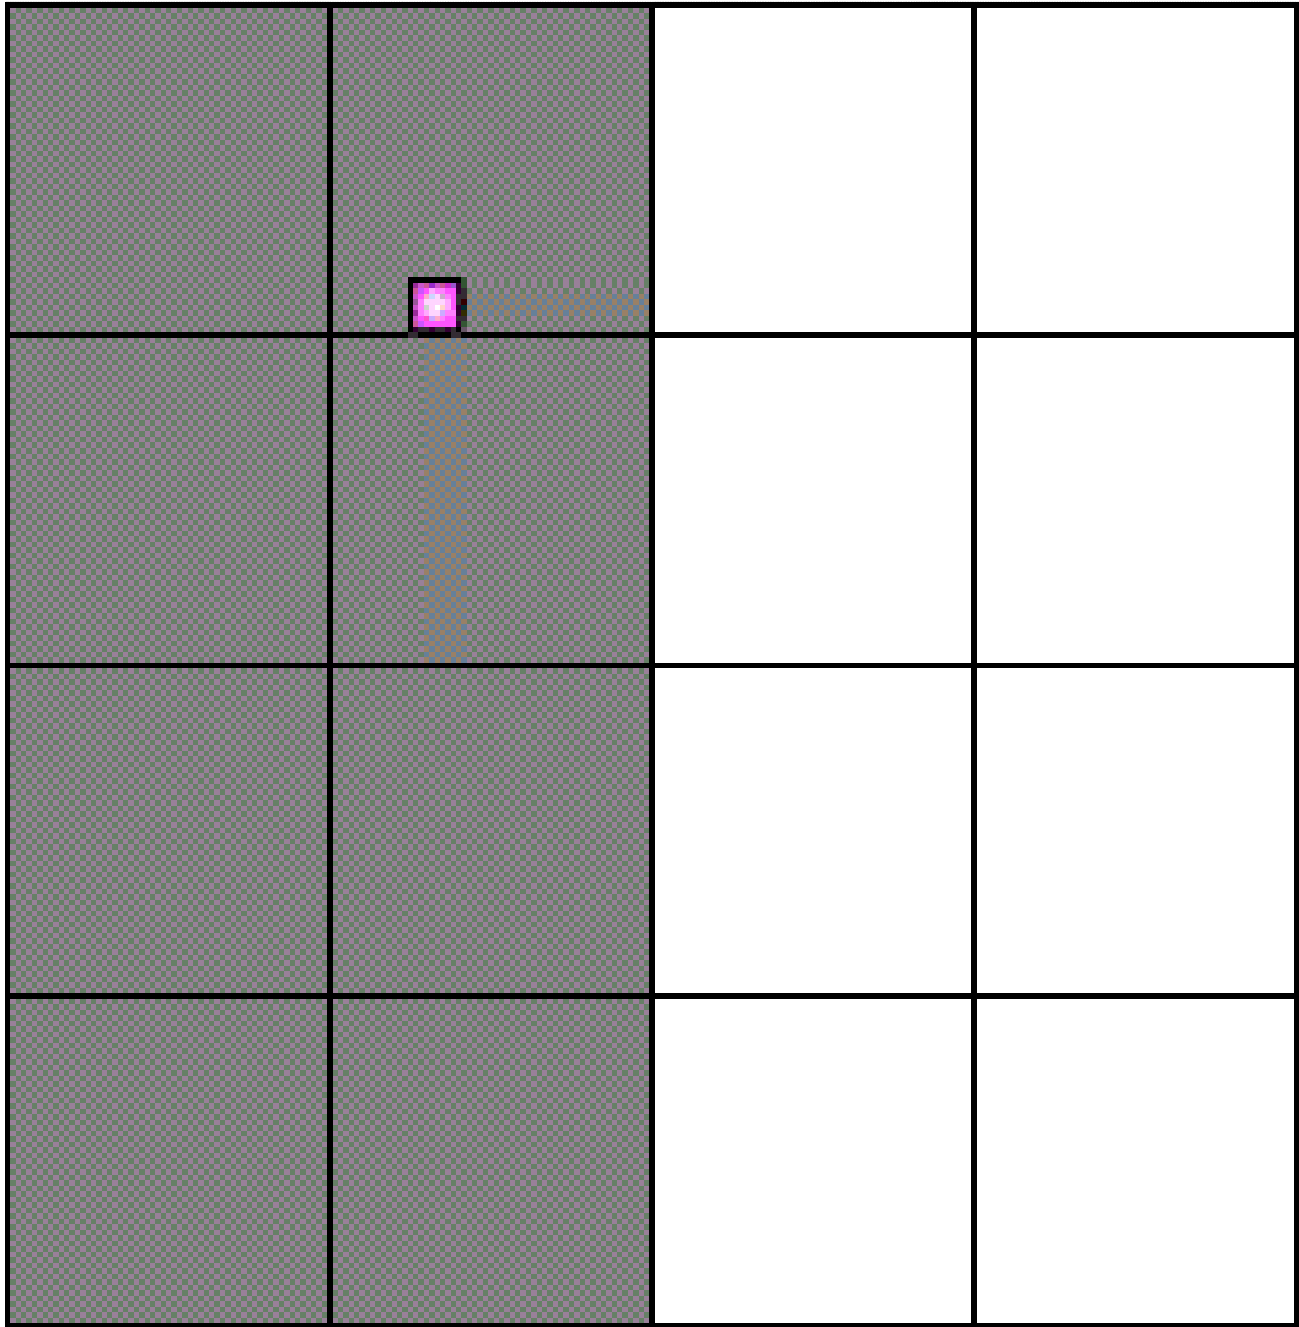

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Electronically
Via E-permitting

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Hilcorp Energy Company **OGRID:** 372171 **Date:** 05/29/2025

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water
SJ 28-6 UNIT 113M	3003925653	C,26,28N,06W	1190' FNL & 1730' FWL	0 BBL	450 MCF	5 BBL

IV. Central Delivery Point Name: _____ [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
SJ 28-6 UNIT 113M	3003925653					

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 
Printed Name: DAWN NASH-DEAL
Title: REGULATORY TECHNICIAN
E-mail Address: DNASH@HICORP.COM
Date: 05/29/2025
Phone: 505-324-5132
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

VI. Separation Equipment:

Hilcorp Energy Company (HEC or Operator) production facilities include separation equipment designed to efficiently separate gas from liquid phases to optimize gas capture based on projected and estimated volumes from the targeted pool of our recomple project. HEC will utilize flowback separation equipment and production separation equipment designed and built to industry specifications after the recomple to optimize gas capture and send gas to sales or flare based on analytical composition. HEC operates facilities that are typically one-well facilities. Production separation equipment is upgraded prior to well being completed, if determined to be undersized or inadequate. This equipment is already on-site and tied into our sales gas lines prior to the recomple operations.

VII. Operational Practices:

1. Subsection (A) Venting and Flaring of Natural Gas
 - o HEC understands the requirements of NMAC 19.15.27.8 which outlines that the venting and flaring of natural gas during drilling, completion or production operations that constitutes waste as defined in 19.15.2 are prohibited.
2. Subsection (B) Venting and Flaring during drilling operations
 - o This gas capture plan isn't for a well being drilled.
3. Subsection (C) Venting and flaring during completion or recompletion
 - o Flowlines will be routed for flowback fluids into a completion or storage tank and if feasible under well conditions, flare rather than vent and commence operation of a separator as soon as it is technically feasible for a separator to function.
 - o At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.
4. Subsection (D) Venting and flaring during production operations
 - o At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.
 - o Monitor manual liquid unloading for wells on-site or in close proximity (<30 minutes' drive time), take reasonable actions to achieve a stabilized rate and pressure at the earliest practical time, and take reasonable actions to minimize venting to the maximum extent practicable.
 - o HEC will not vent or flare except during the approved activities listed in NMAC 19.15.27.8 (D) 1-4.
5. Subsection (E) Performance standards
 - o All tanks and separation equipment are designed for maximum throughput and pressure to minimize waste.
 - o If a flare is utilized during production operations it will have a continuous pilot and is located more than 100 feet from any known well or storage tanks.
 - o At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.

6. Subsection (F) Measurement or estimation of vented and flared natural gas
 - o Measurement equipment is installed to measure the volume of natural gas flared from process piping.
 - o When measurement isn't practicable, estimation of vented and flared natural gas will be completed as noted in 19.15.27.8 (F) 5-6.

VIII. Best Management Practices:

1. Operator has adequate storage and takeaway capacity for wells it chooses to recomplete as the flowlines at the sites are already in place and tied into a gathering system.
2. Operator will flare rather than vent vessel blowdown gas when technically feasible during active and/or planned maintenance to equipment on-site.
3. Operator combusts natural gas that would otherwise be vented or flared, when technically feasible.
4. Operator will shut in wells in the event of a takeaway disruption, emergency situation, or other operations where venting or flaring may occur due to equipment failures.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 470449

CONDITIONS

Operator: HILCORP ENERGY COMPANY 1111 Travis Street Houston, TX 77002	OGRID: 372171
	Action Number: 470449
	Action Type: [C-107] Down Hole Commingle (C-107A)

CONDITIONS

Created By	Condition	Condition Date
llowe	None	7/17/2025