Case M.

1991

Large Exhibits

LANE WELLS Acoustilog

RUN NO.

COMPANY TEXACO INC.

WELL C.P. FALBY B NO.3

FIELD PENROSE SKELLY (OIL) EUNICE (GAS)

COUNTY LEA STATE NEW MEXICO

LOCATION: 660' FS & WL

SEC. 8 TWP. 22 S RGE. 37E

Other Services:

Permanent Datum: Ground Level Elev. 3,407

Log Measured from K.B. 10 Ft. Above Permanent Datum

Drilling Measured from K.D.B.

Date	6-28-60	
Run No.	1	
Depth—Driller	3800	
Depth—Logger	3798	
Bottom Logged Interval	3798	3780
Top Logged Interval	60	
Casing—Driller	330 @ 7 7/8"	
Casing—Logger		
Bit Size	6 3/4"	
Type Fluid in Hole	Salt Mud	
Density and Viscosity	10.1	37
pH and Fluid Loss		11.2 cc
Source of Sample	PIT	
Rm @ Meas. Temp.	@ °F	@ °F
Rmf @ Meas. Temp.	@ °F	@ °F
Rmc @ Meas. Temp.	@ °F	@ °F
Source of Rmf and Rmc		
Rm @ BHT	@ °F	@ °F
Time Since Circ.	3 Hrs.	
Max. Rec. Temp. Deg. F	°F	°F
Equip. No. and Location	6286 Hobbs	
Recorded By	J.Hemmis	
Witnessed By		

BEFORE EXAMINER NUTTER
OIL CONSERVATION COMMISSION
EXHIBIT NO. 5
CASE NO. 1967

Run No. 1

Elevations:
KB 3417
DF 3416
GL 3407

DETECTOR TYPE—R.E.U.(RMU)
DETECTOR LENGTH—3"

ACOUSTILOG
T.A.R....R.S.R.

GAMMA RAY
Radiation Intensity Increases

DEPTH

. SPECIFIC ACOUSTIC TIME
Micro Seconds Per Foot

Velocity—1000s ft/sec

1" Spacing
5" Spacing

100 200 300 400 500 600 700 800 900 1000 1100 1200 1300 1400 1500 1600

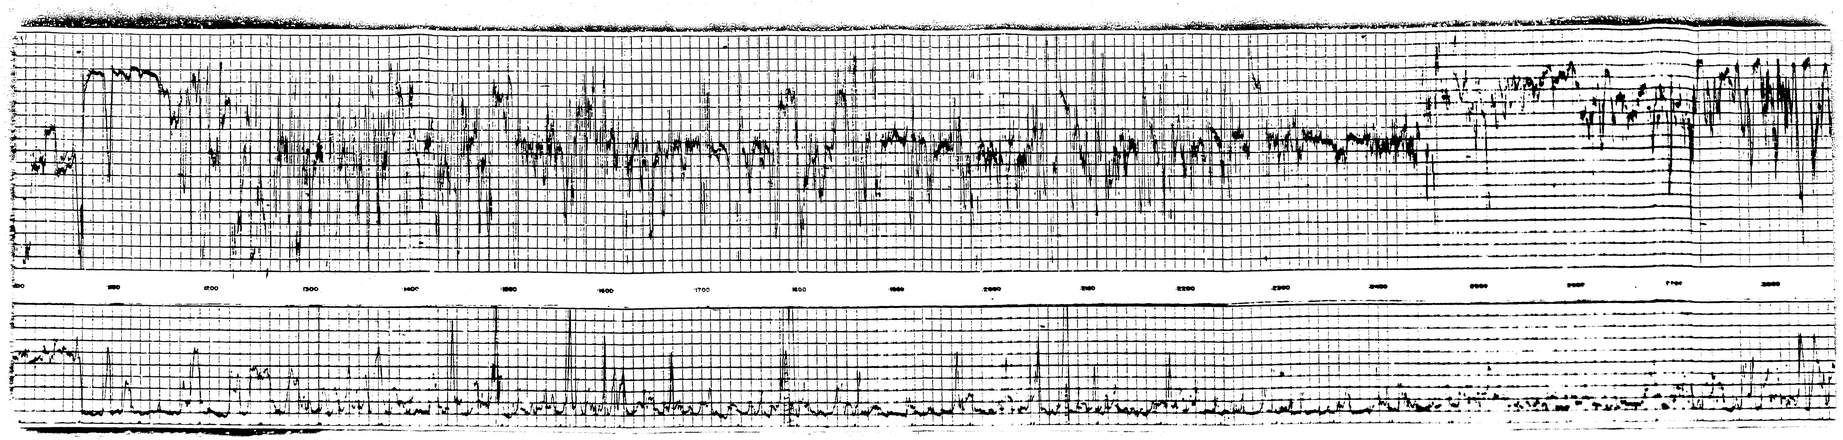

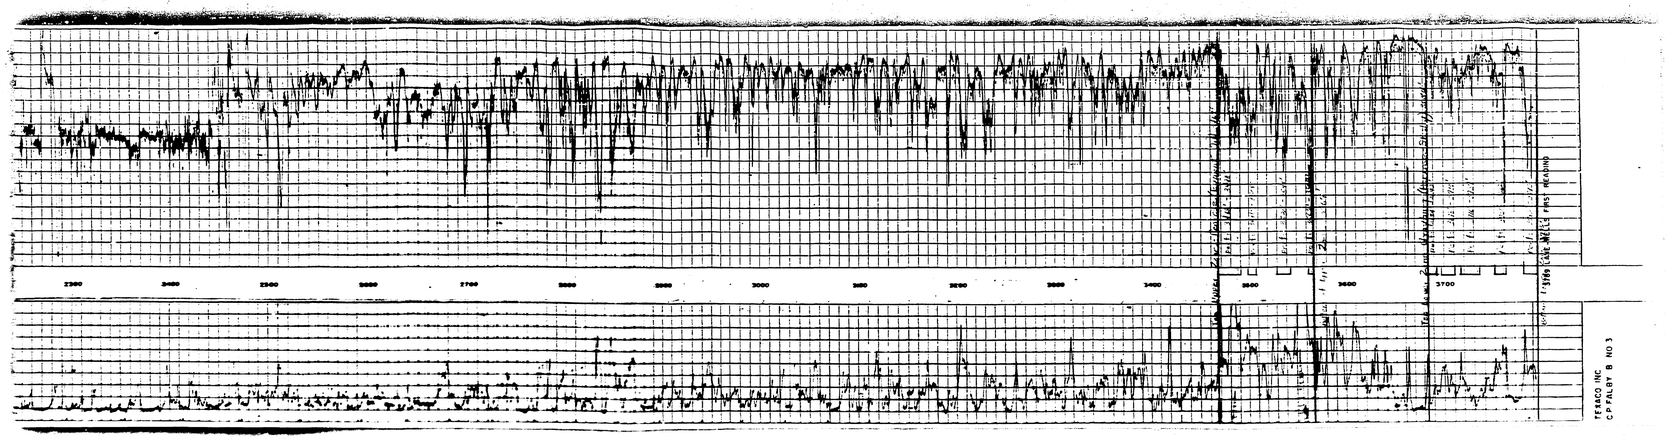
TEXACO INC
C P FALBY B NO 3