District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources** Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action: Below grade tank registration

☐ Closure of a p ✓ Modification	it or proposed alternative method pit, below-grade tank, or proposed alternative method to an existing permit/or registration only submitted for an existing permitted or non-permitted pit, below-grade tank,
Instructions: Please submit one appli	cation (Form C-144) per individual pit, below-grade tank or alternative request
Please be advised that approval of this request does not relieve environment. Nor does approval relieve the operator of its res	the operator of liability should operations result in pollution of surface water, ground water or the sponsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator:OXY USA Inc	OGRID #: 16696
Address: 5 GREENWAY PLAZA SUITE 110, HOUS	STON , TX 77046
Facility or well name:21 32 32 1 G	
l .	OCD Permit Number:
U/L or Qtr/QtrG Section32	Township21 N Range32 E County:HARDING
l .	Longitude NAD:
Surface Owner: ☐ Federal ☐ State ☒ Private ☐ Triba	I Trust or Indian Allotment
 ☑ Lined ☐ Unlined Liner type: Thickness20 ☑ String-Reinforced 	
Tank Construction material:	
	ible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls on	ly
Liner type: Thicknessmil	HDPE PVC Other
4. Alternative Method: Submittal of an exception request is required. Exception	ns must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.
5.	
Fencing: Subsection D of 1915 1711 NMAC (Applies.	
Chain link, six feet in height, two strands of barbed w	to permanent pits, temporary pits, and below-grade tanks) vire at top (Required if located within 1000 feet of a permanent residence, school, hospital,
	rice at top (Required if located within 1000 feet of a permanent residence, school, hospital,

6. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other	
Monthly inspections (If netting or screening is not physically feasible)	II.
7. Signs: Subsection C of 19.15.17.11 NMAC ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☐ Signed in compliance with 19.15.16.8 NMAC	
Nation State Stat	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	table source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No ☐ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☒ No ☐ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☑ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ⊠ No
Within an unstable area. (Does not apply to below grade tanks) - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes 🏻 No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	☐ Yes ☑ No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map: Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
ignes: Subsection C of 19.15.17.11 NMAC 3 12** 24**. 2** lettering, providing Operator's name, site location, and emergency telephone numbers 3 Signed in compliance with 19.15.16.8 NMAC **Cariances and Excentions** usifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. **Enter check a box if one or more of the following is requested, if not leave blank** Variance(S) Requests must be submitted to the suppropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Sting Criteria fregarding nermitting): 19.15.17.10 NMAC Institutions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable unstructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable unstructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable unstructed are provided below. Siting criteria does not upply to drying pads or above-grade tanks. Seneral siting	
Within 300 feet from an occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ⊠ No
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes 🖾 No

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Natructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docattached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC	NMAC
Previously Approved Design (attach copy of design) API Number: _30-021-20638 or Permit Number:	
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the dot attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeological Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number:	.15.17.9 NMAC
	-

Page 3 of 6

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the description	ocuments are				
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment					
 ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC 					
Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC					
Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization					
Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
13.					
<u>Proposed Closure</u> : 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.					
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Fi Alternative Proposed Closure Method: Waste Excavation and Removal	uid Management Pit				
 Waste Removal (Closed-loop systems only) ✓ On-site Closure Method (Only for temporary pits and closed-loop systems) ☐ In-place Burial ✓ On-site Trench Burial PROPOSED MODIFICATION TO ORIGO 	GINAL PLAN SEE				
Alternative Closure Method ATTACHED DESCRIPTION AND SKE					
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be a closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	attached to the				
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC					
Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. P 19.15.17.10 NMAC for guidance.					
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☒ No ☐ NA				
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No ☐ NA				
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells					
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No				
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☑ No				
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☑ No				
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No				
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance					

- Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☒ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☒ No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	5 5
Within a 100-year floodplain. FEMA map	☐ Yes ☒ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.13 Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	11 NMAC 15.17.11 NMAC
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and believed.	ef
Name (Print): Title:	
Signature: Date:	
organica	
e-mail address:	
e-mail address: Telephone:	
e-mail address:	
e-mail address:	the closure report.
e-mail address:	the closure report.
e-mail address:	the closure report. complete this

22.
Operator Closure Certification:
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and
belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print): HI KO 1455QNI Title: Dr Engineering Advisor
$\alpha d \beta = -1$
Signature: Date: 9/3/2015
e-mail address: albert giussoni DOX. com Telephone: 806 638 1296
c-main address.

SUPPORTING MATERIAL FOR REQUEST TO MODIFY PIT CLOSURE FOR

BDU 21 32 32 1 G, API: 30-021-20638

PROPOSED PIT CLOSURE

PROPOSED MODIFIED PIT CLOSURE DEEP TRENCH CLOSURE - BURIAL IN PLACE - 19.15.17.13.D

- PROPOSED PLAN:
- Wait until waste material in existing temporary pit has dried enough to be able to work. Any free liquid has been removed.
- Test waste materials in the temporary pit: Done on May 2015, met. 19.15.17.13.D.5
- Sitting Criteria for burial trenches, 19.15.17.10.C, is met. (see depth of water section)
- Location is on private land, letter to land owner was sent on: 7/20/2015
- Excavate deep trench, size: 75' long, 40' wide, 15 'deep following 19.15.17.11.K requirements.
 - In particular:
 - Proper constructed foundation with side walls consisting of a firm unyielding base, smooth and free of rocks to prevent liner rupture/tear.
 - Install Geotextile under liner.
 - Install geomembrane, consisting of 20 mil string reinforced LLDPE liner.
 - Outer edges of liner are secured for the deposit of the excavated waste material.
- Location of the trench is 25 to 30 feet to the east side of the existing temporary pit. (see enclosed drawing)


PROPOSED MODIFIED PIT CLOSURE DEEP TRENCH CLOSURE - BURIAL IN PLACE - 19.15.17.13.D

- PROPOSED PLAN continuation:
- Carefully transfer material and liner from temporary pit into trench.
- Cover surface of filled trench with same liner used to construct trench, cover trench.
 - Size of trench has been calculated to allow for 4' coverage with material meeting 19.15.17.13.H.3
- Contour surface to match existing location existing grade and prevent ponding of water and erosion of the cover material. 19.15.17.13.H.4
- Set marker with required information as per 19.15.17.13.F.3 and report location using form C-105 as per 19.15.17.13.F.2
- Reclaim and set surface vegetation of areas not needed for production operations to their final land use.
- Once waste material and liner have been removed from the existing temporary pit a five point composite sample test will be performed in the excavated area. Based on the results staying within the guideline values set forth in Table II of 19.15.17.13, the temporary pit will be closed as per 19.15.17.13.H.3,4,5.
- A Deed notice will be filed identifying location of onsite burial with Harding County Clerk. 19.15.17.13.E.4.


BDCDGU 21 32 32 1 G

API: 30-021-20638

LOCATION: : 36.0088768,-103.550354 NAD83

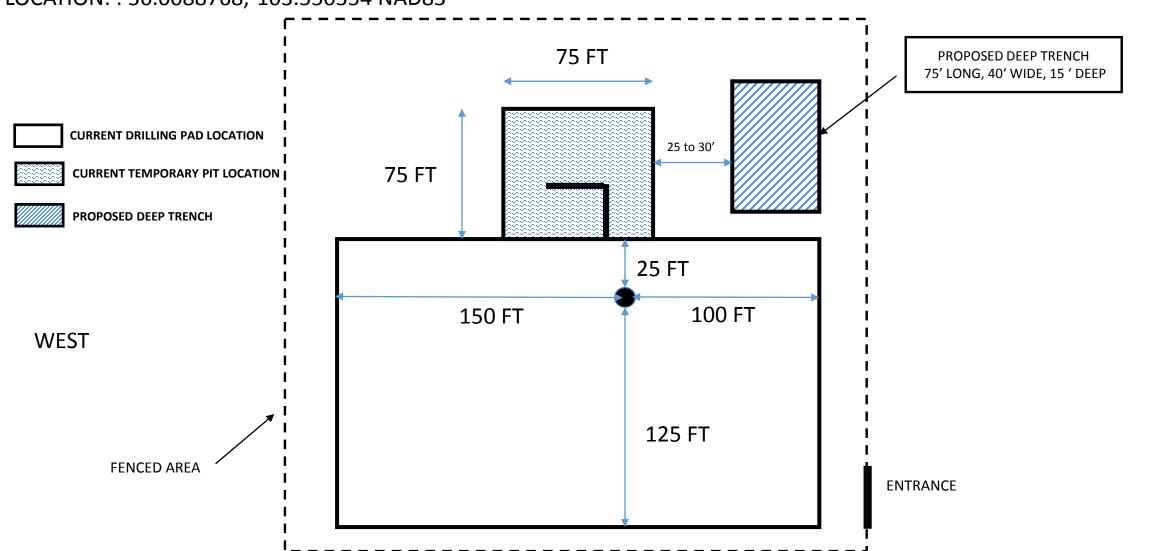

EAST

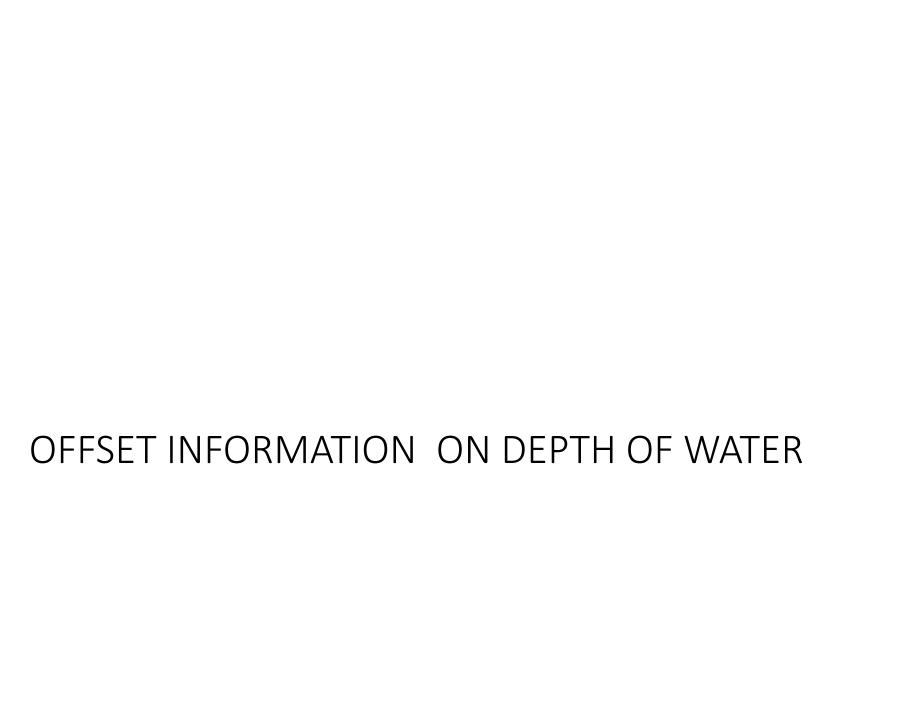



New Mexico Office of the State Engineer Water Column/Average Depth to Water

(A C LW ##### in the POD suffix indicates the POD has been replaced & no longer serves a water right file.)

(R=POD has been replaced, O=orphaned,

(quarters are 1=NW 2=NE 3=SW 4=SE) C=the file is

(quarters are smallest to largest) (NAD83 UTM in meters) closed)

(In feet)

DOD Musshan	POD Sub-	Q Q Q	O T	D	v	Tu Tu	Depth Depth V	
POD Number	Code basin County			-	eneown	20020ees 🐣	Well Water Co	olumn
TU 00552	HA	4 4 4	02 21N	32E	635843	3993066*	210	
TU 00553	HA	2 4 4	03 21N	32E	634201	3993250° 🌕	165	
TU 00554	HA	1 3 2	17 21N	32E	630409	3990775* 🌍	94	_
TU 00555	HA	1 2 1	34 21N	32E	633320	3986364* 🌑	165	
<u>TU 00556</u>	HA	2 3 3	15 21N	32E	633046	3990000* 🌑	10	
TU 00557	HA	4 3 1	03 21N	32E	632982	3993838* 🌑	110	
TU 00558	HA	2 3 3	15 21N	32E	633046	3990000* 🌑	40	
TU 00597	HA	2 2 2 3	27 21N	32E	634301	3987996* 🌑	130	
TU 00598	HA	1 2 1	22 21N	32E	633259	3989600* 🌑	120	
TU 00599	HA	4 2 1	16 21N	32E	631813	3991002* 🌍	110	

Average Depth to Water:

Minimum Depth:

Maximum Depth:

Record Count: 10

Basin/County_Search:

County: Harding

Assumed depth to ground water> 100 ft

PLSS Search:

Township: 21N Range: 32E



New Mexico Office of the State Engineer Water Column/Average Depth to Water

(A CLW##### in the POD suffix indicates the POD has been replaced & no longer serves a water right file.)

(R=POD has been replaced, O=orphaned,

C=the file is closed)

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest) (NAD83 UTM in meters)

(In feet)

· ,						_	, ,	,	, ,	
POD Number	POD Sub- Code basin County	Q 0			Twe	Dna	х	v	Depth Depth Water Col	
FOD MUIIDA	code pasin county	04 1	0 4	360	1742	Kilg	^		Weil Water Co	IUIIIII
TU 00506	HA	2 4	2	25	20N	32E	636784	3978177* 🌕	50	
TU 00566	НА	2 2	2	24	20N	32E	636747	3980198* 🍑	300	
TU 00672	НА	4 3	4	32	20N	32E	629969	3975412* 🌍	110	
TU 00673	НА	3 4	2	34	20N	32E	633388	3976308* 🌑	114	

Average Depth to Water.

Minimum Depth:

Maximum Depth:

Record Count: 4


Basin/County Search:

County: Harding


PLSS Search:

Township: 20N Range: 32E

Township south of location in question, no water data in the northeast quarter



LOCATION OF WELLHEAD/TEMPORARY PIT/DEEP TRENCH AND DISTANCE FROM NEAREST WATERCOURSE AND PERMANENT PRIVATE HABITATION.

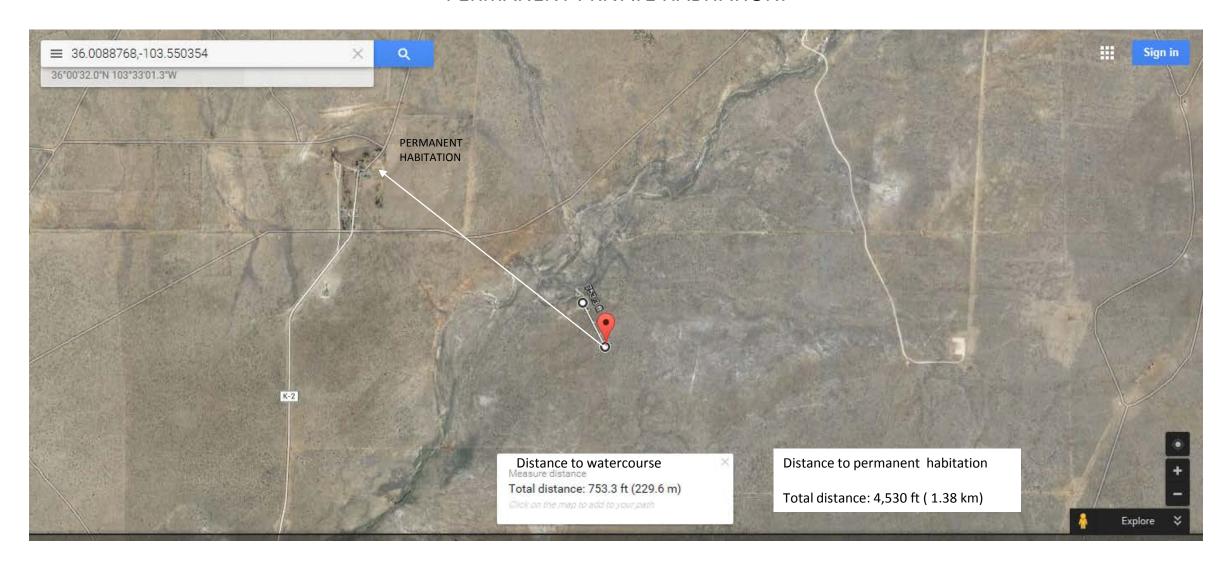





Search by Address ?

Please enter a valid US address/place.

Enter an address, place, or coordinates:


Enter an address, place, or coo



To find your flood map, enter an address, a place, or a set of longitude/latitude coordinates. The map will zoom in and show the boundaries of the flood map for the chosen location. When a specific flood map is selected, view and download options for that map will appear.

Welcome to Search by Address

The Search by Address feature of the MSC website enables you to enter an address, a place, or a set of longitude/latitude coordinates to find the effective flood map for that location. After locating the flood map, you can view or download it, as well as view or download any Letters of Map Change (LOMC) issued for that flood map.



No FEMA data available



From: Lowe, Leonard, EMNRD

To: "Albert Giussani@oxy.com"

Cc:Jones, William V, EMNRD; Griswold, Jim, EMNRDSubject:BDU 21 32 32 1 G, API # 30-021-20638 Pit modification

Date: Wednesday, September 30, 2015 3:49:00 PM

Importance: High

Mr. Al Giussani,

OCD has reviewed your submittal of deep trench modification at BDU 21 32 32 1 G, API # 30-21-20638.

OCD approves your modification for deep trench burial.

If the sampling beneath the pit liner indicates a leak has occurred then OXY shall adhere to NMAC 19.15.29 Release Notification in reporting and remediating the release.

Notify the OCD when the closure commences. Document the procedures done in closure.

Leonard Lowe

Environmental Engineer

[Environmental Bureau]

Oil Conservation Division

Energy Minerals and Natural Resources Department

1220 South St. Frances

Santa Fe, New Mexico 87004

Office: 505-476-3492 Fax: 505-476-3462

E-mail: leonard.lowe@state.nm.us

Website: http://www.emnrd.state.nm.us/ocd/