<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

UL - Lot

District II 811 S. First St., Artesia, NM 88210 Phone;(575) 748-1283 Fax:(575) 748-9720 District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone;(505) 334-6178 Fax:(505) 334-6170 District IV

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

Section

36

State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Form C-101 August 1, 2011

APPLICA	ATION FOR PERMIT TO DE	RILL, RE-E	NTER, DEEPEN	N, PLUGBACK	, OR ADD A	ZONE	
Operator Name and Address EOG RESOURCES INC					2.	OGRID Number 7377	
P.O. Box 2267 Midland, TX 79702					3	API Number 30-025-43008	
4. Property Code 38965	5. Property Name BLACK BEAR 36 STA	TE			6.	Well No. 703H	
		7. Surfac	ce Location				
UL - Lot Section Township A 36 2	Range Lo 5S 33E	t Idn A	Feet From 253	N/S Line N	Feet From 705	E/W Line	County Lea
	8. P	roposed Bo	tom Hole Locatio	n			795

9. Pool Information

Feet From

230

N/S Line

S

Feet From

1035

E/W Line

County

Lea

Lot Idn

or i con monitation	
WC-025 G-09 S253336D:UPPER WOLFCAMP	98094

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3325
16. Multiple N	17. Proposed Depth 17416	18. Formation Wolfcamp	19. Contractor	20. Spud Date 2/1/2016
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

■ We will be using a closed-loop system in lieu of lined pits

Township

258

Range

33E

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	14.75	10.75	40.5	1065	500	0
Int1	9.875	7.625	29.7	10500	1450	0
Prod	6.75	5.5	23	10500	625	10000
Prod	6.75	5	23.2	17416	625	10000

Casing/Cement Program: Additional Comments

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	10000	5000	

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒, if applicable. Signature:				OIL CONS	SERVATION DIVISION
Printed Name:	Electronically filed by Stan Wagner		Approved By:	Paul Kautz	
Title:	Regulatory Analyst		Title:	Geologist	1.0225.ca (00)
Email Address:	Stan_Wagner@eogresources.com		Approved Date:	1/11/2016	Expiration Date: 1/11/2018
Date:	1/7/2016	Conditions of App	oroval Attached	A CONTRACTOR OF THE CONTRACTOR	

District I

1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Form C-102 August 1, 2011

WELL LOCATION AND ACREAGE DEDICATION PLAT

1. API Number	2. Pool Code	3. Pool Name
30-025-43008	98094	WC-025 G-09 S253336D;UPPER WOLFCAMP
4. Property Code	5. Property Name	6. Well No.
38965	BLACK BEAR 36 STATE	703H
7. OGRID No. 7377	8. Operator Name FOG RESOURCES INC	9. Elevation 3325


10. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
A	36	25S	33E	A	253	N	705	E	Lea

11. Bottom Hole Location If Different From Surface

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
Р	36	25S	33E	P	230	S	1035	E	Lea
12. Dedicated Acre 160.00			13. Joint or Infill	•	14. Consolidation Code	•		15. Order No.	

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY

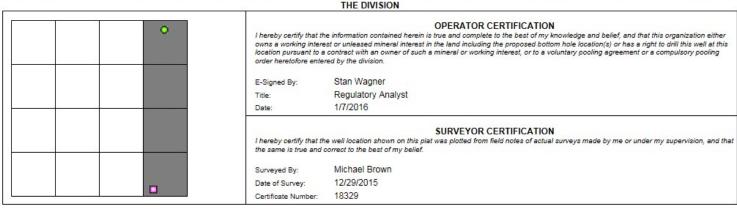

Form APD Comments

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 Phone:(575) 393-6161 Fax:(575) 393-0720 <u>District II</u>:
311 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 <u>District III</u>:
1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 <u>District IV</u>:
1220 S. St Francis Dr., Santa Fe. NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Permit 214888

PERMIT COMMENTS

Operator Name and Address:	API Number:
EOG RESOURCES INC [7377]	30-025-43008
P.O. Box 2267	Well:
Midland, TX 79702	BLACK BEAR 36 STATE #703H

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Frencis Dr., Santa Fe. NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Permit 214888

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:
EOG RESOURCES INC [7377]	30-025-43008
P.O. Box 2267	Well:
Midland, TX 79702	BLACK BEAR 36 STATE #703H

OCD Reviewer	Condition
pkautz	Will require a directional survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	If using a pit for drilling and completion operations, must have an approved pit from prior to spudding the well.
pkautz	1) SURFACE & INTERNEMIATE CASING - Cement must circulate to surface 2) PRODUCTION CASING - Cement must tie back into intermediate casing
pkautz	If cement does not circulate to surface, must run temperature survey or other log to determine top of cement
pkautz	Surface casing must be set 25' below top of Rustler Anhydrite in order to seal off protectable water
pkautz	Must notify OCD Hobbs Office if lost circulation is encountered at 575-370-3186
pkautz	1) Must notify OCD Hobbs Office prior to running Stage Tool at 575-370-3186 2) If using Stage Tool on Surface casing, Stage Tool must be set greater than 350' from surface and a minimum of 200 feet above surface shoe. 3) When using a Stage Tool on Intermediate or Production Casing Stage must be a minimum of 50 feet below previous casing shoe.