<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

Phone:(575) 393-6161 Fax:(575) 393-0720 <u>District II</u> 311 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fa, NM 87505

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Form C-101 August 1, 2011

Permit 233117

Operator Name and Address XTO ENERGY, INC		2. OGRID Number 5380
9193 S. Jamaica St. Englewood, CO 80155		3. API Number 30-025-43696
4. Property Code 317520	5. Property Name CHISTERA 32 STATE	6. Well No. 003H
	7. Surface Location	

UL - Lot	Section 32	Township 20S	Range 33E	Lot Idn A	Feet From 260	N/S Line N	Feet From 500	E/W Line E	County
05	è a		N. Control of the Con	Parentin of the said	District Committee	35.	A A	101	93-

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
Р	32	20S	33E	Р	200	S	330	E	Lea

9. Pool Information

HAT MESA;BONE SPRING	ra National de Marchae	30213

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3621
16. Multiple N	17. Proposed Depth 15774	18. Formation 3rd Bone Spring Sand	19. Contractor	20. Spud Date 8/1/2017
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

■ We will be using a closed-loop system in lieu of lined pits

21 Droposed Casing and Coment Drogram

		21. Froposed Casing and Centent Frogram											
	Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC						
	Surf	17.5	13.375 54.5		1800	1600	0						
	Int1	12.25	9.625	36	3225	1600	0						
г	Drod	0.75	5.5	17	15774	2725	0						

Casing/Cement Program: Additional Comments

22. Proposed Blowout Prevention Program

Type	Type Working Pressure		Manufacturer
Double Ram	5000	5000	Cameron

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ⋈ and/or 19.15.14.9 (B) NMAC ⋈, if applicable.				OIL CONS	ERVATION DIVISION
Signature:		21199		11000	
Printed Name:	Electronically filed by Janice Farn	sworth	Approved By:	Paul Kautz	
Title:	Regulatory Compliance Tech	Regulatory Compliance Tech		Geologist	
Emsil Address: Janice_Farnsworth@xtoenergy.com			Approved Date:	3/16/2017	Expiration Date: 3/16/2019
Date:	3/11/2017	Conditions of Ap	proval Attached	·	

District I

1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Form C-102 August 1, 2011

Permit 233117

WELL LOCATION AND ACREAGE DEDICATION PLAT

1. API Number	2. Pool Code	3. Pool Name
30-025-43696	30213	HAT MESA;BONE SPRING
4. Property Code	5. Property Name	6. Well No.
317520	CHISTERA 32 STATE	003H
7. OGRID No.	8. Operator Name	9. Elevation
5380	XTO ENERGY, INC	3621


10. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
A	32	20S	33E	A	260	N	500	E	Lea

11. Bottom Hole Location If Different From Surface

UL - Lot	Section 32	Township 20S	Range 33E	Lot Idn P	Feet From 200	N/S Line S	Feet From 330	E/W Line	County Lea
12. Dedicated Acre 160.00			13. Joint or Infill		14. Consolidation Code	e		15. Order No.	

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY

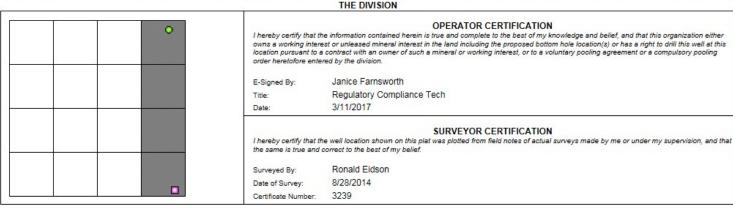

Form APD Comments

Permit 233117

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

Phone:(575) 393-6161 Fax:(575) 393-0720 <u>District II</u>:
311 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 <u>District III</u>:
1000 Rio Brazos Rd., Azteo, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 <u>District IV</u>:
1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

PERMIT COMMENTS

Operator Name and Address:	API Number:	
XTO ENERGY, INC [5380]	30-025-43696	
9193 S. Jamaica St.	Well:	
Englewood, CO 80155	CHISTERA 32 STATE #003H	

Created By	Comment	Comment Date
	Intrepid Potash Company was notified of XTO's intention to submit a drilling permit on this well 02/16/2017 via certified mail: 7013 1710 0001 7955 6728 Bureau of Land Management was notified of XTO's intention to submit a drilling permit on this well 02/15/2017 via certified mail: 7013 1710 0001 7955 6742 These wells are on a BLM/Intrepid approved Potash drill island. Attachments were also emailed to Paul Kautz.	3/11/2017

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Frencis Dr., Santa Fe. NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Permit 233117

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:
XTO ENERGY, INC [5380]	30-025-43696
9193 S. Jamaica St.	Well:
Englewood, CO 80155	CHISTERA 32 STATE #003H

OCD Reviewer	Condition	
pkautz	Will require a directional survey with the C-104	
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	
pkautz	If using a pit for drilling and completion operations, must have an approved pit from prior to spudding the well.	
pkautz	1) SURFACE & INTERMEDIATE CASING - Cement must circulate to surface 2) PRODUCTION CASING - Cement must tie back into intermediate casing	
pkautz	If cement does not circulate to surface, must run temperature survey or other log to determine top of cement	
pkautz	Potash Area Three String Casing Program - In accordance with R-111-P all strings shall be cemented to surface. Salt Protection String - If the cement fails to reach the surface or the bottom of the cellar, where required, the top of the cement shall be located by a temperature or other survey and additional cementing shall be done until the cement is brought to the surface.	
pkautz	Surface casing must be set 25' below top of Rustler Anhydrite in order to seal off protectable water	
pkautz	Only Fresh Water and Air are Valid Drilling Fluids for Surface Casing	
pkautz	Operator shall notify appropriate District office when setting conductor pipe.	
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of spudding a well.	
pkautz	It is the operator's responsibility to monitor cancellation dates of approved APDs. APD's are good for 2 years and may be extended for one year. Only one 1 year extension will be granted if submitted by C-103 before expiration date. After expiration date or after a 1 year extension must submit new APD.	
pkautz	If an APD expires and if site construction has occurred, site remediation is required.	
pkautz	Stage Tool 1) Must notify OCD Hobbs Office prior to running Stage Tool at 575-370-3186 2) If using Stage Tool on Surface casing, Stage Tool must be set greater than 350' from surface and a minimum of 200 feet above surface shoe. 3) When using a Stage Tool on Intermediate or Production Casing Stage must be a minimum of 50 feet below previous casing shoe.	
pkautz	Oil Based mud may not be used while drilling through the Capitan Reef.	
pkautz	Submit Gas Capture Plan form prior to spud	