UL - Lot

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesis, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District III

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

Section

32

# State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Form C-101 August 1, 2011

Permit 228983

APPLICATION FOR PERMIT	TO DRILL, RE-ENTER, DEEPEN	, PLUGBACK, OR ADD A ZONE
------------------------	----------------------------	---------------------------

			APPLICA	HON FOR P	EKIVII I	IO DRILL	., KE-E	:N IEK, DEEPER	N, PLUGBA	CK, OR AD	DAZON	E		
	ENERGY,	INC									2. OGRID	Number 5380		
	S. Jamaio ewood, CC										3. API Nu	mber 30-025-4369	95	
4. Property Code 3175				5. Property Name CHIS	TERA 32 S	STATE					6. Well No	002H		
							7. Surfa	ce Location						
UL - Lot B	Section	32	Township 20	Range S	33E	Lot Idn	В	Feet From 200	N/S Line N	Feet From	1730	E/W Line E	County	Lea

0

Lot Idn

8. Proposed Bottom Hole Location

Feet From

200

N/S Line

Feet From

1650

E/W Line

County

Lea

	9. Pool information	And the second s
HAT MESA BONE SPRING	La Salvestania de Maria de	30213

### Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3618
16. Multiple N	17. Proposed Depth 15800	18. Formation 3rd Bone Spring Sand	19. Contractor	20. Spud Date 7/1/2017
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

### ■ We will be using a closed-loop system in lieu of lined pits

Township

20S

Range

33E

### 21. Proposed Casing and Cement Program

		Entroposa dusing and committingiam									
[	Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC				
	Surf	17.5	13.375	54.5	2000	1810	0				
1	Int1	12.25	9.625	36	3225	1150	0				
1	Prod	8.75	5.5	17	15800	2380	0				

## Casing/Cement Program: Additional Comments

22	Droposod	Dlowout	Prevention	Drogram

22. Proposed Blowout Prevention Program										
Type	Working Pressure	Test Pressure	Manufacturer							
Double Ram	5000	5000	Cameron							

knowledge and be	have complied with 19.15.14.9 (A)			OIL CONSE	ERVATION DIVISION
Printed Name:	Electronically filed by Janice Farns	worth	Approved By:	Paul Kautz	
Title:	Regulatory Compliance Tech		Title:	Geologist	
Email Address:	Janice_Farnsworth@xtoenergy.co	m	Approved Date:	3/16/2017	Expiration Date: 3/16/2019
Date:	3/11/2017	Phone: 303-397-3676	Conditions of Ap	proval Attached	

District I

1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 District IV 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Form C-102 August 1, 2011

## WELL LOCATION AND ACREAGE DEDICATION PLAT

1. API Number	2. Pool Code	3. Pool Name
30-025-43695	30213	HAT MESA;BONE SPRING
4. Property Code 317520	Property Name     CHISTERA 32 STATE	6. Well No. 002H
7. OGRID No.	8. Operator Name	9. Elevation
5380	XTO ENERGY, INC	3618


10. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
В	32	20S	33E	В	200	N	1730	E	Lea

11. Bottom Hole Location If Different From Surface

UL - Lot	-	Section		Township	Range		Lot Idn		Feet From	N/S Line	Feet From	E/W Line	County
0	)		32	208		33E	300000000000000000000000000000000000000	0	200	S	1650	E	Lea
12. Dedicated	d Acres				13. Joint of	r Infill			14. Consolidation Code	e		15. Order No.	31

## NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY

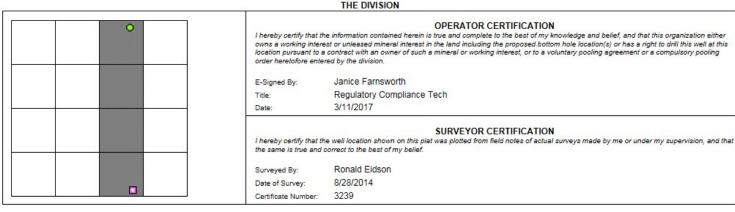

Form APD Comments

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

Phone:(575) 393-6161 Fax:(575) 393-0720 <u>District II</u>:
311 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 <u>District III</u>:
1000 Rio Brazos Rd., Azteo, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 <u>District IV</u>:
1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

# State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Permit 228983

## PERMIT COMMENTS

Operator Name and Address:	API Number:		
XTO ENERGY, INC [5380]	30-025-43695		
9193 S. Jamaica St.	Well:		
Englewood, CO 80155	CHISTERA 32 STATE #002H		

Created By	Comment	Comment Date
srabadue	Intrepid Potash Company was notified of XTO's intention to submit a drilling permit on this well 02/16/2017 via certified mail: 7013 1710 0001 7955 6728 Bureau of Land Management was notified of XTO's intention to submit a drilling permit on this well 02/15/2017 via certified mail: 7013 1710 0001 7955 6742 These wells are on a BLM/Intrepid approved Potash drill island. Attachments were also emailed to Paul Kautz.	3/11/2017

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 Phone:(575) 393-6161 Fax:(575) 393-0720 <u>District II</u>:
311 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 <u>District III</u>:
1000 Rio Brazos Rd., Azteo, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 <u>District IV</u>:
1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

# State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Permit 228983

## PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:	
XTO ENERGY, INC [5380]	30-025-43695	
9193 S. Jamaica St.	Well:	
Englewood, CO 80155	CHISTERA 32 STATE #002H	

OCD Reviewer	Condition	
pkautz	Will require a directional survey with the C-104	
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	
pkautz	If using a pit for drilling and completion operations, must have an approved pit from prior to spudding the well.	
pkautz	1) SURFACE & INTERMEDIATE CASING - Cement must circulate to surface 2) PRODUCTION CASING - Cement must tie back into intermediate casing	
pkautz	If cement does not circulate to surface, must run temperature survey or other log to determine top of cement	
pkautz	Three String Casing Program - In accordance with R-111-P all strings shall be cemented to surface. Salt Protection String - If the cement fails to reach the surface or the bottom of the cellar, where required, the top of the cement shall be located by a temperature or other survey and additional cementing shall be done until the cement is brought to the surface.	
pkautz	Oil Based mud may not be used while drilling through the Capitan Reef.	
pkautz	Surface casing must be set 25' below top of Rustler Anhydrite in order to seal off protectable water	
pkautz	Only Fresh Water and Air are Valid Drilling Fluids for Surface Casing	
pkautz	Operator shall notify appropriate District office when setting conductor pipe.	
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of spudding a well.	
pkautz	It is the operator's responsibility to monitor cancellation dates of approved APDs. APD's are good for 2 years and may be extended for one year. Only one 1 year extension will be granted if submitted by C-103 before expiration date. After expiration date or after a 1 year extension must submit new APD.	
pkautz	If an APD expires and if site construction has occurred, site remediation is required.	
pkautz	Stage Tool 1) Must notify OCD Hobbs Office prior to running Stage Tool at 575-370-3186 2) If using Stage Tool on Surface casing, Stage Tool must be set greater than 350' from surface and a minimum of 200 feet above surface shoe. 3) When using a Stage Tool on Intermediate or Production Casing Stage must be a minimum of 50 feet below previous casing shoe.	
pkautz	Submit Gas Capture Plan form prior to spud	