

Well Name: MCKITTRICK 11 FEDERAL	Well Location: T22S / R24E / SEC 11 / NENW /	County or Parish/State: EDDY / NM
Well Number: 5	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM53219	Unit or CA Name:	Unit or CA Number:
US Well Number: 300153361100S1	Well Status: Water Disposal Well	Operator: OXY USA WTP LP

Accepted for record – NMOCD gc 4/19/2021

Notice of Intent

Type of Submission: Notice of Intent	Type of Action Plug and Abandonment
Date Sundry Submitted: 03/04/2021	Time Sundry Submitted: 07:18
Date proposed operation will begin: 04/08/2021	

Procedure Description: OXY USA WTP LP respectfully requests approval to plug and abandon the subject well. Work will be completed before April 30, 2021. The plan is as follows: 10# MLF between plugs. Utilize above-ground steel tanks. 1. POOH WITH INJECTION EQUIPMENT 2. SET CIBP @ 8660'. DUMP BAIL 5 SX CLASS H CMT. TAG. 3. SPOT 150 SKS CLASS H CMT 8473-7794. WOC 4 HRS AND TAG. 4. SPOT 40 SX CLASS C CMT 7442-7267. WOC 4 HRS AND TAG. 5. SPOT 35 SX CLASS C CMT 5500-5345. WOC 4 HRS AND TAG. 6. SPOT 35 SX CLASS C CMT 3900-3760. WOC 4 HRS AND TAG. 7. SPOT 30 SX CLASS C CMT 2050-1930. WOC 4 HRS AND TAG. 8. PERF AND SQZ 370 SKS CLASS C CMT 1669-SURFACE. WOC 4 HRS AND TAG.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

MCKITTRICK_11_FED_5_PROPOSED_P_A_20210304071720.pdf

MCKITTRICK_11_FED_5_CURRENT_WB_20210304071656.pdf

Well Name: MCKITTRICK 11 FEDERAL	Well Location: T22S / R24E / SEC 11 / NENW /	County or Parish/State: EDDY / NM
Well Number: 5	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM53219	Unit or CA Name:	Unit or CA Number:
US Well Number: 300153361100S1	Well Status: Water Disposal Well	Operator: OXY USA WTP LP

Conditions of Approval

Specialist Review

Reclamation_Objectives_and_Procedures_20210319150248.doc
COA_Plug___abandon_122010_20210319150232.docx

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: HOFFMAN	Signed on: MAR 04, 2021 07:17 AM
Name: OXY USA WTP LP	
Title: Regulatory Tech II	
Street Address: P O BOX 4294	
City: HOUSTON	State: TX
Phone: (713) 366-5360	
Email address:	


Field Representative

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: JAMES A AMOS	BLM POC Title: Acting Assistant Field Manager
BLM POC Phone: 5752345927	BLM POC Email Address: jamos@blm.gov
Disposition: Approved	Disposition Date: 03/19/2021
Signature: James A. Amos	

OXY USA WTP LIMITED PARTNERSHIP
MCKITTRICK 11 FEDERAL SWD #005
30-015-33611

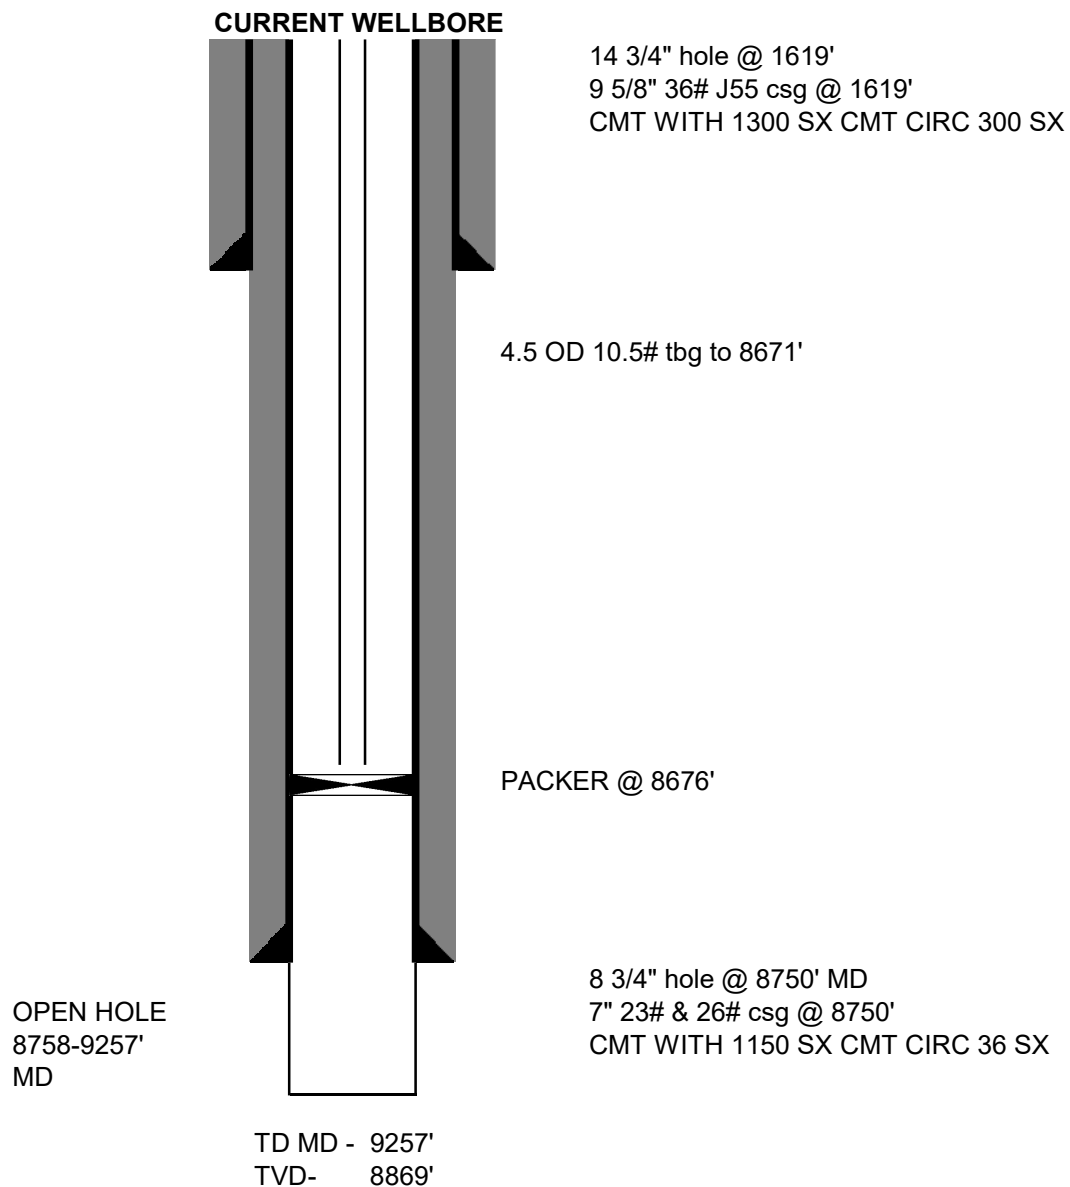

OXY USA WTP LIMITED PARTNERSHIP
MCKITTRICK 11 FEDERAL SWD #005
30-015-33611

PROPOSED P&A

14 3/4" hole @ 1619'
9 5/8" 36# J55 LTC & STC csg @ 1619' MD
CMT WITH 1300 SX CMT CIRC 300 SX

Perf/sqz 370 sx Class C cmt from 1669-surface

Spot 30 sx Class C cement from 2050' to 1930'

Spot 35 sx Class C cement from 3900' to 3760'

Spot 35 sx Class C cement from 5500' to 5345'

Spot 40 sx Class C cement from 7442' to 7267'

Spot 150 sx Class H cement from 8473' to 7794'

Tag and add cement to bring top to 8625'
CIBP @ 8660'
DUMP BAIL 35' - 5 SX CLASS H CMT

8 3/4" hole @ 8750' MD
7" 23# & 26# csg @ 8750'
CMT WITH 1150 SX CMT CIRC 36 SX

OPEN HOLE
8758-9257'
MD

TD MD - 9257'
TVD- 8869'

*not to scale

**BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972**

**Permanent Abandonment of Federal Wells
Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.**

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 21557

CONDITIONS OF APPROVAL

Operator:	OXY USA WTP LIMITED PARTNERSHI	P.O. Box 4294	Houston, TX772104294	OGRID:	192463	Action Number:	21557	Action Type:	C-103F
OCD Reviewer	Condition								
gcordero	None								