



U.S. Department of the Interior
Bureau of Land Management

Application for Permit to Drill

APD Package Report

Date Printed:

APD ID:
APD Received Date:
Operator:

Well Status:
Well Name:
Well Number:

APD Package Report Contents

- Form 3160-3
- Operator Certification Report
- Application Report
- Application Attachments
 - Well Plat: 1 file(s)
- Drilling Plan Report
- Drilling Plan Attachments
 - Blowout Prevention Choke Diagram Attachment: 2 file(s)
 - Blowout Prevention BOP Diagram Attachment: 3 file(s)
 - Casing Taperd String Specs: 4 file(s)
 - Casing Design Assumptions and Worksheet(s): 5 file(s)
 - Hydrogen sulfide drilling operations plan: 3 file(s)
 - Proposed horizontal/directional/multi-lateral plan submission: 3 file(s)
 - Other Variances: 1 file(s)
- SUPO Report
- SUPO Attachments
 - Existing Road Map: 1 file(s)
 - New Road Map: 1 file(s)
 - Attach Well map: 1 file(s)
 - Water source and transportation map: 1 file(s)
 - Well Site Layout Diagram: 3 file(s)
- PWD Report
- PWD Attachments
 - None
- Bond Report
- Bond Attachments
 - None

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		5. Lease Serial No. 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No.
2. Name of Operator		9. API Well No.
3a. Address	3b. Phone No. (include area code)	10. Field and Pool, or Exploratory
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		11. Sec., T. R. M. or Blk. and Survey or Area
14. Distance in miles and direction from nearest town or post office*		12. County or Parish
13. State		
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No of acres in lease	17. Spacing Unit dedicated to this well
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth	20. BLM/BIA Bond No. in file
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will start*	23. Estimated duration
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title		
Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



Approval Date: 04/12/2021

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: NWNE / 290 FNL / 1760 FEL / TWSP: 26S / RANGE: 32E / SECTION: 11 / LAT: 32.064212 / LONG: -103.642661 (TVD: 0 feet, MD: 0 feet)

PPP: NENE / 100 FNL / 990 FEL / TWSP: 26S / RANGE: 32E / SECTION: 11 / LAT: 32.064734 / LONG: -103.640176 (TVD: 12003 feet, MD: 12076 feet)

BHL: SESE / 50 FSL / 990 FEL / TWSP: 26S / RANGE: 32E / SECTION: 11 / LAT: 32.050443 / LONG: -103.640194 (TVD: 12233 feet, MD: 17358 feet)

BLM Point of Contact

Name: TENILLE ORTIZ

Title: Legal Instruments Examiner

Phone: (575) 234-2224

Email: tortiz@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	BTA Oil Producers LLC
LEASE NO.:	NMNM014492
COUNTY:	Lea County, NM

Wells:

Well Pad 1

Mesa 8105 11 Federal 58H

Surface Hole Location: 290' FNL & 1730' FEL, Section 11, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 330' FEL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 59H

Surface Hole Location: 290' FNL & 1760' FEL, Section 11, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 990' FEL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 60H

Surface Hole Location: 290' FNL & 1790' FEL, Section 11, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 1650' FEL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 61H

Surface Hole Location: 290' FNL & 1820' FEL, Section 11, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 2310' FEL, Section 11, T. 26 S, R 32 E.

Well Pad 2

Mesa 8105 11 Federal 62H

Surface Hole Location: 320' FNL & 1700' FWL, Section 11, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 2310' FWL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 63H

Surface Hole Location: 320' FNL & 1670' FWL, Section 11, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 1650' FWL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 64H

Surface Hole Location: 320' FNL & 1640' FWL, Section 11, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 990' FWL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 65H

Surface Hole Location: 320' FNL & 1610' FWL, Section 11, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 330' FWL, Section 11, T. 26 S, R 32 E.

Well Pad 3

Mesa 8105 11 Federal 74H

Surface Hole Location: 490' FNL & 1730' FEL, Section 11, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 330' FEL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 75H

Surface Hole Location: 490' FNL & 1760' FEL, Section 11, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 990' FEL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 76H

Surface Hole Location: 490' FNL & 1790' FEL, Section 11, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 1650' FEL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 77H

Surface Hole Location: 490' FNL & 1820' FEL, Section 11, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 2310' FEL, Section 11, T. 26 S, R 32 E.

Well Pad 4

Mesa 8105 11 Federal 78H

Surface Hole Location: 490' FNL & 1560' FWL, Section 11, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 2310' FWL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 79H

Surface Hole Location: 490' FNL & 1530' FWL, Section 11, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 1650' FWL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 80H

Surface Hole Location: 490' FNL & 1500' FWL, Section 11, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 990' FWL, Section 11, T. 26 S, R 32 E.

Mesa 8105 11 Federal 81H

Surface Hole Location: 490' FNL & 1470' FWL, Section 11, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 330' FWL, Section 11, T. 26 S, R 32 E.

Well Pad 5

Mesa 8105 1-12 Federal 50H

Surface Hole Location: 530' FNL & 700' FEL, Section 1, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 330' FEL, Section 12, T. 26 S, R 32 E.

Mesa 8105 1-12 Federal 51H

Surface Hole Location: 530' FNL & 730' FEL, Section 1, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 990' FEL, Section 12, T. 26 S, R 32 E.

Well Pad 6

Mesa 8105 1-12 Federal 52H

Surface Hole Location: 305' FNL & 1080' FEL, Section 1, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 1650' FEL, Section 12, T. 26 S, R 32 E.

Mesa 8105 1-12 Federal 53H

Surface Hole Location: 305' FNL & 1110' FEL, Section 1, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 2310' FEL, Section 12, T. 26 S, R 32 E.

Well Pad 7

Mesa 8105 1-12 Federal 54H

Surface Hole Location: 670' FNL & 1524' FWL, Section 1, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 2310' FWL, Section 12, T. 26 S, R 32 E.

Mesa 8105 1-12 Federal 55H

Surface Hole Location: 670' FNL & 1494' FWL, Section 1, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 1650' FWL, Section 12, T. 26 S, R 32 E.

Well Pad 8

Mesa 8105 1-12 Federal 56H

Surface Hole Location: 480' FNL & 990' FWL, Section 1, T. 26 S., R. 32 E.
Bottom Hole Location: 50' FSL & 990' FWL, Section 12, T. 26 S, R 32 E.

Mesa 8105 1-12 Federal 57H

Surface Hole Location: 480' FNL & 960' FWL, Section 1, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 330' FWL, Section 12, T. 26 S, R 32 E.

Well Pad 9

Mesa 8105 1-12 Federal 66H

Surface Hole Location: 730' FNL & 700' FEL, Section 1, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 330' FEL, Section 12, T. 26 S, R 32 E.

Mesa 8105 1-12 Federal 67H

Surface Hole Location: 730' FNL & 730' FEL, Section 1, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 990' FEL, Section 12, T. 26 S, R 32 E.

Well Pad 10

Mesa 8105 1-12 Federal 68H

Surface Hole Location: 505' FNL & 1080' FEL, Section 1, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 1650' FEL, Section 12, T. 26 S, R 32 E.

Mesa 8105 1-12 Federal 69H

Surface Hole Location: 505' FNL & 1110' FEL, Section 1, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 2310' FEL, Section 12, T. 26 S, R 32 E.

Well Pad 11

Mesa 8105 1-12 Federal 70H

Surface Hole Location: 470' FNL & 1530' FWL, Section 1, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 2310' FWL, Section 12, T. 26 S, R 32 E.

Mesa 8105 1-12 Federal 71H

Surface Hole Location: 470' FNL & 1500' FWL, Section 1, T. 26 S., R. 32 E.

Bottom Hole Location: 50' FSL & 1650' FWL, Section 12, T. 26 S, R 32 E.

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Watershed
 - Cave/Karst
 - Range
 - VRM IV
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**

- ☒ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural resource (historic or prehistoric site or object) discovered by the holder, or any person working on the holder's behalf, on public or Federal land shall be immediately reported to the Authorized Officer. The holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to the proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

OR

If the entire project is covered under the Permian Basin Programmatic Agreement (cultural resources only):

The proponent has contributed funds commensurate to the undertaking into an account for offsite mitigation. Participation in the PA serves as mitigation for the effects of this project on cultural resources. If any human skeletal remains, funerary objects, sacred objects, or objects of cultural patrimony are discovered at any time during construction, all construction activities shall halt and the BLM will be notified as soon as possible within 24 hours. Work shall not resume until a Notice to Proceed is issued by the BLM. See information below discussing NAGPRA.

If the proposed project is split between a Class III inventory and a Permian Basin Programmatic Agreement contribution, the portion of the project covered under Class III inventory should default to the first paragraph stipulations.

The holder is hereby obligated to comply with procedures established in the Native American Graves Protection and Repatriation Act (NAGPRA) to protect such cultural items as human remains, associated funerary objects, sacred objects, and objects of cultural patrimony discovered inadvertently during the course of project implementation. In the event that any of the cultural items listed above are discovered during the course of project work, the proponent shall immediately halt the disturbance and contact the BLM within 24 hours for instructions. The proponent or initiator of any project shall be held responsible for protecting, evaluating, reporting, excavating, treating, and disposing of these cultural items according to the procedures established by the BLM in consultation with Indian Tribes."

Any paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on the holder's behalf, on public or Federal land shall be immediately reported to the Authorized Officer. The holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to the proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

SPECIAL REQUIREMENT(S)

Watershed:

The entire well pad(s) will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad. The compacted berm shall be constructed at a minimum of 12 inches with impermeable mineral material (e.g. caliche). Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed. Any water erosion that may occur due to the construction of the well pad during the life of the well will be quickly corrected and proper measures will be taken to prevent future erosion. Stockpiling of topsoil is required. The topsoil shall be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and not used for berming or erosion control. If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.

Cave/Karst:

Construction Mitigation

In order to mitigate the impacts from construction activities on cave and karst resources, the following Conditions of Approval will apply to this APD or project:

General Construction:

- No blasting
- The BLM, Carlsbad Field Office, will be informed immediately if any subsurface drainage channels, cave passages, or voids are penetrated during construction, and no additional construction shall occur until clearance has been issued by the Authorized Officer.
- All linear surface disturbance activities will avoid sinkholes and other karst features to lessen the possibility of encountering near surface voids during construction, minimize changes to runoff, and prevent untimely leaks and spills from entering the karst drainage system.
- All spills or leaks will be reported to the BLM immediately for their immediate and proper treatment.

Pad Construction:

- The pad will be constructed and leveled by adding the necessary fill and caliche – no blasting.

- The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.
- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g., caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised (i.e. an access road crossing the berm cannot be lower than the berm height).
- Following a rain event, all fluids will vacuumed off of the pad and hauled off-site and disposed at a proper disposal facility.

Road Construction:

- Turnout ditches and drainage leadoffs will not be constructed in such a manner as to alter the natural flow of water into or out of cave or karst features.
- Special restoration stipulations or realignment may be required if subsurface features are discovered during construction.

Drilling Mitigation

Federal regulations and standard Conditions of Approval applied to all APDs require that adequate measures are taken to prevent contamination to the environment. Due to the extreme sensitivity of the cave and karst resources in this project area, the following additional Conditions of Approval will be added to this APD.

To prevent cave and karst resource contamination the following will be required:

- Closed loop system using steel tanks - all fluids and cuttings will be hauled off-site and disposed of properly at an authorized site
- Rotary drilling with fresh water where cave or karst features are expected to prevent contamination of freshwater aquifers.
- Directional drilling is only allowed at depths greater than 100 feet below the cave occurrence zone to prevent additional impacts resulting from directional drilling.
- Lost circulation zones will be logged and reported in the drilling report so BLM can assess the situation and work with the operator on corrective actions.
- Additional drilling, casing, and cementing procedures to protect cave zones and fresh water aquifers. See drilling COAs.

Production Mitigation

In order to mitigate the impacts from production activities and due to the nature of karst terrane, the following Conditions of Approval will apply to this APD:

- Tank battery locations and facilities will be bermed and lined with a 20 mil thick permanent liner that has a 4 oz. felt backing, or equivalent, to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.
- Development and implementation of a leak detection system to provide an early alert to operators when a leak has occurred.

- Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Residual and Cumulative Mitigation

The operator will perform annual pressure monitoring on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be taken to correct the problem to the BLM's approval.

Plugging and Abandonment Mitigation

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Range:**Cattleguards**

Where a permanent cattlegaurd is approved, an appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s). Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations. A gate shall be constructed on one side of the cattleguard and fastened securely to H-braces.

Fence Requirement

Where entry granted across a fence line, the fence must be braced and tied off on both sides of the passageway prior to cutting. Once the work is completed, the fence will be restored to its prior condition, or better. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Livestock Watering Requirement

Any damage to structures that provide water to livestock throughout the life of the well, caused by operations from the well site, must be immediately corrected by the operator. The operator must notify the BLM office (575-234-5972) and the private surface landowner or the grazing allotment holder if any damage occurs to structures that provide water to livestock.

VRM IV:

Above-ground structures including meter housing that are not subject to safety requirements are painted a flat non-reflective paint color, Shale Green from the BLM Standard Environmental Color Chart (CC-001: June 2008).

V. CONSTRUCTION**A. NOTIFICATION**

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates,

erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

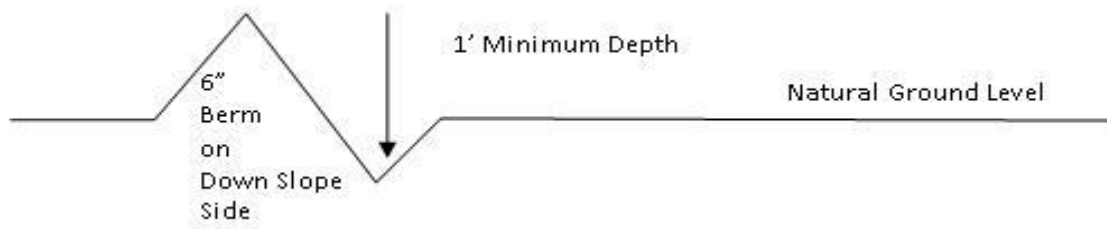

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be

repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes



Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VI. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

VII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

VIII. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

Species

	<u>lb/acre</u>
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sand love grass (<i>Eragrostis trichodes</i>)	1.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

Seed Mixture 3, for Shallow Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass (<i>Setaria macrostachya</i>)	1.0
Green Sprangletop (<i>Leptochloa dubia</i>)	2.0
Sideoats Grama (<i>Bouteloua curtipendula</i>)	5.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	BTA Oil Producers LLC
LEASE NO.:	NMNM014492
WELL NAME & NO.:	MESA 8105 11 Federal 59H
SURFACE HOLE FOOTAGE:	290'/N & 1760'/E
BOTTOM HOLE FOOTAGE:	50'/S & 990'/E
LOCATION:	Section 11, T.26 S., R.32 E., NMP
COUNTY:	Lea County, New Mexico

COA

H2S	<input type="radio"/> Yes	<input checked="" type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input type="radio"/> Low	<input checked="" type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

Casing Design:

1. The **10-3/4** inch surface casing shall be set at approximately **795 feet** (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after

- completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **7-5/8** inch intermediate casing shall be set at approximately **11,736** feet. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**
Excess cement calculates to -43%, additional cement might be required.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
Excess cement calculates to -6%, additional cement might be required.
 - b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
 - ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
3. The minimum required fill of cement behind the **5 1/2 X 5** inch production casing is:

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).⁷
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Chaves and Roosevelt Counties
 Call the Roswell Field Office, 2909 West Second St., Roswell NM 88201.
 During office hours call (575) 627-0272.
 After office hours call (575)

☒ Eddy County
 Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be

onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time.
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to

Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).

- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

OTA11042020



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

04/14/2021



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

04/14/2021

APD ID: 10400058110

Submission Date: 06/19/2020

Highlighted data
reflects the most
recent changes

Operator Name: BTA OIL PRODUCERS LLC

Well Name: MESA 8105 11 FEDERAL

Well Number: 59H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400058110

Tie to previous NOS?

Submission Date: 06/19/2020

BLM Office: CARLSBAD

User: Sammy Hajar

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM014492

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? Y

Permitting Agent? NO

APD Operator: BTA OIL PRODUCERS LLC

Operator letter of designation:

Operator Info

Operator Organization Name: BTA OIL PRODUCERS LLC

Operator Address: 104 S. Pecos

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)682-3753

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: MESA 8105 11 FEDERAL

Well Number: 59H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WC-025

Pool Name: UPPER
WOLFCAMP

Is the proposed well in an area containing other mineral resources? NONE

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** MESA 8105 11 FEDERAL**Well Number:** 59H**Is the proposed well in an area containing other mineral resources?** NONE**Is the proposed well in a Helium production area?** N**Use Existing Well Pad?** N**New surface disturbance?****Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:** MESA 8105 11 FEDERAL**Number:** 58H, 59H, 60H, and 61H**Well Class:** HORIZONTAL**Number of Legs:** 1**Well Work Type:** Drill**Well Type:** OIL WELL**Describe Well Type:****Well sub-Type:** INFILL**Describe sub-type:****Distance to town:****Distance to nearest well:** 428 FT**Distance to lease line:** 290 FT**Reservoir well spacing assigned across Measurement:** 160 Acres**Well plat:** Signed_Mesa_8105_11_Federal_59H_C102_20200617074528.pdf**Well work start Date:** 11/14/2021**Duration:** 30 DAYS**Section 3 - Well Location Table****Survey Type:** RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NGVD29**Survey number:****Reference Datum:** GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	290	FNL	1760	FEL	26S	32E	11	Aliquot NWNE	32.064212	-103.642661	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 014492	3253	0	0	Y
KOP Leg #1	100	FNL	990	FEL	26S	32E	11	Aliquot NENE	32.064734	-103.640176	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 014492	-8502	11811	11755	Y
PPP Leg #1-1	100	FNL	990	FEL	26S	32E	11	Aliquot NENE	32.064734	-103.640176	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 014492	-8750	12076	12003	Y

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** MESA 8105 11 FEDERAL**Well Number:** 59H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
EXIT Leg #1	100	FSL	990	FEL	26S	32E	11	Aliquot SESE	32.05058	- 103.6401 94	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 014492	- 898 0	170 78	122 33	Y
BHL Leg #1	50	FSL	990	FEL	26S	32E	11	Aliquot SESE	32.05044 3	- 103.6401 94	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 014492	- 898 0	173 58	122 33	Y

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool Name WC-025 ; Upper Wolfcamp
Property Code	Property Name MESA 8105 11 FEDERAL	Well Number 59H
OGRID No. 260297	Operator Name BTA OIL PRODUCERS, LLC	Elevation 3253'

Surface Location


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	11	26-S	32-E		290	NORTH	1760	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	11	26-S	32-E		50	SOUTH	990	EAST	LEA

Dedicated Acres 160	Joint or Infill	Consolidation Code	Order No.
------------------------	-----------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

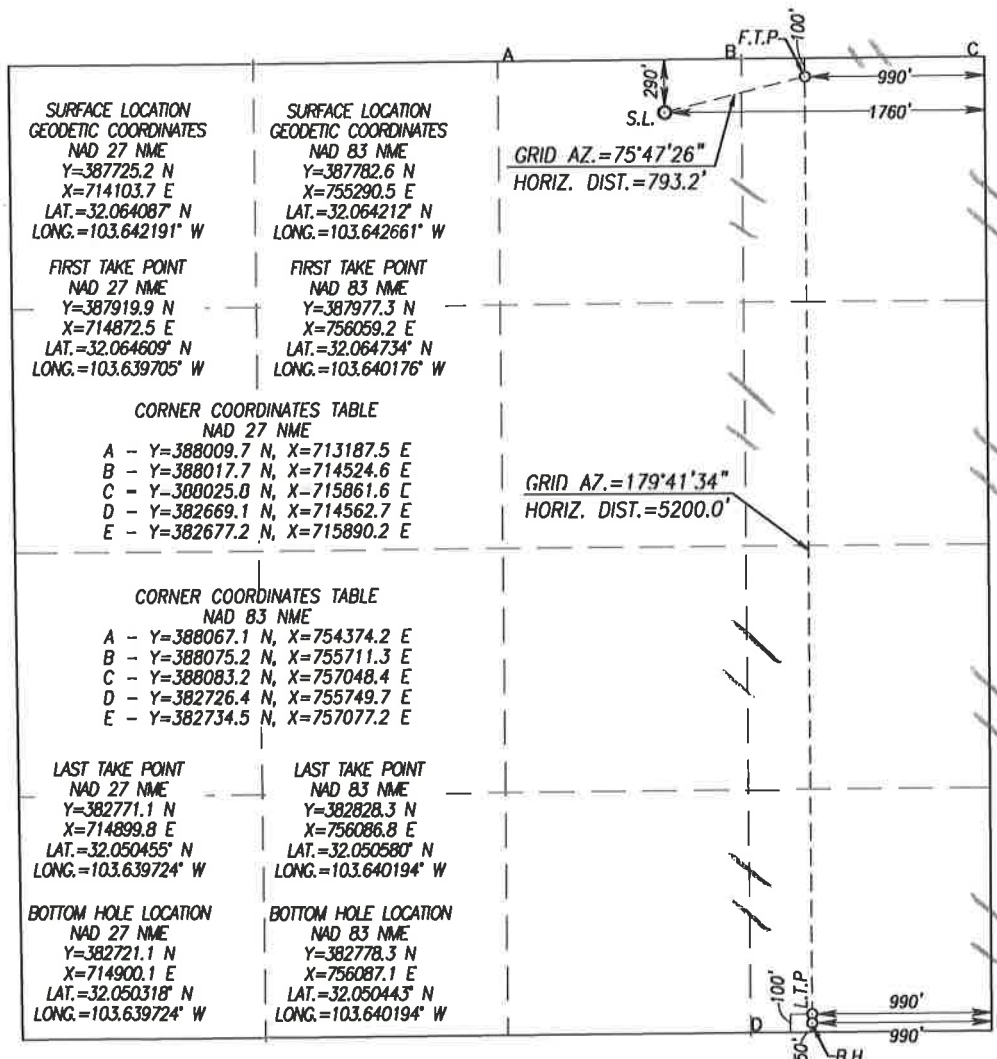

OPERATOR CERTIFICATION

I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: *Sammy Hajar* Date: 5/5/2020

Printed Name: Sammy Hajar

E-mail Address: SHAJAR@BTAOIL.COM

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date of Survey: 02/20/2020
Signature & Seal of Professional Surveyor: *Ronald J. Eidson*

Certificate Number: 3239
Gary G. Eidson 12641
Ronald J. Eidson 3239

ACK JWSC W.O.: 19.11.1269



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

04/14/2021

APD ID: 10400058110

Submission Date: 06/19/2020

Highlighted data
reflects the most
recent changes

Operator Name: BTA OIL PRODUCERS LLC

Well Name: MESA 8105 11 FEDERAL

Well Number: 59H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
761613	QUATERNARY	3253	0	0	ALLUVIUM	NONE	N
761614	RUSTLER	2535	718	718	ANHYDRITE	NONE	N
761615	TOP SALT	2055	1198	1198	SALT	NONE	N
761616	BASE OF SALT	-1150	4403	4403	SALT	NONE	N
761617	DELAWARE	-1370	4623	4623	LIMESTONE	NATURAL GAS, OIL	N
761626	BELL CANYON	-1395	4648	4648	SANDSTONE	NATURAL GAS, OIL	N
761619	CHERRY CANYON	-2745	5998	5998	SANDSTONE	NATURAL GAS, OIL	N
761620	BRUSHY CANYON	-4025	7278	7278	SANDSTONE	NATURAL GAS, OIL	N
761621	BONE SPRING LIME	-5615	8868	8868	LIMESTONE	NATURAL GAS, OIL	N
761622	FIRST BONE SPRING SAND	-6515	9768	9768	SANDSTONE	NATURAL GAS, OIL	N
761623	BONE SPRING 2ND	-7110	10363	10363	SANDSTONE	NATURAL GAS, OIL	N
761624	BONE SPRING 3RD	-8255	11508	11508	SANDSTONE	NATURAL GAS, OIL	N
761625	WOLFCAMP	-8750	12003	12003	SHALE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** MESA 8105 11 FEDERAL**Well Number:** 59H**Pressure Rating (PSI):** 10M**Rating Depth:** 14000

Equipment: The blowout preventer equipment (BOP) shown in Exhibit A will consist of a (10M system) double ram type (10,000 psi WP) preventer and a bag-type (Hydril) preventer (5000 psi WP). Both units will be hydraulically operated and the ram type preventer will be equipped with blind rams on top and 5" drill pipe rams on bottom. The BOPs will be installed on the 10-3/4" surface casing and utilized continuously until total depth is reached. A 2" kill line and 3" choke line will be incorporated in the drilling spool below the ram-type BOP. A remote kill line will be used for the 10M system as per onshore order #2. Other accessory BOP equipment will include a Kelly cock, floor safety valve, choke lines, and choke manifold having a 10,000 psi WP rating. The 5M annular will be tested as per BLM drilling Operations Order No. 2, and will be test to 100% of working pressure.

Requesting Variance? NO**Variance request:**

Testing Procedure: Pipe rams will be operated and checked each 24-hour period and each time the drill pipe is out of the hole. These functional tests will be documented on the daily drillers log. All BOPs and associated equipment will be tested as per BLM drilling Operations Order No. 2.

Choke Diagram Attachment:

Choke_Hose___Test_Chart_and_Specs_20190723082742.pdf

10M_choke_mannifold_20200521113335.pdf

BOP Diagram Attachment:

BLM_10M_BOP_with_5M_annular_20200521113411.pptx

5M_annular_well_control_plan_for_BLM_20200521113411.docx

10M_annular_variance_20200521113430.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	745	0	745	3253	2508	745	J-55	40.5	ST&C	4.9	9.7	DRY	13.9	DRY	20.8
2	INTERMEDIATE	9.875	7.625	NEW	API	Y	0	8056	0	8000	3018	-4747	8056	P-110	29.7	BUTT	1.4	2.4	DRY	4	DRY	3.9
3	PRODUCTION	6.75	5.5	NEW	API	Y	0	11536	0	11481	3018	-8228	11536	P-110	20	BUTT	1.3	1.5	DRY	2.9	DRY	2.8
4	INTERMEDIATE	8.75	7.625	NEW	API	Y	8056	11736	8000	11681	-4635	-8428	3680	P-110	29.7	FJ	1.7	1.7	DRY	2.8	DRY	2.7
5	PRODUCTION	6.75	5.0	NEW	API	Y	11536	17358	11481	12233	-8228	-8980	5822	P-110	18	BUTT	1.3	1.4	DRY	1.9	DRY	1.9

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** MESA 8105 11 FEDERAL**Well Number:** 59H**Casing Attachments**

Casing ID: 1 **String Type:** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**Mesa_59H_casing_assumption_20200617085613.JPG

Casing ID: 2 **String Type:** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:**

7_5_8_tapered_string_9_7_8_hole_spec__20200521134254.jpg

Casing Design Assumptions and Worksheet(s):Mesa_59H_casing_assumption_20200617092919.JPG

Casing ID: 3 **String Type:** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:**

5.5_tapered_string_spec_20190930151650.jpg

Casing Design Assumptions and Worksheet(s):Mesa_59H_casing_assumption_20200617093019.JPG

Operator Name: BTA OIL PRODUCERS LLC

Well Name: MESA 8105 11 FEDERAL

Well Number: 59H

Casing Attachments

Casing ID: 4 String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

7_5_8_tapered_string_8_3_4_hole_spec_for_FJ_20200521140259.jpg

Casing Design Assumptions and Worksheet(s):

Mesa_59H_casing_assumption_20200617093125.JPG

Casing ID: 5 String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

5_tapered_string_spec_20190930151627.jpg

Casing Design Assumptions and Worksheet(s):

Mesa_59H_casing_assumption_20200617084428.JPG

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	500	310	1.8	13.5	558	100	Class C	2% CaCl2
SURFACE	Tail		500	745	200	1.34	14.8	268	100	Class C	2% CaCl2
INTERMEDIATE	Lead	4631	0	4205	675	2.19	12.7	1478.25	50	Class C	0.5% CaCl2
INTERMEDIATE	Tail		4205	4631	150	1.33	14.8	199.5	50	Class C	1% CaCl2
INTERMEDIATE	Lead		4631	8185	365	2.64	10.5	936.6	25	Class H	0.5% CaCl2

Operator Name: BTA OIL PRODUCERS LLC

Well Name: MESA 8105 11 FEDERAL

Well Number: 59H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
INTERMEDIATE	Tail		8185	1173 6	400	1.19	15.6	476	25	Class H	1% CaCl2
PRODUCTION	Lead		1074 0	1153 6	0	0	0	0		n/a	n/a

PRODUCTION	Lead		1153 6	1735 8	645	1.27	14.8	819.1 5	10	Class H	0.1% Fluid Loss
------------	------	--	-----------	-----------	-----	------	------	------------	----	---------	-----------------

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	745	OTHER : FW SPUD	8.3	8.4							
745	1173 6	OTHER : DBE	9	9.4							
1173 6	1223 3	OIL-BASED MUD	11	14							

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** MESA 8105 11 FEDERAL**Well Number:** 59H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Drill Stem Tests will be based on geological sample shows.

List of open and cased hole logs run in the well:

MUD LOG/GEOLOGICAL LITHOLOGY LOG,GAMMA RAY LOG,CEMENT BOND LOG,

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 8906**Anticipated Surface Pressure:** 6214**Anticipated Bottom Hole Temperature(F):** 179**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards attachment:****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations plan:**

BTA_Oil_Producers_LLC___EMERGENCY_CALL_LIST_20190723161502.pdf

H2S_Equipment_Schematic_20190723161502.pdf

H2S_Plan_20190723161502.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Mesa_59H_Wall_plot_20200617094823.pdf

Mesa_59H_directional_plan_20200617094823.pdf

Mesa_8105_59H_Gas_Capture_Plan_20200617094949.pdf

Other proposed operations facets description:

A variance is requested for a Multi Bowl Wellhead. See the attached schematic. *All strings will be kept 1/3 full while running.

Other proposed operations facets attachment:**Other Variance attachment:**

BTA_MB_10_34___7_58___5_12_20200521143833.pdf

CONFIDENTIAL



ContiTech

CONTITECH RUBBER Industrial Kft.	No:QC-DB- 599/ 2014 Page: 16 / 176
-------------------------------------	---------------------------------------

Rig 94

ASSET 24455


QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1592	
PURCHASER: ContiTech Oil & Marine Corp.				P.O. N°: 4500461753	
CONTITECH ORDER N°: 539225		HOSE TYPE: 3" ID Choke & Kill Hose			
HOSE SERIAL N°: 68547		NOMINAL / ACTUAL LENGTH: 7,62 m / 7,66 m			
W.P. 68,9 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.	
Pressure test with water at ambient temperature					
See attachment. (1 page)					
→ 10 Min.					
↑ 50 MPa					
COUPLINGS Type		Serial N°		Quality	
3" coupling with		2574 5533		AISI 4130	
4 1/16" 10K API Swivel Flange end				AISI 4130	
Hub				AISI 4130	
				A1582N H8672	
				58855	
				A1199N A1423N	
Not Designed For Well Testing				API Spec 16 C	
Fire Rated				Temperature rate:"B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
Date:		Inspector		Quality Control	
04. September 2014.				ContiTech Rubber Industrial Kft. Quality Control Dept. <i>[Signature]</i>	

ContiTech Rubber Industrial Kft. | Budapesti út 10. 11 678 Szeged | H-6701 P.O.Box 152 Szeged, Hungary
 Phone: +36 62 566 737 | Fax: +36 62 566 738 | e-mail: info@bud.contitech.hu | Internet: www.contitech-rubber.hu, www.contitech.hu
 The Court of Szeged County as Registry Court | Registry Court No. Cg 06 09 002572 | EU VAT No. HU1067296
 Bank code: Commerzbank Zrt., Budapest | 14220100 26831003

File Name : 000220_68543_68545-547.GEV.....000236_68543_68545-547.GEV
File Message : 68543_68545_58547
Device Type : GX10
Serial No. : S3F606399
Data Count : 9046
Print Group :
Print Range :
Comment :
Press-Temp :
2014/09/04 01:53:54.000 - 2014/09/04 04:39:39.000

Sampling Int. : 1.000 sec
Start Time : 2014/09/04 01:53:54.000
Stop Time : 2014/09/04 04:39:39.000


Data No.	Cursor A	Cursor B	Difference
Absolute Time	2014/09/04 02:51:05.000	2014/09/04 03:51:06.000	01:00:01.000
Toy Comment	Value A	Value B	Value B-A
Pressure[bar]	1062.95	1048.57	-14.38
Ambient Temperature[°C]	23.24	23.14	-0.10

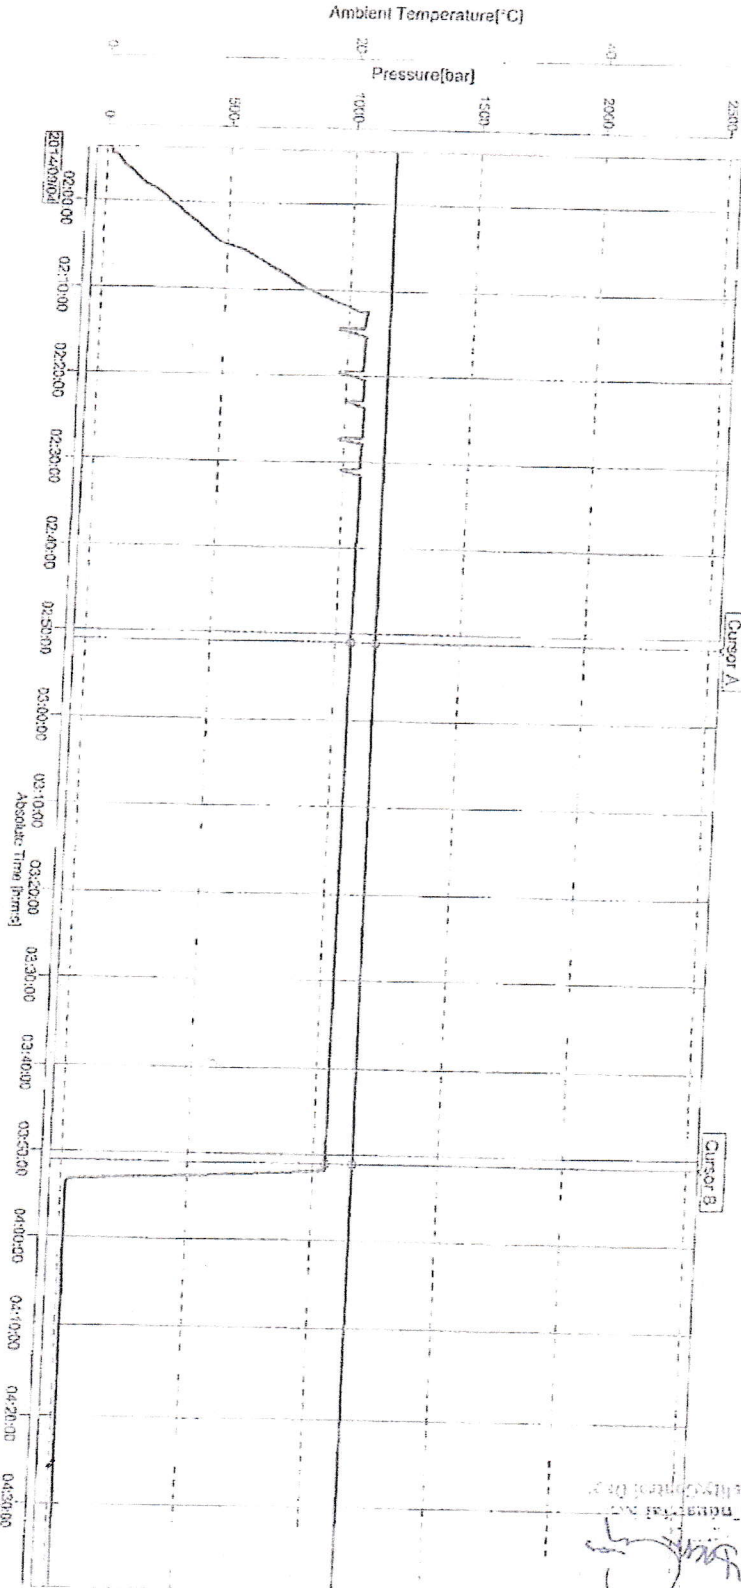

10mm/div


Page: 1 / 1

ATTACHMENT OF QUALITY CONTROL INSPECTION AND TEST CERTIFICATE No.: 1588, 1590, 1592

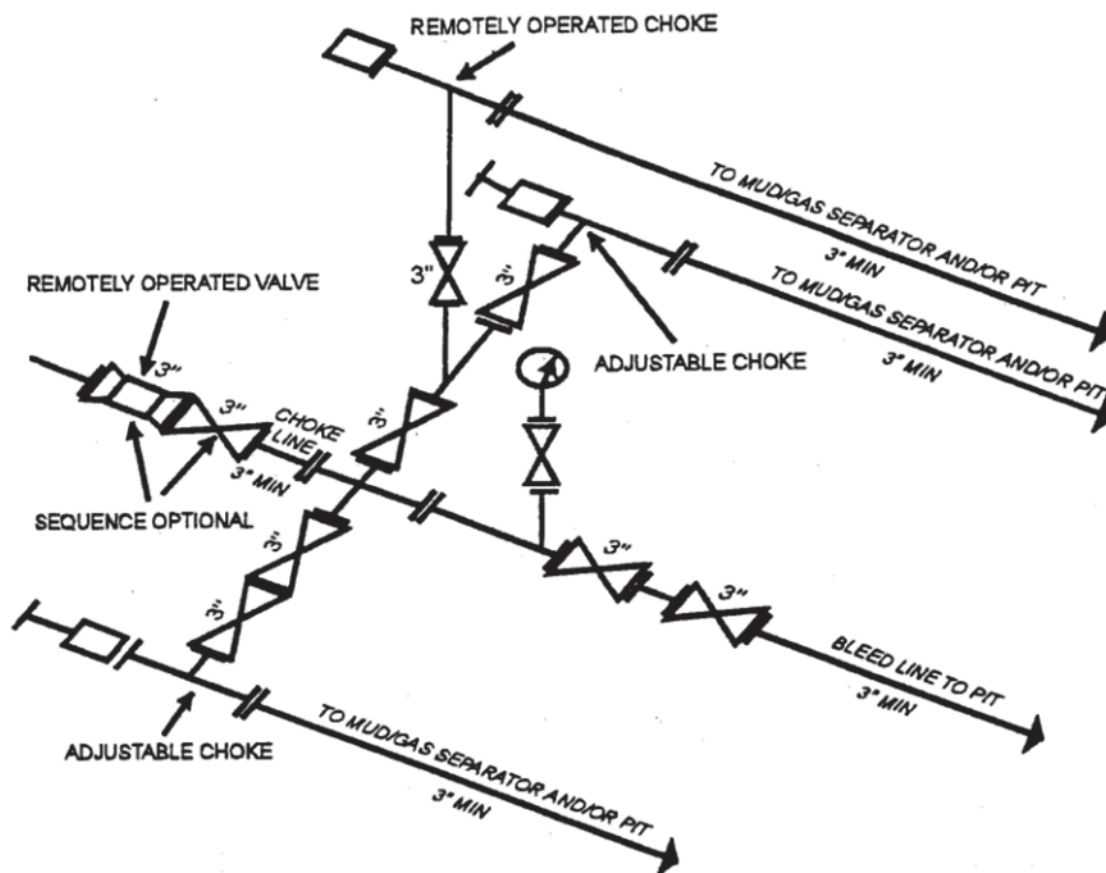

10M AND 15M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY
 [53 FR 49661, Dec. 9, 1988 and 54 FR 39528, Sept. 27, 1989]

13-5/8" 10M PSI BOP Stack

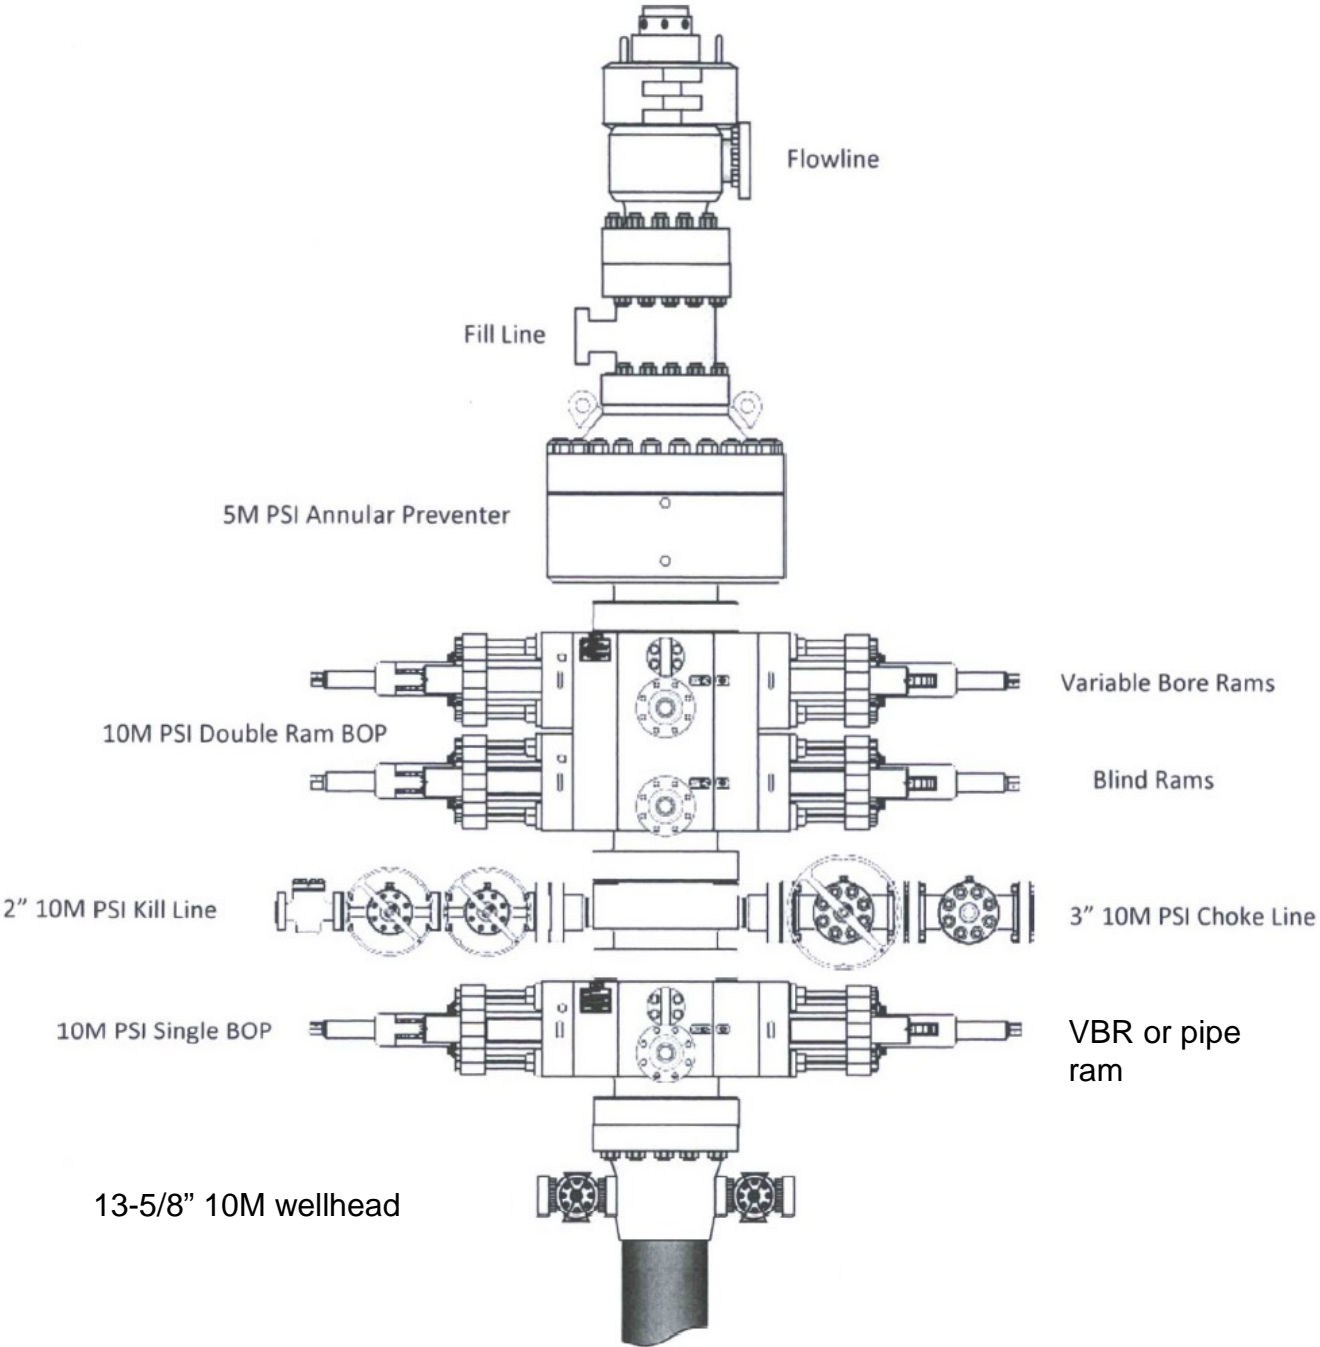

Well control plan for 10M BOPE with 5M annular

Drilling

1. Sound alarm (alert crew).
2. Space out drill string.
3. Shut down pumps (stop pumps and rotary).
4. Shut-in Well with annular with HCR and choke in closed position.
5. Confirm shut-in.
6. Notify tool pusher/company representative.
7. Read and record the following:
 - a. SIDPP & SICP
 - b. Time of shut in
 - c. Pit gain
8. Regroup and identify forward plan. If pressure has increased to 2500 psi, confirm spacing and close the upper variable bore rams.
9. Prepare for well kill operation.

Tripping

1. Sound alarm (alert rig crew)
2. Stab full opening safety valve and close valve
3. Space out drill string
4. Shut in the well with the annular with HCR and choke in closed position
5. Confirm shut in
6. Notify tool pusher/company representative
7. Read and record the following
 - a. Time of shut in
 - b. SIDPP and SICP
 - c. Pit gain
8. If pressure has increased to 2500 psi, confirm spacing and close the upper most variable bore ram.
9. Prepare for well kill operation.

While Running Casing

1. Sound alarm (alert rig crew)
2. Stab crossover and full opening safety valve and close valve
3. Space out casing string
4. Shut in well with annular with HCR and choke in closed position
5. Confirm shut in
6. Notify tool pusher/company representative
7. Read and record the following:
 - a. SIDPP & SICP
 - b. Pit gain
 - c. Time
8. If pressure has increased to 2500 psi, confirm spacing and close the upper most variable bore ram.
9. Prepare for well kill operation.

No Pipe In Hole (Open Hole)

1. Sound alarm (alert rig crew)

Well control plan for 10M BOPE with 5M annular

2. Shut in blind rams with HCR and choke in closed position
3. Confirm shut in
4. Notify tool pusher/company representative
5. Read and record the following:
 - a. SICP
 - b. Pit gain
 - c. Time
6. Prepare for well kill operation

Pulling BHA thru Stack

1. Prior to pulling last joint of drill pipe thru the stack
 - a. Perform flow check, if flowing:
 - a.i. Sound Alarm (alert crew)
 - a.ii. Stab full opening safety valve and close valve
 - a.iii. Space out drill string
 - a.iv. Shut in using upper most VBR, choke and HCR in closed position
 - a.v. Confirm shut in
 - a.vi. Notify tool pusher/company representative.
 - a.vii. Read and record the following:
 - a.vii.1. SIDPP and SICP
 - a.vii.2. Pit gain
 - a.vii.3. Time
 - a.viii. Prepare for well kill operation
 2. With BHA in the stack:
 - a. If possible pull BHA clear of stack
 - a.i. Follow 'open hole' procedure above
 - b. If unable to pull BHA clear of stack
 - b.i. Stab crossover with full opening safety valve, close valve.
 - b.ii. Space out
 - b.iii. Shut in using upper most VBR. HCR and choke in closed position.
 - b.iv. Confirm shut in
 - b.v. Notify tool pusher/company rep
 - b.vi. Read and record the following:
 - b.vi.1. SIDPP and SICP
 - b.vi.2. Pit gain
 - b.vi.3. Time
 - b.vii. Prepare for well kill operation

Drilling component and preventer compatibility table **for 10M approval**

The following table outlines the drilling and production liner components for Wolfcamp targets requiring 10M BOPE approval. Variance is requested to utilize a 5M annular preventer in 6-1/8" hole as all components can be covered using 10M rated VBR's (variable bore rams). 5M annular on the 10M system will be tested to 100% of rated working pressure.

6-1/8" hole section – 10M BOPE requirement (13-5/8" BOP)			
Component	OD	Preventer	RWP
Drill pipe	4"	3.5"-5.5" VBR	10M
HWDP	4"	3.5"-5.5" VBR	10M
Jars	5"	3.5"-5.5" VBR	10M
DC's and NMDC's	4-3/4"	3.5"-5.5" VBR	10M
Mud motor	5"	3.5"-5.5" VBR	10M
Casing	4-1/2"	3.5"-5.5" VBR	10M
Open hole	NA	Blind rams	10M

12-1/4" & 8-3/4" hole sections – 5M BOPE requirement (13-5/8" BOP)			
Component	OD	Preventer	RWP
Drill pipe	5"	3.5"-5.5" VBR or 5" pipe rams	10M
HWDP	5"	3.5"-5.5" VBR or 5" pipe rams	10M
Jars	6-1/4"	Annular	5M
DC's and NMDC's	7"-8"	Annular	5M
Mud motor	7"-8"	Annular	5M
Casing	9-5/8" & 7"	Annular	5M
Open hole	NA	Blind rams	10M

DIMENSIONS AND

Size O.D. In.	Grade	Wt. Per Ft. With Cplg. Lb.	Inside Dia. In.	Thread & Cplg.		Extreme Line		Collapse Resistance PSI
				Drift Dia. In.	O.D. of Cplg. In.	Drift Dia. In.	O.D. of Box In.	
5	C-75*	20.30	4.184	—	—	4.059	5.094	11,240
	C-75*	23.20	4.044	—	—	3.919	5.094†	12,970
	HCL-80+	15.00	4.408	4.283	—	—	—	9,390
	HCL-80+	18.00	4.276	4.151	—	—	—	11,880
	HCL-80+	23.20	4.044	3.919	—	—	—	15,820
	HCN-80+	15.00	4.408	4.283	—	—	—	9,380
	HCN-80+	18.00	4.276	4.151	—	—	—	11,680
	HCN-80+	23.20	4.044	3.919	—	—	—	15,820
	L-80	15.00	4.408	4.283	—	—	—	7,250
	L-80	24.10	4.000	3.875	—	—	—	14,400
	L-80	18.00	4.276	4.151	—	—	—	10,500
	L-80	21.40	4.126	4.001	—	—	—	12,760
	L-80	23.20	4.044	3.919	—	—	—	13,830
	N-80	15.00	4.408	4.283	5.563	4.151	5.360	7,250
	N-80	18.00	4.276	4.151	5.563	4.151	5.360	10,490
	N-80	20.30	4.184	—	—	4.059	5.250	11,990
	N-80	23.20	4.044	—	—	3.919	5.094†	13,830
	N-80	21.40	4.126	4.001	—	—	—	12,760
	N-80	24.10	4.000	3.875	—	—	—	14,400
	C-90	15.00	4.408	4.233	—	—	—	7,840
	C-90	18.00	4.276	4.151	—	—	—	11,530
	C-90	21.40	4.126	4.001	—	—	—	14,360
	C-90	23.20	4.044	3.919	—	—	—	15,560
	C-90	24.10	4.000	3.875	—	—	—	16,200
	C-95	15.00	4.408	4.283	5.563	4.151	5.360	8,090
	C-95	18.00	4.276	4.151	5.563	4.151	5.360	12,010
	C-95	20.30	4.184	—	—	4.059	5.250	14,250
	C-95	23.20	4.044	—	—	3.919	5.094†	16,430
	C-95	21.40	4.126	4.001	—	—	—	15,160
	C-95	24.10	4.000	3.875	—	—	—	17,100
	S-95+	15.00	4.408	4.283	—	—	—	9,380
	S-95+	18.00	4.276	4.151	—	—	—	12,030
	S-95+	23.20	4.044	3.919	—	—	—	16,430
	T-95	15.00	4.408	4.283	—	—	—	8,110
	T-95	18.00	4.276	4.151	—	—	—	12,030
	T-95	21.40	4.126	4.001	—	—	—	15,160
	T-95	23.20	4.044	3.919	—	—	—	16,430
	T-95	24.10	4.000	3.875	—	—	—	17,100
	P-110	15.00	4.408	4.283	5.563	4.151	5.360	8,830
	P-110	18.00	4.276	4.151	5.563	4.151	5.360	13,450
	P-110	20.30	4.184	—	—	4.059	5.094†	16,490

NO. 203

STRENGTHS OF CASING

Plain End or Ext. Line	Internal Yield Pressure PSI**			Body Yield Stgth, 1,000 Lbs.	Joint Strength - 1000 Lbs.**			
	Round Thread		But- tress Thd.		Threaded & Cplg. Joint			Ext. Line Joint
	Short	Long			Round Thread		But- tress Thd.	
					Short	Long		
10.710	—	—	—	—	369†	—	—	529††
12.550	—	—	—	—	369†	—	—	529††
8.290	—	8,290	8,290	—	—	311	408	—
10.140	—	10.140	9,910	422	—	396	492	—
13.380	—	10,810	9,910	543	—	540	516	—
8.290	—	8,290	8,290	350	—	311	408	—
10.140	—	10.140	9,910	422	—	396	492	—
13.380	—	10,810	9,910	543	—	540	537	—
8.290	—	8,290	8,290	350	—	295	379	—
14.000	—	10,810	9,910	566	—	538	510	—
10.140	—	10.140	9,910	422	—	377	457	—
12.240	—	10,810	9,910	501	—	466	510	—
13.380	—	10,810	9,910	543	—	513	510	—
8.290	—	8,290	8,290	350	—	311	396	437
10.140	—	10.140	9,910	422	—	396	477	469
11.420	—	—	—	—	388†	284††	363†	556††
13.380	—	—	—	—	388†	284††	363†	556††
12.240	—	10,810	9,910	501	—	490	537	—
14.000	—	10,810	9,910	566	—	558	537	—
9.320	—	9,320	9,320	394	—	311	404	—
11.400	—	11,400	11,150	475	—	396	484	—
13.770	—	12,170	11,150	564	—	490	537	—
15.060	—	12,170	11,150	611	—	540	537	—
15.750	—	12,170	11,150	636	—	567	537	—
9.840	—	9,840	9,840	416	—	326	424	459
12.040	—	12,040	11,770	501	—	416	512	493
13.560	—	—	—	—	—	—	—	584††
15.890	—	—	—	—	—	—	—	584††
14.530	—	12,840	11,770	595	—	515	563	—
16.630	—	12,840	11,770	672	—	595	563	—
9.840	—	9,840	9,840	416	—	342	441	—
12.040	—	12,040	11,770	501	—	436	532	—
15.890	—	12,840	11,770	645	—	594	590	—
9.840	—	9,840	9,840	416	—	326	424	—
12.040	—	12,040	11,770	501	—	416	512	—
14.530	—	12,840	11,770	595	—	515	563	—
15.890	—	12,840	11,770	645	—	587	563	—
16.630	—	12,840	11,770	672	—	595	563	—
11.400	—	11,400	11,400	481	—	388	503	547
13.940	—	13,940	13,620	580	—	495	606	587
15.710	—	—	—	—	—	—	—	—

DIMENSIONS AND

Size O.D. In.	Grade	Wt. Per Ft. Cplg., Lb.	Inside Dia. In.	Thread & Cplg.		Extreme Line		Col/pse Resistance PSI
				Drift Dia. in.	O.D. of Cplg. In.	Drift Dia. in.	O.D. of Box In.	
5 1/2	T-95	29.70	4.376	4.251	—	—	—	17,430
	T-95	32.60	4.250	4.125	—	—	—	19,140
	T-95	35.30	4.126	4.001	—	—	—	20,760
	T-95	38.00	4.000	3.875	—	—	—	22,380
	T-95	40.50	3.876	3.751	—	—	—	23,920
	T-95	43.10	3.750	3.625	—	—	—	25,400
	HCP-110	17.00	4.892	4.767	—	—	—	8,580
	P-110	17.00	4.892	4.767	6.050	4.653	5.860	7,460
	P-110	20.00	4.778	4.653	6.050	4.653	5.860	11,080
	P-110	23.00	4.670	4.545	6.050	4.545	5.860	14,520
	P-110	26.00	4.548	—	—	4.423	5.656	17,390
	HCP-125	17.00	4.892	4.767	—	—	—	8,580
	Q-125	17.00	4.892	4.767	—	—	—	12,080
	Q-125	20.00	4.778	4.653	—	—	—	16,070
	Q-125	23.00	4.670	4.545	—	—	—	19,770
	Q-125	26.00	4.548	4.423	—	—	—	8,580
	LS-140	17.00	4.892	4.767	—	—	—	12,950
	LS-140	20.00	4.778	4.653	—	—	—	17,500
	LS-140	23.00	4.670	4.545	—	—	—	13,460
	V-150	20.00	4.778	4.653	6.050	—	—	13,480
	V-150	23.00	4.670	4.545	6.050	—	—	18,390
	V-150	26.00	4.548	4.423	6.050	—	—	23,720

STRENGTHS OF CASING

Plan End or Ext. Line	Internal Yield Pressure PSI**			Body Yield Stgh. 1,000 Lbs.	Joint Strength - 1000 Lbs.**			
	Round Thread		But- tress Thd.		Threaded & Cplg. Joint			Ext. Line Joint
					Round Thread		But- tress Thd.	
16,990	—	—	—	828	—	—	—	—
18,810	—	—	—	909	—	—	—	—
20,770	—	—	—	987	—	—	—	—
22,670	—	—	—	1,063	—	—	—	—
24,540	—	—	—	1,136	—	—	—	—
26,450	—	—	—	1,208	—	—	—	—
10,640	—	10,640	10,640	546	—	445	568	—
10,640	—	10,640	10,640	546	—	445	568	620
12,640	—	12,640	12,360	641	—	548	667	654
14,520	—	13,580	12,360	729	—	643	724	722
16,660	—	—	—	—	569†	393††	564†	892††
12,090	—	12,090	12,090	620	—	481	620	—
12,090	—	12,090	12,090	620	—	481	620	—
14,360	—	14,360	14,050	729	—	592	728	—
16,510	—	15,430	14,050	829	—	694	782	—
18,930	—	15,430	14,050	939	—	808	782	—
13,540	—	13,540	13,540	695	—	534	690	—
16,080	—	16,080	15,740	816	—	657	810	—
18,490	—	17,290	15,740	928	—	771	869	—
17,230	—	17,230	16,860	874	—	701	865	—
—	—	17,230	16,860	874	—	701	908	—
—	—	18,520	16,860	994	—	823	910	—
—	—	22,720	—	—	—	—	—	722†
11,870	—	9,880	8,990	612	—	—	—	—

7.625 29.7# P-110 HC Stinger™

Pipe Body Data

Nominal OD	7.625	Inches
Wall Thickness	0.375	Inches
Weight	29.70	Lb/ft
PE Weight	29.04	Lb/ft
Nominal ID	6.875	Inches
Drift	6.750	Inches
Minimum Yield Strength	110,000	PSI
Minimum Tensile Strength	125,000	PSI
RBW	87.5%	Rating

Make-Up torques

Yield torque	25,960	LBS.
Max Operating Torque	23,600	LBS.
Max Make-Up	18,900	LBS.
Optimum Make-Up	17,200	LBS.
Minimum Make-Up	15,500	LBS.



Connection Data

Connection OD	7.625	Inches
Connection ID	6.875	Inches
Make-Up loss	3.030	Inches
Tension Efficiency	60%	Rating
Compression Efficiency	60%	Rating
Yield Strength in Tension	564,000	LBS.
Yield Strength in Compression	564,000	LBS.
MinYP (Burst)	7,570	PSI
Collapse Pressure	6,150	PSI
Uniaxial Bending	-	degrees

OFSI SYNERGY
SERVICE PACKAGE

Technical Sales Support: Rafael Escamilla Jr., Cell: 281-949-7704, jescamilla@ofsiint.com

This document contains proprietary and confidential information and may not be copied, published, distributed, or transmitted, in whole or in part, by any medium or in any form without obtaining prior written consent.

Product is sold by OFSI under a license from Fermata Technologies, LLC



BTA Oil Producers, LLC
104 S Pecos
Midland, TX 79701

WELL: Mesa 8105 11 Fed #59H (WUAP)
TVD: 12233
MD: 17358

DRILLING PLAN

Casing Program

Hole Size	Csg. Size	From (MD)	To (MD)	From (TVD)	To (TVD)	Tapered String	Weight (lbs)	Grade	Conn.	Collapse	Burst	Body Tension	Joint Tension	Dry/Buoyant	Mud Weight (ppg)
14 3/4	10 3/4	0	745	0	745	No	40.5	J-55	STC	4.9	9.7	20.8	13.9	Dry	8.3
9 7/8	7 5/8	0	8056	0	8000	yes	29.7	P110	Buttress	1.4	2.4	3.9	4.0	Dry	9.4
8 3/4	7 5/8	8056	11736	8000	11681	yes	29.7	P110	FJ	1.7	1.7	2.7	2.8	Dry	9.4
6 3/4	5 1/2	0	11536	0	11481	Yes	20	P110	Buttress	1.3	1.5	2.8	2.9	Dry	14
6 3/4	5	11536	17358	11481	12233	Yes	18	P110	Buttress	1.3	1.4	1.9	1.9	Dry	14

*7 5/8" has DV Tool @ 4631'



BTA Oil Producers, LLC
104 S Pecos
Midland, TX 79701

WELL: Mesa 8105 11 Fed #59H (WUAP)
TVD: 12233
MD: 17358

DRILLING PLAN

Casing Program

Hole Size	Csg. Size	From (MD)	To (MD)	From (TVD)	To (TVD)	Tapered String	Weight (lbs)	Grade	Conn.	Collapse	Burst	Body Tension	Joint Tension	Dry/Buoyant	Mud Weight (ppg)
14 3/4	10 3/4	0	745	0	745	No	40.5	J-55	STC	4.9	9.7	20.8	13.9	Dry	8.3
9 7/8	7 5/8	0	8056	0	8000	yes	29.7	P110	Buttress	1.4	2.4	3.9	4.0	Dry	9.4
8 3/4	7 5/8	8056	11736	8000	11681	yes	29.7	P110	FJ	1.7	1.7	2.7	2.8	Dry	9.4
6 3/4	5 1/2	0	11536	0	11481	Yes	20	P110	Buttress	1.3	1.5	2.8	2.9	Dry	14
6 3/4	5	11536	17358	11481	12233	Yes	18	P110	Buttress	1.3	1.4	1.9	1.9	Dry	14

*7 5/8" has DV Tool @ 4631'



BTA Oil Producers, LLC
104 S Pecos
Midland, TX 79701

WELL: Mesa 8105 11 Fed #59H (WUAP)
TVD: 12233
MD: 17358

DRILLING PLAN

Casing Program

Hole Size	Csg. Size	From (MD)	To (MD)	From (TVD)	To (TVD)	Tapered String	Weight (lbs)	Grade	Conn.	Collapse	Burst	Body Tension	Joint Tension	Dry/Buoyant	Mud Weight (ppg)
14 3/4	10 3/4	0	745	0	745	No	40.5	J-55	STC	4.9	9.7	20.8	13.9	Dry	8.3
9 7/8	7 5/8	0	8056	0	8000	yes	29.7	P110	Buttress	1.4	2.4	3.9	4.0	Dry	9.4
8 3/4	7 5/8	8056	11736	8000	11681	yes	29.7	P110	FJ	1.7	1.7	2.7	2.8	Dry	9.4
6 3/4	5 1/2	0	11536	0	11481	Yes	20	P110	Buttress	1.3	1.5	2.8	2.9	Dry	14
6 3/4	5	11536	17358	11481	12233	Yes	18	P110	Buttress	1.3	1.4	1.9	1.9	Dry	14

*7 5/8" has DV Tool @ 4631'



BTA Oil Producers, LLC
104 S Pecos
Midland, TX 79701

WELL: Mesa 8105 11 Fed #59H (WUAP)
TVD: 12233
MD: 17358

DRILLING PLAN

Casing Program

Hole Size	Csg. Size	From (MD)	To (MD)	From (TVD)	To (TVD)	Tapered String	Weight (lbs)	Grade	Conn.	Collapse	Burst	Body Tension	Joint Tension	Dry/Buoyant	Mud Weight (ppg)
14 3/4	10 3/4	0	745	0	745	No	40.5	J-55	STC	4.9	9.7	20.8	13.9	Dry	8.3
9 7/8	7 5/8	0	8056	0	8000	yes	29.7	P110	Buttress	1.4	2.4	3.9	4.0	Dry	9.4
8 3/4	7 5/8	8056	11736	8000	11681	yes	29.7	P110	FJ	1.7	1.7	2.7	2.8	Dry	9.4
6 3/4	5 1/2	0	11536	0	11481	Yes	20	P110	Buttress	1.3	1.5	2.8	2.9	Dry	14
6 3/4	5	11536	17358	11481	12233	Yes	18	P110	Buttress	1.3	1.4	1.9	1.9	Dry	14

*7 5/8" has DV Tool @ 4631'



BTA Oil Producers, LLC
104 S Pecos
Midland, TX 79701

WELL: Mesa 8105 11 Fed #59H (WUAP)
TVD: 12233
MD: 17358

DRILLING PLAN

Casing Program

Hole Size	Csg. Size	From (MD)	To (MD)	From (TVD)	To (TVD)	Tapered String	Weight (lbs)	Grade	Conn.	Collapse	Burst	Body Tension	Joint Tension	Dry/Buoyant	Mud Weight (ppg)
14 3/4	10 3/4	0	745	0	745	No	40.5	J-55	STC	4.9	9.7	20.8	13.9	Dry	8.3
9 7/8	7 5/8	0	8056	0	8000	yes	29.7	P110	Buttress	1.4	2.4	3.9	4.0	Dry	9.4
8 3/4	7 5/8	8056	11736	8000	11681	yes	29.7	P110	FJ	1.7	1.7	2.7	2.8	Dry	9.4
6 3/4	5 1/2	0	11536	0	11481	Yes	20	P110	Buttress	1.3	1.5	2.8	2.9	Dry	14
6 3/4	5	11536	17358	11481	12233	Yes	18	P110	Buttress	1.3	1.4	1.9	1.9	Dry	14


*7 5/8" has DV Tool @ 4631'

EMERGENCY CALL LIST

	<u>OFFICE</u>	<u>MOBILE</u>
BTA Oil Producers LLC OFFICE	432-682-3753	
BEN GRIMES, Operations	432-682-3753	432-559-4309
NICK EATON, Drilling	432-682-3753	432-260-7841
TRACE WOHLFAHRT, Completions	432-682-3753	

EMERGENCY RESPONSE NUMBERS

	<u>OFFICE</u>
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451

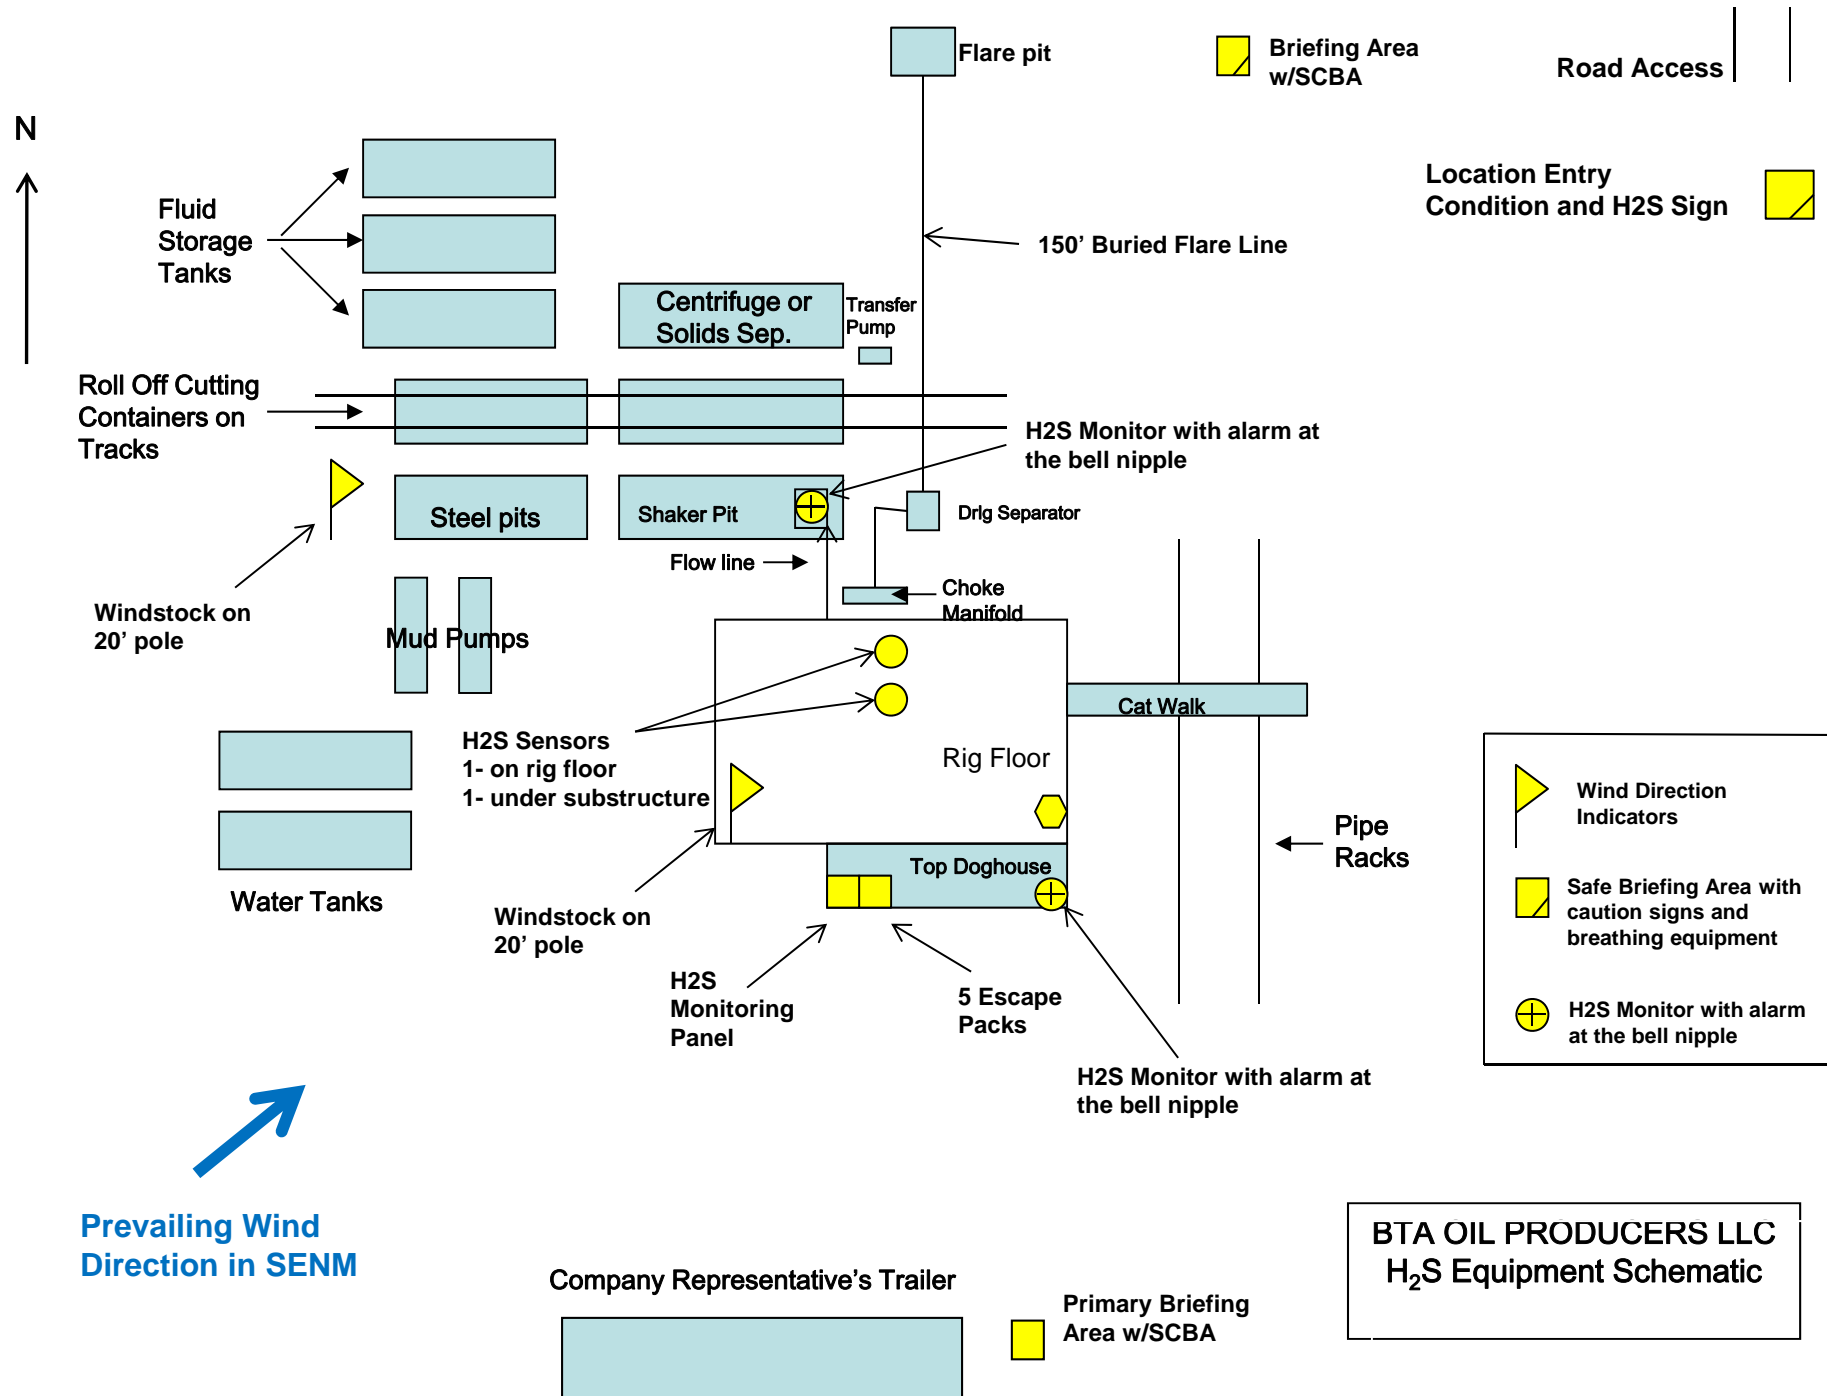

BTA OIL PRODUCERS LLC**HYDROGEN SULFIDE DRILLING OPERATIONS PLAN****1. HYDROGEN SULFIDE TRAINING**

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.
- b. Protective equipment for essential personnel:
 - Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H₂S detection and monitoring equipment:

- 2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.

W A R N I N G


**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED**
- 2. HARD HATS REQUIRED**
- 3. SMOKING IN DESIGNATED AREAS ONLY**
- 4. BE WIND CONSCIOUS AT ALL TIMES**
- 5. CK WITH BTA OIL PRODUCERS LLC FOREMAN AT MAIN OFFICE**

BTA OIL PRODUCERS LLC

1-432-682-3753

BTA Oil Producers, LLC



Azimuths to Grid North
True North: -0.37°
Magnetic North: 7.40°

Magnetic Field
Strength: 48689.8nT
Dip Angle: 60.08°
Date: 12/31/2009
Model: IGRF200510

SITE DETAILS: Mesa Sec 11, T26S, R32E

Site Centre Northing: 387721.83
Easting: 752135.43

Positional Uncertainty: 0.0
Convergence: 0.36
Local North: Grid


SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00
2	1500.0	0.00	0.00	1500.0	0.0	0.0	0.00
3	1900.0	8.00	70.68	1898.7	9.2	26.3	2.00
4	7362.3	8.00	70.68	7307.8	260.8	743.7	0.00
5	7762.3	0.00	0.00	7706.5	270.0	770.0	2.00
6	11736.3	0.00	0.00	11680.5	270.0	770.0	0.00
7	11811.3	0.00	0.00	11755.5	270.0	770.0	0.00
8	12561.3	90.00	179.71	12233.0	-207.5	772.4	12.00
9	17358.4	90.00	179.71	12233.0	-5004.5	796.6	0.00

PROJECT DETAILS: Lea County, NM (NAD 83)


Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone

System Datum: Ground Level

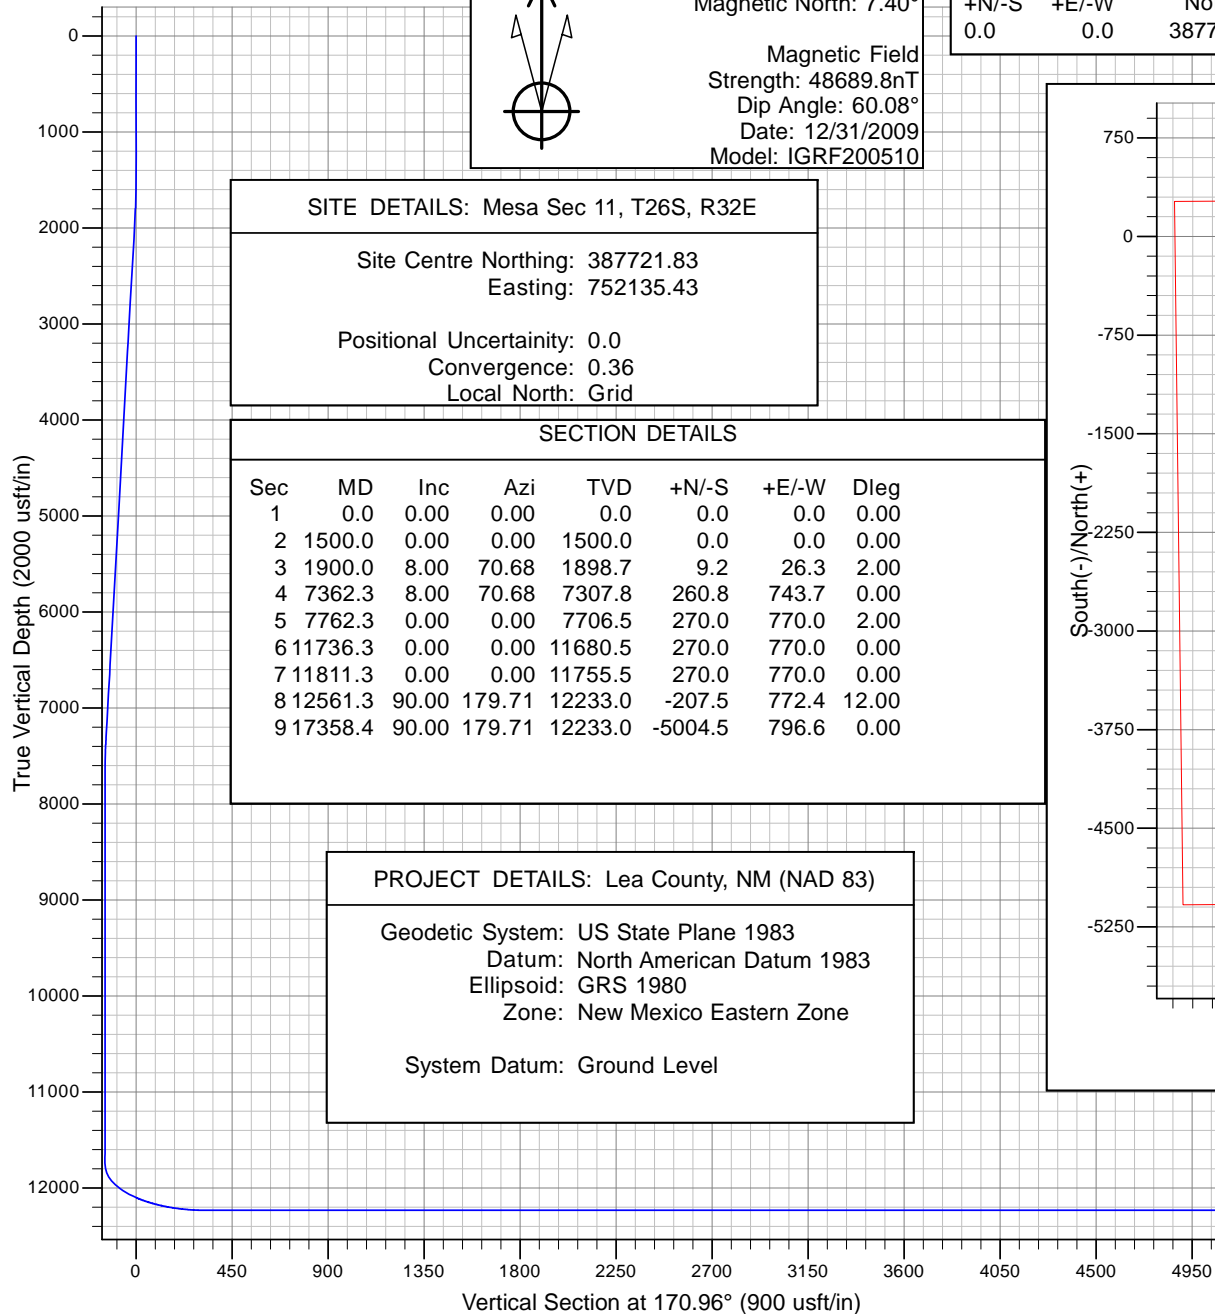

WELL DETAILS: Mesa #59H

+N/-S	+E/-W	Northing	Ground Level Easting	3253.0 Latitude	Longitude
0.0	0.0	387782.60	755290.50	32° 3' 51.164 N	103° 38' 33.581 W

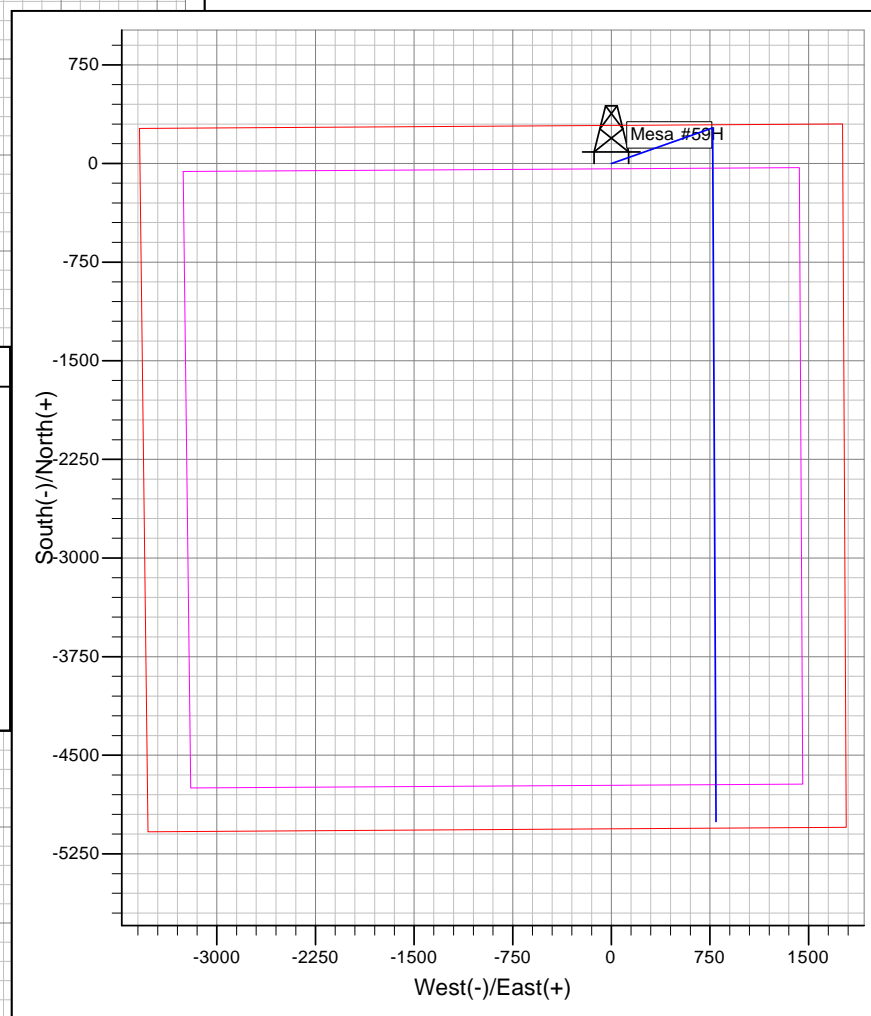

BTA Oil Producers, LLC

Lea County, NM (NAD 83)

Mesa Sec 11, T26S, R32E

Mesa #59H

Wellbore #1

Plan: Design #1

Standard Planning Report - Geographic

15 June, 2020

Microsoft
Planning Report - Geographic

Database:	Old	Local Co-ordinate Reference:	Well Mesa #59H
Company:	BTA Oil Producers, LLC	TVD Reference:	GL @ 3253.0usft
Project:	Lea County, NM (NAD 83)	MD Reference:	GL @ 3253.0usft
Site:	Mesa Sec 11, T26S, R32E	North Reference:	Grid
Well:	Mesa #59H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	Lea County, NM (NAD 83), Lea County, NM		
Map System:	US State Plane 1983	System Datum:	Ground Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		Using geodetic scale factor

Site	Mesa Sec 11, T26S, R32E					
Site Position:		Northing:	387,721.83 usft	Latitude:	32° 3' 50.761 N	
From:	Map	Easting:	752,135.43 usft	Longitude:	103° 39' 10.249 W	
Position Uncertainty:		0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.36 °

Well	Mesa #59H					
Well Position	+N/-S	0.0 usft	Northing:	387,782.60 usft	Latitude:	32° 3' 51.164 N
	+E/-W	0.0 usft	Easting:	755,290.50 usft	Longitude:	103° 38' 33.581 W
Position Uncertainty		0.0 usft	Wellhead Elevation:		Ground Level:	3,253.0 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	7.77	60.08	48,689.76087879

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	170.96

Plan Survey Tool Program	Date	6/15/2020		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	17,358.4	Design #1 (Wellbore #1)	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,900.0	8.00	70.68	1,898.7	9.2	26.3	2.00	2.00	0.00	70.68	
7,362.3	8.00	70.68	7,307.8	260.8	743.7	0.00	0.00	0.00	0.00	
7,762.3	0.00	0.00	7,706.5	270.0	770.0	2.00	-2.00	0.00	180.00	
11,736.3	0.00	0.00	11,680.5	270.0	770.0	0.00	0.00	0.00	0.00	
11,811.3	0.00	0.00	11,755.5	270.0	770.0	0.00	0.00	0.00	0.00	
12,561.3	90.00	179.71	12,233.0	-207.5	772.4	12.00	12.00	0.00	179.71	
17,358.4	90.00	179.71	12,233.0	-5,004.5	796.6	0.00	0.00	0.00	0.00	Mesa #59H BHL

Microsoft
Planning Report - Geographic

Database:	Old	Local Co-ordinate Reference:	Well Mesa #59H
Company:	BTA Oil Producers, LLC	TVD Reference:	GL @ 3253.0usft
Project:	Lea County, NM (NAD 83)	MD Reference:	GL @ 3253.0usft
Site:	Mesa Sec 11, T26S, R32E	North Reference:	Grid
Well:	Mesa #59H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
100.0	0.00	0.00	100.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
200.0	0.00	0.00	200.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
300.0	0.00	0.00	300.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
400.0	0.00	0.00	400.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
500.0	0.00	0.00	500.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
600.0	0.00	0.00	600.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
700.0	0.00	0.00	700.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
800.0	0.00	0.00	800.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
900.0	0.00	0.00	900.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
1,000.0	0.00	0.00	1,000.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
1,100.0	0.00	0.00	1,100.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
1,200.0	0.00	0.00	1,200.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
1,300.0	0.00	0.00	1,300.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
1,400.0	0.00	0.00	1,400.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
1,500.0	0.00	0.00	1,500.0	0.0	0.0	387,782.60	755,290.50	32° 3' 51.164 N	103° 38' 33.581 W
1,600.0	2.00	70.68	1,600.0	0.6	1.6	387,783.18	755,292.14	32° 3' 51.170 N	103° 38' 33.562 W
1,700.0	4.00	70.68	1,699.8	2.3	6.6	387,784.91	755,297.08	32° 3' 51.186 N	103° 38' 33.504 W
1,800.0	6.00	70.68	1,799.5	5.2	14.8	387,787.79	755,305.31	32° 3' 51.214 N	103° 38' 33.408 W
1,900.0	8.00	70.68	1,898.7	9.2	26.3	387,791.82	755,316.81	32° 3' 51.254 N	103° 38' 33.275 W
2,000.0	8.00	70.68	1,997.7	13.8	39.4	387,796.43	755,329.94	32° 3' 51.298 N	103° 38' 33.122 W
2,100.0	8.00	70.68	2,096.8	18.4	52.6	387,801.03	755,343.07	32° 3' 51.343 N	103° 38' 32.969 W
2,200.0	8.00	70.68	2,195.8	23.0	65.7	387,805.64	755,356.20	32° 3' 51.388 N	103° 38' 32.816 W
2,300.0	8.00	70.68	2,294.8	27.6	78.8	387,810.24	755,369.34	32° 3' 51.432 N	103° 38' 32.663 W
2,400.0	8.00	70.68	2,393.8	32.3	92.0	387,814.85	755,382.47	32° 3' 51.477 N	103° 38' 32.510 W
2,500.0	8.00	70.68	2,492.9	36.9	105.1	387,819.45	755,395.60	32° 3' 51.522 N	103° 38' 32.357 W
2,600.0	8.00	70.68	2,591.9	41.5	118.2	387,824.06	755,408.73	32° 3' 51.567 N	103° 38' 32.204 W
2,700.0	8.00	70.68	2,690.9	46.1	131.4	387,828.66	755,421.87	32° 3' 51.611 N	103° 38' 32.051 W
2,800.0	8.00	70.68	2,789.9	50.7	144.5	387,833.27	755,435.00	32° 3' 51.656 N	103° 38' 31.898 W
2,900.0	8.00	70.68	2,889.0	55.3	157.6	387,837.87	755,448.13	32° 3' 51.701 N	103° 38' 31.745 W
3,000.0	8.00	70.68	2,988.0	59.9	170.8	387,842.48	755,461.27	32° 3' 51.746 N	103° 38' 31.592 W
3,100.0	8.00	70.68	3,087.0	64.5	183.9	387,847.08	755,474.40	32° 3' 51.790 N	103° 38' 31.439 W
3,200.0	8.00	70.68	3,186.1	69.1	197.0	387,851.69	755,487.53	32° 3' 51.835 N	103° 38' 31.286 W
3,300.0	8.00	70.68	3,285.1	73.7	210.2	387,856.29	755,500.66	32° 3' 51.880 N	103° 38' 31.133 W
3,400.0	8.00	70.68	3,384.1	78.3	223.3	387,860.90	755,513.80	32° 3' 51.925 N	103° 38' 30.980 W
3,500.0	8.00	70.68	3,483.1	82.9	236.4	387,865.50	755,526.93	32° 3' 51.969 N	103° 38' 30.827 W
3,600.0	8.00	70.68	3,582.2	87.5	249.6	387,870.11	755,540.06	32° 3' 52.014 N	103° 38' 30.674 W
3,700.0	8.00	70.68	3,681.2	92.1	262.7	387,874.71	755,553.20	32° 3' 52.059 N	103° 38' 30.521 W
3,800.0	8.00	70.68	3,780.2	96.7	275.8	387,879.32	755,566.33	32° 3' 52.104 N	103° 38' 30.368 W
3,900.0	8.00	70.68	3,879.2	101.3	289.0	387,883.92	755,579.46	32° 3' 52.148 N	103° 38' 30.215 W
4,000.0	8.00	70.68	3,978.3	105.9	302.1	387,888.53	755,592.59	32° 3' 52.193 N	103° 38' 30.062 W
4,100.0	8.00	70.68	4,077.3	110.5	315.2	387,893.13	755,605.73	32° 3' 52.238 N	103° 38' 29.910 W
4,200.0	8.00	70.68	4,176.3	115.1	328.4	387,897.74	755,618.86	32° 3' 52.282 N	103° 38' 29.757 W
4,300.0	8.00	70.68	4,275.3	119.7	341.5	387,902.34	755,631.99	32° 3' 52.327 N	103° 38' 29.604 W
4,400.0	8.00	70.68	4,374.4	124.4	354.6	387,906.95	755,645.13	32° 3' 52.372 N	103° 38' 29.451 W
4,500.0	8.00	70.68	4,473.4	129.0	367.8	387,911.55	755,658.26	32° 3' 52.417 N	103° 38' 29.298 W
4,600.0	8.00	70.68	4,572.4	133.6	380.9	387,916.16	755,671.39	32° 3' 52.461 N	103° 38' 29.145 W
4,700.0	8.00	70.68	4,671.5	138.2	394.0	387,920.76	755,684.52	32° 3' 52.506 N	103° 38' 28.992 W
4,800.0	8.00	70.68	4,770.5	142.8	407.2	387,925.37	755,697.66	32° 3' 52.551 N	103° 38' 28.839 W
4,900.0	8.00	70.68	4,869.5	147.4	420.3	387,929.97	755,710.79	32° 3' 52.596 N	103° 38' 28.686 W
5,000.0	8.00	70.68	4,968.5	152.0	433.4	387,934.58	755,723.92	32° 3' 52.640 N	103° 38' 28.533 W
5,100.0	8.00	70.68	5,067.6	156.6	446.6	387,939.18	755,737.05	32° 3' 52.685 N	103° 38' 28.380 W
5,200.0	8.00	70.68	5,166.6	161.2	459.7	387,943.79	755,750.19	32° 3' 52.730 N	103° 38' 28.227 W
5,300.0	8.00	70.68	5,265.6	165.8	472.8	387,948.39	755,763.32	32° 3' 52.775 N	103° 38' 28.074 W
5,400.0	8.00	70.68	5,364.6	170.4	486.0	387,953.00	755,776.45	32° 3' 52.819 N	103° 38' 27.921 W

Microsoft
Planning Report - Geographic

Database:	Old	Local Co-ordinate Reference:	Well Mesa #59H
Company:	BTA Oil Producers, LLC	TVD Reference:	GL @ 3253.0usft
Project:	Lea County, NM (NAD 83)	MD Reference:	GL @ 3253.0usft
Site:	Mesa Sec 11, T26S, R32E	North Reference:	Grid
Well:	Mesa #59H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
5,500.0	8.00	70.68	5,463.7	175.0	499.1	387,957.60	755,789.59	32° 3' 52.864 N	103° 38' 27.768 W	
5,600.0	8.00	70.68	5,562.7	179.6	512.2	387,962.21	755,802.72	32° 3' 52.909 N	103° 38' 27.615 W	
5,700.0	8.00	70.68	5,661.7	184.2	525.4	387,966.81	755,815.85	32° 3' 52.954 N	103° 38' 27.462 W	
5,800.0	8.00	70.68	5,760.7	188.8	538.5	387,971.42	755,828.98	32° 3' 52.998 N	103° 38' 27.309 W	
5,900.0	8.00	70.68	5,859.8	193.4	551.6	387,976.02	755,842.12	32° 3' 53.043 N	103° 38' 27.156 W	
6,000.0	8.00	70.68	5,958.8	198.0	564.8	387,980.63	755,855.25	32° 3' 53.088 N	103° 38' 27.003 W	
6,100.0	8.00	70.68	6,057.8	202.6	577.9	387,985.23	755,868.38	32° 3' 53.132 N	103° 38' 26.850 W	
6,200.0	8.00	70.68	6,156.9	207.2	591.0	387,989.84	755,881.52	32° 3' 53.177 N	103° 38' 26.697 W	
6,300.0	8.00	70.68	6,255.9	211.9	604.2	387,994.44	755,894.65	32° 3' 53.222 N	103° 38' 26.545 W	
6,400.0	8.00	70.68	6,354.9	216.5	617.3	387,999.05	755,907.78	32° 3' 53.267 N	103° 38' 26.392 W	
6,500.0	8.00	70.68	6,453.9	221.1	630.4	388,003.65	755,920.91	32° 3' 53.311 N	103° 38' 26.239 W	
6,600.0	8.00	70.68	6,553.0	225.7	643.6	388,008.26	755,934.05	32° 3' 53.356 N	103° 38' 26.086 W	
6,700.0	8.00	70.68	6,652.0	230.3	656.7	388,012.86	755,947.18	32° 3' 53.401 N	103° 38' 25.933 W	
6,800.0	8.00	70.68	6,751.0	234.9	669.8	388,017.47	755,960.31	32° 3' 53.446 N	103° 38' 25.780 W	
6,900.0	8.00	70.68	6,850.0	239.5	683.0	388,022.07	755,973.45	32° 3' 53.490 N	103° 38' 25.627 W	
7,000.0	8.00	70.68	6,949.1	244.1	696.1	388,026.68	755,986.58	32° 3' 53.535 N	103° 38' 25.474 W	
7,100.0	8.00	70.68	7,048.1	248.7	709.2	388,031.28	755,999.71	32° 3' 53.580 N	103° 38' 25.321 W	
7,200.0	8.00	70.68	7,147.1	253.3	722.4	388,035.89	756,012.84	32° 3' 53.625 N	103° 38' 25.168 W	
7,300.0	8.00	70.68	7,246.1	257.9	735.5	388,040.49	756,025.98	32° 3' 53.669 N	103° 38' 25.015 W	
7,362.3	8.00	70.68	7,307.8	260.8	743.7	388,043.36	756,034.16	32° 3' 53.697 N	103° 38' 24.920 W	
7,400.0	7.25	70.68	7,345.2	262.4	748.4	388,045.02	756,038.88	32° 3' 53.713 N	103° 38' 24.865 W	
7,500.0	5.25	70.68	7,444.6	266.0	758.7	388,048.62	756,049.14	32° 3' 53.748 N	103° 38' 24.745 W	
7,600.0	3.25	70.68	7,544.3	268.5	765.7	388,051.07	756,056.13	32° 3' 53.772 N	103° 38' 24.664 W	
7,700.0	1.25	70.68	7,644.2	269.8	769.4	388,052.36	756,059.83	32° 3' 53.785 N	103° 38' 24.621 W	
7,762.3	0.00	0.00	7,706.5	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
7,800.0	0.00	0.00	7,744.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
7,900.0	0.00	0.00	7,844.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
8,000.0	0.00	0.00	7,944.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
8,100.0	0.00	0.00	8,044.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
8,200.0	0.00	0.00	8,144.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
8,300.0	0.00	0.00	8,244.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
8,400.0	0.00	0.00	8,344.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
8,500.0	0.00	0.00	8,444.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
8,600.0	0.00	0.00	8,544.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
8,700.0	0.00	0.00	8,644.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
8,800.0	0.00	0.00	8,744.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
8,900.0	0.00	0.00	8,844.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
9,000.0	0.00	0.00	8,944.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
9,100.0	0.00	0.00	9,044.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
9,200.0	0.00	0.00	9,144.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
9,300.0	0.00	0.00	9,244.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
9,400.0	0.00	0.00	9,344.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
9,500.0	0.00	0.00	9,444.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
9,600.0	0.00	0.00	9,544.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
9,700.0	0.00	0.00	9,644.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
9,800.0	0.00	0.00	9,744.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
9,900.0	0.00	0.00	9,844.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
10,000.0	0.00	0.00	9,944.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
10,100.0	0.00	0.00	10,044.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
10,200.0	0.00	0.00	10,144.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
10,300.0	0.00	0.00	10,244.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
10,400.0	0.00	0.00	10,344.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
10,500.0	0.00	0.00	10,444.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
10,600.0	0.00	0.00	10,544.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
10,700.0	0.00	0.00	10,644.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	

Microsoft
Planning Report - Geographic

Database:	Old	Local Co-ordinate Reference:	Well Mesa #59H
Company:	BTA Oil Producers, LLC	TVD Reference:	GL @ 3253.0usft
Project:	Lea County, NM (NAD 83)	MD Reference:	GL @ 3253.0usft
Site:	Mesa Sec 11, T26S, R32E	North Reference:	Grid
Well:	Mesa #59H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
10,800.0	0.00	0.00	10,744.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
10,900.0	0.00	0.00	10,844.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,000.0	0.00	0.00	10,944.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,100.0	0.00	0.00	11,044.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,200.0	0.00	0.00	11,144.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,300.0	0.00	0.00	11,244.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,400.0	0.00	0.00	11,344.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,500.0	0.00	0.00	11,444.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,600.0	0.00	0.00	11,544.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,700.0	0.00	0.00	11,644.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,736.3	0.00	0.00	11,680.5	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,800.0	0.00	0.00	11,744.2	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,811.3	0.00	0.00	11,755.5	270.0	770.0	388,052.59	756,060.47	32° 3' 53.787 N	103° 38' 24.613 W	
11,900.0	10.65	179.71	11,843.7	261.8	770.0	388,044.37	756,060.51	32° 3' 53.705 N	103° 38' 24.613 W	
12,000.0	22.65	179.71	11,939.4	233.2	770.2	388,015.78	756,060.65	32° 3' 53.423 N	103° 38' 24.614 W	
12,100.0	34.65	179.71	12,027.0	185.3	770.4	387,967.93	756,060.89	32° 3' 52.949 N	103° 38' 24.615 W	
12,200.0	46.65	179.71	12,102.7	120.3	770.8	387,902.92	756,061.22	32° 3' 52.306 N	103° 38' 24.616 W	
12,300.0	58.65	179.71	12,163.3	41.0	771.2	387,823.58	756,061.62	32° 3' 51.521 N	103° 38' 24.617 W	
12,400.0	70.65	179.71	12,206.0	-49.2	771.6	387,733.38	756,062.08	32° 3' 50.628 N	103° 38' 24.618 W	
12,500.0	82.65	179.71	12,229.1	-146.3	772.1	387,636.27	756,062.57	32° 3' 49.667 N	103° 38' 24.620 W	
12,561.3	90.00	179.71	12,233.0	-207.5	772.4	387,575.15	756,062.88	32° 3' 49.062 N	103° 38' 24.621 W	
12,600.0	90.00	179.71	12,233.0	-246.2	772.6	387,536.44	756,063.07	32° 3' 48.679 N	103° 38' 24.621 W	
12,700.0	90.00	179.71	12,233.0	-346.2	773.1	387,436.45	756,063.58	32° 3' 47.689 N	103° 38' 24.623 W	
12,800.0	90.00	179.71	12,233.0	-446.2	773.6	387,336.45	756,064.08	32° 3' 46.700 N	103° 38' 24.625 W	
12,900.0	90.00	179.71	12,233.0	-546.2	774.1	387,236.46	756,064.59	32° 3' 45.710 N	103° 38' 24.626 W	
13,000.0	90.00	179.71	12,233.0	-646.2	774.6	387,136.46	756,065.09	32° 3' 44.721 N	103° 38' 24.628 W	
13,100.0	90.00	179.71	12,233.0	-746.2	775.1	387,036.47	756,065.60	32° 3' 43.731 N	103° 38' 24.629 W	
13,200.0	90.00	179.71	12,233.0	-846.2	775.6	386,936.47	756,066.10	32° 3' 42.742 N	103° 38' 24.631 W	
13,300.0	90.00	179.71	12,233.0	-946.2	776.1	386,836.48	756,066.61	32° 3' 41.752 N	103° 38' 24.633 W	
13,400.0	90.00	179.71	12,233.0	-1,046.2	776.6	386,736.48	756,067.11	32° 3' 40.763 N	103° 38' 24.634 W	
13,500.0	90.00	179.71	12,233.0	-1,146.2	777.2	386,636.49	756,067.62	32° 3' 39.773 N	103° 38' 24.636 W	
13,600.0	90.00	179.71	12,233.0	-1,246.2	777.7	386,536.49	756,068.12	32° 3' 38.784 N	103° 38' 24.637 W	
13,700.0	90.00	179.71	12,233.0	-1,346.2	778.2	386,436.50	756,068.63	32° 3' 37.794 N	103° 38' 24.639 W	
13,800.0	90.00	179.71	12,233.0	-1,446.2	778.7	386,336.50	756,069.13	32° 3' 36.805 N	103° 38' 24.641 W	
13,900.0	90.00	179.71	12,233.0	-1,546.2	779.2	386,236.51	756,069.64	32° 3' 35.815 N	103° 38' 24.642 W	
14,000.0	90.00	179.71	12,233.0	-1,646.1	779.7	386,136.51	756,070.14	32° 3' 34.825 N	103° 38' 24.644 W	
14,100.0	90.00	179.71	12,233.0	-1,746.1	780.2	386,036.52	756,070.65	32° 3' 33.836 N	103° 38' 24.645 W	
14,200.0	90.00	179.71	12,233.0	-1,846.1	780.7	385,936.52	756,071.15	32° 3' 32.846 N	103° 38' 24.647 W	
14,300.0	90.00	179.71	12,233.0	-1,946.1	781.2	385,836.53	756,071.66	32° 3' 31.857 N	103° 38' 24.649 W	
14,400.0	90.00	179.71	12,233.0	-2,046.1	781.7	385,736.53	756,072.16	32° 3' 30.867 N	103° 38' 24.650 W	
14,500.0	90.00	179.71	12,233.0	-2,146.1	782.2	385,636.54	756,072.67	32° 3' 29.878 N	103° 38' 24.652 W	
14,600.0	90.00	179.71	12,233.0	-2,246.1	782.7	385,536.54	756,073.17	32° 3' 28.888 N	103° 38' 24.653 W	
14,700.0	90.00	179.71	12,233.0	-2,346.1	783.2	385,436.55	756,073.68	32° 3' 27.899 N	103° 38' 24.655 W	
14,800.0	90.00	179.71	12,233.0	-2,446.1	783.7	385,336.55	756,074.18	32° 3' 26.909 N	103° 38' 24.657 W	
14,900.0	90.00	179.71	12,233.0	-2,546.1	784.2	385,236.56	756,074.69	32° 3' 25.920 N	103° 38' 24.658 W	
15,000.0	90.00	179.71	12,233.0	-2,646.1	784.7	385,136.56	756,075.19	32° 3' 24.930 N	103° 38' 24.660 W	
15,100.0	90.00	179.71	12,233.0	-2,746.1	785.2	385,036.57	756,075.70	32° 3' 23.941 N	103° 38' 24.661 W	
15,200.0	90.00	179.71	12,233.0	-2,846.1	785.7	384,936.57	756,076.20	32° 3' 22.951 N	103° 38' 24.663 W	
15,300.0	90.00	179.71	12,233.0	-2,946.1	786.2	384,836.58	756,076.70	32° 3' 21.961 N	103° 38' 24.665 W	
15,400.0	90.00	179.71	12,233.0	-3,046.1	786.7	384,736.58	756,077.21	32° 3' 20.972 N	103° 38' 24.666 W	
15,500.0	90.00	179.71	12,233.0	-3,146.1	787.2	384,636.59	756,077.71	32° 3' 19.982 N	103° 38' 24.668 W	
15,600.0	90.00	179.71	12,233.0	-3,246.1	787.8	384,536.59	756,078.22	32° 3' 18.993 N	103° 38' 24.669 W	
15,700.0	90.00	179.71	12,233.0	-3,346.1	788.3	384,436.60	756,078.72	32° 3' 18.003 N	103° 38' 24.671 W	
15,800.0	90.00	179.71	12,233.0	-3,446.1	788.8	384,336.60	756,079.23	32° 3' 17.014 N	103° 38' 24.673 W	
15,900.0	90.00	179.71	12,233.0	-3,546.1	789.3	384,236.61	756,079.73	32° 3' 16.024 N	103° 38' 24.674 W	

Microsoft
Planning Report - Geographic

Database:	Old	Local Co-ordinate Reference:	Well Mesa #59H
Company:	BTA Oil Producers, LLC	TVD Reference:	GL @ 3253.0usft
Project:	Lea County, NM (NAD 83)	MD Reference:	GL @ 3253.0usft
Site:	Mesa Sec 11, T26S, R32E	North Reference:	Grid
Well:	Mesa #59H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
16,000.0	90.00	179.71	12,233.0	-3,646.1	789.8	384,136.61	756,080.24	32° 3' 15.035 N	103° 38' 24.676 W	
16,100.0	90.00	179.71	12,233.0	-3,746.1	790.3	384,036.62	756,080.74	32° 3' 14.045 N	103° 38' 24.677 W	
16,200.0	90.00	179.71	12,233.0	-3,846.1	790.8	383,936.63	756,081.25	32° 3' 13.056 N	103° 38' 24.679 W	
16,300.0	90.00	179.71	12,233.0	-3,946.1	791.3	383,836.63	756,081.75	32° 3' 12.066 N	103° 38' 24.681 W	
16,400.0	90.00	179.71	12,233.0	-4,046.1	791.8	383,736.64	756,082.26	32° 3' 11.076 N	103° 38' 24.682 W	
16,500.0	90.00	179.71	12,233.0	-4,146.1	792.3	383,636.64	756,082.76	32° 3' 10.087 N	103° 38' 24.684 W	
16,600.0	90.00	179.71	12,233.0	-4,246.1	792.8	383,536.65	756,083.27	32° 3' 9.097 N	103° 38' 24.685 W	
16,700.0	90.00	179.71	12,233.0	-4,346.1	793.3	383,436.65	756,083.77	32° 3' 8.108 N	103° 38' 24.687 W	
16,800.0	90.00	179.71	12,233.0	-4,446.1	793.8	383,336.66	756,084.28	32° 3' 7.118 N	103° 38' 24.688 W	
16,900.0	90.00	179.71	12,233.0	-4,546.1	794.3	383,236.66	756,084.78	32° 3' 6.129 N	103° 38' 24.690 W	
17,000.0	90.00	179.71	12,233.0	-4,646.1	794.8	383,136.67	756,085.29	32° 3' 5.139 N	103° 38' 24.692 W	
17,100.0	90.00	179.71	12,233.0	-4,746.1	795.3	383,036.67	756,085.79	32° 3' 4.150 N	103° 38' 24.693 W	
17,200.0	90.00	179.71	12,233.0	-4,846.1	795.8	382,936.68	756,086.30	32° 3' 3.160 N	103° 38' 24.695 W	
17,300.0	90.00	179.71	12,233.0	-4,946.1	796.3	382,836.68	756,086.80	32° 3' 2.171 N	103° 38' 24.696 W	
17,358.4	90.00	179.71	12,233.0	-5,004.5	796.6	382,778.30	756,087.10	32° 3' 1.593 N	103° 38' 24.697 W	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
- hit/miss target										
- Shape										
Mesa #59H BHL	0.00	0.00	12,233.0	-5,004.5	796.6	382,778.30	756,087.10	32° 3' 1.593 N	103° 38' 24.697 W	
- plan hits target center										
- Point										

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Original
to Appropriate
District Office

GAS CAPTURE PLAN

Date: 5/27/2020

☒ Original Operator & OGRID No.: 260297
☐ Amended - Reason for Amendment: _____

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected MCF/D	Flared or Vented	Comments
MESA 8105 11		SEC 11 ; 26S ; 32E	290 FNL 1760 FEL	2000	Flared	Battery Connected
FEDERAL 59H						To ETP System

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is dedicated to Gas Transporter and will be connected to Gas Transporter low/high pressure gathering system located in LEA County, New Mexico. It will require 0 ' of pipeline to (ETP) connect the facility to low/high pressure gathering system. Operator provides (periodically) to Gas Transporter a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, Operator and Gas Transporter have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at Gas Transporter Processing Plant located in Sec.____, Twn.____, Rng.____, _____ County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Gas Transporter system at that time. Based on current information, it is Operator's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines




TOTAL LENGTH = 78'-3/8"

TUBING SPOOL

SW-TCM

13-5/8" 5M x 7-1/16" 10M
5-1/2" PP SEAL
w/ (2) 1-13/16" 10M SSO

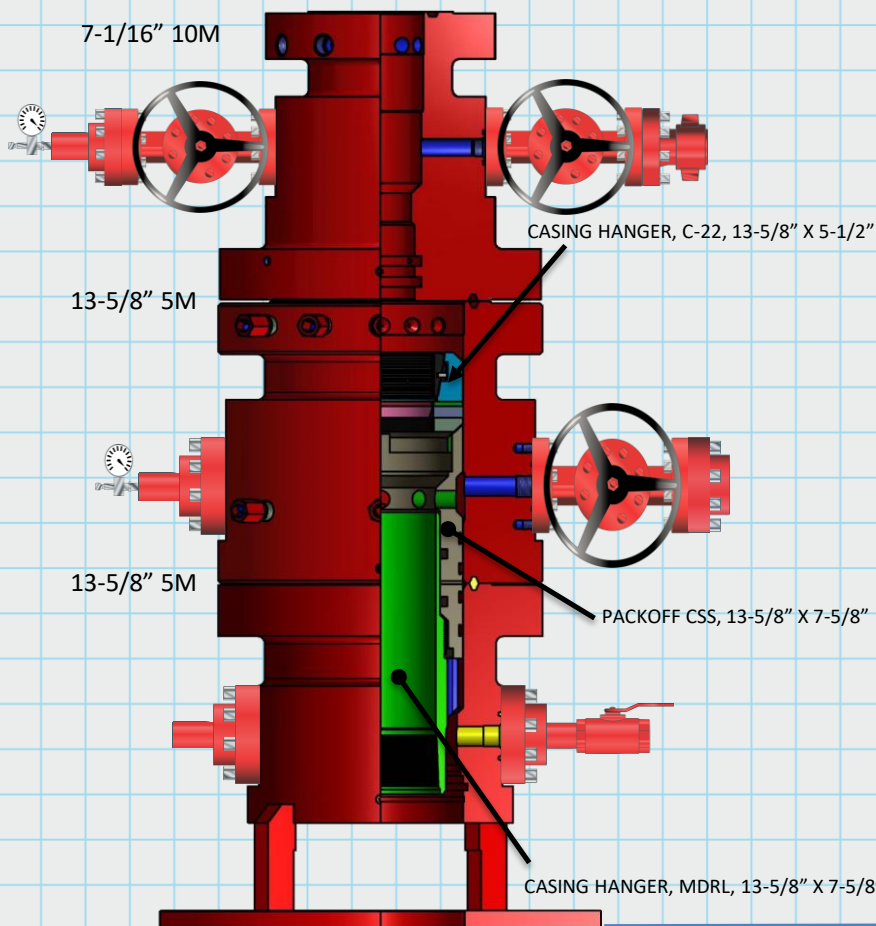

SW-MB SPOOL ASSEMBLY

UPPER MBH

13-5/8" 5M x 13-5/8" 5M
w/ (2) 2-1/16" 5M SSO


CASING HEAD ASSEMBLY

LOWER MBH

13-5/8" 5M x 10-3/4" SOW
w/ (2) 2-1/16" 5M SSO

10-3/4" SOW x 7-5/8" x 5-1/2"



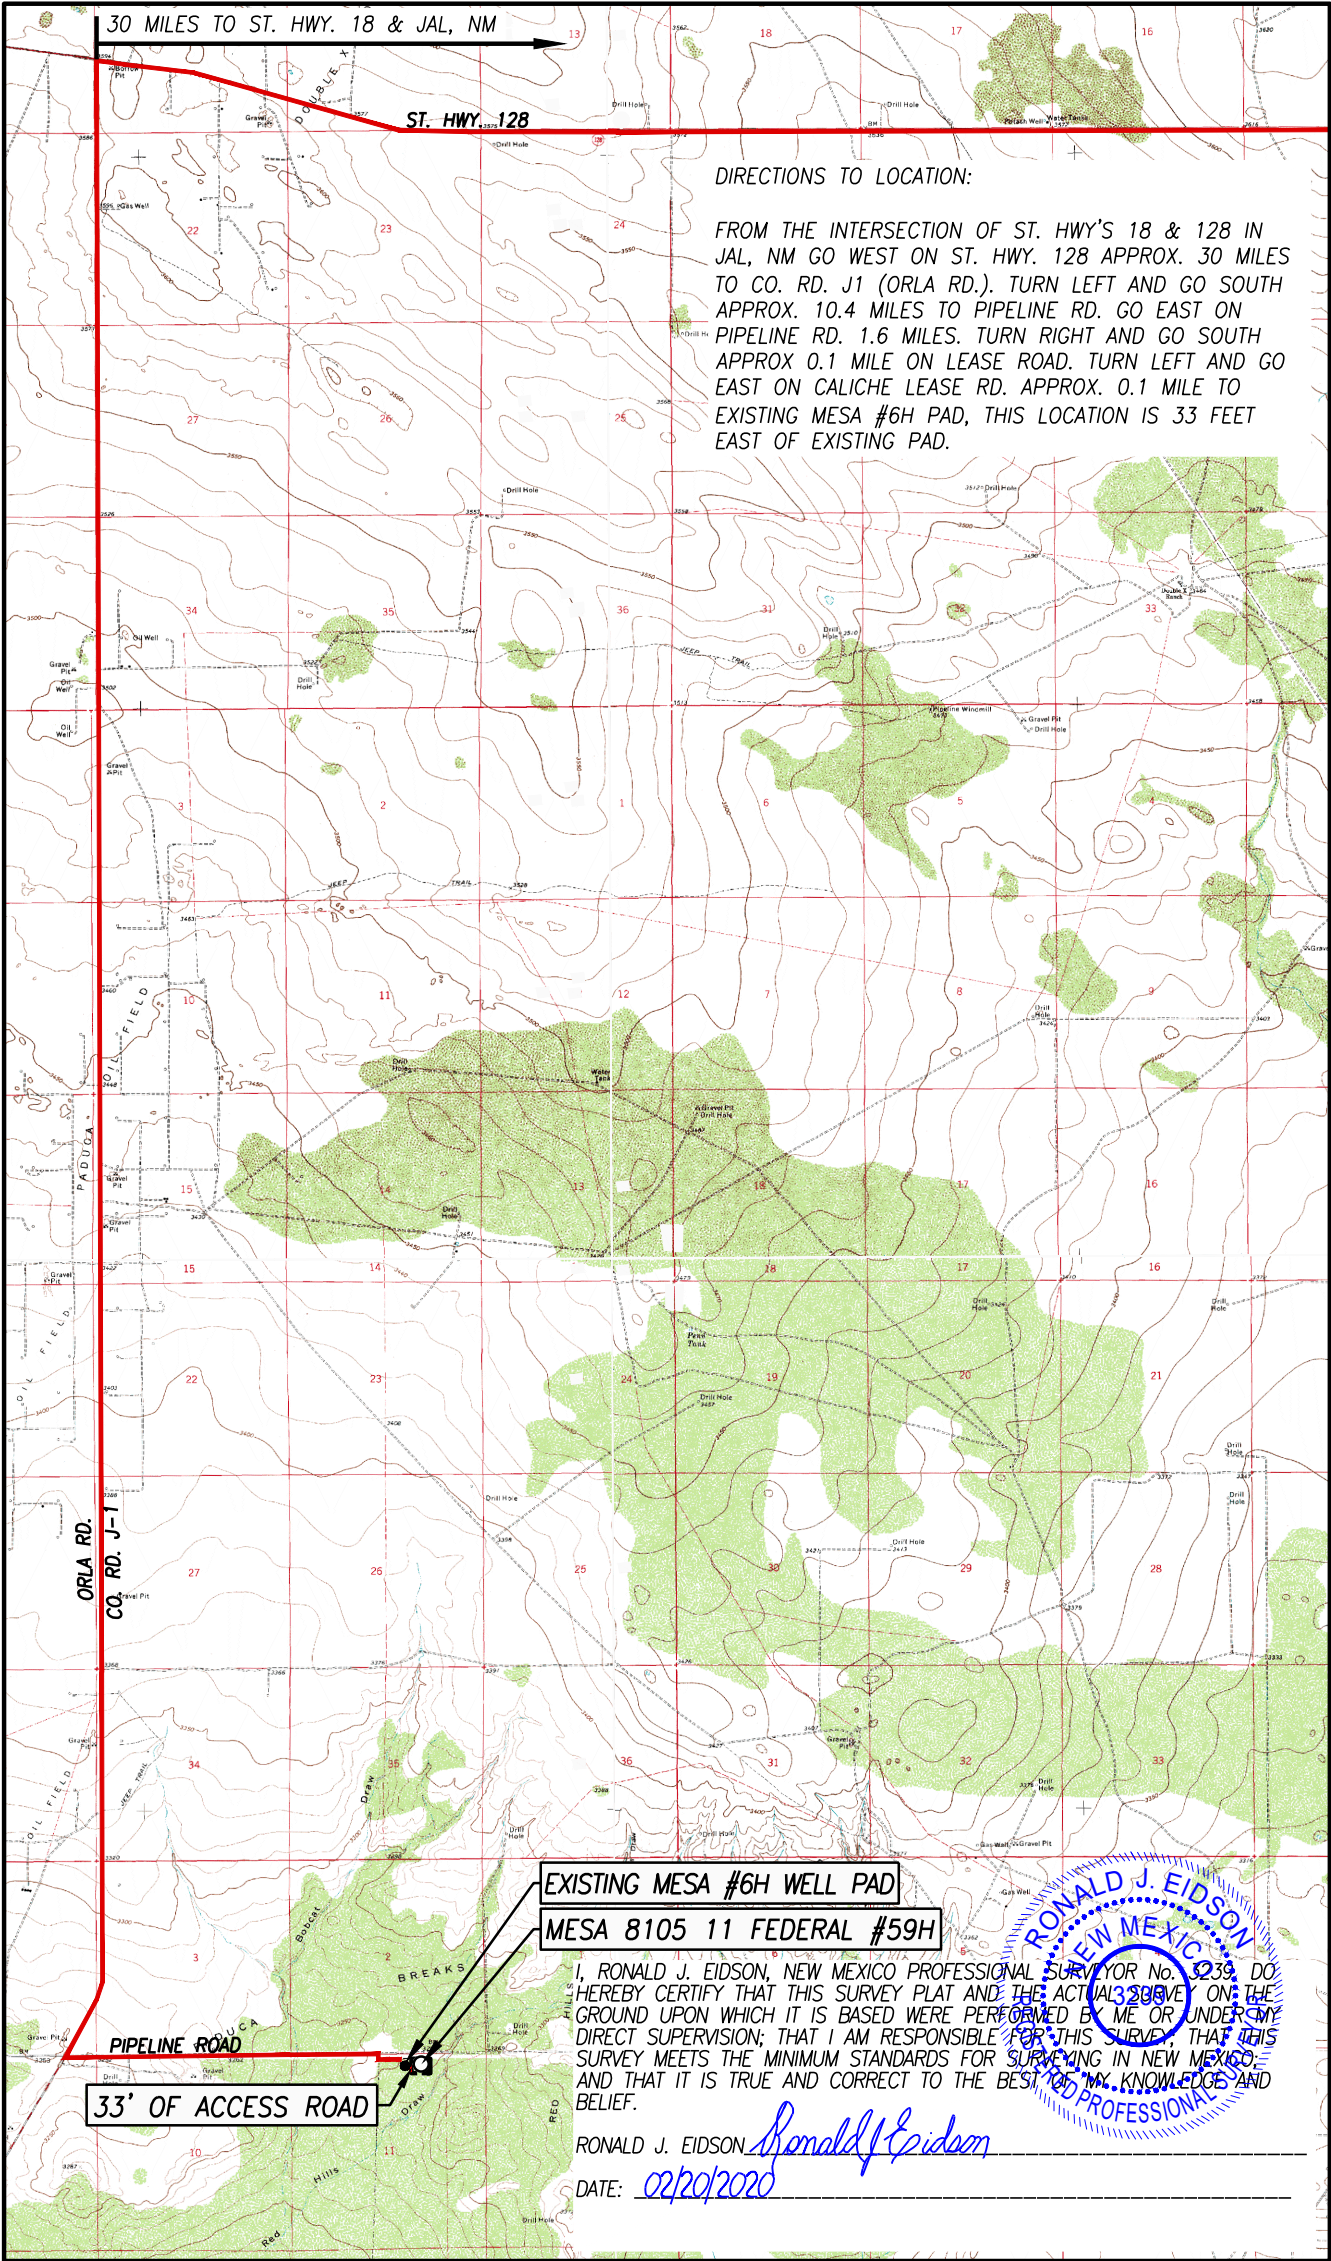

SEC. 11 TWP. 26-S RGE. 32-E
COUNTY LEA STATE NEW MEXICO
DESCRIPTION 290' FNL & 1760' FEL
ELEVATION 3253'
OPERATOR BTA OIL PRODUCERS, LLC
LEASE MESA 8105 11 FEDERAL
U.S.G.S. TOPOGRAPHIC MAP
PADUCA BREAKS EAST, N.M. SURVEY N.M.P.M.

CONTOUR INTERVAL: PADUCA BREAKS SW, N.M. - 10'
BELL, N.M. - 10', PADUCA BREAKS EAST, N.M. - 10'
SCALE: 1" = 5280'



PROVIDING SURVEYING SERVICES
SINCE 1946
JOHN WEST SURVEYING COMPANY
412 N. DAL PASO HOBBS, N.M. 88240
(575) 393-3117 www.jwsc.biz
TBPLS# 10021000

VICINITY, TOPOGRAPHIC AND ACCESS ROAD MAP



CONTOUR INTERVAL: PADUCA BREAKS SW, N.M. - 10'
BELL, N.M. - 10', PADUCA BREAKS EAST, N.M. - 10'
SCALE: 1" = 5280'

TBPLS# 10021000



DISTRICT I

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-9720

DISTRICT II

811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III

1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV

1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool Name WC-025 ; Upper Wolfcamp
Property Code	Property Name MESA 8105 11 FEDERAL	Well Number 59H
OGRID No. 260297	Operator Name BTA OIL PRODUCERS, LLC	Elevation 3253'

Surface Location


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	11	26-S	32-E		290	NORTH	1760	EAST	LEA


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	11	26-S	32-E		50	SOUTH	990	EAST	LEA

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
160			


NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

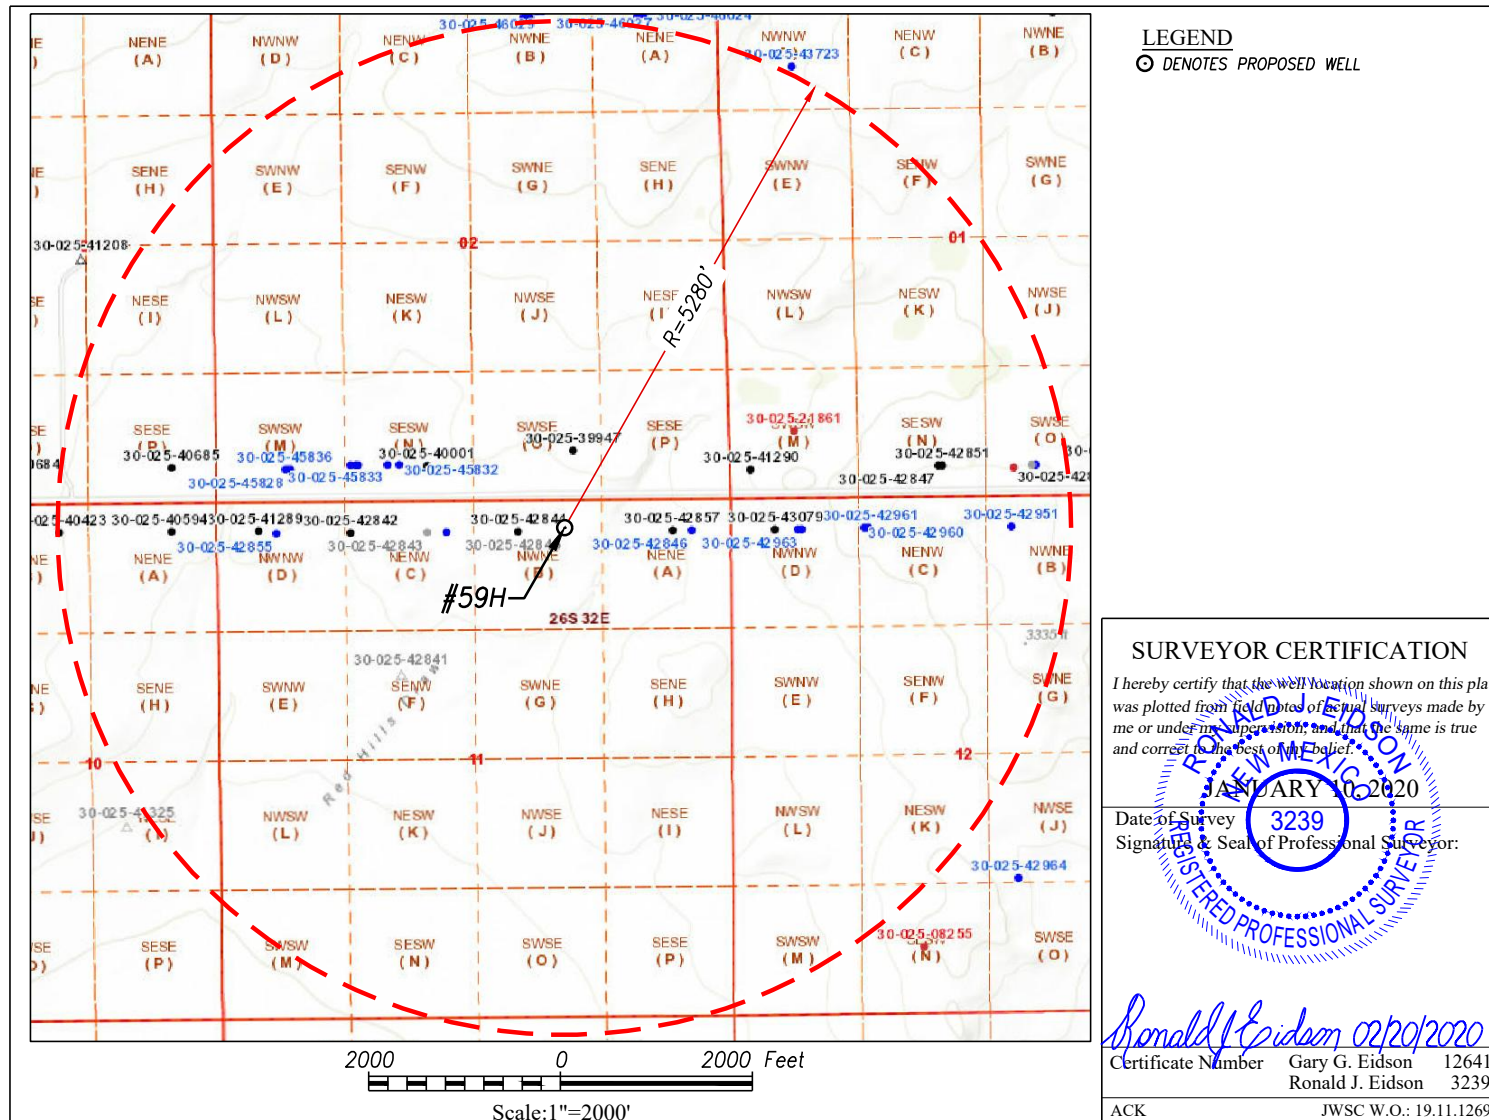

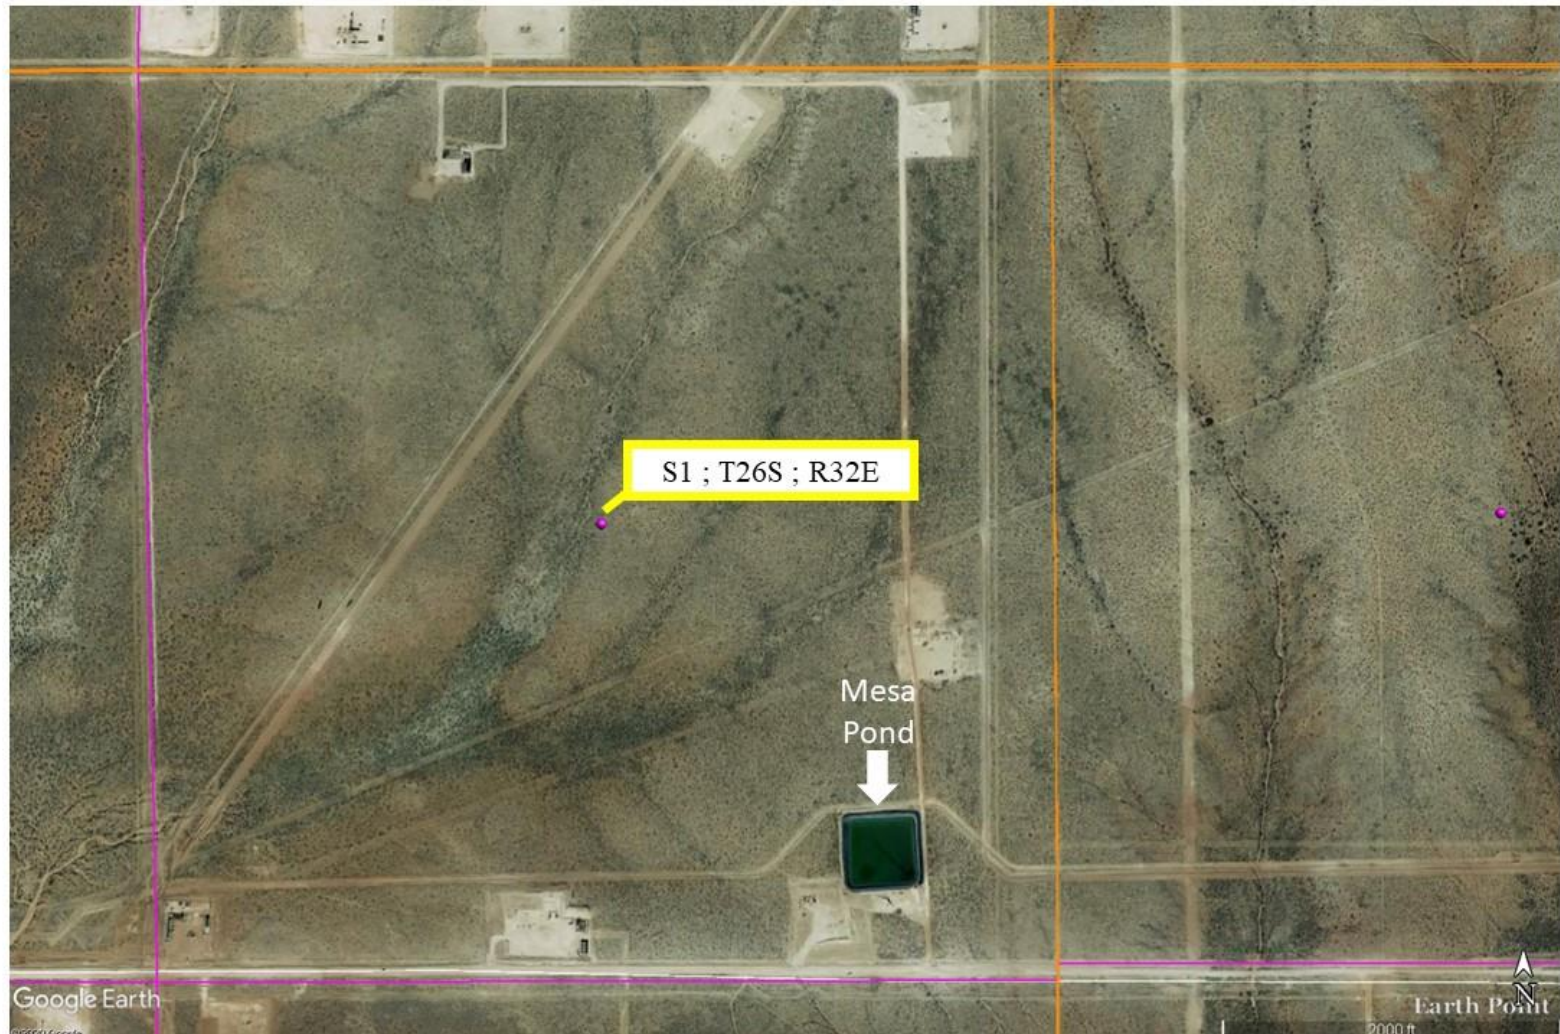


BTA OIL PRODUCERS, LLC
WATER TRANSPORTATION MAP
MESA 8105 FEDERAL WATER TRANSPORT MAP
SEC 1; T26S ; R32E (Water Pit is in SESE QUARTER QUARTER)
LEA COUNTY, NM



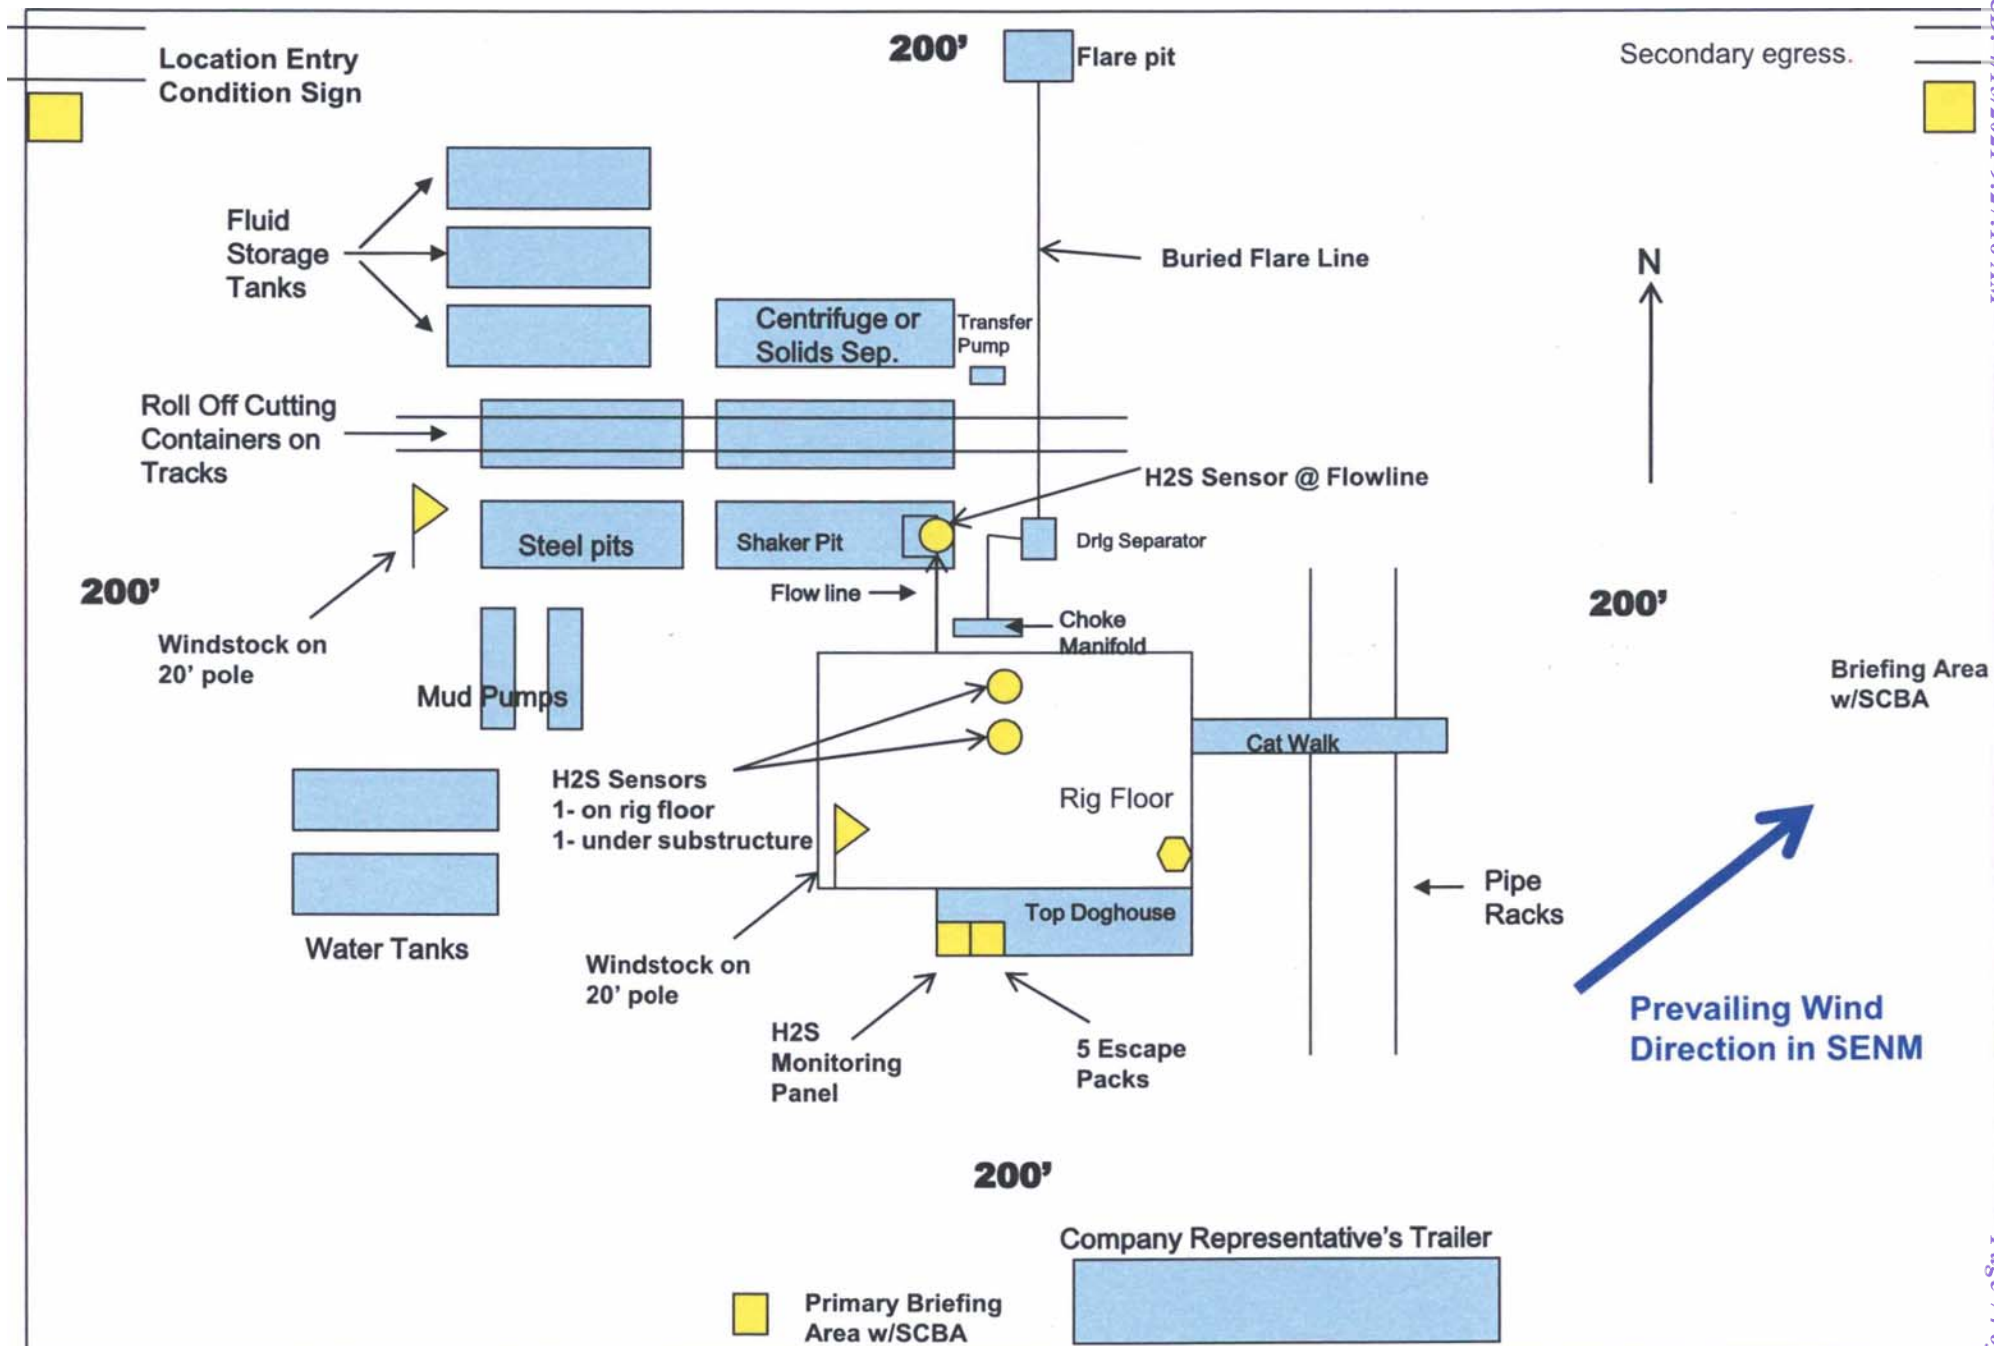

Sheet 1 of 1

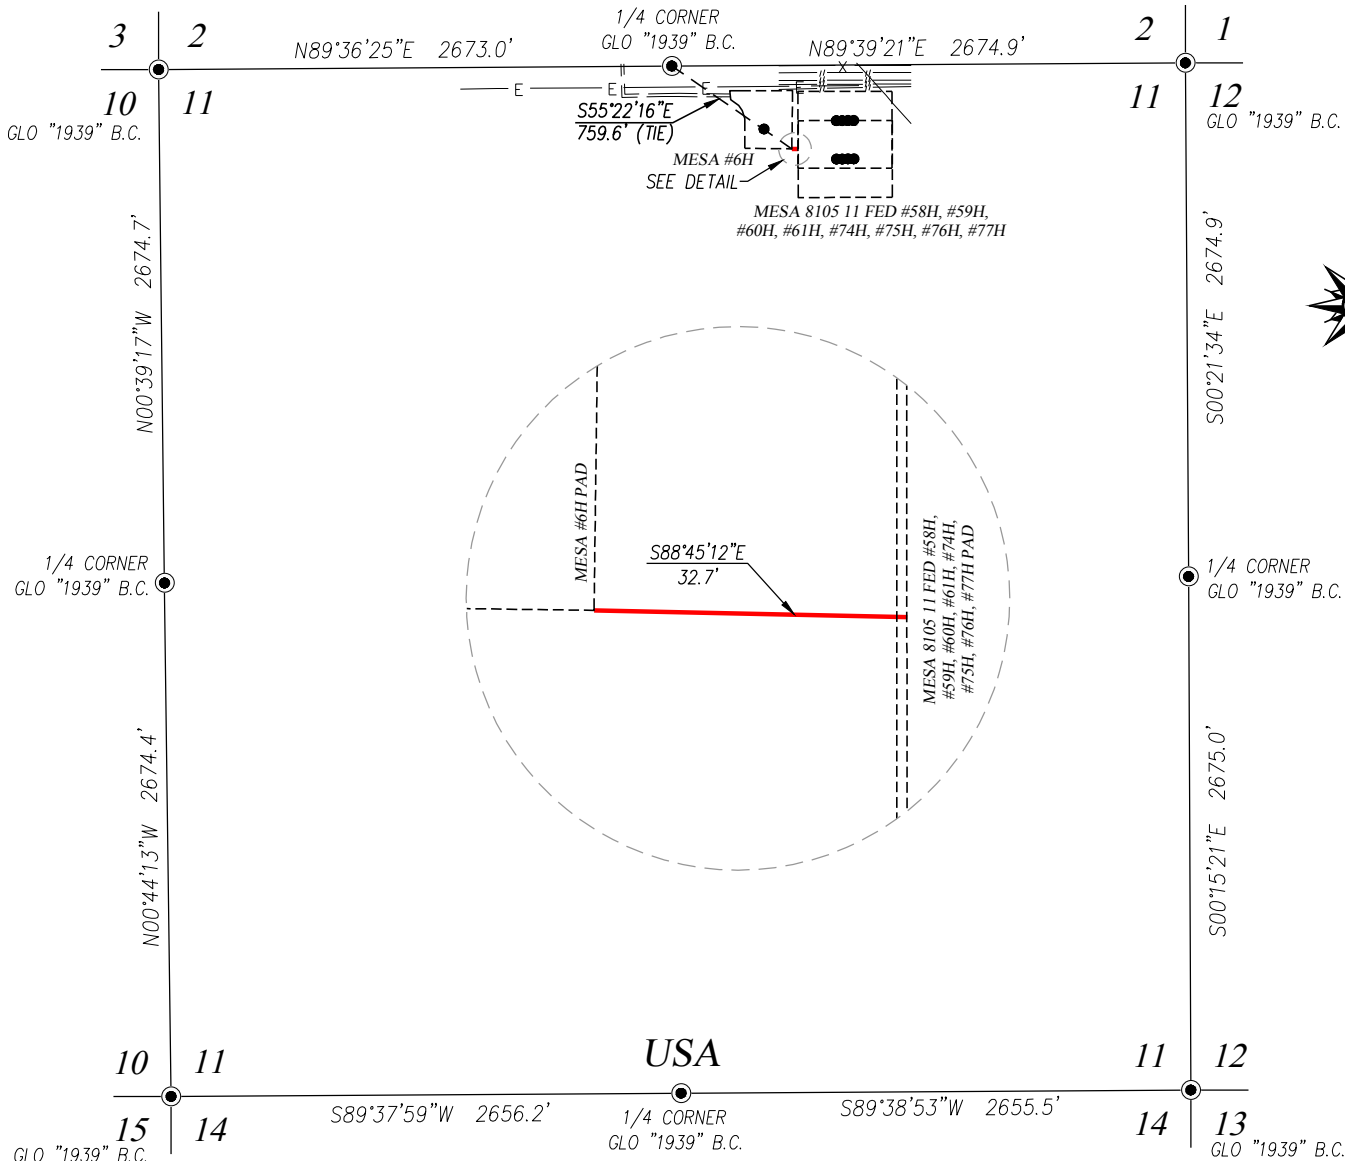

DESCRIPTION

SURVEY OF A STRIP OF LAND 30.0 FEET WIDE AND 32.7 FEET OR 0.006 MILES IN LENGTH CROSSING USA LAND IN SECTION 11, TOWNSHIP 26 SOUTH, RANGE 32 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEY.

NOTE


BEARINGS SHOWN HEREON ARE MERCATOR, GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM, "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.

I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RONALD J. EIDSON *Ronald J. Eidson*
DATE: 06/19/2020

LEGEND

- - DENOTES FOUND CORNER AS NOTED
- (red line) - DENOTES CENTERLINE SURVEY



BTA OIL PRODUCERS, LLC

SURVEY FOR ACCESS ROAD TO THE MESA 8105 11 FEDERAL #58H, #59H, #60H, #61H & #74H, #75H, #76H, #77H PAD CROSSING SECTION 11, TOWNSHIP 26 SOUTH, RANGE 32 EAST, N.M.P.M. LEA COUNTY, NEW MEXICO

Survey Date: 1/10/2020	CAD Date: 6/17/2020	Drawn By: ACK
W.O. No.: 20130274	Rev: .	Rel. W.O.: Sheet 1 of 1



PROVIDING SURVEYING SERVICES
SINCE 1946
JOHN WEST SURVEYING COMPANY
412 N. DAL PASO HOBBS, N.M. 88240
(575) 393-3117 www.jwsc.biz
TBPLS# 10021000



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

04/14/2021

APD ID: 10400058110

Submission Date: 06/19/2020

Operator Name: BTA OIL PRODUCERS LLC

Well Name: MESA 8105 11 FEDERAL

Well Number: 59H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Operator Name: BTA OIL PRODUCERS LLC

Well Name: MESA 8105 11 FEDERAL

Well Number: 59H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** MESA 8105 11 FEDERAL**Well Number:** 59H**Is the reclamation bond a rider under the BLM bond?****Unlined pit bond number:****Unlined pit bond amount:****Additional bond information attachment:**

Section 4 - Injection

Would you like to utilize Injection PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Injection PWD discharge volume (bbl/day):****Injection well mineral owner:****Injection well type:****Injection well number:****Injection well name:****Assigned injection well API number?****Injection well API number:****Injection well new surface disturbance (acres):****Minerals protection information:****Mineral protection attachment:****Underground Injection Control (UIC) Permit?****UIC Permit attachment:**

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Surface discharge PWD discharge volume (bbl/day):****Surface Discharge NPDES Permit?****Surface Discharge NPDES Permit attachment:****Surface Discharge site facilities information:****Surface discharge site facilities map:**

Section 6 - Other

Would you like to utilize Other PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Other PWD discharge volume (bbl/day):**

Operator Name: BTA OIL PRODUCERS LLC

Well Name: MESA 8105 11 FEDERAL

Well Number: 59H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

04/14/2021

APD ID: 10400058110**Submission Date:** 06/19/2020

Highlighted data
reflects the most
recent changes

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** MESA 8105 11 FEDERAL**Well Number:** 59H[Show Final Text](#)**Well Type:** OIL WELL**Well Work Type:** Drill

Bond Information

Federal/Indian APD: FED**BLM Bond number:** NMB001711**BIA Bond number:****Do you have a reclamation bond?** NO**Is the reclamation bond a rider under the BLM bond?****Is the reclamation bond BLM or Forest Service?****BLM reclamation bond number:****Forest Service reclamation bond number:****Forest Service reclamation bond attachment:****Reclamation bond number:****Reclamation bond amount:****Reclamation bond rider amount:****Additional reclamation bond information attachment:**

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 24150

CONDITIONS OF APPROVAL

Operator:				OGRID:	Action Number:	Action Type:
	BTA OIL PRODUCERS, LLC	104 S Pecos	Midland, TX79701	260297	24150	FORM 3160-3

OCD Reviewer	Condition
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string