

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT Sundry Print Report

Well Name: RESOLUTE 12 FED COM Well Location: T25S / R32E / SEC 12 / County or Parish/State: LEA /

SESW / 32.138922 / -103.6299774

Well Number: 742H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM110835 Unit or CA Name: Unit or CA Number:

US Well Number: 3002547616 Well Status: Drilling Well Operator: EOG RESOURCES

INCORPORATED

Notice of Intent

Type of Submission: Notice of Intent

Type of Action Other

Date Sundry Submitted: 06/24/2021 Time Sundry Submitted: 02:35

Date proposed operation will begin: 06/24/2021

Procedure Description: EOG respectfully requests an amendment to our approved APD for this well to reflect the following changes: Change name from #724H to #742H. Change BHL to T-25-S, R-32-E, Sec 1, 100' FNL, 1460' FEL, Lea Co., N.M. Change target formation to Wolfcamp U4.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Resolute_12_Fed_Com_742H_Wall_Plot_20210624143355.pdf

LO_RESOLUTE_12_FED_COM_742H_C102_REV5_Signed_20210624143328.pdf

 $Resolute_12_Fed_Com_742H_Sundry_Info___Rev_Name__BHL__tgt_6.24.2021_20210624143319.pdf$

Page 1 of 2

ed by OCD: 7/19/2021 7:48:00 AM ell Name: RESOLUTE 12 FED COM Well Location: T25S / R32E / SEC 12 / County or Parish/State: LÉ

SESW / 32.138922 / -103.6299774

Well Number: 742H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM110835 **Unit or CA Name: Unit or CA Number:**

US Well Number: 3002547616 Well Status: Drilling Well **Operator:** EOG RESOURCES

INCORPORATED

Conditions of Approval

Additional Reviews

122532N_Sundry_2505075_Resolute_12_Federal_Com_724H_Lea_NMNM110835_EOG_13_22_07162021_NMK_202 10716152601.pdf

Resolute_12_Fed_Com_742H_Sundry_Info___Rev_Name__BHL__tgt_6.24.2021_20210716152552.pdf

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: ERIC BRORMAN Signed on: JUN 24, 2021 02:34 PM

Name: EOG RESOURCES INCORPORATED

Title: Engineering Associate

Street Address: 5509 CHAMPIONS DRIVE

City: MIDLAND State: TX

Phone: (432) 556-1276

Email address: ERIC_BRORMAN@EOGRESOURCES.COM

Field Representative

Representative Name:

Street Address:

City: State: Zip:

Phone:

Email address:

BLM Point of Contact

Signature: Chris Walls

BLM POC Name: CHRISTOPHER WALLS BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752342234 BLM POC Email Address: cwalls@blm.gov

Disposition: Approved Disposition Date: 07/16/2021

Page 2 of 2

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number		² Pool Code			
30-025-47616		98180	WC-025 G-09 S253309P; Upper Wolfcar		
⁴ Property Code		⁵ Pr	operty Name	⁶ Well Number	
329310		RESOLUTI	E 12 FED COM	742H	
⁷ OGRID №.		⁸ O _I	perator Name	⁹ Elevation	
7377	EOG RESOURCES, INC. 3500'				

¹⁰Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	12	25-S	32-E	1	399'	SOUTH	2185'	WEST	LEA
	¹¹ Bottom Hole Location If Different From Surface								
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
2	1	25-S	32-E	_	100'	NORTH	1460'	EAST	LEA
12Dedicated Acres	¹³ Joint or l	Infill 14Co	nsolidation Co	de ¹⁵ Ord	er No.				
640.21									

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

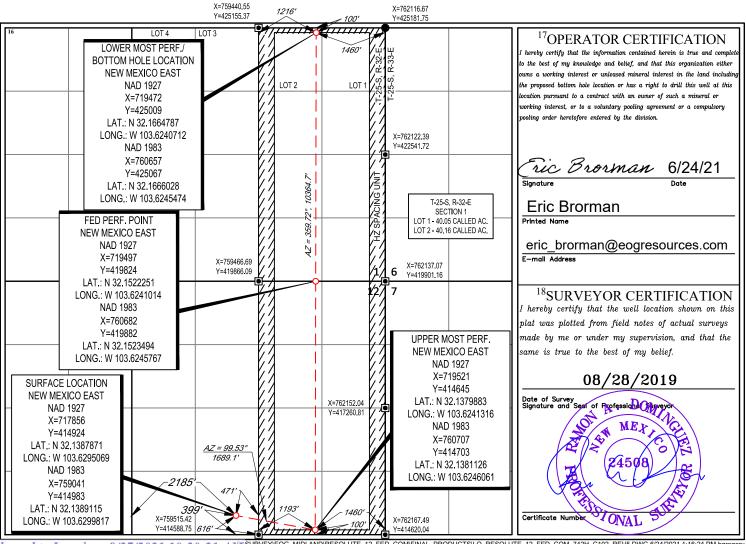

Released to Imaging: 8/27/2021 10:20:21 AN SURVEYLEOG_MIDLANDIRESOLUTE_12_FED_COMFINAL_PRODUCTSILO_RESOLUTE_12_FED_COM_742H_C102_REV5.DWG 6/24/2021 1:16:24 PM bgregory



Resolute 12 Fed Com 742H

Revised Permit Information 06/24/2021:

Well Name: Resolute 12 Fed Com 742H

Location: SHL: 399' FSL & 2185' FWL, Section 12, T-25-S, R-32-E, Lea Co., N.M. BHL: 100' FNL & 1460' FEL, Section 1, T-25-S, R-32-E, Lea Co., N.M.

Casing Program:

Hole		Csg				DFmin	DFmin	DFmin
Size	Interval	OD	Weight	Grade	Conn	Collapse	Burst	Tension
12.25"	0' - 1,100'	9.625"	36#	J-55	LTC	1.125	1.25	1.6
8.75"	0' - 11,220'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.6
6.75"	0' - 10,720'	5.5"	20#	P-110EC	DWC/C-IS MS	1.125	1.25	1.6
6.75"	10,720' - 11,220'	5.5"	20#	P-110EC	VAM SFC	1.125	1.25	1.6
6.75"	11,220' - 23,078'	5.5"	20#	P-110EC	DWC/C-IS MS	1.125	1.25	1.6

Variance is requested to waive the centralizer requirements for the 7-5/8" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4 hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 5-1/2" casing by 7-5/8" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

Cementing Program:

		Wt.	Yld	Slurry Description	
Depth	No. Sacks	ppg	Ft3/sk	Gian, y Dessilphon	
1,100' 9-5/8''	310	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk Cello-Flake (TOC @ Surface)	
	80	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 900')	
11,220' 7-5/8''	470	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 7,220')	
	1230	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)	
23,078' 5-1/2"	1050	14.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,720')	



Resolute 12 Fed Com 742H

Additive	Purpose		
Bentonite Gel	Lightweight/Lost circulation prevention		
Calcium Chloride	Accelerator		
Cello-flake	Lost circulation prevention		
Sodium Metasilicate	Accelerator		
MagOx	Expansive agent		
Pre-Mag-M	Expansive agent		
Sodium Chloride	Accelerator		
FL-62	Fluid loss control		
Halad-344	Fluid loss control		
Halad-9	Fluid loss control		
HR-601	Retarder		
Microbond	Expansive Agent		

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,420') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 1,234 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,100'	Fresh - Gel	8.6-8.8	28-34	N/c
1,100' – 11,220'	Brine	10.0-10.2	28-34	N/c
11,220' – 12,390'	Oil Base	8.7-9.4	58-68	N/c - 6
12,390' – 23,078'	Oil Base	10.0-14.0	58-68	4 - 6



Resolute 12 Fed Com 742H

399' FSL 2185' FWL **Revised Wellbore**

KB: 3525' GL: 3500'

Section 12

T-25-S, R-32-E

API: 30-025-47616

Bit Size: 12-1/4" 9-5/8", 36#, J-55, LTC, 0' - 1,100" Bit Size: 8-3/4" 7-5/8", 29.7#, HCP-110, FXL, 0' -11,220' TOC: 10,720' Bit Size: 6-3/4" Lateral: 23,078' MD, 12,854' TVD 5-1/2", 20#, P-110EC, DWC/C-IS MS, @ 0' -**Upper Most Perf:** 100' FSL & 1460' FEL Sec. 12 10,720' **Lower Most Perf:** 5-1/2", 20#, P-110EC, VAM SFC, @ 10,720' -100' FNL & 1460' FEL Sec. 1 BH Location: 100' FNL & 1460' FEL Sec. 1 5-1/2", 20#, P-110EC, DWC/C-IS MS, @ 11,220' -T-25-S R-32-E 23,078' KOP: 12,390'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 36769

CONDITIONS

Operator:	OGRID:	
EOG RESOURCES INC	7377	
P.O. Box 2267	Action Number:	
Midland, TX 79702	36769	
	Action Type:	
	[C-103] NOI Change of Plans (C-103A)	

CONDITIONS

Created By	Condition	Condition Date
pkautz	None	8/27/2021