Form 3160-3 (June 2015)				OMB N	APPROV No. 1004-0 January 31	0137
UNITED STATES DEPARTMENT OF THE II BUREAU OF LAND MANA	NTERIOR	,		5. Lease Serial No		<u></u>
APPLICATION FOR PERMIT TO D				6. If Indian, Allote	e or Tribe	Name
1a. Type of work:	EENTER			7. If Unit or CA Ag	greement,	Name and No.
1b. Type of Well: Oil Well Gas Well O	ther					
	_	7		8. Lease Name and	l Well No.	
1c. Type of Completion: Hydraulic Fracturing Si	ngle Zone	Multiple Zone			33133	6]
2. Name of Operator [260297]				9. API Well No.	30-02	5-49378
3a. Address	3b. Phone N	o. (include area coa	le)	10. Field and Pool,	or Exploi	ratory [51020]
4. Location of Well (Report location clearly and in accordance v	vith any State	requirements *)		11. Sec., T. R. M. o	or Blk, and	1 Survey or Area
At surface	The any State	equirements.)			, Bill. Will	a survey or race
At proposed prod. zone						
14. Distance in miles and direction from nearest town or post offi	ice*			12. County or Pari	sh	13. State
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No of ac	res in lease	17. Spacir	ng Unit dedicated to	this well	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed	l Depth	20, BLM/	BIA Bond No. in file		
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approxi	mate date work will	start*	23. Estimated dura	tion	
	24. Attacl	hments				
The following, completed in accordance with the requirements of (as applicable)	f Onshore Oil	and Gas Order No.	1, and the H	lydraulic Fracturing	rule per 4	3 CFR 3162.3-3
Well plat certified by a registered surveyor. A Drilling Plan.		Item 20 above).		s unless covered by	an existing	g bond on file (see
3. A Surface Use Plan (if the location is on National Forest System SUPO must be filed with the appropriate Forest Service Office		5. Operator certific6. Such other site sBLM.		mation and/or plans a	ıs may be ı	requested by the
25. Signature	Name	(Printed/Typed)			Date	
Title	·					
Approved by (Signature)	Name	(Printed/Typed)			Date	
Title	Office					
Application approval does not warrant or certify that the applicar applicant to conduct operations thereon. Conditions of approval, if any, are attached.	nt holds legal o	or equitable title to t	hose rights	in the subject lease v	which wou	ıld entitle the
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, n of the United States any false, fictitious or fraudulent statements					any depai	rtment or agency
NGMP Rec 09/07/2021					 レフ	
		II CONDII	10NS	09/	15/202	1
SL	ven Wi	LONDA				
(Continued on page 2)	יון עמן			*(I	nstructic	ons on page 2)

Released to Imaging: 9/15/2021 12:40:23 PM Approval Date: 09/07/2021

DISTRICT 1625 N French Dr. Hobbs, NM 88240 Phone (575) 393-6161 Fax (575) 393-0720

DISTRICT III

DISTRICT II 811 S First St., Artesia, NM 88210 Phone (575) 748-1283 Fax (575) 748-9720

1000 Rio Brazos Road, Aztec, NM 87410 Phone (505) 334-6178 Fax (505) 334-6170

DISTRICT IV 1220 S St Francis Dr., Santa Fe, NM 87505 Phone (505) 476-3460 Fax (505) 476-3462

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, New Mexico 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

□ AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

30-025-49378	Pool Code 51020	RED HILLS;LWR BONE	SPRING
Property Code 331336	·	erty Name 22 FEDERAL COM	Well Number 51H
OGRID No.	Oper	ator Name	Elevation
260297	BTA OIL PR	ODUCERS, LLC	3327'

Surface Location

UL or lot No	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	27	25-S	33-E		220	SOUTH	985	EAST	LEA
				Bottom Hol	e Location If Diffe	erent From Surface			
UL or lot No	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	22	25-S	33-E		50	NORTH	380	EAST	LEA
Dedicated Acres	Joint or	Infill C	onsolidation C	ode Ord	er No.				
320									

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

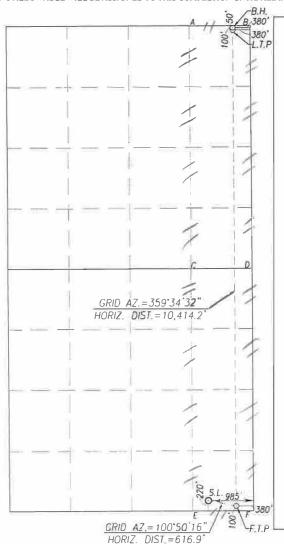

SCALE: 1"=2000'

BOTTOM HOLE LOCATION BOTTOM HOLE LOCATION NAD 83 NME NAD 27 NME Y= 409357.9 N X= 741758.6 E Y= 409415.7 N X= 782944.6 E LAT.=32.123157 N LAT.=32.123033° N LONG.=103.552891° W LONG.=103.552420° W

LAST TAKE POINT NAD 27 NME LAST TAKE POINT NAD 83 NME Y = 4093079 NY = 409365.7 NX= 782945.0 E X = 7417590 ELAT. =32.123020° N LAT.=32.122895° N LONG.=103.552891° W LONG.=103.552420° W

CORNER COORDINATES TABLE

VELOCULARDINATES

NAD 27 NME

- Y= 409401.4 N, X=

- Y= 409410.5 N, X=

- Y= 404121.2 N 740813.4 E 742138.1 E B 740851.6 E 742177.8 E - Y= 404129.8 N, X= 742177.8 E 398839.9 N, X= 740891.1 E D Y= 398848.7 N, X= 742215.8 E

CORNER COORDINATES TABLE

Y= 409468.3 N, X= Y= 404179.0 N, X= 781999 4 E B - Y= C - Y= 783324.2 E 782037.9 E Y= 404187.5 N, X= 783364.2 E Y= 398897.5 N, X= 782077.7 E Y= 398906.3 N, X= 783402.4 E

FIRST TAKE POINT FIRST TAKE POINT NAD 83 NME NAD 27 NME Y= 398946.1 N X= 741835.2 E Y= 399003.7 N X= 783021,8 E LAT.=32.094412° N LAT. =32.094536° N LONG.=103.552885° W LONG.=103.552416° W

GEODETIC COORDINATES NAD 83 NME SURFACE LOCATION Y= 399119.7 N X= 782416.0 E LAT.=32.094867° N

LONG. = 103.5548.39° W

GEODETIC COORDINATES

NAD 27 NME

SURFACE LOCATION

Y= 399062.1 N X= 741229.4 E LAT.=32.094742" N LONG. = 103.554369° W

OPERATOR CERTIFICATION

I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division

10/13/2020

Date

Sammy Hajar

SHAJAR@BTAOIL.COM

E-mail Address

SURVEYOR CERTIFICATION

Thereby certify that the well location shown on this plat was plotted from field blood of Eural surveys made by me or under my supervision and that the same is true and correct to he best of My Europe 1

Signature Scal of Professional Survey Date of Survey nal Sur@or.

Certificate Number Gary G. Eidson 12641

Ronald J. Eidson 3239 JWSC W () 20 11 0293 ACK



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Application Data Report

APD ID: 10400065307

Submission Date: 11/17/2020

Highlighted data reflects the most recent changes

Operator Name: BTA OIL PRODUCERS LLC

Well Number: 51H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Well Name: ROJO 7811 27-22 FEDERAL COM

10400065307 Tie to previous NOS? Submission Date: 11/17/2020

BLM Office: Carlsbad

APD ID:

User: Sammy Hajar

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM15091

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? Y

Permitting Agent? NO

APD Operator: BTA OIL PRODUCERS LLC

Operator letter of designation:

Operator Info

Operator Organization Name: BTA OIL PRODUCERS LLC

Operator Address: 104 S. Pecos

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)682-3753

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO **Master Development Plan name:**

Well in Master SUPO? NO Master SUPO name:

Well in Master Drilling Plan? NO Master Drilling Plan name:

Well API Number: Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Field/Pool or Exploratory? Field and Pool Field Name: SANDERS TANK; Pool Name: 2ND BONE

UPPER WOLFCAMP SPRING SAND

Is the proposed well in an area containing other mineral resources? NONE

Page 1 of 3

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Is the proposed well in an area containing other mineral resources? NONE

Is the proposed well in a Helium production area? N Use Existing Well Pad? Y New surface disturbance? Y

Type of Well Pad: MULTIPLE WELL Multiple Well Pad Name: ROJO Number: 51H, 52H, 53H and

Well Class: HORIZONTAL 7811 27-22 FEDERAL COM 54H

: HORIZONTAL Number of Legs: 1

Well Work Type: Drill
Well Type: OIL WELL
Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: Distance to nearest well: 532 FT Distance to lease line: 220 FT

Reservoir well spacing assigned acres Measurement: 320 Acres

Well plat: Signed_ROJO_7811_27_22_Federal_Com_51H_C102_20201117091937.pdf

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83 Vertical Datum: NGVD29

Survey number: Reference Datum: GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL	220	FSL	985	FEL	25S	33E	27	Aliquot	32.09486	-	LEA	NEW	NEW		FEE	332	0	0	Υ
Leg								SESE	7	103.5548			MEXI			7			
#1										39		СО	CO						
KOP	100	FSL	380	FEL	25S	33E	27	Aliquot	32.09453	-	LEA	NEW	NEW		FEE	-	105	105	Υ
Leg								SESE	6	103.5528		I	MEXI			721	72	39	
#1										85		CO	CO			2			
PPP	100	FSL	380	FEL	25S	33E	27	Aliquot	32.09453	-	LEA	NEW	NEW		FEE	-	107	107	Υ
Leg								SESE	6	103.5528		I	MEXI			737	40	02	
#1-1										85		CO	CO			5			

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
PPP Leg #1-2	258 2	FNL	380	FEL	25S	33E	22	Aliquot SENE	32.11618 3	- 103.5528 9	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 15091	- 769 0	188 00	110 17	Y
EXIT Leg #1	100	FNL	380	FEL	25S	33E	22	Aliquot NENE	32.12302	- 103.5528 91	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 15091	- 769 0	210 57	110 17	Y
BHL Leg #1	50	FNL	380	FEL	25S	33E	22	Aliquot NENE	32.12315 7	- 103.5528 91	LEA	NEW MEXI CO		F	NMNM 15091	- 769 0	213 37	110 17	Υ



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

09/07/2021

APD ID: 10400065307

Submission Date: 11/17/2020

Highlighted data reflects the most recent changes

Well Name: ROJO 7811 27-22 FEDERAL COM

Operator Name: BTA OIL PRODUCERS LLC

Well Number: 51H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1162290	QUATERNARY	3327	0	0	ALLUVIUM	NONE	N
1162291	RUSTLER	2305	1022	1022	ANHYDRITE	NONE	N
1162292	TOP SALT	1755	1572	1572	SALT	NONE	N
1162293	BASE OF SALT	-1440	4767	4767	SALT	NONE	N
1162294	DELAWARE	-1665	4992	4992	LIMESTONE	NATURAL GAS, OIL	N
1162303	BELL CANYON	-1690	5017	5017	SANDSTONE	NATURAL GAS, OIL	N
1162296	CHERRY CANYON	-3095	6422	6422	SANDSTONE	NATURAL GAS, OIL	N
1162297	BRUSHY CANYON	-4280	7607	7607	SANDSTONE	NATURAL GAS, OIL	N
1162298	BONE SPRING LIME	-5800	9127	9127	LIMESTONE	NATURAL GAS, OIL	N
1162299	FIRST BONE SPRING SAND	-6795	10122	10122	SANDSTONE	NATURAL GAS, OIL	N
1162311	BONE SPRING 2ND	-7375	10702	10702	SANDSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M Rating Depth: 12000

Equipment: The blowout preventer equipment (BOP) shown in Exhibit A will consist of a (5M system) double ram type (5,000 psi WP) preventer and a bag-type (Hydril) preventer (5000 psi WP). Both units will be hydraulically operated and the ram type preventer will be equipped with blind rams on top and 5" drill pipe rams on bottom. The BOPs will be installed on the 13-3/8" surface casing and utilized continuously until total depth is reached. A 2" kill line and 3" choke line will be incorporated in the drilling spool below the ram-type BOP. A remote kill line will be used for the 5M system as per onshore order #2. Other accessory BOP equipment will include a Kelly cock, floor safety valve, choke lines, and choke manifold having a 5,000 psi WP rating. The 5M annular will be tested as per BLM drilling Operations Order No. 2, and will be test to 100% of working pressure.

Requesting Variance? NO

Variance request:

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Testing Procedure: Pipe rams will be operated and checked each 24-hour period and each time the drill pipe is out of the hole. These functional tests will be documented on the daily drillers log. All BOPs and associated equipment will be tested as per BLM drilling Operations Order No. 2.

Choke Diagram Attachment:

5M_choke_mannifold_20200917143047.pdf

Choke_Hose___Test_Chart_and_Specs_20190723082742.pdf

BOP Diagram Attachment:

5M_BOP_diagram_20200917143053.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1070	0	1070	3327	2257	1070	J-55	54.5	ST&C	2.4	5.9	DRY	8.8	DRY	14.6
2	INTERMED IATE	12.2 5	9.625	NEW	API	N	0	4992	0	4972	3419	-1645	4992	J-55	40	LT&C	1.9	1.6	DRY	2.6	DRY	3.2
3	PRODUCTI ON	8.75	5.5	NEW	API	N	0	21337	0	11017	3419	-7690	21337	P- 110	17	BUTT	1.4	2	DRY	1.6	DRY	1.5

Casing Attachments

Casing ID: 1 String Type: SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Rojo_51H_casing_assumption_20201117132102.JPG

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Casing Attachments

Casing ID: 2

String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Rojo_51H_casing_assumption_20201117132020.JPG

Casing ID: 3

String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

 $Rojo_51H_casing_assumption_20201117131928.JPG$

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	735	595	1.73	13.5	1029. 35	100	Class C	2% CaCl2
SURFACE	Tail		735	1070	340	1.35	14.8	459	100	Class C	2% CaCl2
INTERMEDIATE	Lead		0	4435	1310	2.46	12.8	3222. 6	100	Class C	0.5% CaCl2
INTERMEDIATE	Tail		4435	4992	200	1.34	14.8	268	25	Class C	1% CaCl2
PRODUCTION	Lead		3992	9910	580	3.9	10.5	2262	60	25% Poz 75% Class C	0.4% Fluid Loss

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

String Type	Lead/Tail	Stage Tool Depth	Тор МD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Tail		9910	2133	2890	1.25	14.4	3612. 5	25	Class H	0.2% LT Retarder

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	НА	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1070	OTHER : FW SPUD	8.3	8.4							
1070	4972	OTHER : FW GEL	9	9.4							
4972	1101 7	OTHER : CUT BRINE	8.7	9.3							

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Drill Stem Tests will be based on geological sample shows.

List of open and cased hole logs run in the well:

MUD LOG/GEOLOGICAL LITHOLOGY LOG, GAMMA RAY LOG, CEMENT BOND LOG,

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5385 Anticipated Surface Pressure: 2961

Anticipated Bottom Hole Temperature(F): 169

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

 $BTA_Oil_Producers_LLC__EMERGENCY_CALL_LIST_20190723161502.pdf \\ H2S_Equipment_Schematic_20190723161502.pdf$

H2S_Plan_20190723161502.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

QES___Rojo_7811_27_22_Fed_Com_51H___Geo_Survey_Rpt_20201117132606.pdf

Rojo_7811_27_22_Fed_Com_51H_WM_20201117132622.pdf

Rojo_51H_Gas_Capture_Plan_20201117132646.pdf

Other proposed operations facets description:

A variance is requested for a Multi Bowl Wellhead. See the attached schematic. *All strings will be kept 1/3 full while running.

Other proposed operations facets attachment:

Other Variance attachment:


BOP_Break_Testing_Variance_20200917143242.pdf
Multi_Bowl_Diagram_13_38_x_9_58_x_5_12_20200917143315.pdf

EMERGENCY CALL LIST

	<u>OFFICE</u>	<u>MOBILE</u>
BTA Oil Producers LLC OFFICE	432-682-3753	
BEN GRIMES, Operations	432-682-3753	432-559-4309
NICK EATON, Drilling	432-682-3753	432-260-7841
TRACE WOHLFAHRT, Completions	432-682-3753	

EMERGENCY RESPONSE NUMBERS

	OFFICE
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451

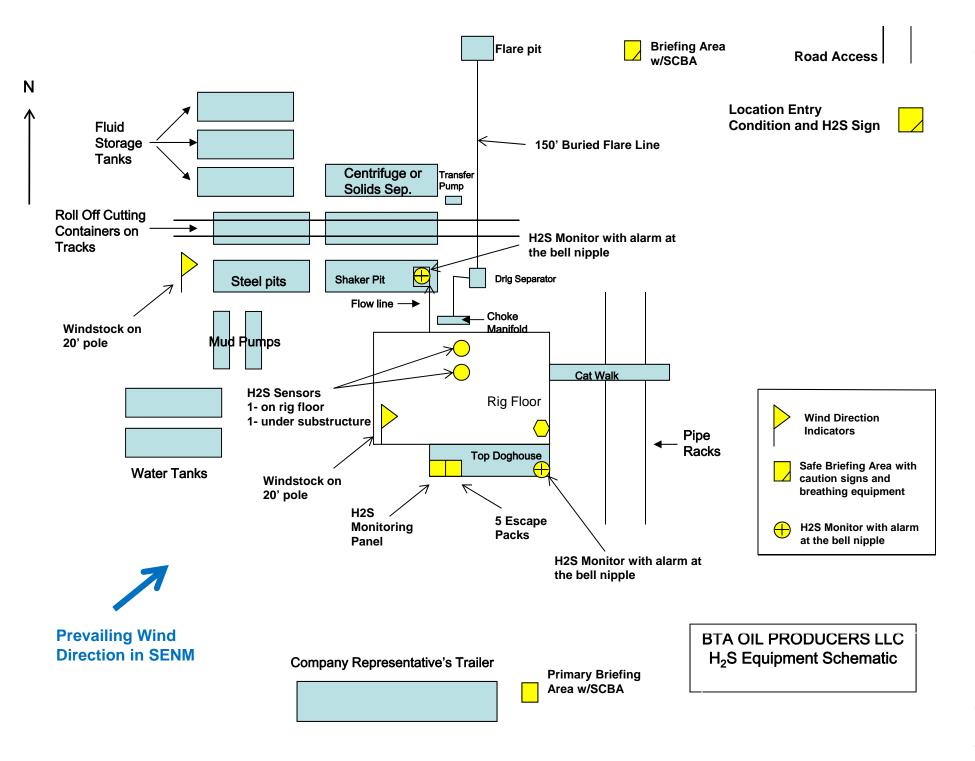

Released to Imaging: 9/15/2021 12:40:23 PM

BTA OIL PRODUCERS LLC



HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H2S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H2S zone (within 3 days or 500 feet) and weekly H2S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H2S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H2S. If H2S greater than 100 ppm is encountered in the gas stream we will shut in and install H2S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.
- b. Protective equipment for essential personnel:
 - Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H2S detection and monitoring equipment:

- 2 portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems: Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
 The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
 All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
 Company vehicles equipped with cellular telephone.

WARNING

YOU ARE ENTERING AN H₂S AREA AUTHORIZED PERSONNEL ONLY

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED
- 2. HARD HATS REQUIRED
- 3. SMOKING IN DESIGNATED AREAS ONLY
- 4. BE WIND CONSCIOUS AT ALL TIMES
- 5. CK WITH BTA OIL PRODUCERS LLC FOREMAN AT MAIN OFFICE

BTA OIL PRODUCERS LLC

1-432-682-3753



BTA Oil Producers, LLC

Lea County, NM (NAD 83) Sec 27, T25-S, R33-E Rojo 7811 27-22 Fed Com #51H

Wellbore #1

Plan: Design #1

Survey Report - Geographic

11 November, 2020







QES Survey Report - Geographic



BTA Oil Producers, LLC Company: Project: Lea County, NM (NAD 83) Sec 27, T25-S, R33-E Site:

Well: Rojo 7811 27-22 Fed Com #51H

Wellbore #1 Wellbore: Design: Design #1

Local Co-ordinate Reference:

Well Rojo 7811 27-22 Fed Com #51H WELL @ 3352.0usft (Patterson) **TVD Reference:** WELL @ 3352.0usft (Patterson) MD Reference:

North Reference: Grid

Minimum Curvature **Survey Calculation Method:** Database: EDM 5000.1 Single User Db

Lea County, NM (NAD 83) **Project**

US State Plane 1983 Map System: North American Datum 1983 Geo Datum: Map Zone: New Mexico Eastern Zone

Mean Sea Level System Datum:

Site Sec 27, T25-S, R33-E

Northing: 403,958.90 usft Site Position: Latitude: 32.108177 From: Мар Easting: 782,026.00 usft Longitude: -103.555986 Slot Radius: 0.41 ° **Position Uncertainty:** 0.0 usft 13-3/16 " **Grid Convergence:**

Well Rojo 7811 27-22 Fed Com #51H **Well Position** +N/-S 0.0 usft Northing: 399,119.70 usft Latitude: 32.094867 +E/-W 0.0 usft Easting: 782,416.00 usft Longitude: -103.554839 0.0 usft usft Ground Level: 3,327.0 usft **Position Uncertainty** Wellhead Elevation:

Wellbore #1 Wellbore Magnetics **Model Name** Sample Date Declination Dip Angle Field Strength (°) (°) (nT) HDGM2020 47,610.80000000 10/21/2020 6.48 59.67

Design #1 Design Audit Notes: Version: Phase: PLAN Tie On Depth: 0.0 **Vertical Section:** Depth From (TVD) +N/-S +E/-W Direction (usft) (usft) (usft) (°) 0.0 0.0 0.0 2.94

10/21/2020 **Survey Tool Program** Date From То (usft) (usft) Survey (Wellbore) **Tool Name** Description OWSG MWD - Standard MWD 0.0 21,337.4 Design #1 (Wellbore #1)

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
100.0	0.00	0.00	100.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
200.0	0.00	0.00	200.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
300.0	0.00	0.00	300.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
400.0	0.00	0.00	400.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
500.0	0.00	0.00	500.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
600.0	0.00	0.00	600.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
700.0	0.00	0.00	700.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
800.0	0.00	0.00	0.008	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
900.0	0.00	0.00	900.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
1,000.0	0.00	0.00	1,000.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839
1,100.0	0.00	0.00	1,100.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554839

QES

Survey Report - Geographic





Company: BTA Oil Producers, LLC Project: Lea County, NM (NAD 83) Site: Sec 27, T25-S, R33-E

Well: Rojo 7811 27-22 Fed Com #51H

Wellbore: Wellbore #1 Design: Design #1

Local Co-ordinate Reference:

Well Rojo 7811 27-22 Fed Com #51H TVD Reference: WELL @ 3352.0usft (Patterson) MD Reference: WELL @ 3352.0usft (Patterson)

North Reference: Grid

Survey Calculation Method: Minimum Curvature

Database: EDM 5000.1 Single User Db

sign:	Design #1				Database:		LDW 0000	i Single Oser Db	
nned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
1,200.0	0.00	0.00	1,200.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554
1,300.0	0.00	0.00	1,300.0	0.0	0.0	399,119.70	782,416.00	32.094867	-103.554
Build 2°/			,			,	. ,		
1,400.0	2.00	107.91	1,400.0	-0.5	1.7	399,119.16	782,417.66	32.094866	-103.554
1,500.0	4.00	107.91	1,499.8	-2.1	6.6	399,117.55	782,422.64	32.094861	-103.554
1,602.9	6.06	107.91	1,602.4	-4.9	15.2	399,114.78	782,431.23	32.094854	-103.554
EOB @ 6	5.06° Inc / 107	.91° Azm							
1,700.0	6.06	107.91	1,698.9	-8.1	25.0	399,111.63	782,440.97	32.094845	-103.554
1,800.0	6.06	107.91	1,798.3	-11.3	35.0	399,108.38	782,451.02	32.094836	-103.554
1,900.0	6.06	107.91	1,897.8	-14.6	45.1	399,105.14	782,461.06	32.094826	-103.554
2,000.0	6.06	107.91	1,997.2	-17.8	55.1	399,101.89	782,471.10	32.094817	-103.554
2,100.0	6.06	107.91	2,096.7	-21.1	65.2	399,098.65	782,481.15	32.094808	-103.554
2,200.0	6.06	107.91	2,196.1	-24.3	75.2	399,095.40	782,491.19	32.094799	-103.554
2,300.0	6.06	107.91	2,295.5	-27.5	85.2	399,092.16	782,501.24	32.094790	-103.554
2,400.0	6.06	107.91	2,395.0	-30.8	95.3	399,088.91	782,511.28	32.094781	-103.554
2,500.0	6.06	107.91	2,494.4	-34.0	105.3	399,085.67	782,521.32	32.094772	-103.554
2,600.0	6.06	107.91	2,593.9	-37.3	115.4	399,082.42	782,531.37	32.094763	-103.554
2,700.0	6.06	107.91	2,693.3	-40.5	125.4	399,079.18	782,541.41	32.094753	-103.554
2,800.0	6.06	107.91	2,792.7	-43.8	135.5	399,075.93	782,551.45	32.094744	-103.554
2,900.0	6.06	107.91	2,892.2	-47.0	145.5	399,072.69	782,561.50	32.094735	-103.554
3,000.0	6.06	107.91	2,991.6	-50.3	155.5	399,069.44	782,571.54	32.094726	-103.554
3,100.0	6.06	107.91	3,091.1	-53.5	165.6	399,066.20	782,581.59	32.094717	-103.554
3,200.0	6.06	107.91	3,190.5	-56.7	175.6	399,062.95	782,591.63	32.094708	-103.554
3,300.0	6.06	107.91	3,290.0	-60.0	185.7	399,059.71	782,601.67	32.094699	-103.554
3,400.0 3,500.0	6.06	107.91 107.91	3,389.4	-63.2	195.7 205.8	399,056.46	782,611.72 782,621.76	32.094690 32.094681	-103.554 -103.554
3,600.0	6.06 6.06	107.91	3,488.8 3,588.3	-66.5 -69.7	205.8	399,053.22 399,049.97	782,631.80	32.094671	-103.554
3,700.0	6.06	107.91	3,687.7	-73.0	225.9	399,046.73	782,641.85	32.094662	-103.554
3,800.0	6.06	107.91	3,787.2	-75.0 -76.2	235.9	399,043.48	782,651.89	32.094653	-103.554
3,900.0	6.06	107.91	3,886.6	-79.5	245.9	399,040.24	782,661.94	32.094644	-103.554
4,000.0	6.06	107.91	3,986.0	-82.7	256.0	399,036.99	782,671.98	32.094635	-103.554
4,100.0	6.06	107.91	4,085.5	-86.0	266.0	399,033.75	782,682.02	32.094626	-103.553
4,200.0	6.06	107.91	4,184.9	-89.2	276.1	399,030.50	782,692.07	32.094617	-103.553
4,300.0	6.06	107.91	4,284.4	-92.4	286.1	399,027.26	782,702.11	32.094608	-103.553
4,400.0	6.06	107.91	4,383.8	-95.7	296.2	399,024.01	782,712.16	32.094598	-103.553
4,500.0	6.06	107.91	4,483.3	-98.9	306.2	399,020.77	782,722.20	32.094589	-103.553
4,600.0	6.06	107.91	4,582.7	-102.2	316.2	399,017.52	782,732.24	32.094580	-103.553
4,700.0	6.06	107.91	4,682.1	-105.4	326.3	399,014.28	782,742.29	32.094571	-103.553
4,800.0	6.06	107.91	4,781.6	-108.7	336.3	399,011.03	782,752.33	32.094562	-103.553
4,900.0	6.06	107.91	4,881.0	-111.9	346.4	399,007.79	782,762.37	32.094553	-103.553
5,000.0	6.06	107.91	4,980.5	-115.2	356.4	399,004.54	782,772.42	32.094544	-103.553
5,100.0	6.06	107.91	5,079.9	-118.4	366.5	399,001.30	782,782.46	32.094535	-103.553
5,200.0	6.06	107.91	5,179.3	-121.6	376.5	398,998.05	782,792.51	32.094525	-103.553
5,300.0	6.06	107.91	5,278.8	-124.9	386.6	398,994.81	782,802.55	32.094516	-103.553
5,400.0	6.06	107.91	5,378.2	-128.1	396.6	398,991.56	782,812.59	32.094507	-103.553
5,500.0	6.06	107.91	5,477.7	-131.4	406.6	398,988.31	782,822.64	32.094498	-103.553
5,600.0	6.06	107.91	5,577.1	-134.6	416.7	398,985.07	782,832.68	32.094489	-103.553
5,700.0	6.06	107.91	5,676.5	-137.9	426.7	398,981.82	782,842.72	32.094480	-103.553
5,800.0	6.06	107.91	5,776.0	-141.1	436.8	398,978.58	782,852.77	32.094471	-103.553
5,900.0	6.06	107.91	5,875.4	-144.4	446.8	398,975.33	782,862.81	32.094462	-103.553
6,000.0	6.06	107.91	5,974.9	-147.6	456.9	398,972.09	782,872.86	32.094453	-103.553
6,100.0	6.06	107.91	6,074.3	-150.9	466.9	398,968.84	782,882.90	32.094443	-103.553
6,200.0	6.06	107.91	6,173.8	-154.1	476.9	398,965.60	782,892.94	32.094434	-103.553
6,300.0	6.06	107.91	6,273.2	-157.3	487.0	398,962.35	782,902.99	32.094425	-103.553
6,400.0	6.06	107.91	6,372.6	-160.6	497.0	398,959.11	782,913.03	32.094416	-103.5532

QES

Survey Report - Geographic



BTA Oil Producers, LLC Company: Project: Lea County, NM (NAD 83) Sec 27, T25-S, R33-E Site:

Well: Rojo 7811 27-22 Fed Com #51H

Wellbore: Wellbore #1 Design: Design #1

Planned Survey

9,300.0

9,400.0

9.500.0

9.600.0

9,700.0

9,800.0

9 900 0

10,000.0

10,100.0

10 200 0

10,300.0

10,400.0

10.500.0

10,572.7

10,600.0

10.625.0

10,650.0

10,675.0

10,700.0

10.725.0

10,750.0

Build 12°/100' 10,575.0

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.28

3.28

6.28

9.28

12.28

15.28

18.28

21.28

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

359.58

359.58

359.58

359.58

359.58

359.58

359.58

359.58

9,266.8

9,366.8

9 466 8

9.566.8

9,666.8

9.766.8

9.866.8

9 966 8

10,066.8

10 166 8

10,266.8

10,366.8

10.466.8

10,539.5

10.541.8

10,566.8

10.591.7

10,616.5

10,641.1

10,665.3

10,689.3

10,712.8

-195.9

-195.9

-1959

-195.9

-195.9

-195.9

-195.9

-1959

-195.9

-1959

-195.9

-195.9

-1959

-195.9

-195.9

-195.1

-193.1

-189.7

-185.0

-179.0

-171.8

-163.4

606.4

606.4

606 4

606.4

606.4

606.4

606 4

606 4

606.4

606 4

606.4

606.4

606 4

606.4

606.4

606.4

606.4

606.3

606.3

606.3

606.2

606.2

398,923.77

398,923.77

398 923 77

398.923.77

398.923.77

398.923.77

398 923 77

398 923 77

398,923.77

398 923 77

398,923.77

398,923.77

398 923 77

398,923.77

398.923.78

398,924.56

398.926.64

398,930.02

398,934.70

398,940.65

398,947.87

398,956.33

783,022.39

783,022.39

783.022.39

783.022.39

783.022.39

783.022.39

783 022 39

783 022 39

783,022.39

783 022 39

783,022.39

783,022.39

783.022.39

783,022.39

783,022.39

783,022.38

783.022.37

783,022.34

783,022.31

783,022.26

783.022.21

783,022.15

32.094317

32.094317

32.094317

32.094317

32.094317

32.094317

32 094317

32 094317

32.094317

32.094317

32.094317

32.094317

32.094317

32.094317

32.094317

32.094319

32.094325

32.094334

32.094347

32.094363

32.094383

32.094406

-103.552886

-103.552886

-103 552886

-103.552886

-103.552886

-103.552886

-103.552886

-103 552886

-103.552886

-103 552886

-103.552886

-103.552886

-103.552886

-103.552886

-103.552886

-103.552886

-103.552886

-103.552886

-103.552886

-103.552886

-103.552886

-103.552886

Local Co-ordinate Reference:

Well Rojo 7811 27-22 Fed Com #51H WELL @ 3352.0usft (Patterson) TVD Reference: MD Reference: WELL @ 3352.0usft (Patterson)

North Reference: Grid

Minimum Curvature **Survey Calculation Method:** Database: EDM 5000.1 Single User Db

Measured Vertical Мар Мар Northing **Easting** Depth Inclination **Azimuth** Depth +N/-S +E/-W (usft) (usft) (usft) (usft) (usft) (°) (usft) Latitude Longitude 107.91 -163.8 398,955.86 782,923.07 32.094407 -103.553205 6,500.0 6.06 6.472.1 507.1 6,600.0 6.06 107.91 6,571.5 -167.1 517.1 398,952.62 782,933.12 32.094398 -103.553173 6,700.0 107.91 6.671.0 -170.3398.949.37 782,943.16 32.094389 -103.553141 6.06 527.2 6,800.0 6.06 107.91 6,770.4 -173.6 537.2 398,946.13 782,953.21 32.094380 -103.553108 6,900.0 6.06 107.91 6,869.8 -176.8 547.3 398,942.88 782,963.25 32.094370 -103.553076 6.06 107.91 6.969.3 557.3 398.939.64 32.094361 7,000.0 -180.1782.973.29 -103.553044 7,100.0 6.06 107.91 7,068.7 -183.3 567.3 398,936.39 782,983.34 32.094352 -103.553011 7,168.2 398,933.15 32.094343 7,200.0 6.06 107.91 -186.6 577.4 782,993.38 -103.552979 7,300.0 6.06 107.91 7,267.6 -189.8587.4 398,929.90 783,003.42 32.094334 -103.552947 783,007.16 6.06 107.91 7,304.6 591.2 398,928.69 32.094331 -103.552935 7.337.2 -191.0 Drop 2°/100' 4.80 107.91 7,367.1 -192.8 596.8 398,926.87 783,012.82 32.094325 -103.552916 7.400.0 7,500.0 2.80 107.91 7,466.9 -194.9 603.1 398,924.83 783,019.13 32.094320 -103.552896 107.91 7,600.0 0.80 7,566.8 -195.8606.1 398,923.86 783,022.12 32.094317 -103.552886 7,607.0 7,640.2 0.00 0.00 -195.9 606.4 398.923.77 783,022.39 32.094317 -103.552886 EOD @ Vert 7,700.0 0.00 0.00 7,666.8 -195.9 606 4 398,923.77 783,022.39 32.094317 -103.552886 7,800.0 0.00 0.00 7,766.8 -195.9 606.4 398,923.77 783,022.39 32.094317 -103.552886 7.900.0 0.00 0.00 7 866 8 -1959606 4 398 923 77 783.022.39 32.094317 -103 552886 8,000.0 0.00 0.00 7,966.8 -195.9 606.4 398,923.77 783,022.39 32.094317 -103.552886 8,100.0 0.00 0.00 8,066.8 -195.9 606.4 398,923.77 783,022.39 32.094317 -103.552886 8.200.0 0.00 0.00 8 166 8 -1959606 4 398 923 77 783.022.39 32 094317 -103 552886 8.300.0 0.00 0.00 8.266.8 -195.9 606.4 398.923.77 783.022.39 -103.552886 32.094317 8,400.0 0.00 0.00 8,366.8 -195.9 606.4 398,923.77 783.022.39 32.094317 -103.552886 8.500.0 0.00 0.00 8.466.8 -195.9 606.4 398.923.77 783.022.39 32.094317 -103.552886 8.600.0 0.00 0.00 8.566.8 -195.9 606 4 398.923.77 783 022 39 32.094317 -103.552886 8,700.0 0.00 0.00 8.666.8 -195.9606.4 398.923.77 783.022.39 32.094317 -103.552886 8,800.0 0.00 0.00 8.766.8 -195.9606.4 398,923.77 783,022.39 32.094317 -103.552886 8 900 0 0.00 0.00 8 866 8 -1959606 4 398 923 77 783 022 39 32 094317 -103 552886 9,000.0 0.00 0.00 8,966.8 -195.9 606 4 398,923.77 783,022.39 32.094317 -103.552886 -103.552886 9,100.0 0.00 0.00 9,066.8 -195.9 606.4 398,923.77 783,022.39 32.094317 9.200.0 0.00 0.00 9.166.8 -1959606 4 398 923 77 783.022.39 32.094317 -103.552886



BUX

QESSurvey Report - Geographic

TVD Reference:

MD Reference:



Company:BTA Oil Producers, LLCProject:Lea County, NM (NAD 83)Site:Sec 27, T25-S, R33-E

Well: Rojo 7811 27-22 Fed Com #51H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference:

Reference: Well Rojo 7811 27-22 Fed Com #51H
WELL @ 3352.0usft (Patterson)
WELL @ 3352.0usft (Patterson)

North Reference: Grid

Survey Calculation Method: Minimum Curvature

Database: EDM 5000.1 Single User Db

Planned Survey	,								
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
10,775.0	24.28	359.58	10,735.8	-153.7	606.1	398,966.01	783,022.08	32.094433	-103.552886
10,800.0	27.28	359.58	10,758.3	-142.8	606.0	398,976.88	783,022.00	32.094463	-103.552886
10,825.0	30.28	359.58	10,780.3	-142.8	605.9	398,988.92	783,021.91	32.094496	-103.552886
10,850.0	33.28	359.58	10,760.5	-130.6	605.8	399,002.08	783,021.81	32.094532	-103.552886
10,875.0	36.28	359.58	10,822.0	-117.0	605.7	399,016.34	783,021.70	32.094571	-103.552886
10,900.0	39.28	359.58	10,841.8	-88.0	605.6	399,031.65	783,021.59	32.094613	-103.552886
10,925.0	42.28	359.58	10,860.7	-71.7	605.5	399,047.98	783,021.47	32.094658	-103.552886
10,950.0	45.28	359.58	10,878.8	-54.4	605.3	399,065.28	783,021.34	32.094706	-103.552886
10,975.0	48.28	359.58	10,895.9	-36.2	605.2	399,083.49	783,021.21	32.094756	-103.552886
11,000.0	51.28	359.58	10,912.0	-17.1	605.1	399,102.58	783,021.06	32.094808	-103.552886
11,025.0	54.28	359.58	10,927.1	2.8	604.9	399,122.48	783,020.92	32.094863	-103.552886
11,050.0	57.28	359.58	10,941.2	23.5	604.8	399,143.15	783,020.76	32.094920	-103.552886
11,075.0	60.28	359.58	10,954.2	44.8	604.6	399,164.53	783,020.61	32.094979	-103.552886
11,100.0	63.28	359.58	10,966.0	66.9	604.4	399,186.56	783,020.44	32.095039	-103.552886
11,125.0	66.28	359.58	10,976.6	89.5	604.3	399,209.17	783,020.27	32.095101	-103.552886
11,150.0	69.28	359.58	10,986.1	112.6	604.1	399,232.31	783,020.10	32.095165	-103.552886
11,175.0	72.28	359.58	10,994.3	136.2	603.9	399,255.91	783,019.93	32.095230	-103.552886
11,200.0	75.28	359.58	11,001.3	160.2	603.8	399,279.91	783,019.75	32.095296	-103.552886
11,225.0	78.28	359.58	11,007.0	184.5	603.6	399,304.25	783,019.57	32.095363	-103.552886
11,250.0	81.28	359.58	11,011.4	209.1	603.4	399,328.85	783,019.39	32.095430	-103.552886
11,275.0	84.28	359.58	11,014.6	233.9	603.2	399,353.65	783,019.20	32.095498	-103.552886
11,300.0	87.28	359.58	11,016.4	258.9	603.0	399,378.58	783,019.02	32.095567	-103.552886
11,322.7	90.00	359.58	11,017.0	281.5	602.9	399,401.22	783,018.85	32.095629	-103.552886
	90° Inc / 359.5			200	002.0	000, 101122	100,010.00	02.000020	100.002000
11,400.0	90.00	359.58	11,017.0	358.9	602.3	399,478.56	783,018.28	32.095842	-103.552886
11,500.0	90.00	359.58	11,017.0	458.9	601.5	399,578.56	783,017.54	32.096117	-103.552886
11,600.0	90.00	359.58	11,017.0	558.9	600.8	399,678.56	783,016.79	32.096392	-103.552886
11,700.0	90.00	359.58	11,017.0	658.9	600.1	399,778.56	783,016.05	32.096666	-103.552886
11,800.0	90.00	359.58	11,017.0	758.9	599.3	399,878.55	783,015.31	32.096941	-103.552886
11,900.0	90.00	359.58	11,017.0	858.9	598.6	399,978.55	783,014.57	32.097216	-103.552886
12,000.0	90.00	359.58	11,017.0	958.8	597.8	400,078.55	783,013.83	32.097491	-103.552886
12,100.0	90.00	359.58	11,017.0	1,058.8	597.1	400,178.54	783,013.09	32.097766	-103.552886
12,200.0	90.00	359.58	11,017.0	1,158.8	596.3	400,278.54	783,012.35	32.098041	-103.552886
12,300.0	90.00	359.58	11,017.0	1,258.8	595.6	400,378.54	783,011.60	32.098316	-103.552886
12,400.0	90.00	359.58	11,017.0	1,358.8	594.9	400,478.54	783,010.86	32.098591	-103.552886
12,500.0	90.00	359.58	11,017.0	1,458.8	594.1	400,578.53	783,010.12	32.098865	-103.552886
12,600.0	90.00	359.58	11,017.0	1,558.8	593.4	400,678.53	783,009.38	32.099140	-103.552887
12,700.0	90.00	359.58	11,017.0	1,658.8	592.6	400,778.53	783,008.64	32.099415	-103.552887
12,800.0	90.00	359.58	11,017.0	1,758.8	591.9	400,878.53	783,007.90	32.099690	-103.552887
12,900.0	90.00	359.58	11,017.0	1,858.8	591.2	400,978.52	783,007.16	32.099965	-103.552887
13,000.0	90.00	359.58	11,017.0	1,958.8	590.4	401,078.52	783,006.41	32.100240	-103.552887
13,100.0	90.00	359.58	11,017.0	2,058.8	589.7	401,178.52	783,005.67	32.100515	-103.552887
13,200.0	90.00	359.58	11,017.0	2,158.8	588.9	401,278.51	783,004.93	32.100790	-103.552887
13,300.0	90.00	359.58	11,017.0	2,258.8	588.2	401,378.51	783,004.19	32.101064	-103.552887
13,400.0	90.00	359.58	11,017.0	2,358.8	587.5	401,478.51	783,003.45	32.101339	-103.552887
13,500.0	90.00	359.58	11,017.0	2,458.8	586.7	401,578.51	783,002.71	32.101614	-103.552887
13,600.0	90.00	359.58	11,017.0	2,558.8	586.0	401,678.50	783,001.97	32.101889	-103.552887
13,700.0	90.00	359.58	11,017.0	2,658.8	585.2	401,778.50	783,001.22	32.102164	-103.552887
13,800.0	90.00	359.58	11,017.0	2,758.8	584.5	401,878.50	783,000.48	32.102439	-103.552887
13,900.0	90.00	359.58	11,017.0	2,858.8	583.7	401,978.50	782,999.74	32.102714	-103.552887
14,000.0	90.00	359.58	11,017.0	2,958.8	583.0	402,078.49	782,999.00	32.102989	-103.552887
14,100.0	90.00	359.58	11,017.0	3,058.8	582.3	402,178.49	782,998.26	32.103263	-103.552887
14,200.0	90.00	359.58	11,017.0	3,158.8	581.5	402,278.49	782,997.52	32.103538	-103.552887
14,300.0	90.00	359.58	11,017.0	3,258.8	580.8	402,378.48	782,996.78	32.103813	-103.552887
14,400.0	90.00	359.58	11,017.0	3,358.8	580.0	402,478.48	782,996.03	32.104088	-103.552888

QES

Survey Report - Geographic





Company: BTA Oil Producers, LLC Project: Lea County, NM (NAD 83) Site: Sec 27, T25-S, R33-E

Well: Rojo 7811 27-22 Fed Com #51H

Wellbore: Wellbore #1 Design: Design #1

Local Co-ordinate Reference:

Well Rojo 7811 27-22 Fed Com #51H TVD Reference: WELL @ 3352.0usft (Patterson) MD Reference: WELL @ 3352.0usft (Patterson)

North Reference: Grid

Survey Calculation Method: Minimum Curvature Database: EDM 5000.1 Single User Db

lanned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
14,500.0	90.00	359.58	11,017.0	3,458.8	579.3	402,578.48	782,995.29	32.104363	-103.5528
14,600.0	90.00	359.58	11,017.0	3,558.8	578.6	402,678.48	782,994.55	32.104638	-103.5528
14,700.0	90.00	359.58	11,017.0	3,658.8	577.8	402,778.47	782,993.81	32.104913	-103.5528
14,800.0	90.00	359.58	11,017.0	3,758.8	577.1	402,878.47	782,993.07	32.105188	-103.5528
14,900.0	90.00	359.58	11,017.0	3,858.8	576.3	402,978.47	782,992.33	32.105462	-103.5528
15,000.0	90.00	359.58	11,017.0	3,958.8	575.6	403,078.47	782,991.59	32.105737	-103.5528
15,100.0	90.00	359.58	11,017.0	4,058.8	574.8	403,178.46	782,990.84	32.106012	-103.5528
15,200.0	90.00	359.58	11,017.0	4,158.8	574.1	403,278.46	782,990.10	32.106287	-103.5528
15,300.0	90.00	359.58	11,017.0	4,258.8	573.4	403,378.46	782,989.36	32.106562	-103.5528
15,400.0	90.00	359.58	11,017.0	4,358.8	572.6	403,478.45	782,988.62	32.106837	-103.5528
15,500.0	90.00	359.58	11,017.0	4,458.8	571.9	403,578.45	782,987.88	32.107112	-103.5528
15,600.0	90.00	359.58	11,017.0	4,558.7	571.1	403,678.45	782,987.14	32.107387	-103.5528
15,700.0	90.00	359.58	11,017.0	4,658.7	570.4	403,778.45	782,986.40	32.107662	-103.5528
15,800.0	90.00	359.58	11,017.0	4,758.7	569.7	403,878.44	782,985.65	32.107936	-103.5528
15,900.0	90.00	359.58	11,017.0	4,858.7	568.9	403,978.44	782,984.91	32.108211	-103.5528
16,000.0	90.00	359.58	11,017.0	4,958.7	568.2	404,078.44	782,984.17	32.108486	-103.5528
16,100.0	90.00	359.58	11,017.0	5,058.7	567.4	404,178.44	782,983.43	32.108761	-103.5528
16,200.0	90.00	359.58	11,017.0	5,158.7	566.7	404,278.43	782,982.69	32.109036	-103.5528
16,300.0	90.00	359.58	11,017.0	5,258.7	565.9	404,378.43	782,981.95	32.109311	-103.5528
16,400.0	90.00	359.58	11,017.0	5,358.7	565.2	404,478.43	782,981.21	32.109586	-103.5528
16,500.0	90.00	359.58	11,017.0	5,458.7	564.5	404,578.42	782,980.46	32.109861	-103.5528
16,600.0	90.00	359.58	11,017.0	5,558.7	563.7	404,678.42	782,979.72	32.110135	-103.5528
16,700.0	90.00	359.58	11,017.0	5,658.7	563.0	404,778.42	782,978.98	32.110410	-103.5528
16,800.0	90.00	359.58	11,017.0	5,758.7	562.2	404,878.42	782,978.24	32.110685	-103.5528
16,900.0	90.00	359.58	11,017.0	5,858.7	561.5	404,978.41	782,977.50	32.110960	-103.5528
17,000.0	90.00	359.58	11,017.0	5,958.7	560.8	405,078.41	782,976.76	32.111235	-103.552
17,100.0	90.00	359.58	11,017.0	6,058.7	560.0	405,178.41	782,976.01	32.111510	-103.5528
17,200.0	90.00	359.58	11,017.0	6,158.7	559.3	405,278.40	782,975.27	32.111785	-103.5528
17,300.0	90.00	359.58	11,017.0	6,258.7	558.5	405,378.40	782,974.53	32.112060	-103.5528
17,400.0	90.00	359.58	11,017.0	6,358.7	557.8	405,478.40	782,973.79	32.112334	-103.5528
17,500.0	90.00	359.58	11,017.0	6,458.7	557.1	405,578.40	782,973.05	32.112609	-103.5528
17,600.0	90.00	359.58	11,017.0	6,558.7	556.3	405,678.39	782,972.31	32.112884	-103.5528
17,700.0	90.00	359.58	11,017.0	6,658.7	555.6	405,778.39	782,971.57	32.113159	-103.552
17,800.0	90.00	359.58	11,017.0	6,758.7	554.8	405,878.39	782,970.82	32.113434	-103.5528
17,900.0	90.00	359.58	11,017.0	6,858.7	554.1	405,978.39	782,970.08	32.113709	-103.552
18,000.0	90.00	359.58	11,017.0	6,958.7	553.3	406,078.38	782,969.34	32.113984	-103.552
18,100.0	90.00	359.58	11,017.0	7,058.7	552.6	406,178.38	782,968.60	32.114259	-103.552
18,200.0	90.00	359.58	11,017.0	7,158.7	551.9	406,278.38	782,967.86	32.114533	-103.5528
18,300.0	90.00	359.58	11,017.0	7,258.7	551.1	406,378.37	782,967.12	32.114808	-103.5528
18,400.0	90.00	359.58	11,017.0	7,358.7	550.4	406,478.37	782,966.38	32.115083	-103.552
18,500.0	90.00	359.58	11,017.0	7,458.7	549.6	406,578.37	782,965.63	32.115358	-103.552
18,600.0	90.00	359.58	11,017.0	7,558.7	548.9	406,678.37	782,964.89	32.115633	-103.552
18,700.0	90.00	359.58	11,017.0	7,658.7	548.2	406,778.36	782,964.15	32.115908	-103.552
18,800.0	90.00	359.58	11,017.0	7,758.7	547.4	406,878.36	782,963.41	32.116183	-103.552
18,900.0	90.00	359.58	11,017.0	7,858.7	546.7	406,978.36	782,962.67	32.116458	-103.5528
19,000.0	90.00	359.58	11,017.0	7,958.7	545.9	407,078.36	782,961.93	32.116732	-103.5528
19,100.0	90.00	359.58	11,017.0	8,058.7	545.2	407,178.35	782,961.19	32.117007	-103.552
19,200.0	90.00	359.58	11,017.0	8,158.7	544.4	407,278.35	782,960.44	32.117282	-103.5528
19,300.0	90.00	359.58	11,017.0	8,258.6	543.7	407,378.35	782,959.70	32.117557	-103.5528
19,400.0	90.00	359.58	11,017.0	8,358.6	543.0	407,478.34	782,958.96	32.117832	-103.552
19,500.0	90.00	359.58	11,017.0	8,458.6	542.2	407,578.34	782,958.22	32.118107	-103.552
19,600.0	90.00	359.58	11,017.0	8,558.6	541.5	407,678.34	782,957.48	32.118382	-103.5528
19,700.0	90.00	359.58	11,017.0	8,658.6	540.7	407,778.34	782,956.74	32.118657	-103.552
19,800.0	90.00	359.58	11,017.0	8,758.6	540.0	407,878.33	782,956.00	32.118931	-103.5528
19,900.0	90.00	359.58	11,017.0	8,858.6	539.3	407,978.33	782,955.25	32.119206	-103.5528



TETAN

QESSurvey Report - Geographic



Company:BTA Oil Producers, LLCProject:Lea County, NM (NAD 83)Site:Sec 27, T25-S, R33-E

Well: Rojo 7811 27-22 Fed Com #51H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Well Rojo 7811 27-22 Fed Com #51H WELL @ 3352.0usft (Patterson) WELL @ 3352.0usft (Patterson)

Grid


Survey Calculation Method: Minimum Curvature

Database: EDM 5000.1 Single User Db

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
20,000.0	90.00	359.58	11,017.0	8,958.6	538.5	408,078.33	782,954.51	32.119481	-103.552891
20,100.0	90.00	359.58	11,017.0	9,058.6	537.8	408,178.33	782,953.77	32.119756	-103.552891
20,200.0	90.00	359.58	11,017.0	9,158.6	537.0	408,278.32	782,953.03	32.120031	-103.552891
20,300.0	90.00	359.58	11,017.0	9,258.6	536.3	408,378.32	782,952.29	32.120306	-103.552891
20,400.0	90.00	359.58	11,017.0	9,358.6	535.6	408,478.32	782,951.55	32.120581	-103.552891
20,500.0	90.00	359.58	11,017.0	9,458.6	534.8	408,578.31	782,950.81	32.120856	-103.552891
20,600.0	90.00	359.58	11,017.0	9,558.6	534.1	408,678.31	782,950.06	32.121130	-103.552891
20,700.0	90.00	359.58	11,017.0	9,658.6	533.3	408,778.31	782,949.32	32.121405	-103.552891
20,800.0	90.00	359.58	11,017.0	9,758.6	532.6	408,878.31	782,948.58	32.121680	-103.552891
20,900.0	90.00	359.58	11,017.0	9,858.6	531.8	408,978.30	782,947.84	32.121955	-103.552891
21,000.0	90.00	359.58	11,017.0	9,958.6	531.1	409,078.30	782,947.10	32.122230	-103.552891
21,100.0	90.00	359.58	11,017.0	10,058.6	530.4	409,178.30	782,946.36	32.122505	-103.552891
21,200.0	90.00	359.58	11,017.0	10,158.6	529.6	409,278.29	782,945.62	32.122780	-103.552891
21,300.0	90.00	359.58	11,017.0	10,258.6	528.9	409,378.29	782,944.87	32.123055	-103.552891
21,337.4	90.00	359.58	11,017.0	10,296.0	528.6	409,415.70	782,944.60	32.123157	-103.552891
TD @ 21:	337' MD / 110	17' TVD							

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
VP Rojo 51H - plan hits target cen - Point	0.00 ter	0.00	7,607.0	-195.9	606.4	398,923.77	783,022.39	32.094317	-103.552886
PBHL Rojo 7811 27-22 F - plan hits target cen - Rectangle (sides W	ter	359.58 0,493.0)	11,017.0	10,296.0	528.6	409,415.70	782,944.60	32.123157	-103.552891

Plan Annotations				
Measured	Vertical	Local Coord	dinates	
Depth (usft)	Depth (usft)	+N/-S (usft)	+E/-W (usft)	Comment
1300	1300	0	0	Build 2°/100'
1603	1602	-5	15	EOB @ 6.06° Inc / 107.91° Azm
7337	7305	-191	591	Drop 2°/100'
7640	7607	-196	606	EOD @ Vert
10,573	10,539	-196	606	Build 12°/100'
11,323	11,017	282	603	EOB @ 90° Inc / 359.58° Azm / 11017' TVD
21,337	11,017	10,296	529	TD @ 21337' MD / 11017' TVD

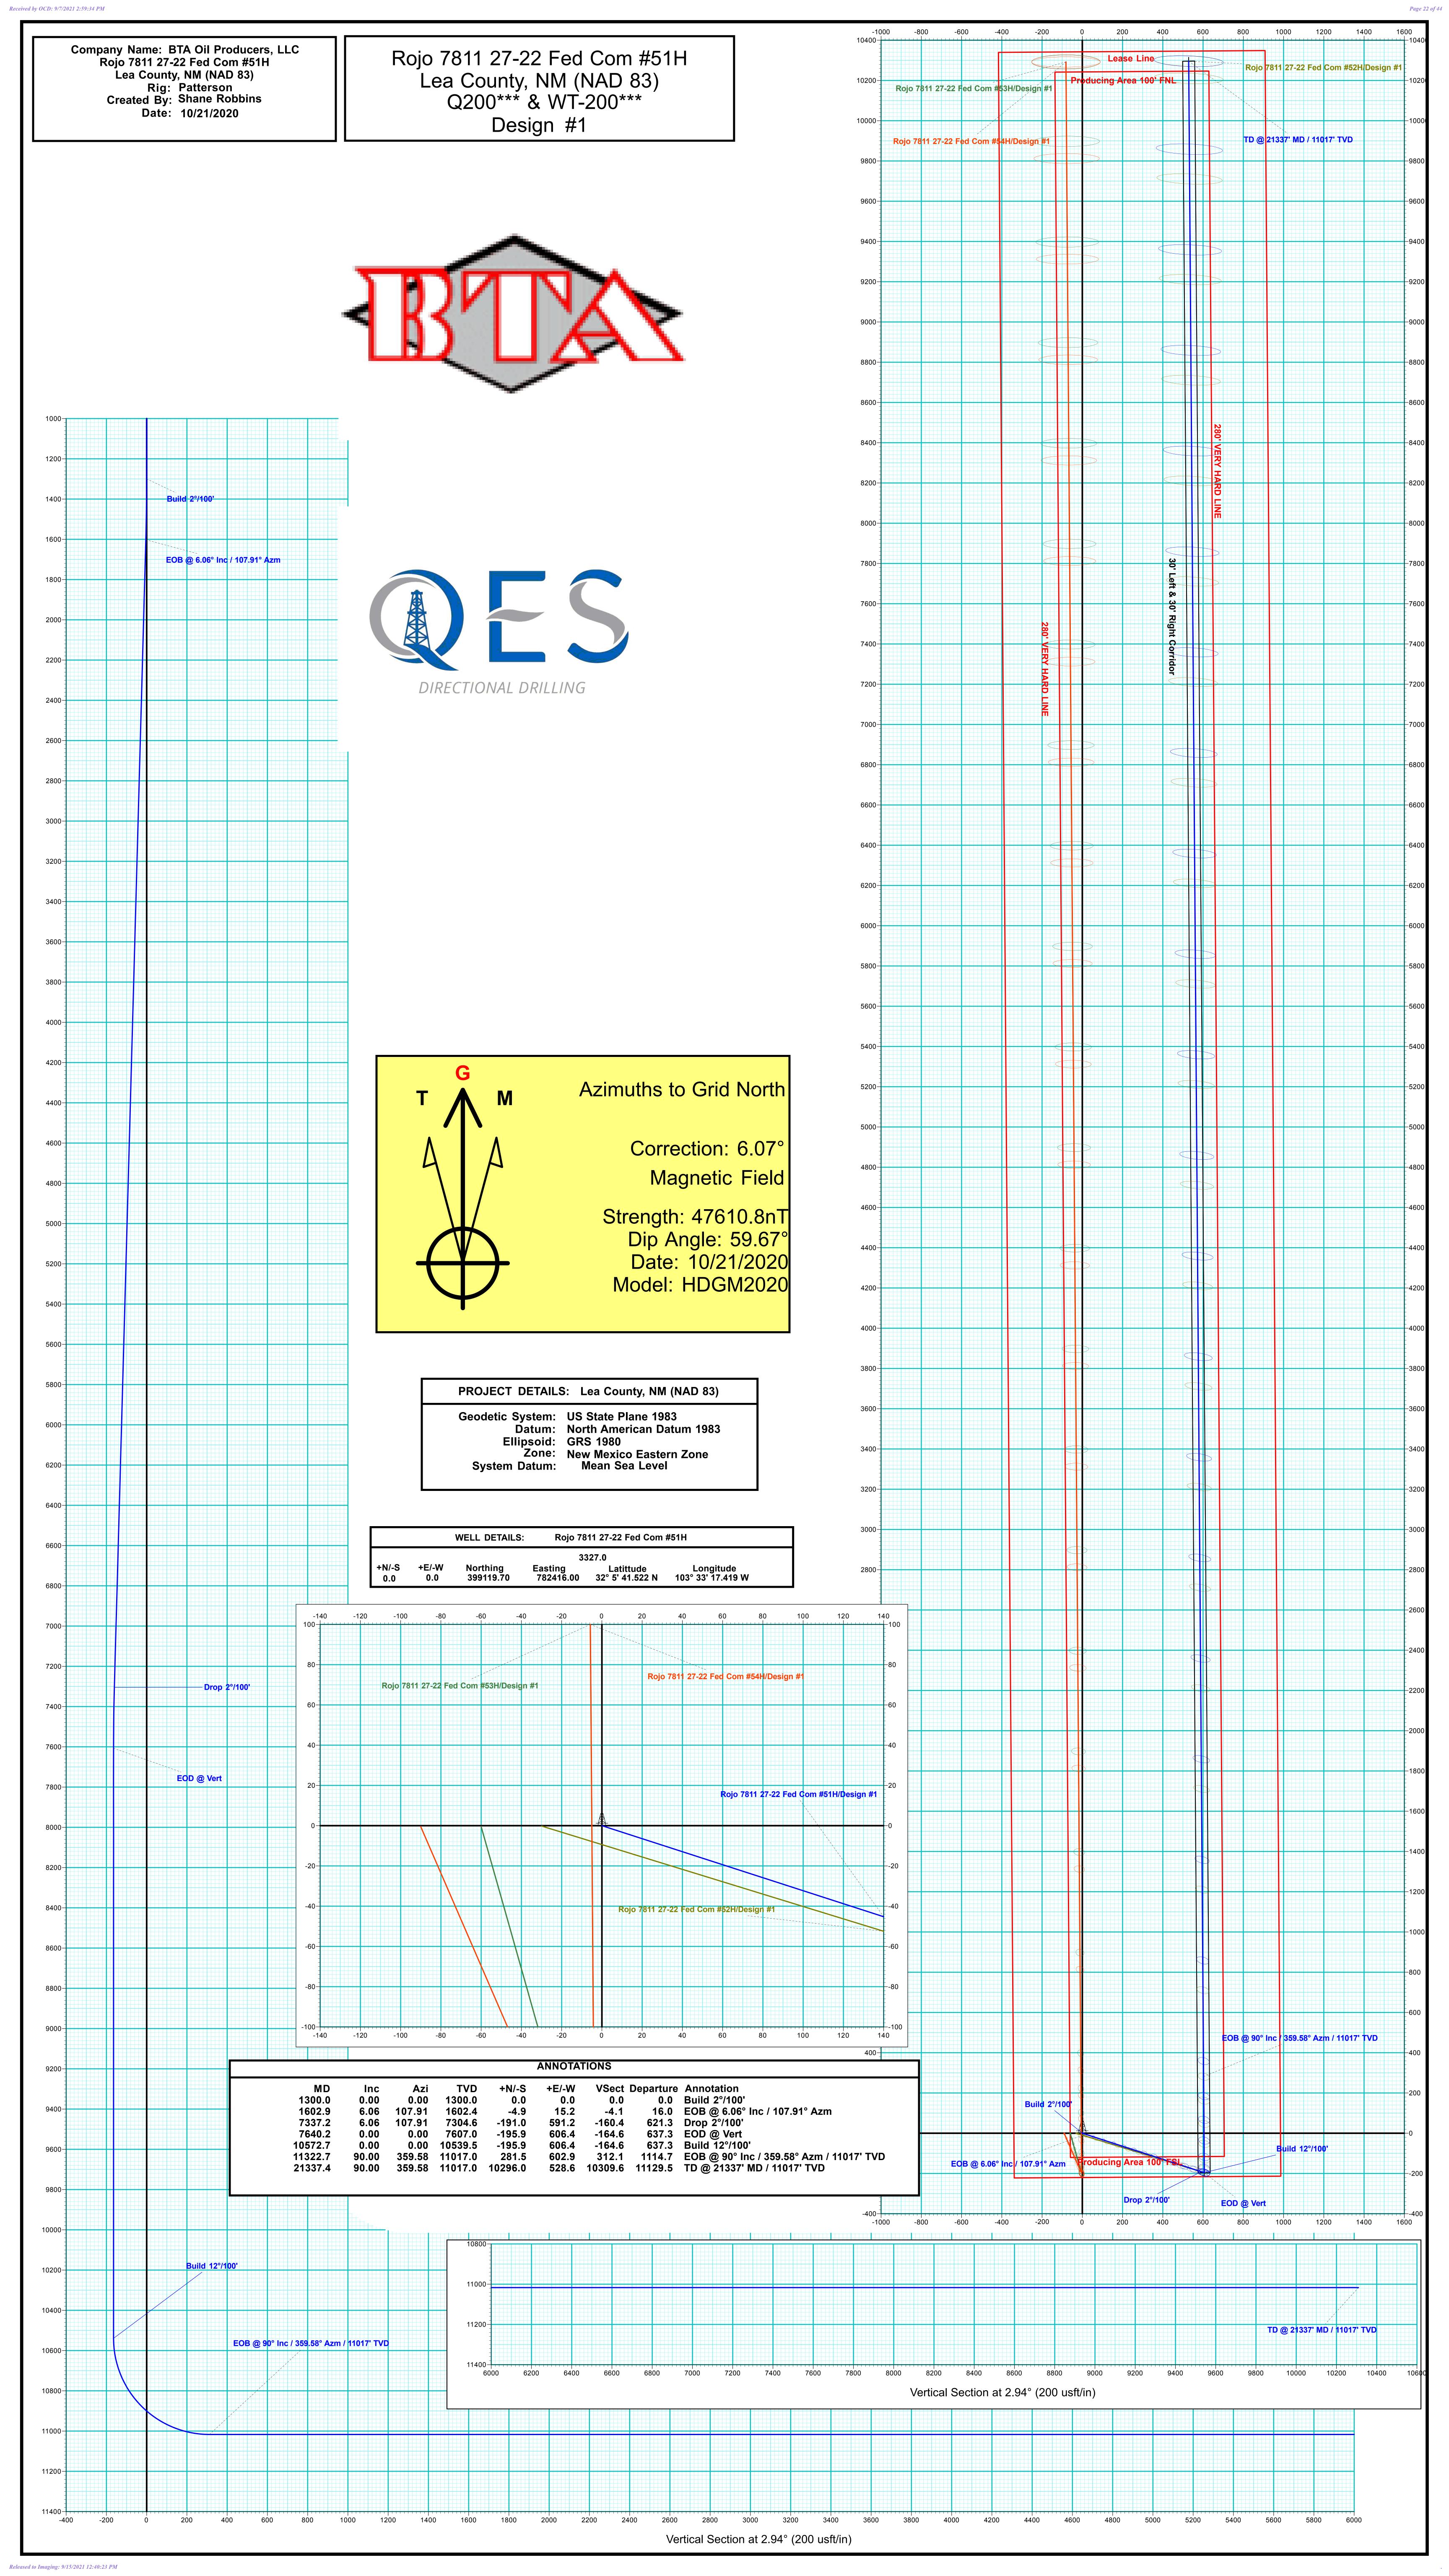

BOP Break Testing Request

BTA requests permission to allow BOP Break Testing under the following conditions:

- After a full BOP test is conducted on the first well on the pad.
- When skidding to drill a hole section that does not penetrate into the Wolfcamp.
- Full BOP test will be required prior to drilling any production hole.





U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

SUPO Data Report

APD ID: 10400065307

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 27-22 FEDERAL COM

Well Type: OIL WELL

Submission Date: 11/17/2020

Well Number: 51H

Well Work Type: Drill

Highlighted data reflects the most recent changes

Show Final Text

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

20110293_Rojo_7811_27_22_Fed_Com_51H_Topographical___Access_Rd_20201117132717.pdf

Existing Road Purpose: ACCESS Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? NO

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

20110293_Rojo_7811_27_22_Fed_Com_51H_1_Mile_Radius___C102_20201117132752.pdf

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? DEFER

Estimated Production Facilities description: Defer, CTB will be sundried at a later date.

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: OTHER

Describe type: PIT

Water source use type: STIMULATION

SURFACE CASING

DUST CONTROL

INTERMEDIATE/PRODUCTION

CASING

Source latitude: Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Water source transport method: TRUCKING

Source land ownership: FEDERAL

Source transportation land ownership: PRIVATE

Water source volume (barrels): 100000 Source volume (acre-feet): 12.88930963

Source volume (gal): 4200000

Water source and transportation map:

Rojo_7811_Water_Transportation_Map__SESE_Quarter_Quarter_of_Section_S22_T25S_R33E__20201103153339.pdf

Water source comments: Water Pit is in SESE Quarter Quarter of Section 22; T25S; R33E

New water well? N

New Water Well Info

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Well latitude: Well Longitude: Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft): Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft): Well casing type:

Well casing outside diameter (in.): Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method: Drill material:

Grout material: Grout depth:

Casing length (ft.): Casing top depth (ft.):

Well Production type: Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Using any construction materials: YES

Construction Materials description: Caliche used for construction of the drilling pad and access road will be obtained from the closest existing caliche pit as approved by the BLM or from prevailing deposits found under the location. If there is not sufficient material available, caliche will be purchased from the nearest caliche pit located in the SWNW Quarter Quarter of Section 23; T25S; R33E Lea County, NM.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: GARBAGE

Waste content description: Trash

Amount of waste: 500 pounds

Waste disposal frequency: One Time Only

Safe containment description: Trash produced during drilling and completion operations will be collected in a trash

container and disposed of properly. Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Trucked to a state approved disposal facility.

Received by OCD: 9/7/2021 2:59:34 PM

Page 28 of 44

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Waste type: SEWAGE

Waste content description: Human waste and grey water.

Amount of waste: 1000 gallons

Waste disposal frequency: One Time Only

Safe containment description: Waste material will be stored safely and disposed of properly.

Safe containment attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Trucked to a state approved disposal facility.

Waste type: DRILLING

Waste content description: Drilling fluids and cuttings.

Amount of waste: 4164 barrels

Waste disposal frequency: One Time Only

Safe containment description: All drilling fluids will be stored safely and disposed of properly.

Safe containment attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Trucked to a state approved disposal facility.

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit? NO

Reserve pit length (ft.) Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? N

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Description of cuttings location

Cuttings area length (ft.) Cuttings area width (ft.)

Cuttings area depth (ft.) Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: N

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

Rig Layout 20190930140859.pdf

20110293_Rojo_7811_27_22_Fed_Com_51H_Well_Site_Plan__600s__20201117132822.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance Multiple Well Pad Name: ROJO 7811 27-22 FEDERAL COM

Multiple Well Pad Number: 51H, 52H, 53H and 54H

Recontouring attachment:

Drainage/Erosion control construction: During construction proper erosion control methods will be used to control erosion, runoff, and siltation of the surrounding area.

Drainage/Erosion control reclamation: Proper erosion control methods will be used on the area to control erosion, runoff, and siltation of the surrounding area.

Well pad proposed disturbance

(acres): 4.49

Road proposed disturbance (acres): 0 Road interim reclamation (acres): 0

Well pad interim reclamation (acres):

Well pad long term disturbance

(acres): 3.93

(acres): 0

Road long term disturbance (acres): 0

Powerline proposed disturbance

(acres): 0

Pipeline proposed disturbance

(acres): 0

Other proposed disturbance (acres): 0

Powerline interim reclamation (acres): Powerline long term disturbance

Pipeline interim reclamation (acres): 0 Pipeline long term disturbance

Other interim reclamation (acres): 0

(acres): 0

Other long term disturbance (acres): 0

Total interim reclamation: 0.56

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Total proposed disturbance: 4.49 Total long term disturbance: 3.93

Disturbance Comments:

Reconstruction method: The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

Topsoil redistribution: Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations.

Soil treatment: To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.

Existing Vegetation at the well pad: The historic climax plant community is a grassland dominated by black grama, dropseeds, and blue stems with sand sage and shinnery oak distributed evenly throughout. Current landscape displays mesquite, shinnery oak, yucca, desert sage, fourwing saltbush, snakeweed, and bunch grasses.

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at other disturbances attachment:

Non native seed used? N

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? N

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation?

Seed harvest description:

Seed harvest description attachment:

Well Name: ROJO 7811 27-22 FEDERAL COM

Well Number: 51H

Seed Management

Seed Table

Seed Summary

Total pounds/Acre:

Seed Type

Pounds/Acre

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name: Chad Last Name: Smith

Phone: (432)682-3753 Email: CSMITH@BTAOIL.COM

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? N

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: No invasive species present. Standard regular maintenance to maintain a clear location and road.

Weed treatment plan attachment:

Monitoring plan description: Identify areas supporting weeds prior to construction; prevent the introduction and spread of weeds from construction equipment during construction; and contain weed seeds and propagules by preventing segregated topsoil from being spread to adjacent areas. No invasive species present. Standard regular maintenance to maintain a clear location and road.

Monitoring plan attachment:

Success standards: To maintain all disturbed areas as per Gold Book standards.

Pit closure description: N/A

Pit closure attachment:

Section 11 - Surface Ownership

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? N

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? Y

Previous Onsite information: Onsite conducted by McKenna Ryder BLM on 10/8/2020

Other SUPO Attachment



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

PWD Data Report

PWD disturbance (acres):

APD ID: 10400065307 **Submission Date:** 11/17/2020

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Well Type: OIL WELL Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres): PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner: PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number: Injection well name:

Assigned injection well API number? Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner: PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner: PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 51H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Bond Info Data Report

09/07/2021

APD ID: 10400065307

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 27-22 FEDERAL COM

Well Type: OIL WELL

Submission Date: 11/17/2020

Highlighted data reflects the most recent changes

Show Final Text

Well Work Type: Drill

Well Number: 51H

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB001711

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: BTA	Oil Producers	s, LLC	_OGRID: _	260297	Date:	9 /	7 / 2021		
II. Type: ☐ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.									
If Other, please descri	be:								
III. Well(s): Provide be recompleted from a					wells proposed to	be dri	lled or proposed to		
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D		Anticipated roduced Water BBL/D		
ROJO 7811 27-22	30-025-49378	P, SEC 27; 25S; 33E	220 FSL, 985 FEL	+/- 800	+/- 2000	+/-	1200		
FEDERAL COM 51H									
V. Anticipated Sched proposed to be recomp	ule: Provide the	following information		ral delivery point.			sed to be drilled or		
well Name	API	Spud Date	Date Date	Completion Commencement			Date		
ROJO 7811 27-22	30-025-49378	9/7/2022	9/27/2022	10/11/2022	11/1/20	022	12/1/2022		
FEDERAL COM 51H									
VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture. VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC. VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.									

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022								
Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.								
☐ Operator certifies capture requirement f			tion because Operator is in	compliance with its statewide	natural gas			
IX. Anticipated Nat	ural Gas Producti	on:						
We	11	API	Anticipated Average Natural Gas Rate MCF/E	Anticipated Volume of Gas for the First Yes				
X. Natural Gas Gatl	hering System (NC	GGS):						
Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily of System Segment Ti				
production operations the segment or portion XII. Line Capacity. production volume from XIII. Line Pressure. natural gas gathering Attach Operator's XIV. Confidentiality Section 2 as provided	s to the existing or point of the natural gas gas. The natural gas gas from the well prior to the operator does system(s) describe plan to manage property: Operator ass I in Paragraph (2) o	planned interconnect of to gathering system(s) to we thering system will to the date of first product does not anticipate that above will continue to enduction in response to the terts confidentiality purs	he natural gas gathering systewhich the well(s) will be considered will not have capacity to getion. At its existing well(s) connect meet anticipated increases in the increased line pressure. uant to Section 71-2-8 NMS 27.9 NMAC, and attaches a few which we have a few well as the considered with the con	ticipated pipeline route(s) corem(s), and the maximum daily nected. ather 100% of the anticipated ed to the same segment, or polline pressure caused by the neck that is a segment of the specific field description of the specific	r capacity of l natural gas ortion, of the lew well(s).			

(i)

Section 3 - Certifications Effective May 25, 2021

	<u> </u>						
Operator certifies that,	after reasonable inquiry and based on the available information at the time of submittal:						
one hundred percent of	Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport ne hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, aking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or						
hundred percent of the into account the current	e able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. The box, Operator will select one of the following:						
Well Shut-In. ☐ Opera D of 19.15.27.9 NMAC	ttor will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection C; or						
2	Plan. Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential						
	ses for the natural gas until a natural gas gathering system is available, including:						
(a)	power generation on lease;						
(b)	power generation for grid;						
(c)	compression on lease;						
(d)	liquids removal on lease;						
(e)	reinjection for underground storage;						
(f)	reinjection for temporary storage;						
(g)	reinjection for enhanced oil recovery;						
(h)	fuel cell production: and						

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

other alternative beneficial uses approved by the division.

- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: Samplejon							
Printed Name: Sammy Hajar							
Title: Regulatory Analyst							
E-mail Address: SHAJAR@BTAOIL.COM							
Date: 9/7/2021							
Phone: 432-682-3753							
OIL CONSERVATION DIVISION							
(Only applicable when submitted as a standalone form)							
Approved By:							
Title:							
Approval Date:							
Conditions of Approval:							

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Separation equipment will be sized to provide adequate separation for anticipated rates.
- Separation equipment will allow for adequate retention time to allow gas and liquids to separate.
- Separation equipment will separate all three phases (Oil, Water, and Gas).
- Collection systems are appropriately sized to handle facility production rates on all (3) phases.
- Ancillary equipment and metering is selected to be serviced without flow interruptions or the need to release gas from the well.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

Drilling Operations

- All flare stacks will be properly sized. The flare stacks will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared, unless there is an equipment
 malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety and
 the environment, at which point the gas will be vented.

Completions/Recompletions Operations

- New wells will not be flowed back until they are connected to a properly sized gathering system.
- The facility will be built/sized for maximum anticipated flowrates and pressures to minimize waste.
- For flowback operations, multiple stages of separation will be used as well as VRU and blowers to make sure waste is minimized off the storage tanks and facility.
- During initial flowback, the well stream will be routed to separation equipment.
- At an existing facility, when necessary, post separation natural gas will be flared until it meets pipeline specifications, at which point it will be turned into a collection system.
- At a new facility, post separation natural gas will be vented until storage tanks can safely function, at which point it will be flared until it meets pipeline spec.

Production Operations

- Weekly AVOs will be performed on all facilities that produce more than 60 MCFD.
- Leaking thief hatches and pressure safety valves found during AVOs will be cleaned and properly re-sealed.
- All flares will be equipped with auto-ignition systems and continuous pilot operations.
- After a well is stabilized from liquid unloading, the well will be turned back into the collection system.
- All gas lift systems will be optimized to limit the amount of waste.
- All tanks will have automatic gauging equipment installed.

Performance Standards

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- All gas will have multiple points of separation to ensure no liquids enter flares, combustors, or gas sales line.
- Weekly AVOs will be performed on all wells and facilities that produce more than 60 MCFD.
- All OOOOa facilities will be filmed with an Optical Gas Imaging Thermographer camera once per month to check for fugitive emissions.

Measurement & Estimation

- All volume that is flared and vented that is not measured will be estimated.
- All measurement equipment for flared volumes will conform to API 14.10.
- All meters will be calibrated at regular intervals according to meter manufacturer recommendations.
- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- During downhole well maintenance, BTA will use best management practices to vent as minimally as possible.
- Prior to the commencement of any maintenance, the tank or vessel will be isolated from the rest of the facilities.
- All valves upstream of the equipment will be closed and isolated.
- After equipment has been isolated, the equipment will be blown down to as low a pressure as possible into the collection system.
- If the equipment being maintained cannot be relieved into the collection system, it shall be released to a tank where the vapor can either be captured or combusted if possible.
- After downhole well maintenance, natural gas will be flared until it reaches pipeline specification.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 46817

CONDITIONS

Operator:	OGRID:
BTA OIL PRODUCERS, LLC	260297
104 S Pecos	Action Number:
Midland, TX 79701	46817
	Action Type:
	[C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created	Condition	Condition
Ву		Date
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104	9/15/2021
	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	9/15/2021
	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	9/15/2021
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing	9/15/2021