U.S. Department of the Interior BUREAU OF LAND MANAGEMENT Sundry Print Report

Well Name: HOLYFIELD 9 FED COM Well Location: T25S / R34E / SEC 9 / County or Parish/State:

SWSE /

Well Number: 721H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM16139 Unit or CA Name: Unit or CA Number:

US Well Number: 3002549244 Well Status: Approved Application for Operator: EOG RESOURCES

Permit to Drill INCORPORATED

### **Notice of Intent**

**Sundry ID:** 2638519

Type of Submission: Notice of Intent

Type of Action: Other

Date Sundry Submitted: 10/13/2021 Time Sundry Submitted: 07:48

Date proposed operation will begin: 10/26/2021

**Procedure Description:** EOG respectfully requests an amendment to our approved APD for this well to reflect the following changes: Change name from #202H to #721H. Change SHL to T-25-S, R-34-E, Sec 9, 200' FSL, 645' FEL, Lea Co., N.M. Change BHL to T-25-S, R-34-E, Sec 4, 100' FNL, 640' FEL, Lea Co., N.M. Change target formation to Wolfcamp U2. Update casing and cement program to current design.

### **Surface Disturbance**

Is any additional surface disturbance proposed?: No

### **NOI Attachments**

### **Procedure Description**

Wellhead\_9.675\_x\_7.625\_x\_5.5\_in\_csg\_20211013074741.pdf

Holyfield\_9\_Fed\_Com\_721H\_Sundry\_Des\_\_\_Rev\_Name\_\_SHL\_\_BHL\_\_tgt\_\_csg\_10.11.2021\_202110130747

32.pdf

EOG\_BLM\_10M\_Annular\_Variance\_\_\_9.625\_in\_20211013074719.pdf

Co\_Flex\_Hose\_Test\_Chart\_20211013074719.pdf

10\_M\_Choke\_Manifold\_20211013074700.pdf

 $Co\_Flex\_Hose\_Certification\_20211013074703.pdf$ 

 $9\_5\_8\_\_36ppf\_J\_55\_LTC\_20211013074659.pdf$ 

veived by OCD: 11/2/2021 3:10:58 PM Well Name: HOLYFIELD 9 FED COM Well Location: T25S / R34E / SEC 9 / County or Parish/State:

SWSE /

Well Number: 721H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM16139 Unit or CA Name: Unit or CA Number:

US Well Number: 3002549244 Well Status: Approved Application for Operator: EOG RESOURCES

Permit to Drill INCORPORATED

Page 2 o

5.500in\_20.00\_VST\_P110EC\_VAM\_SFC\_20211013074659.pdf

10\_M\_BOP\_Diagram\_11\_in\_20211013074659.pdf

7.625in\_29.70\_P110HC\_FXL\_20211013074659.pdf

5.500in\_20.00\_VST\_P110EC\_DWC\_C\_IS\_MS\_Spec\_Sheet\_20211013074659.pdf

HOLYFIELD\_9\_FED\_COM\_721H\_C\_102\_fka\_202H\_\_20211013074637.pdf

# **Operator Certification**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: STAR HARRELL Signed on: OCT 13, 2021 07:47 AM

Name: EOG RESOURCES INCORPORATED

Title: Regulatory Specialist

Street Address: 5509 CHAMPIONS DRIVE

City: MIDLAND State: TX

Phone: (432) 848-9161

Email address: STAR\_HARRELL@EOGRESOURCES.COM

#### **Field Representative**

Representative Name: Eric Brorman

Street Address: 5509 Champions Drive

Phone: (432)556-1276

City: Midland

Email address: eric\_brorman@eogresources.com

### **BLM Point of Contact**

BLM POC Name: CHRISTOPHER WALLS

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752342234 BLM POC Email Address: cwalls@blm.gov

**Disposition:** Approved **Disposition Date:** 11/02/2021

Signature: Chris Walls

State: TX

Page 2 of 2

**Zip:** 79706

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT


#### WELL LOCATION AND ACREAGE DEDICATION PLAT

¹API Number 30-025-49244		<sup>2</sup> Pool Code 96994	³ <sub>Pool Name</sub> Pitchfork Ranch; Wolfcar	mp, South
<sup>4</sup> Property Code 329345			Operty Name LD 9 FED COM	<sup>6</sup> Well Number 721H
<sup>7</sup> OGRID №. 7377		-	perator Name SOURCES, INC.	<sup>9</sup> Elevation 3334'

<sup>10</sup>Surface Location

P	9	25-S	34-E		200'	SOUTH	645'	EAST	LEA
11Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	4	25-S	34-E	-	100'	NORTH	640'	EAST	LEA
12Dedicated Acres	<sup>13</sup> Joint or I	nfill 14Co	nsolidation Co	de <sup>15</sup> Ord	er No.				
639.56									

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

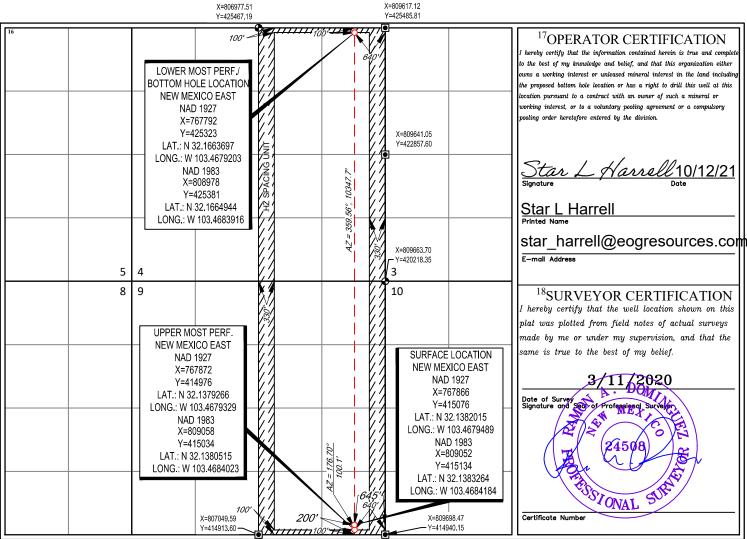

Relêased to Imaging: 11/3/2021 2:55:25 PM

S:\SURVEY\EOG\_MIDLAND\HOLYFIELD\_9\_FED\FINAL\_PRODUCTS\LO\_HOLYFIELD\_9\_FC\_721H\_C102.DWG 10/8/2021 10:07:59 AM bzollinge



## **Revised Permit Information 10/11/2021:**

Well Name: Holyfield 9 Fed Com 721H

Location: SHL: 200' FSL & 645' FEL, Section 9, T-25-S, R-34-E, Lea Co., N.M. BHL: 100' FNL & 640' FEL, Section 4, T-25-S, R-34-E, Lea Co., N.M.

**Casing Program:** 

Hole		Csg				DFmin	DFmin	DFmin
Size	Interval	OD	Weight	Grade	Conn	Collapse	Burst	Tension
12.25"	0' - 870'	9.625"	36#	J-55	LTC	1.125	1.25	1.6
8.75"	0' - 11,440'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.6
6.75"	0' - 10,940'	5.5"	20#	P-110EC	DWC/C-IS MS	1.125	1.25	1.6
6.75"	10,940' - 11,440'	5.5"	20#	P-110EC	VAM SFC	1.125	1.25	1.6
6.75"	11,440' - 22,914'	5.5"	20#	P-110EC	DWC/C-IS MS	1.125	1.25	1.6

Variance is requested to waive the centralizer requirements for the 7-5/8" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4 hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 5-1/2" casing by 7-5/8" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

**Cementing Program:** 

		Wt.	Yld	Slurry Description	
Depth	No. Sacks	ppg	Ft3/sk	Starry Description	
870'	250	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk Cello-	
9-5/8''				Flake (TOC @ Surface)	
	80	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium	
				Metasilicate (TOC @ 664')	
11,440'	450	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3%	
7-5/8''				Microbond (TOC @ 7,660')	
	1310	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-	
				M + 6% Bentonite Gel (TOC @ surface)	
22,914'	1020	14.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond	
5-1/2''				(TOC @ 10,943')	



Additive	Purpose	
Bentonite Gel	Lightweight/Lost circulation prevention	
Calcium Chloride	Accelerator	
Cello-flake	Lost circulation prevention	
Sodium Metasilicate	Accelerator	
MagOx	Expansive agent	
Pre-Mag-M	Expansive agent	
Sodium Chloride	Accelerator	
FL-62	Fluid loss control	
Halad-344	Fluid loss control	
Halad-9	Fluid loss control	
HR-601	Retarder	
Microbond	Expansive Agent	

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,860') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 1,306 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

#### **Mud Program:**

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 870'	Fresh - Gel	8.6-8.8	28-34	N/c
870' – 11,440'	Brine	10.0-10.2	28-34	N/c
11,440' - 12,244'	Oil Base	8.7-9.4	58-68	N/c - 6
12,244' – 22,914'	Oil Base	10.0-14.0	58-68	4 - 6



#### Wellhead:

EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 30 days per Onshore Order No. 2.
- Function test BOP elements per Onshore Order No. 2.
- Break testing BOP and BOPE coupled with batch drilling operations and production sections that do not penetrate the Wolfcamp or deeper formations.
- After the well section is cemented the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad. The cemented well will be secured with a blind flange and a pressure gauge for monitoring.



200' FSL 645' FEL **Revised Wellbore** 

KB: 3359' GL: 3334'

Section 9

T-25-S, R-34-E

API: 30-025-49244

Bit Size: 12-1/4" 9-5/8", 36#, J-55, LTC, 0' - 870' Bit Size: 8-3/4" 7-5/8", 29.7#, HCP-110, FXL, 0' -11,440' TOC: 10,943' Bit Size: 6-3/4" Lateral: 22,914' MD, 12,720' TVD 5-1/2", 20#, P-110EC, DWC/C-IS MS, @ 0' -**Upper Most Perf:** 100' FSL & 640' FEL Sec. 9 10,940' **Lower Most Perf:** 5-1/2", 20#, P-110EC, VAM SFC, @ 10,940' -100' FNL & 640' FEL Sec. 4 BH Location: 100' FNL & 640' FEL Sec. 4 5-1/2", 20#, P-110EC, DWC/C-IS MS, @ 11,440' -T-25-S R-34-E 22,914' KOP: 12,244'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505** 

CONDITIONS

Action 59515

#### **CONDITIONS**

Operator		OGRID:
	EOG RESOURCES INC	7377
	P.O. Box 2267	Action Number:
	Midland, TX 79702	59515
		Action Type:
		[C-103] NOI Change of Plans (C-103A)

#### CONDITIONS

Created By	Condition	Condition Date
pkautz	None	11/3/2021