
Received by OCD: 11/2/2021 9:35:50	State of New Mex	ico	Form C-103 ¹ of 8				
Office <u>District I</u> – (575) 393-6161	Energy, Minerals and Natura	al Resources WELL AP	Revised July 18, 2013				
1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> – (575) 748-1283	OIL CONSERVATION I	20 015 26					
811 S. First St., Artesia, NM 88210 <u>District III</u> – (505) 334-6178	1220 South St. France	sig Dr. 5. Indicate	5. Indicate Type of Lease STATE ☐ FEE ☒				
1000 Rio Brazos Rd., Aztec, NM 87410 District IV – (505) 476-3460	Santa Fe, NM 875	317	6. State Oil & Gas Lease No.				
1220 S. St. Francis Dr., Santa Fe, NM 87505							
SUNDRY NOTI (DO NOT USE THIS FORM FOR PROPO DIFFERENT RESERVOIR. USE "APPLIC	G BACK TO A Ceniza AC	7. Lease Name or Unit Agreement Name Ceniza AGZ Com					
PROPOSALS.)	8. Well No	umber					
Type of Well: Oil Well Name of Operator		9. OGRID Number					
EOG Resources, Inc.	7377						
3. Address of Operator104 South Fourth Street, Artesia, N		10. Pool name or Wildcat Cemetery; Morrow					
4. Well Location	00210		2.101.0 \(\)				
	1980 feet from the North	line and660 fe	eet from the West line				
Section 13	Township 20S Rang		Eddy County				
	11. Elevation (Show whether DR, 13603'C						
12. Check /	Appropriate Box to Indicate Na		Other Data				
		•					
NOTICE OF IN PERFORM REMEDIAL WORK □		REMEDIAL WORK	T REPORT OF: ☐ ALTERING CASING ☐				
TEMPORARILY ABANDON	CHANGE PLANS	COMMENCE DRILLING OPN	S. P AND A				
PULL OR ALTER CASING	MULTIPLE COMPL	CASING/CEMENT JOB					
DOWNHOLE COMMINGLE CLOSED-LOOP SYSTEM			fy OCD 24 hrs. prior to any work				
OTHER: 13. Describe proposed or comp	oleted operations. (Clearly state all pe	OTTILIN.					
	ork). SEE RULE 19.15.7.14 NMAC.	For Multiple Completions: A	Attach wellbore diagram of				
EOG Resources, Inc. plans to plug an		pot 25 sx Cmt @ 8900' - T Atoka pot 25 sx Cmt @ 8300'- T of S					
	_	-	Strawif (W 6231)				
	seded. NU BOP. POOH with production est. Spot 36 sx Class "H" cement on top to		over Morrow perfs.				
3. Spot a 34 sx Class "H" cement p	lug from 7645'-7464'. This will cover Ca	anyon top.	, let interes in politic				
 Spot a 31 sx Class "C" cement p. Perforate at 5350'. Attempt inject 	lug from 5784'-5599'. This will cover Westion rate. Spot a 27 sx Class "C" cement	olfcamp and Abo top. plug from 5450'-5289'. This will	cover DV tool. WOC & tag				
6. Spot a 25 sx Class "C" cement p	lug from 3414'-3265'. This will cover Bollug from 2169'-2020'. This will cover Gl	one Spring top.	(NOS & lag				
7. Spot a 25 sx Class "C" cement p8. Perforate at 1264'. Attempt inject	etion rate. Spot a 25 sx Class "C" cement	plug from 1264'-1115'. WOC and	I tag. This will cover casing shoe.				
9. Spot a 25 sx Class "C" cement p	lug from 610'-461'. This will cover San A lug from 59' and circulate up to surface. I	Andres top.	landathanakta sina anakta anaf				
11. Cut off wellhead and install dry l	hole marker. Clean location as per regulat	ed.	and attempt to circ cmt to surf.				
Wellbore schematics attached							
Spud Date:	Rig Release Date	e:					
****SEE ATTACHE		Must be plugged by 11/3/202					
·	above is true and complete to the bes	t of my knowledge and belief.					
SIGNATURE Tina Huerta	TITLE Reg	ulatory Specialist DATE	November 2, 2021				
Type or print name Tina Hue For State Use Only	erta E-mail address: tina	a_huerta@eogresources.com	PHONE: <u>575-748-4168</u>				

Received by OCD: 11/2/2021 9:35:50 AM

Ceniz COMMENTS	za AGZ	Com #3	Current			13-20S-24E 1980' FNL & 660	FWL			30-015-26467 3603			
				CASING					-		1 1		
				#	HOLE SIZE		WGHT	GRADE	Тор	Bottom	Sx Cmt	Circ/TOC	TOC by
				A	14 3/4	9 5/8	36		0	1214		Redi Mix to surf	
				В	8 3/4	7	23/26		0	9765	2330	Circ	
					-								
				FORMAT	ION TOPS								
						Formation	Тор			Formation	Тор		
						San Andres	560			Atoka	8850		
		1, 1				Glorieta	2119			Morrow	9251		
	A					Yeso	2183			Chester	9599		
						BS	3364						
						Abo	5654						
						WC	5734						
						Canyon	7595						
						Strawn	8251						
				TUBING I		T				ı			
				#	Joints	Description	Length	OD	ID	Grade	Wt (lb/ft):	Top (ftKB):	Btm (ftKB):
					1	2 7/8" tubing 9212 v	vith packer s	et at 9221					
				NOTES									
					1	T .			1	I			
									_				
				Perforation	on Detail								
					ormation	Тор	Bottom			Treatment		Notes	
						·		w/3000g 20%	NEFE	acid. Re-acid w/120	000a. 20%		
					Canyon	7,786	7,870	NEFE acid & 8	800# bl	ock	3,		
								Acidized w/200	00g 7 1	/5% iron control HC	L acid w/1500		
					Morrow	9,276	9,342	scf/bll N2					
DV Tool @ 5400													
				PLUGS	1								,
				#	SX	Class	Тор	Bottom	Δ	Notes			Tag
					-								
Canyon Perfs 7786-7	870	XX	EX.										
				-		1			-				
				-		1							
				ADDITIO	NAL DETAIL								
						s 2% KCL down tbg at 5	BPM at 0 nei	Pumped 150 sv I	H Neat v	v/10% thixad & 100 ev I	H Neat, Displace	d on vac with no pres	s.
				0,20,100		H Neat w/10% thixas &						prea	
		X _											
Morrow Perfs: 9276-9	9342												
	В				P '	hu D Chour 10/5/01							
	PBTD	9,675 MD			Prepared	by: D Chavez 10/5/21		1					
	TD												
ļ	10	. 0,700 WIL											

Received by OCD: 11/2/2021 9:35:50 AM

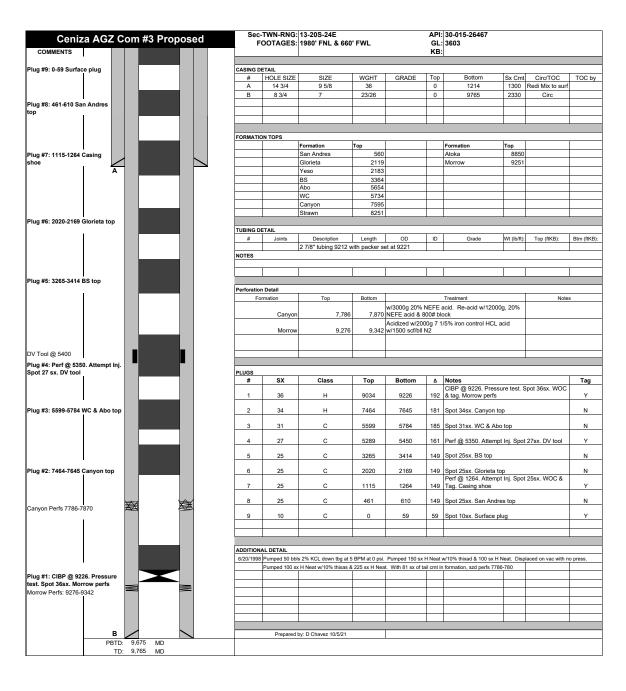

CONDITIONS FOR PLUGGING AND ABANDONMENT

OCD - Southern District

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, Notify NMOCD District Office II at (575)-748-1283 at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down. Company representative will be on location during plugging procedures.

- 1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
- 2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
- 3. Trucking companies being used to haul oilfield waste fluids to a disposal commercial or private shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
- 4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
- 5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
- 6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
- 7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.
- 8. Produced water will not be used during any part of the plugging operation.
- 9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
- 10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
- 11. Class 'C' cement will be used above 7500 feet.
- 12. Class 'H' cement will be used below 7500 feet.
- 13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged
- 14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.

- 16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
- 17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.
- 18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).
- 19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.
- 20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
 - A) Fusselman
 - B) Devonian
 - C) Morrow
 - D) Wolfcamp
 - E)Bone Springs
 - F) Delaware
 - G) Any salt sections
 - H) Abo
 - I) Glorieta
 - J) Yates.
 - K)Potash---(In the R-111-P Area (Page 3 & 4), a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
- 21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing

DRY HOLE MARKER REQUIRMENTS

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

1. Operator name 2. Lease and Well Number 3.API Number 4. Unit Letter 5. Quarter Section (feet from the North, South, East or West) 6. Section, Township and Range 7. Plugging Date 8. County (SPECIAL CASES)------AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)

SITE REMEDIATION DUE WITHIN ONE YEAR OF WELL PLUGGING COMPLETION

R-111-P Area

T 18S - R 30E

Sec 10 Unit P. Sec 11 Unit M,N. Sec 13 Unit L,M,N. Sec 14 Unit C -P. Sec 15 Unit A G,H,I,J,K,N,O,P. Sec 22 Unit All except for M. Sec 23, Sec 24 Unit C,D,E,L, Sec 26 Unit A-G, Sec 27 Unit A,B,C

T 19S - R 29E

Sec 11 Unit P. Sec 12 Unit H-P. Sec 13. Sec 14 Unit A,B,F-P. Sec 15 Unit P. Sec 22 Unit A,B,C,F,G,H,I,J K,N,O,P. Sec 23. Sec 24. Sec 25 Unit D. Sec 26 Unit A-F. Sec 27 Unit A,B,C,F,G,H.

T 19S - R 30E

Sec 2 Unit K,L,M,N. Sec 3 Unit I,L,M,N,O,P. Sec 4 Unit C,D,E,F,G,I-P. Sec 5 Unit A,B,C,E-P. Sec 6 Unit I,O,P. Sec 7 – Sec 10. Sec 11 Unit D, G—P. Sec 12 Unit A,B,E-P. Sec 13 Unit A-O. Sec 14-Sec 18. Sec 19 Unit A-L, P. Sec 20 – Sec 23. Sec 24 Unit C,D,E,F,L,M,N. Sec 25 Unit D. Sec 26 Unit A-G, I-P. Sec 27, Sec 28, Sec 29 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 32 Unit A,B,G,H,I,J,N,O,P. Sec 33. Sec 34. Sec 35. Sec 36 Unit D,E,F,I-P.

T 19S - R 31E

Sec 7 Unit C,D,E,F,L. Sec 18 Unit C,D,E,F,G,K,L. Sec 31 Unit M. Sec 34 Unit P. Sec 35 Unit M,N,O. Sec 36 Unit O,P.

T 20S - R 29E

Sec 1 Unit H,I,P. Sec 13 Unit E,L,M,N. Sec 14 Unit B-P. Sec 15 Unit A,H,I,J,N,O,P. Sec 22 Unit A,B,C,F,G,H,I,J,O,P. Sec 23. Sec 24 Unit C,D,E,F,G,J-P. Sec 25 Unit A-O. Sec 26. Sec 27 Unit A,B,G,H,I,J,O,P. Sec 34 Unit A,B,G,H. Sec 35 Unit A-H. Sec 36 Unit B-G.

T 20S - R 30E

Sec 1 – Sec 4. Sec 5 Unit A,B,C,E-P. Sec 6 Unit E,G-P. Sec 7 Unit A-H,I,J,O,P. Sec 8 – 17. Sec 18 Unit A,B,G,H,I,J,O,P. Sec 19 Unit A,B,G,H,I,J,O,P. Sec 20 – 29. Sec 30 Unit A-L,N,O,P. Sec 31 Unit A,B,G,H,I,P. Sec 32 – Sec 36.

T 20S - R 31E

Sec 1 Unit A,B,C,E-P. Sec 2. Sec 3 Unit A,B,G,H,I,J,O,P. Sec 6 Unit D,E,F,J-P. Sec 7. Sec 8 Unit E-P. Sec 9 Unit E,F,J-P. Sec 10 Unit A,B,G-P. Sec 11 – Sec 36.

T 21S - R 29E

Sec 1 – Sec 3. Sec 4 Unit L1 – L16,I,J,K,O,P. Sec 5 Unit L1. Sec 10 Unit A,B,H,P. Sec 11 – Sec 14. Sec 15 Unit A,H,I. Sec 23 Unit A,B. Sec 24 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 25 Unit A,O,P. Sec 35 Unit G,H,I,J,K,N,O,P. Sec 36 A,B,C,F – P.

T 21S - R 30E

Sec 1 – Sec 36

T 21S - R 31E

Sec 1 – Sec 36

T 22S - R 28E

Sec 36 Unit A,H,I,P.

T 22S - R 29E

Sec 1. Sec2. Sec 3 Unit I,J,N,O,P. Sec 9 Unit G – P. Sec 10 – Sec 16. Sec 19 Unit H,I,J. Sec 20 – Sec 28. Sec 29 Unit A,B,C,D,G,H,I,J,O,P. Sec 30 Unit A. Section 31 Unit C – P. Sec 32 – Sec 36

T 22S - R 30E

Sec 1 – Sec 36

T 22S - R 31E

Sec 1 – Sec 11. Sec 12 Unit B,C,D,E,F,L. Sec 13 Unit E,F,K,L,M,N. Sec 14 – Sec 23. Sec 24 Unit C,D,E,F,K,L,M,N. Sec 25 Unit A,B,C,D. Sec 26 Unit A,BC,D,G,H. Sec 27 – Sec 34.

T 23S - R 28E

Sec 1 Unit A

T 23S - R 29E

Sec 1 – Sec 5. Sec 6 Unit A – I, N,O,P. Sec 7 Unit A,B,C,G,H,I,P. Sec 8 Unit A – L, N,O,P. Sec 9 – Sec 16. Sec 17 Unit A,B,G,H,I,P. Sec 21 – Sec 23. Sec 24 Unit A – N. Sec 25 Unit D,E,L. Sec 26. Sec 27. Sec 28 Unit A – J, N,O,P. Sec 33 Unit A,B,C. Sec 34 Unit A,B,C,D,F,G,H. Sec 35. Sec 36 Unit B,C,D,E,F,G,K,L.

T 23S - R 30E

Sec 1 – Sec 18. Sec 19 Unit A – I,N,O,P. Sec 20, Sec 21. Sec 22 Unit A – N, P. Sec 23, Sec 24, Sec 25. Sec 26 Unit A,B,F-P. Sec 27 Unit C,D,E,I,N,O,P. Sec 28 Unit A – H, K,L,M,N. Sec 29 Unit A – J, O,P. Sec 30 Unit A,B. Sec 32 A,B. Sec 33 Unit C,D,H,I,O,P. Sec 34, Sec 35, Sec 36.

T 23S - R 31E

Sec 2 Unit D,E,J,O. Sec 3 – Sec 7. Sec 8 Unit A – G, K – N. Sec 9 Unit A,B,C,D. Sec 10 Unit D,P. Sec 11 Unit G,H,I,J,M,N,O,P. Sec 12 Unit E,L,K,M,N. Sec 13 Unit C,D,E,F,G,J,K,L,M,N,O. Sec 14. Sec 15 Unit A,B,E – P. Sec 16 Unit I, K – P. Sec 17 Unit B,C,D,E, I – P. Sec 18 – Sec 23. Sec 24 Unit B – G, K,L,M,N. Sec 25 Unit B – G, J,K,L. Sec 26 – Sec 34. Sec 35 Unit C,D,E.

T 24S – R 29E

Sec 2 Unit A, B, C, D. Sec 3 Unit A

T 24S - R 30E

Sec 1 Unit A – H, J – N. Sec 2, Sec 3. Sec 4 Unit A,B,F – K, M,N,O,P. Sec 9 Unit A – L. Sec 10 Unit A – L, O,P. Sec 11. Sec 12 Unit D,E,L. Sec 14 Unit B – G. Sec 15 Unit A,B,G,H.

T 24S - R 31E

Sec 3 Unit B – G, J – O. Sec 4. Sec 5 Unit A – L, P. Sec 6 Unit A – L. Sec 9 Unit A – J, O,P. Sec 10 Unit B – G, K – N. Sec 35 Unit E – P. Sec 36 Unit E,K,L,M,N.

T 25S - R 31E

Sec 1 Unit C,D,E,F. Sec 2 Unit A – H.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 59245

CONDITIONS

Operator:	OGRID:
EOG RESOURCES INC	7377
P.O. Box 2267	Action Number:
Midland, TX 79702	59245
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date		
gcordero	None	11/3/2021		