

Submit 1 Copy To Appropriate District Office

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised July 18, 2013

WELL API NO. 30-031-20944
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Hospah Sand Unit
8. Well Number 105
9. OGRID Number
10. Pool name or Wildcat Upper Hospah
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 6978 GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Dominion Production Company, LLC

3. Address of Operator
1414 W Swann Av, Suite 100, Tampa, FL 33606

4. Well Location
Unit Letter N : 70 feet from the S line and 1750 feet from the W line
Section 36 Township 18N Range 9W NMPM County McKinley

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☒
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Dominion Production Company plugged this well in accordance with the attached report.

Spud Date:

10/2/2019

Rig Release Date:

10/4/2019

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Burns TITLE Manager

DATE 7/27/2021

Type or print name David Burns

E-mail address: db@cogllc.com

PHONE: 337-534-8686

For State Use Only

APPROVED BY: Monica Kuehling TITLE Deputy Oil and Gas Inspector DATE 11/9/2021

Conditions of Approval (if any):

Dominion Production

Plug And Abandonment End Of Well Report

Hospah Sand Unit 105

70' FSL & 1750' FWL, Section 36, T18N, R9W

McKinley County, NM / API 30-031-20944

Work Summary:

- 10/2/19** Made NMOCD P&A operations notifications at 9:00 AM MST.
- 10/3/19** MOL and R/U P&A rig. Checked well pressures: Tubing: 0 psi, Casing: 0 psi, Bradenhead: 0 psi. Bled down well. L/D rod string and rod pump. L/D tubing string. N/D wellhead, N/U BOP and function tested. Shut-in well for the day.
- 10/4/19** Checked well pressures: Tubing: 0 psi, Casing: 0 psi, Bradenhead: 0 psi. Bled down well. P/U work string and tallied on the way in the hole to a total depth of 1710'. R/U cementing services. Pumped plug #1 from 1710'-1354' to cover the Upper Hospah Sand open hole interval and formation top. WOC 4 hours. R/U wire line services. Ran CBL from 1320' to surface. CBL results were sent to NMOCD office for review. TIH and tagged plug #1 top at 1350'. PUH. R/U cementing services. Pumped plug #2 from 759' to surface to cover the Mancos and Point Lookout formation tops and surface casing shoe. N/D BOP and cut-off wellhead. Installed P&A marker per NMOCD standards. Ran weighted tally tape down both casings and tagged cement 60' down surface casing and 60' down in 5.5" production casing. Ran 3/4" poly pipe down both casings and topped-off well with 70 sx of cement. Photographed the P&A marker in place and recorded its location via GPS coordinates. R/D and MOL. Monica Kuehling was NMOCD inspector on location.

Plug Summary:

Plug #1: (Upper Hospah Sand Open Hole Interval and Formation Top 1710'-1350', 39 Sacks Class G Cement)

Mixed 39 sx Class G cement and spotted a balanced plug to cover the Upper Hospah Sand open hole interval and formation top.

Plug #2: (Mancos and Point Lookout Formation Tops and Surface Casing Shoe 759'-Surface, 177 Sacks Class G Cement(70 sx for top-off))

Pumped plug #2 from 759' to surface to cover the Mancos and Point Lookout formation tops and surface casing shoe. N/D BOP and cut-off wellhead. Installed P&A marker per NMOCD standards. Ran weighted tally tape down both casings and tagged cement 60' down surface casing and 60' down in 5.5" production casing. Ran ¾" poly pipe down both casings and topped-off well with 70 sx of cement. Photographed the P&A marker in place and recorded its location via GPS coordinates. R/D and MOL.

Wellbore Diagram

Hospah Sand Unit 105
API #: 3003120944
McKinley County, New Mexico

Plug 2

759 feet - Surface
759 feet plug
177 sacks of Class G Cement
70 sacks for top-off

Plug 1

1710 feet - 1350
360 feet plug
39 sacks of Class G Cement

Surface Casing


8.625" 24# @ 84 ft

Formation

Gallup - 1520 feet

Production Casing

5.5" 15.5# @ 1701 ft

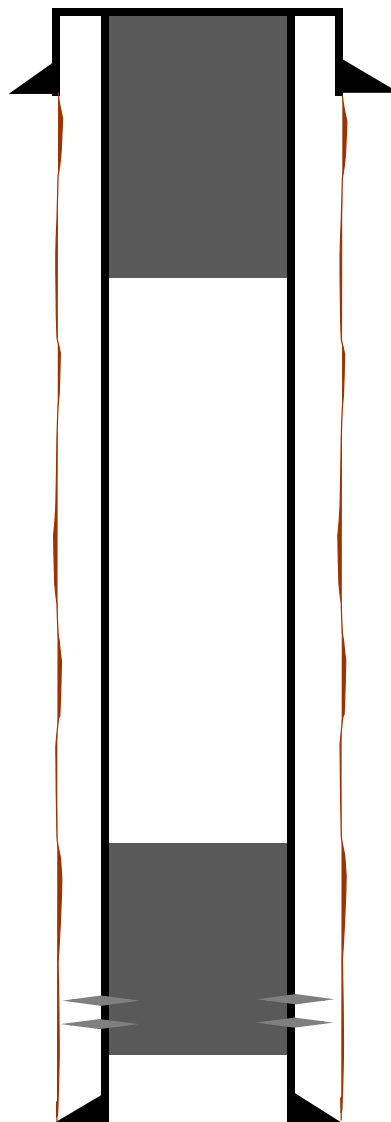

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 40125

CONDITIONS

Operator: DOMINION PRODUCTION COMPANY, LLC 1414 W Swann Avenue Tampa, FL 33606	OGRID: 291567
	Action Number: 40125
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	11/9/2021