

Released to Imaging: 11/30/2021 12:01:51 PM

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address Mewbourne Oil Company PO Box 5270 Hobbs, NM 88240		² OGRID Number 14744
		³ Reason for Filing Code/ Effective Date NW / 06/24/2021
⁴ API Number 30 - 015-47693	⁵ Pool Name Purple Sage; Wolfcamp (Gas)	⁶ Pool Code 98220
⁷ Property Code 322296	⁸ Property Name Silver Bullet 16 W1CN State	⁹ Well Number 3H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
C	16	26S	29E		205	North	2100	West	Eddy

¹¹ Bottom Hole Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	16	26S	29E		318	South	1654	West	Eddy
¹² Lse Code S	¹³ Producing Method Code Gas Lift		¹⁴ Gas Connection Date 06/24/21		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters


¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
195739	Plains Pipeline 5500 Ming Ave Suite 300 Bakersfield, CA 93309	O
314437	Delaware Basin Midstream, LLC PO Box 1330 Houston, TX 77251	G

IV. Well Completion Data

²¹ Spud Date 01/01/2021	²² Ready Date 06/24/2021	²³ TD 14545'	²⁴ PBDT 14504'	²⁵ Perforations 10054' - 14489'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
17 ½"		13 ¾"		585'	450
12 ¼"		9 ⅝"		2800'	600
8 ¾"		7"		10240'	775
6 ⅞"		4 ½" Liner		9369' – 14545'	350

V. Well Test Data

³¹ Date New Oil 06/24/2021	³² Gas Delivery Date 06/24/2021	³³ Test Date 07/05/2021	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure 1545	³⁶ Csg. Pressure 1590
³⁷ Choke Size 38/64"	³⁸ Oil 883	³⁹ Water 3598	⁴⁰ Gas 2335		⁴¹ Test Method Production

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: 		OIL CONSERVATION DIVISION	
Printed name: Jackie Lathan		Approved by: <i>PATRICIA MARTINEZ</i>	
Title: Regulatory		Title: <i>PETROLEUM SPECIALIST</i>	
E-mail Address: jlathan@mewbourne.com		Approval Date: <i>11/30/2021</i>	
Date: 09/23/2021	Phone: 575-393-5905		

Received by OCD: 11/2/2021 8:50:37 AM

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT
AS DRILLED

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-47693	² Pool Code 98220	³ Pool Name Purple Sage; Wolfcamp (Gas)
⁴ Property Code 322296	⁵ Property Name SILVER BULLET 16 W1CN STATE	
⁷ OGRID NO. 14744	⁸ Operator Name MEWBOURNE OIL COMPANY	⁶ Well Number 3H
		⁹ Elevation 2919'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet From the	East/West line	County
C	16	26S	29E		205	NORTH	2100	WEST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	16	26S	29E		318	SOUTH	1654	WEST	EDDY

¹² Dedicated Acres 320	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature: <u>Jackie Lathan</u> Date: <u>09/29/21</u> Printed Name: <u>Jackie Lathan</u> E-mail Address: <u>jlathan@mewbourne.com</u>		18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. 08-23-2018 Date of Survey Signature and Seal of Professional Surveyor 19680 Certificate Number	
GEODETIC DATA NAD 83 GRID - NM EAST SURFACE LOCATION N: 381779.2 - E: 647452.1 LAT: 32.0491283° N LONG: 103.9908332° W BOTTOM HOLE N: 377147.8 - E: 646847.4 LAT: 32.0364021° N LONG: 103.9928319° W			
CORNER DATA NAD 83 GRID - NM EAST A: FOUND BRASS CAP "1940" N: 376837.6 - E: 645175.0 B: FOUND BRASS CAP "1940" N: 379288.7 - E: 645345.4 C: FOUND BRASS CAP "1940" N: 381957.6 - E: 645352.8 D: FOUND BRASS CAP "1940" N: 381991.3 - E: 648004.2 E: FOUND BRASS CAP "1940" N: 381998.4 - E: 650671.1 F: FOUND BRASS CAP "1940" N: 376782.4 - E: 650623.1 G: FOUND BRASS CAP "1940" N: 376806.3 - E: 647898.7			

Plan #2



Project: Eddy Co., NM (NAD 83)
 Site: Silver Bullet Pod
 Well: Silver Bullet 16 W1CN State #3H
 Wellbore: OH
 Design: Plan #2
 Lat: 32.049128
 Long: -103.990833
 GL: 2919.00
 KB: KB=28' @ 2947.00usft



WELL DETAILS: Silver Bullet 16 W1CN State #3H



+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	381779.20	647452.10	32.049128	-103.990833

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
Silver Bullet 16 W1CN State #3H BB P2	9414.04	189.37	-449.26	381968.57	647002.84	Point
Silver Bullet 16 W1CN State #3H PBHL P29977.00	-4631.40	-604.70	377147.80	646847.40	Point	


SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Annotation
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2900.00	0.00	0.00	2900.00	0.00	0.00	0.00	0.00	0.00	Build 1.5°/100'
3199.04	4.49	292.86	3198.73	4.54	-10.78	1.50	292.86	-3.11	5934' Hold
9133.79	4.49	292.86	9115.31	184.83	-438.48	0.00	0.00	-126.50	Drop 1.5°/100'
9432.83	0.00	0.00	9414.04	189.37	-449.26	1.50	180.00	-129.61	Build 10°/100'
10334.18	90.13	181.85	9987.00	-384.64	-467.77	10.00	181.85	441.96	4248' Hold
14583.16	90.13	181.85	9977.00	-4631.40	-604.70	0.00	0.00	4670.71	TD at 14583.16

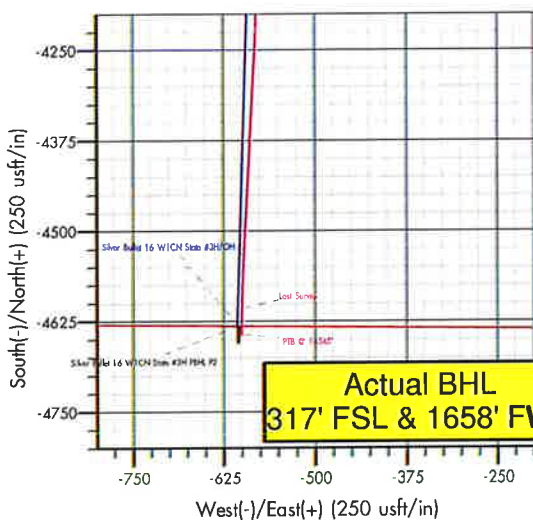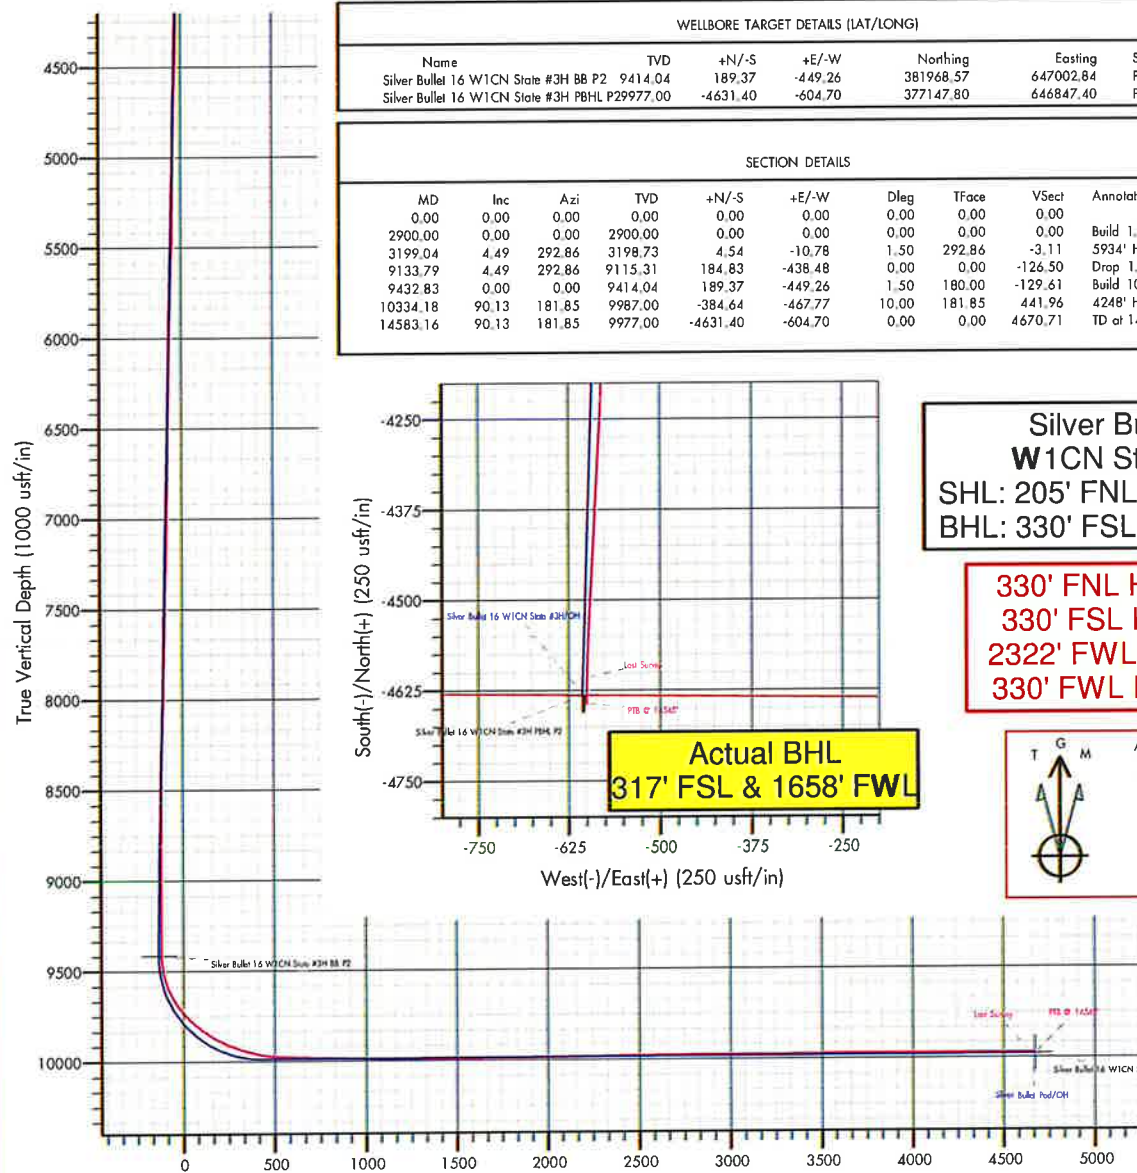


Silver Bullet 16
 W1CN State #3H
 SHL: 205' FNL & 2100' FWL
 BHL: 330' FSL & 1650' FWL

330' FNL Hard Line
 330' FSL Hard Line
 2322' FWL Hard Line
 330' FWL Hard Line



Azimuths to Grid North
 True North: -0.18°
 Magnetic North: 6.52°
 Magnetic Field
 Strength: 47671.5nT
 Dip Angle: 59.65°
 Date: 11/5/2020
 Model: HDGM2020

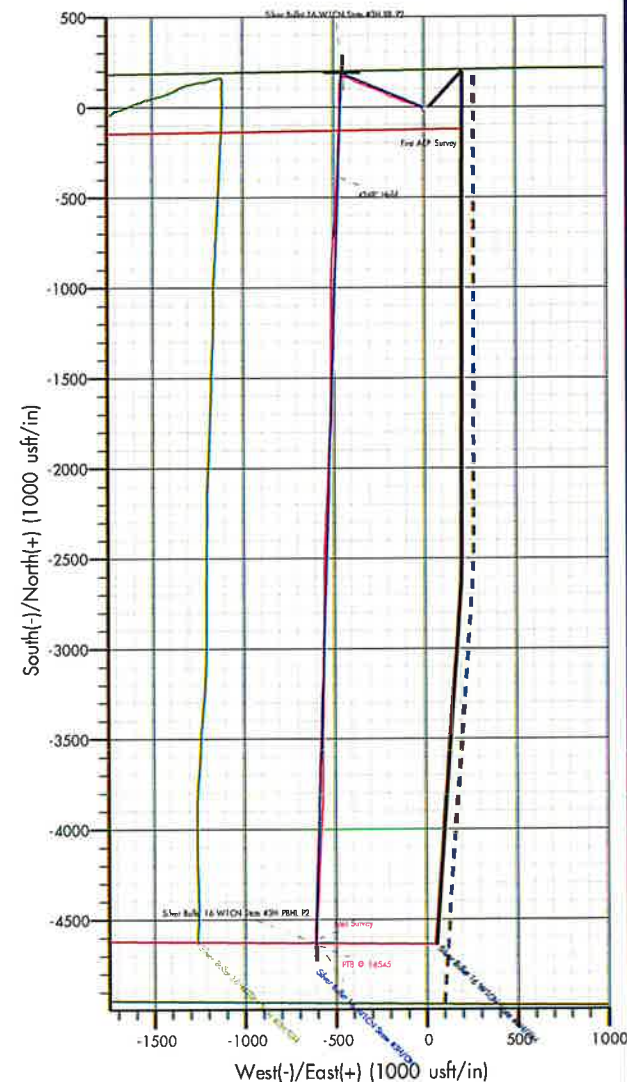

Plan: Plan #2 (Silver Bullet 16 W1CN State #3H/OH)

Created By: Dusty Mayer

Date: 5:17 January 14, 2021



Mewbourne Oil Company

Eddy Co., NM (NAD 83)

Silver Bullet Pad

Silver Bullet 16 W1CN State #3H

OH

Design: OH

Standard Survey Report

15 January, 2021





Altitude Energy Partners

Survey Report



Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Silver Bullet 16 W1CN State #3H
Project:	Eddy Co., NM (NAD 83)	TVD Reference:	KB=28' @ 2947.00usft
Site:	Silver Bullet Pad	MD Reference:	KB=28' @ 2947.00usft
Well:	Silver Bullet 16 W1CN State #3H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.1 Single User Db

Project	Eddy Co., NM (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Silver Bullet Pad		
Site Position:		Northing:	381,736.80 usft
From:	Map	Easting:	645,682.20 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32.049027
		Longitude:	-103.996546

Well	Silver Bullet 16 W1CN State #3H		
Well Position	+N/-S	0.00 usft	Northing: 381,779.20 usft
	+E/-W	0.00 usft	Easting: 647,452.10 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft
Grid Convergence:	0.18 °	Ground Level:	2,919.00 usft
		Latitude:	32.049128
		Longitude:	-103.990833

Wellbore	OH		
Magnetics	Model Name	Sample Date	Declination
			(°)
	HDGM2020	11/5/2020	6.70
			Dip Angle (°)
			59.65
			Field Strength (nT)
			47,671.50000000

Design	OH		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
		Tie On Depth:	
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.00	0.00	0.00
			Direction
			(°)
			187.44

Survey Program	Date	1/15/2021		
From	To	Survey (Wellbore)	Tool Name	Description
(usft)	(usft)			
100.60	485.00	Surface (OH)	MWD	OWSG MWD - Standard
660.00	14,545.00	MWD Survey (OH)	MWD + HDGM	MWD + HDGM - Standard

Survey									
Measured Depth	Inclination	Azimuth	Vertical Depth	+N/-S	+E/-W	Vertical Section	Dogleg Rate	Build Rate	Turn Rate
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.60	0.30	161.61	100.60	-0.25	0.08	0.24	0.30	0.30	0.00
190.00	0.60	198.61	190.00	-0.92	0.01	0.91	0.45	0.34	41.39
280.60	0.60	198.61	280.59	-1.81	-0.30	1.84	0.00	0.00	0.00
369.60	1.30	224.61	369.58	-2.98	-1.15	3.10	0.90	0.79	29.21
459.20	1.00	210.61	459.16	-4.37	-2.26	4.63	0.46	-0.33	-15.63
485.00	1.00	205.61	484.96	-4.77	-2.48	5.05	0.34	0.00	-19.38
660.00	0.84	173.93	659.94	-7.42	-3.00	7.75	0.30	-0.09	-18.10
First AEP Survey									



Altitude Energy Partners

Survey Report



Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Silver Bullet 16 W1CN State #3H
Project:	Eddy Co., NM (NAD 83)	TVD Reference:	KB=28' @ 2947.00usft
Site:	Silver Bullet Pad	MD Reference:	KB=28' @ 2947.00usft
Well:	Silver Bullet 16 W1CN State #3H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.1 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
756.00	0.79	150.20	755.93	-8.70	-2.60	8.96	0.35	-0.05	-24.72
851.00	0.26	192.04	850.92	-9.47	-2.32	9.69	0.65	-0.56	44.04
945.00	0.44	194.32	944.92	-10.03	-2.45	10.27	0.19	0.19	2.43
1,039.00	0.40	347.96	1,038.92	-10.06	-2.61	10.31	0.87	-0.04	163.45
1,134.00	1.10	3.60	1,133.91	-8.83	-2.62	9.09	0.76	0.74	16.46
1,228.00	0.88	11.33	1,227.90	-7.22	-2.42	7.47	0.27	-0.23	8.22
1,323.00	0.18	25.40	1,322.89	-6.37	-2.21	6.60	0.74	-0.74	14.81
1,417.00	0.22	311.83	1,416.89	-6.11	-2.29	6.36	0.26	0.04	-78.27
1,511.00	0.26	35.24	1,510.89	-5.82	-2.30	6.07	0.34	0.04	88.73
1,605.00	0.18	170.15	1,604.89	-5.79	-2.15	6.02	0.43	-0.09	143.52
1,700.00	0.22	200.83	1,699.89	-6.11	-2.19	6.34	0.12	0.04	32.29
1,794.00	0.13	90.70	1,793.89	-6.28	-2.15	6.50	0.31	-0.10	-117.16
1,888.00	0.22	142.99	1,887.89	-6.42	-1.93	6.62	0.19	0.10	55.63
1,981.00	0.18	150.64	1,980.89	-6.69	-1.75	6.86	0.05	-0.04	8.23
2,075.00	0.62	137.02	2,074.89	-7.20	-1.33	7.31	0.48	0.47	-14.49
2,169.00	0.62	137.54	2,168.88	-7.94	-0.64	7.96	0.01	0.00	0.55
2,263.00	1.01	128.23	2,262.87	-8.83	0.35	8.71	0.44	0.41	-9.90
2,357.00	0.84	50.27	2,356.86	-8.90	1.53	8.63	1.25	-0.18	-82.94
2,452.00	0.97	6.85	2,451.85	-7.66	2.16	7.31	0.72	0.14	-45.71
2,546.00	0.48	28.56	2,545.84	-6.52	2.45	6.15	0.59	-0.52	23.10
2,640.00	0.62	116.19	2,639.84	-6.40	3.09	5.95	0.82	0.15	93.22
2,741.00	0.44	124.36	2,740.84	-6.86	3.90	6.30	0.19	-0.18	8.09
2,856.00	0.57	115.04	2,855.83	-7.35	4.78	6.67	0.13	0.11	-8.10
2,933.00	0.84	299.25	2,932.83	-7.24	4.64	6.58	1.83	0.35	-228.30
3,027.00	2.90	300.76	3,026.78	-5.69	1.99	5.38	2.19	2.19	1.61
3,121.00	4.66	296.01	3,120.57	-2.80	-3.48	3.22	1.90	1.87	-5.05
3,217.00	5.19	293.46	3,216.21	0.64	-10.97	0.78	0.60	0.55	-2.66
3,311.00	5.14	292.50	3,309.83	3.95	-18.76	-1.49	0.11	-0.05	-1.02
3,405.00	5.10	290.56	3,403.46	7.03	-26.56	-3.53	0.19	-0.04	-2.06
3,501.00	4.84	290.04	3,499.09	9.91	-34.36	-5.38	0.27	-0.27	-0.54
3,594.00	4.57	292.06	3,591.78	12.65	-41.48	-7.17	0.34	-0.29	2.17
3,689.00	5.54	290.30	3,686.41	15.66	-49.29	-9.15	1.03	1.02	-1.85
3,783.00	5.71	288.01	3,779.96	18.68	-57.99	-11.02	0.30	0.18	-2.44
3,878.00	5.45	288.01	3,874.51	21.54	-66.78	-12.71	0.27	-0.27	0.00
3,972.00	5.41	286.78	3,968.09	24.20	-75.26	-14.25	0.13	-0.04	-1.31
4,066.00	5.23	286.08	4,061.68	26.66	-83.62	-15.61	0.20	-0.19	-0.74
4,160.00	5.05	286.43	4,155.30	29.02	-91.71	-16.90	0.19	-0.19	0.37
4,253.00	4.79	286.43	4,247.96	31.27	-99.36	-18.15	0.28	-0.28	0.00
4,347.00	4.44	284.15	4,341.66	33.27	-106.65	-19.19	0.42	-0.37	-2.43
4,441.00	5.14	293.02	4,435.33	35.81	-114.06	-20.74	1.08	0.74	9.44
4,535.00	5.54	296.28	4,528.92	39.47	-122.00	-23.34	0.53	0.43	3.47
4,629.00	5.23	294.08	4,622.51	43.22	-129.98	-26.03	0.40	-0.33	-2.34
4,724.00	4.97	293.55	4,717.13	46.63	-137.70	-28.41	0.28	-0.27	-0.56



Altitude Energy Partners

Survey Report



Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Silver Bullet 16 W1CN State #3H
Project:	Eddy Co., NM (NAD 83)	TVD Reference:	KB=28' @ 2947.00usft
Site:	Silver Bullet Pad	MD Reference:	KB=28' @ 2947.00usft
Well:	Silver Bullet 16 W1CN State #3H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.1 Single User Db

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/S (usft)	+E/W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,819.00	4.88	292.94	4,811.78	49.85	-145.20	-30.63	0.11	-0.09	-0.64
4,914.00	4.66	290.74	4,906.45	52.79	-152.53	-32.60	0.30	-0.23	-2.32
5,008.00	4.31	290.65	5,000.16	55.39	-159.40	-34.29	0.37	-0.37	-0.10
5,102.00	4.04	287.40	5,093.91	57.63	-165.87	-35.67	0.38	-0.29	-3.46
5,196.00	3.65	285.99	5,187.70	59.44	-171.91	-36.69	0.43	-0.41	-1.50
5,291.00	4.18	285.90	5,282.48	61.22	-178.14	-37.65	0.56	0.56	-0.09
5,385.00	4.22	289.07	5,376.23	63.29	-184.71	-38.85	0.25	0.04	3.37
5,479.00	4.31	301.55	5,469.97	66.27	-190.98	-40.99	0.99	0.10	13.28
5,573.00	4.31	304.54	5,563.70	70.12	-196.90	-44.04	0.24	0.00	3.18
5,668.00	4.13	304.27	5,658.44	74.07	-202.67	-47.21	0.19	-0.19	-0.28
5,761.00	3.82	302.87	5,751.22	77.64	-208.04	-50.05	0.35	-0.33	-1.51
5,855.00	4.92	293.73	5,844.95	80.96	-214.36	-52.53	1.38	1.17	-9.72
5,949.00	4.79	293.46	5,938.61	84.15	-221.65	-54.74	0.14	-0.14	-0.29
6,044.00	4.44	291.53	6,033.30	87.07	-228.71	-56.73	0.40	-0.37	-2.03
6,138.00	4.13	289.42	6,127.04	89.53	-235.29	-58.32	0.37	-0.33	-2.24
6,232.00	5.01	291.62	6,220.74	92.17	-242.30	-60.03	0.95	0.94	2.34
6,327.00	5.10	291.18	6,315.37	95.23	-250.09	-62.05	0.10	0.09	-0.46
6,422.00	4.70	287.40	6,410.02	97.92	-257.74	-63.72	0.54	-0.42	-3.98
6,517.00	4.22	285.55	6,504.73	100.02	-264.82	-64.89	0.53	-0.51	-1.95
6,611.00	5.05	293.99	6,598.43	102.63	-271.93	-66.56	1.14	0.88	8.98
6,706.00	4.66	295.57	6,693.09	105.99	-279.24	-68.95	0.43	-0.41	1.66
6,800.00	3.47	291.97	6,786.85	108.70	-285.32	-70.85	1.29	-1.27	-3.83
6,894.00	4.18	293.81	6,880.64	111.15	-291.09	-72.53	0.77	0.76	1.96
6,986.00	3.34	290.56	6,972.44	113.45	-296.67	-74.08	0.94	-0.91	-3.53
7,078.00	4.35	285.29	7,064.23	115.31	-302.54	-75.17	1.16	1.10	-5.73
7,172.00	4.18	293.02	7,157.97	117.59	-309.14	-76.58	0.64	-0.18	8.22
7,266.00	4.92	297.95	7,251.68	120.82	-315.85	-78.91	0.89	0.79	5.24
7,361.00	5.89	294.96	7,346.25	124.78	-323.87	-81.80	1.06	1.02	-3.15
7,454.00	5.01	288.37	7,438.83	128.08	-332.05	-84.01	1.16	-0.95	-7.09
7,549.00	4.97	288.98	7,533.47	130.72	-339.88	-85.62	0.07	-0.04	0.64
7,643.00	5.71	293.64	7,627.06	133.92	-348.01	-87.74	0.91	0.79	4.96
7,737.00	5.63	286.87	7,720.60	137.13	-356.71	-89.80	0.72	-0.09	-7.20
7,831.00	5.05	297.77	7,814.20	140.40	-364.78	-91.99	1.24	-0.62	11.60
7,925.00	3.74	306.47	7,907.92	144.15	-370.91	-94.92	1.56	-1.39	9.26
8,019.00	4.48	301.29	8,001.68	147.88	-376.51	-97.89	0.88	0.79	-5.51
8,114.00	4.57	292.23	8,096.38	151.24	-383.18	-100.36	0.76	0.09	-9.54
8,209.00	4.00	299.26	8,191.12	154.29	-389.58	-102.55	0.81	-0.60	7.40
8,303.00	3.87	304.98	8,284.90	157.71	-395.04	-105.24	0.44	-0.14	6.09
8,398.00	4.40	299.26	8,379.65	161.33	-400.84	-108.08	0.71	0.56	-6.02
8,492.00	4.44	283.18	8,473.37	163.92	-407.53	-109.78	1.31	0.04	-17.11
8,587.00	4.13	276.94	8,568.11	165.17	-414.51	-110.12	0.59	-0.33	-6.57
8,681.00	5.14	282.13	8,661.80	166.47	-421.98	-110.43	1.16	1.07	5.52
8,775.00	5.27	279.05	8,755.41	168.03	-430.36	-110.90	0.33	0.14	-3.28
8,869.00	2.99	282.83	8,849.16	169.26	-437.02	-111.25	2.44	-2.43	4.02



Altitude Energy Partners

Survey Report



Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Silver Bullet 16 W1CN State #3H
Project:	Eddy Co., NM (NAD 83)	TVD Reference:	KB=28' @ 2947.00usft
Site:	Silver Bullet Pad	MD Reference:	KB=28' @ 2947.00usft
Well:	Silver Bullet 16 W1CN State #3H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.1 Single User Db

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,963.00	2.15	285.46	8,943.07	170.27	-441.11	-111.73	0.90	-0.89	2.80
9,058.00	1.63	281.86	9,038.02	171.02	-444.15	-112.08	0.56	-0.55	-3.79
9,152.00	1.27	276.94	9,131.99	171.42	-446.49	-112.18	0.40	-0.38	-5.23
9,245.00	0.97	278.87	9,224.97	171.67	-448.29	-112.19	0.33	-0.32	2.08
9,335.00	0.70	280.37	9,314.96	171.89	-449.59	-112.23	0.30	-0.30	1.67
9,386.00	0.84	279.66	9,365.95	172.00	-450.26	-112.26	0.28	0.27	-1.39
9,433.00	2.51	199.60	9,412.94	171.09	-450.94	-111.27	5.33	3.55	-170.34
9,480.00	6.29	187.99	9,459.79	167.57	-451.65	-107.69	8.22	8.04	-24.70
9,527.00	11.60	183.51	9,506.20	160.30	-452.30	-100.39	11.39	11.30	-9.53
9,574.00	16.79	183.42	9,551.75	148.80	-452.99	-88.90	11.04	11.04	-0.19
9,621.00	22.64	184.04	9,595.98	132.99	-454.03	-73.09	12.45	12.45	1.32
9,669.00	28.18	184.48	9,639.32	112.46	-455.57	-52.53	11.55	11.54	0.92
9,716.00	34.15	181.75	9,679.52	88.18	-456.84	-28.30	13.05	12.70	-5.81
9,763.00	38.81	179.21	9,717.30	60.25	-457.04	-0.57	10.42	9.91	-5.40
9,810.00	43.65	179.47	9,752.64	29.29	-456.69	30.08	10.30	10.30	0.55
9,857.00	49.14	180.52	9,785.04	-4.73	-456.70	63.82	11.79	11.68	2.23
9,904.00	51.78	180.70	9,814.96	-40.97	-457.09	99.80	5.62	5.62	0.38
9,951.00	55.38	181.49	9,842.86	-78.78	-457.82	137.39	7.78	7.66	1.68
9,998.00	59.43	182.46	9,868.17	-118.34	-459.19	176.80	8.79	8.62	2.06
10,046.00	63.34	182.63	9,891.16	-160.43	-461.06	218.77	8.15	8.15	0.35
10,093.00	67.34	182.54	9,910.76	-203.09	-462.99	261.32	8.51	8.51	-0.19
10,140.00	71.25	183.16	9,927.38	-246.99	-465.17	305.14	8.41	8.32	1.32
10,187.00	73.76	183.16	9,941.51	-291.75	-467.64	349.84	5.34	5.34	0.00
10,208.00	74.73	182.90	9,947.21	-311.93	-468.71	369.99	4.77	4.62	-1.24
10,273.00	78.42	182.63	9,962.30	-375.07	-471.76	432.99	5.69	5.68	-0.42
10,367.00	87.30	182.19	9,973.97	-468.16	-475.68	525.81	9.46	9.45	-0.47
10,461.00	88.09	182.46	9,977.75	-562.01	-479.49	619.36	0.89	0.84	0.29
10,555.00	89.14	185.62	9,980.02	-655.74	-486.11	713.15	3.54	1.12	3.36
10,650.00	88.40	185.09	9,982.06	-750.30	-494.97	808.07	0.96	-0.78	-0.56
10,744.00	88.53	182.02	9,984.58	-844.07	-500.80	901.81	3.27	0.14	-3.27
10,837.00	88.97	181.14	9,986.61	-937.01	-503.36	994.30	1.06	0.47	-0.95
10,931.00	89.41	180.96	9,987.94	-1,030.99	-505.08	1,087.70	0.51	0.47	-0.19
11,025.00	90.07	180.52	9,988.36	-1,124.98	-506.30	1,181.06	0.84	0.70	-0.47
11,119.00	89.98	180.08	9,988.32	-1,218.98	-506.79	1,274.33	0.48	-0.10	-0.47
11,214.00	90.20	180.35	9,988.17	-1,313.98	-507.14	1,368.58	0.37	0.23	0.28
11,308.00	90.42	180.17	9,987.66	-1,407.97	-507.57	1,461.84	0.30	0.23	-0.19
11,402.00	90.07	180.26	9,987.26	-1,501.97	-507.92	1,555.09	0.38	-0.37	0.10
11,495.00	90.73	180.08	9,986.61	-1,594.97	-508.20	1,647.34	0.74	0.71	-0.19
11,589.00	90.42	181.58	9,985.67	-1,688.95	-509.56	1,740.71	1.63	-0.33	1.60
11,684.00	90.33	182.81	9,985.05	-1,783.88	-513.20	1,835.31	1.30	-0.09	1.29
11,779.00	90.11	182.63	9,984.68	-1,878.77	-517.71	1,929.98	0.30	-0.23	-0.19
11,873.00	90.77	182.19	9,983.96	-1,972.68	-521.66	2,023.62	0.84	0.70	-0.47
11,968.00	90.46	183.25	9,982.94	-2,067.57	-526.17	2,118.29	1.16	-0.33	1.12



Altitude Energy Partners

Survey Report



Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Silver Bullet 16 W1CN State #3H
Project:	Eddy Co., NM (NAD 83)	TVD Reference:	KB=28' @ 2947.00usft
Site:	Silver Bullet Pad	MD Reference:	KB=28' @ 2947.00usft
Well:	Silver Bullet 16 W1CN State #3H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,061.00	90.59	183.07	9,982.09	-2,160.42	-531.29	2,211.03	0.24	0.14	-0.19
12,156.00	90.68	182.28	9,981.04	-2,255.31	-535.73	2,305.69	0.84	0.09	-0.83
12,250.00	90.68	182.81	9,979.92	-2,349.21	-539.90	2,399.34	0.56	0.00	0.56
12,345.00	90.86	182.28	9,978.64	-2,444.11	-544.12	2,493.99	0.59	0.19	-0.56
12,439.00	90.33	180.61	9,977.67	-2,538.07	-546.49	2,587.46	1.86	-0.56	-1.78
12,534.00	90.20	180.35	9,977.23	-2,633.07	-547.29	2,681.76	0.31	-0.14	-0.27
12,628.00	90.11	180.17	9,976.97	-2,727.07	-547.71	2,775.03	0.21	-0.10	-0.19
12,723.00	90.33	180.88	9,976.61	-2,822.06	-548.58	2,869.33	0.78	0.23	0.75
12,817.00	89.32	180.44	9,976.90	-2,916.05	-549.67	2,962.68	1.17	-1.07	-0.47
12,912.00	90.68	181.31	9,976.90	-3,011.04	-551.12	3,057.05	1.70	1.43	0.92
13,009.00	90.46	180.44	9,975.93	-3,108.02	-552.60	3,153.41	0.93	-0.23	-0.90
13,102.00	90.42	180.96	9,975.22	-3,201.01	-553.73	3,245.76	0.56	-0.04	0.56
13,196.00	90.68	180.88	9,974.31	-3,295.00	-555.24	3,339.15	0.29	0.28	-0.09
13,290.00	90.55	180.88	9,973.31	-3,388.98	-556.69	3,432.53	0.14	-0.14	0.00
13,383.00	90.46	180.96	9,972.49	-3,481.96	-558.18	3,524.92	0.13	-0.10	0.09
13,477.00	90.37	180.35	9,971.81	-3,575.96	-559.25	3,618.26	0.66	-0.10	-0.65
13,572.00	89.54	180.08	9,971.88	-3,670.95	-559.61	3,712.51	0.92	-0.87	-0.28
13,666.00	89.93	180.17	9,972.31	-3,764.95	-559.82	3,805.74	0.43	0.41	0.10
13,761.00	90.15	182.46	9,972.25	-3,859.92	-562.00	3,900.19	2.42	0.23	2.41
13,855.00	90.02	182.72	9,972.11	-3,953.82	-566.24	3,993.86	0.31	-0.14	0.28
13,950.00	90.07	182.46	9,972.03	-4,048.73	-570.54	4,088.52	0.28	0.05	-0.27
14,044.00	90.02	182.63	9,971.96	-4,142.63	-574.71	4,182.18	0.19	-0.05	0.18
14,138.00	90.24	183.07	9,971.75	-4,236.52	-579.38	4,275.87	0.52	0.23	0.47
14,233.00	90.24	182.63	9,971.35	-4,331.40	-584.11	4,370.57	0.46	0.00	-0.46
14,328.00	90.02	183.34	9,971.13	-4,426.27	-589.05	4,465.28	0.78	-0.23	0.75
14,408.00	90.24	183.25	9,970.95	-4,506.14	-593.65	4,545.07	0.30	0.28	-0.11
14,508.00	89.80	181.14	9,970.92	-4,606.06	-597.48	4,644.65	2.16	-0.44	-2.11
Last Survey									
14,545.00	89.80	181.14	9,971.05	-4,643.05	-598.22	4,681.42	0.00	0.00	0.00
PTB @ 14545'									

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
660.00	659.94	-7.42	-3.00	First AEP Survey
14,508.00	9,970.92	-4,606.06	-597.48	Last Survey
14,545.00	9,971.05	-4,643.05	-598.22	PTB @ 14545'

Checked By: _____ Approved By: _____ Date: _____



ALTITUDE ENERGY PARTNERS LLC. SURVEY DATA CERTIFICATION

ALTITUDE JOB NUMBER	AEP 20178	OPERATOR	MEWBOURNE OIL COMPANY
WELL NAME	Silver Bullet 16 W1CN State 3H	COUNTY & STATE	EDDY COUNTY, NM
API WELL NUMBER	30-015-45213	PROPOSED DIRECTION	187.44
Latitude	32.04913 N	Longitude	103.99083 W

TIE-IN DATA						
MEASURED	VERTICAL			N-S	E-W	DATA
DEPTH	DEPTH	INCLIN	AZIMUTH	COORD	COORD	SOURCE
485.0	484.96	1.00	205.61	-4.77	-2.48	Invictus
FIRST	FIRST				SURVEY INSTRUMENT	
SURVEY	SURVEY				TYPE	
DATE	DEPTH	INCLIN	AZIMUTH		MWD	
1/3/21	660	0.84	173.93	MAGNETIC DECLINATION OR TOTAL GRID		
LAST	LAST			TOTAL CORRECTION USED		6.5
SURVEY	SURVEY			DECLINATION OR GRID		GRID
DATE	DEPTH	INCLIN	AZIMUTH			
1/14/21	14508	89.90	181.14			
PROJECTED	PROJECTED					
TD SURVEY	TD SURVEY					
DATE	DEPTH	INCLIN	AZIMUTH			
1/14/21	14445	89.90	181.14			
The data and calculations for this survey have been checked by me and conform to the calibration standards and operational procedures set forth by Altitude Energy Partners LLC. I am authorized and qualified to review the data, calculations and this report, and that the report represents a true and correct Directional Survey of this well based on the original data corrected to True North and obtained at the well site. Wellbore coordinates are calculated using Minimum curvature or other method.						

Cody Harvick

PRINT MWD NAME ABOVE

Cody Harvick

SIGN MWD NAME ABOVE

1/14/21

TODAY'S DATE

Cody Harvick

PRINT MWD NAME ABOVE

Cody Harvick

SIGN MWD NAME ABOVE

1/14/21

TODAY'S DATE

7197 Derrick Dr.

Casper, WY 82604

307-237-2372

Intent ☐ As Drilled ☒

API # 30-015-47693		
Operator Name: Mewbourne Oil Co.	Property Name: Silver Bullet 16 W1CN State	Well Number 3H

Kick Off Point (KOP)

UL C	Section 16	Township 26S	Range 29E	Lot	Feet 28	From N/S N	Feet 1648	From E/W W	County Eddy
Latitude 32.0496025					Longitude -103.9922867				NAD 83

First Take Point (FTP)

UL C	Section 16	Township 26S	Range 29E	Lot	Feet 367	From N/S N	Feet 1639	From E/W W	County Eddy
Latitude 32.0486713					Longitude -103.9923241				NAD 83

Last Take Point (LTP)

UL N	Section 16	Township 26S	Range 29E	Lot	Feet 336	From N/S S	Feet 1653	From E/W W	County Eddy
Latitude 32.0364194					Longitude -103.9928100				NAD 83

Is this well the defining well for the Horizontal Spacing Unit? ☐ NIs this well an infill well? ☐ Y

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API # 30-015-45212		
Operator Name: Mewbourne Oil Co.	Property Name: Silver Bullet 16 W1DM State	Well Number 2H

KZ 06/29/2018

Submit 1 Copy To Appropriate District

Office

District I - (575) 393-6161

1625 N. French Dr., Hobbs, NM 88240

District II - (575) 748-1283

811 S. First St., Artesia, NM 88210

District III - (505) 334-6178

1000 Rio Brazos Rd., Aztec, NM 87410

District IV - (505) 476-3460

1220 S. St. Francis Dr., Santa Fe, NM

87505

State of New Mexico
Energy, Minerals and Natural ResourcesOIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505Form C-103
Revised July 18, 2013

WELL API NO.

30-015-47693

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

Silver Bullet 16 W1CN State

8. Well Number 3H

9. OGRID Number 14744

10. Pool name or Wildcat

Purple Sage; Wolfcamp (Gas) 98220

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator

Mewbourne Oil Company

3. Address of Operator

PO Box 5270, Hobbs NM 88241

4. Well Location

Unit Letter C : 205 feet from the North line and 2100 feet from the West line

Section 16 Township 26S Range 29E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

2919' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐TEMPORARILY ABANDON ☐ CHANGE PLANS ☐PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐DOWNHOLE COMMINGLE ☐CLOSED-LOOP SYSTEM ☐OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐COMMENCE DRILLING OPNS. ☐ P AND A ☐CASING/CEMENT JOB ☐OTHER: Completion Sundry ☒

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

06/11/2021 Frac Wolfcamp from 10054' MD to 14489' MD w/11,289,348 gals slickwater carrying 11,165,360# Local 100 Mesh sand. Flow back well for cleanup.

06/20/2021 Drill out frac plugs to 14504' PBTD.

06/23/2021 RIH w/2 7/8" 6.5# L80 tbg & GLVs to 9345'.

06/24/2021 Put well on production.

Formation Top Bottom Descriptions, Contents, etc.

Name Top Wolfcamp 9774' - 14545' WATER, OIL & GAS

Castile 1160', Base of salt 2680', Delaware 2880', Bell Canyon 2910', Cherry Canyon 3790', Manzanita Marker 3960', Brushy Canyon 5000', Bone Spring 6670', 1st Bone Spring 7530', 2nd Bone Spring 8400', 3rd Bone Spring 9410', Wolfcamp 9774'.

Spud Date: 01/01/2021

Rig Release Date: 01/16/2021

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE Regulatory DATE 09/23/2021Type or print name Jackie Lathan E-mail address: jathan@mewbourne.com PHONE: 575-393-5905**For State Use Only**

APPROVED BY: _____ TITLE _____ DATE _____

Released to Imaging: 11/30/2021 12:01:51 PM

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Bell Canyon 2910'	T. Ojo Alamo	T. Penn A"
T. Salt	T. Strawn	T. Kirtland	T. Penn. "B"
B. Salt 2680	T. Atoka	T. Fruitland	T. Penn. "C"
T. Yates	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. 7 Rivers	T. Devonian	T. Cliff House	T. Leadville
T. Queen	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Manzanita Marker 3960'	T. Dakota	
T. Tubb	T. Delaware 2880'	T. Morrison	
T. Drinkard	T. Bone Springs 6670'	T. Todilto	
T. Abo	T. Cherry Canyon 3790'	T. Entrada	
T. Wolfcamp 9774'	T. Rustler	T. Wingate	
T. Penn	T. Castile 1160'	T. Chinle	
T. Cisco (Bough C)	T. Brushy Canyon 5000'	T. Permian	

OIL OR GAS SANDS OR ZONES

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....

No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....

No. 2, from.....to.....feet.....

No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

LITHOLOGY RECORD (Attach additional sheets if necessary)						
From	To	Thickness In Feet		Lithology		

Mewbourne Oil Company

Well Name: Silver Bullet 16 W1CN State #3H

Updated by: Andy Taylor

Spud Date: 1/1/2021

Date Updated: 10/18/2021

Surface

17 1/2" x 13 3/4" 54.5# J55

Set @ 585'

Cmt w/ 450 sx

Circ. 169 sx to pit

Intermediate

12 1/4" x 9 3/4" 40# HCL80

Set @ 2800'

Cmt w/ 600 sx

Circ. 160 sx to pit

Production

8 3/4" x 7" 29# HCP110

Set @ 10,240'

Cmt w/ 775 sx

TOC @ 1500' (est.)

Liner

6 1/8" x 4 1/2" 13.5# HCP110

Set @ 9369'-14,545'

Cmt w/ 350 sx

TOC @ 9369'

TBG Detail:

1	2 3/8" 6.5# L80 pup jt	6.00'
1	2 3/8" x 7" AS 1X Pkr	9.75'
1	2 3/8" 6.5# L80 IPC tbg	32.75'
1	2 3/8" L80 IPC GLV #1	4.10'
1	2 3/8" SN & Collar	1.10'
20	2 3/8" 6.5# L80 IPC tbg	652.94'
1	2 3/8" L80 IPC GLV #2	4.10'
21	2 3/8" 6.5# L80 IPC tbg	686.07'
1	2 3/8" L80 IPC GLV #3	4.10'
21	2 3/8" 6.5# L80 IPC tbg	687.31'
1	2 3/8" L80 IPC GLV #4	4.10'
21	2 3/8" 6.5# L80 IPC tbg	685.60'
1	2 3/8" L80 IPC GLV #5	4.10'
21	2 3/8" 6.5# L80 IPC tbg	684.98'
1	2 3/8" L80 IPC GLV #6	4.10'
21	2 3/8" 6.5# L80 IPC tbg	685.25'
1	2 3/8" L80 IPC GLV #7	4.10'
21	2 3/8" 6.5# L80 IPC tbg	685.01'
1	2 3/8" L80 IPC GLV #8	4.10'
25	2 3/8" 6.5# L80 IPC tbg	819.26'
1	2 3/8" L80 IPC GLV #9	4.10'
43	2 3/8" 6.5# L80 IPC tbg	1406.06'
1	2 3/8" L80 IPC GLV #10	4.10'
67	2 3/8" 6.5# L80 IPC tbg	2191.34'
1	2 3/8" 6.5# L80 IPC sub	10.00'
1	2 3/8" 6.5# L80 IPC tbg	32.65'
Total tbg		9317.06'
KB Correction		28.00'
Tbg set @		9345.06'

KOP @ 9433'

Dev @ KOP: 2.51°

TVD @ 9988'

TD 6 1/8" hole @ 14,545'

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 59208

ACKNOWLEDGMENTS

Operator: MEWBOURNE OIL CO P.O. Box 5270 Hobbs, NM 88241	OGRID: 14744
	Action Number: 59208
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 59208

CONDITIONS

Operator: MEWBOURNE OIL CO P.O. Box 5270 Hobbs, NM 88241	OGRID: 14744
	Action Number: 59208
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	None	11/30/2021