

Well Name: BISTI COAL 5 COM	Well Location: T25N / R12W / SEC 5 / NESW / 36.429672 / -108.136719	County or Parish/State: SAN JUAN / NM
Well Number: 2	Type of Well: OTHER	Allottee or Tribe Name: EASTERN NAVAJO
Lease Number: 14206031292	Unit or CA Name: BISTI COAL 5 COM	Unit or CA Number: NMNM87084
US Well Number: 3004528198	Well Status: Abandoned	Operator: DJR OPERATING LLC

Subsequent Report

Sundry ID: 2650961

Type of Submission: Subsequent Report

Date Sundry Submitted: 01/04/2022

Date Operation Actually Began: 07/27/2020

Type of Action: Plug and Abandonment

Time Sundry Submitted: 12:57

**Actual Procedure:** The subject well was Plugged & Abandoned on 07/27/2020 per the attached End of Well Report, Wellbore Diagram, and Marker.

SR Attachments

Actual Procedure

- PA\_Marker\_Bisti\_Coal\_5K\_Com\_2\_20220104125647.pdf
- EOW\_Report\_Bisti\_Coal\_5K\_Com\_2\_20220104125647.pdf
- As\_Plugged\_WBD\_Bisti\_Coal\_5K\_Com\_2\_20220104125647.pdf

<b>Well Name:</b> BISTI COAL 5 COM	<b>Well Location:</b> T25N / R12W / SEC 5 / NESW / 36.429672 / -108.136719	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 2	<b>Type of Well:</b> OTHER	<b>Allottee or Tribe Name:</b> EASTERN NAVAJO
<b>Lease Number:</b> 14206031292	<b>Unit or CA Name:</b> BISTI COAL 5 COM	<b>Unit or CA Number:</b> NMNM87084
<b>US Well Number:</b> 3004528198	<b>Well Status:</b> Abandoned	<b>Operator:</b> DJR OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

<b>Operator Electronic Signature:</b> SHAW-MARIE FORD	<b>Signed on:</b> JAN 04, 2022 12:56 PM
<b>Name:</b> DJR OPERATING LLC	
<b>Title:</b> Regulatory Specialist	
<b>Street Address:</b> 1 Road 3263	
<b>City:</b> Aztec	<b>State:</b> NM
<b>Phone:</b> (505) 632-3476	
<b>Email address:</b> sford@djrlc.com	

Field Representative

<b>Representative Name:</b>		
<b>Street Address:</b>		
<b>City:</b>	<b>State:</b>	<b>Zip:</b>
<b>Phone:</b>		
<b>Email address:</b>		

BLM Point of Contact

<b>BLM POC Name:</b> KENNETH G RENNICK	<b>BLM POC Title:</b> Petroleum Engineer
<b>BLM POC Phone:</b> 5055647742	<b>BLM POC Email Address:</b> krennick@blm.gov
<b>Disposition:</b> Accepted	<b>Disposition Date:</b> 01/07/2022
<b>Signature:</b> Kenneth Rennick	

**Plug and Abandonment End of Well Report**  
**for**  
**DJR Operating, LLC**  
**Bisti Coal 5K Com 2**  
**API # 30-045-28198**  
**NE/SW, Unit K, Sec. 5, T25N, R12W**  
**San Juan County, NM**

7-20-2020: Notified BLM and NMOCD of pending P&A operations.

7-23, 24 & 27-2020:

1. MIRU A Plus rig 9. SITP = 20 psi, SICP = 20 psi, BH = 0 psi.
2. Pull rods and pump. NDWH, NU BOP.
3. TOOH with 2 3/8" production string. TIH with bit and scraper on 2 3/8" work string to 1060'. TOOH.
4. TIH with 4 1/2" cement retainer, set retainer at 1055'. Test casing, no test, able to pump in at 1.5 bpm at 800 psi. No flow out BH. Contact BLM engineer and NMOCD with plan of action.
5. Plug 1: Sting into retainer, mix and pump 10 sx class G cement + 2% CaCl<sub>2</sub> through retainer.
6. Plug 2: Sting out of retainer, roll hole and place 12 sx of class G cement + 2% CaCl<sub>2</sub> above retainer. TOOH. WOC.
7. Tag cement at 900' with work string. BLM requests a CBL log.
8. MIRU logging truck, run CBL from 900' to surface. Cement to surface with some poor bond at 300-250' and 15' to surface.
9. Tie into and pump on BH, with less than a bbl pumped had flow out of side of 7" casing.
10. Pressure test casing, still a slow leak off, no test.

11. Plug 3: TIH with work string to 900', roll hole, mix and pump 75 sx class G cement + 2% CaCl<sub>2</sub> from 900' to 225'. WOC. TOOH.
12. TIH with work string, tag cement at 225'. Pressure test casing, slow leak off, no test.
13. Plug 4: Roll hole, mix and pump 16 sx class G cement + 2% CaCl<sub>2</sub> from 225' to surface. WOC. TOOH.
14. Tag TOC in 4 ½" casing at 14'. Cut off WH, TOC in 4 ½" x 7" annulus at 23'.
15. Top off plug: Mix and pump 34 sx class G cement to top off the 4 ½" casing and the 4 ½" x 7" annulus.
16. Check for fall back, no fall back. Release rig.

**Jimmy Dobson, BLM representative on site.**

**All cement used was class G, mixed at 15.8 ppg, yield of 1.15 cu ft/sx.**

**Attached is the As Plugged WBD and a photo of the P&A marker.**

**GPS coordinates: Lat, 36.429745, Long, -108.137566**

# DJR Operating, LLC As Plugged Wellbore Diagram

## Bisti Coal 5K Com 2

API # 30-045-28198

NE/SW, Unit K, Sec 5, T25N, R12W  
San Juan County, NM

GL 6163'

KB N/A

Spud Date 10/1/1990

### SURF CSG

Hole size 8.75"  
Csg Size: 7"  
Wt: 20#  
Grade: J-55  
ID: 6.456"  
Depth 135'  
casing cap ft<sup>3</sup>/ft: 0.2273  
TOC: Circ cmt  
to surface

### FORMATION TOPS


FORMATION TOPS	Surface
Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Basal Ft. Coal	1092'
Pictured Cliffs	1138'

### PROD CSG

Hole size 6.25"  
Csg Size: 4.5"  
Wt: 9.5#  
Grade: J-55  
ID: 4.09"  
Depth 1235'  
casing cap ft<sup>3</sup>/ft: 0.0912  
7x4.5 capacity ft<sup>3</sup>/ft 0.1169  
TOC: Circ cmt  
to surface

Cement Ret. 1055'  
Fruitland Coal perms  
1093-1114'

PBTD 1160'  
TD 1240'

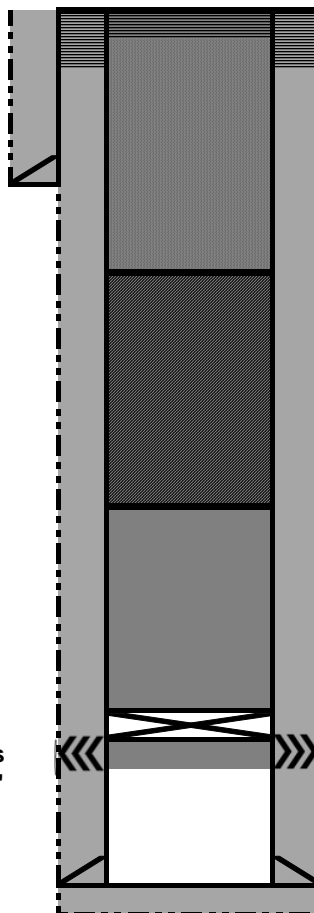

**Top off Plug:** Mix and place 34 sx class G cement to top off 4 1/2" casing and 4 1/2" x 7" annulus.

**Plug 4:** 225', mix and place 16 sx class G cement + 2% CaCl<sub>2</sub> to 14'.

**Plug 3:** 900', mix and place 75 sx class G cement + 2% CaCl<sub>2</sub> to 225', tag at 225' with tubing.

**Plug 2:** 1055', mix and place 12 sx class G cement + 2% CaCl<sub>2</sub> on top of CR. WOC, tag at 900' with tubing.

**Plug 1:** Mix and pump 10 sx class G cement through CR into Fruitland perms.

**Plug and Abandonment Marker  
for  
DJR Operating, LLC  
Bisti Coal 5K Com 2  
API # 30-045-28198  
NE/SW, Unit K, Sec. 5, T25N, R12W  
San Juan County, NM**



**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS  
  
Action 71067

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 71067
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	3/1/2022