

Form 3160-5
(June 2019)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021**SUNDRY NOTICES AND REPORTS ON WELLS**
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. NMNM110838

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator EOG RESOURCES INCORPORATED

3a. Address 1111 BAGBY SKY LOBBY 2, HOUSTON, TX 77030 3b. Phone No. (include area code)
(713) 651-70004. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEC 19/T25S/R33E/NMP

7. If Unit of CA/Agreement, Name and/or No.

8. Well Name and No. AUDACIOUS 19 FEDERAL/603H

9. API Well No. 3002545041

10. Field and Pool or Exploratory Area
WC025 G09 S253309P; UPPER WOLFCAMP11. Country or Parish, State
LEA/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity	
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☒ Other	
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon		
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

EOG respectfully requests an amendment to our approved APD for this well to reflect the following changes:

Change name from 603H to Audacious 19 Fed Com 757H.

Change SHL from T-25-S, R-33-E, Sec 19, 1832' FSL, 2322' FWL, Lea Co., NM, to T-25-S, R-33-E, Sec 19, 2389' FSL, 902' FEL, Lea Co., N.M.

Change BHL from T-25-S, R-33-E, Sec 30, 230' FSL, 2310' FWL, Lea Co., NM, to T-25-S, R-33-E, Sec 30, 100' FSL, 870' FEL, Lea Co., N.M.

Change target formation to Wolfcamp M1.

Continued on page 3 additional information

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) STAR HARRELL / Ph: (432) 848-9161	Title Regulatory Specialist
Signature	Date 03/17/2022

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by CHRISTOPHER WALLS / Ph: (575) 234-2234 / Approved	Title Petroleum Engineer	Date 03/24/2022
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office CARLSBAD	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Additional Remarks

Update casing and cement program to current design.

EOG requests execution of Variance 3a (attached) to offline cement the intermediate sections.

Location of Well

0. SHL: NESW / 1832 FSL / 2322 FWL / TWSP: 25S / RANGE: 33E / SECTION: 19 / LAT: 32.1138682 / LONG: -103.6124041 (TVD: 0 feet, MD: 0 feet)

PPP: NESW / 2310 FSL / 2310 FWL / TWSP: 25S / RANGE: 33E / SECTION: 19 / LAT: 32.1151817 / LONG: -103.6124463 (TVD: 12101 feet, MD: 12244 feet)

BHL: SESW / 230 FSL / 2310 FWL / TWSP: 25S / RANGE: 33E / SECTION: 30 / LAT: 32.0949506 / LONG: -103.6124589 (TVD: 12145 feet, MD: 19610 feet)

CONFIDENTIAL

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102

Revised August 1, 2011

**Submit one copy to appropriate
District Office**

☐ **AMENDED REPORT**

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-45041	² Pool Code 98180	³ Pool Name WC-025 G-09 S253309P; Upper Wolfcamp
⁴ Property Code 322220	⁵ Property Name AUDACIOUS 19 FED COM	
⁶ Well Number 757H		
⁷ OGRID No. 7377	⁸ Operator Name EOG RESOURCES, INC.	
	⁹ Elevation 3435'	

¹⁰Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	19	25-S	33-E	—	2389'	SOUTH	902'	EAST	LEA

¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	30	25-S	33-E	—	100'	SOUTH	870'	EAST	LEA

¹² Dedicated Acres 480.00	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

53



Audacious 19 Fed Com 757H

Revised Permit Information 03/11/2022:

Well Name: Audacious 19 Fed Com 757H

Location: SHL: 2389' FSL & 902' FEL, Section 19, T-25-S, R-33-E, Lea Co., N.M.

BHL: 100' FSL & 870' FEL, Section 30, T-25-S, R-33-E, Lea Co., N.M.

Casing Program:

Hole Size	Interval TVD (MD for EOL)	Csg OD	Weight	Grade	Conn	DFmin Clps/Brst	DFmin Tension
12-1/4"	0' - 970'	9-5/8"	36#	J-55	LTC	1.25	1.6
8-3/4"	0' - 11,170'	7-5/8"	29.7#	HCP-110	FXL	1.25	1.6
6-3/4"	0' - 10,670'	5-1/2"	20#	P110-EC	DWC/C IS MS	1.25	1.6
6-3/4"	10,670' - 11,170'	5-1/2"	20#	P110-EC	Vam Sprint SF	1.25	1.6
6-3/4"	11,170' - 20,596'/13,030' TVD	5-1/2"	20#	P110-EC	DWC/C IS MS	1.25	1.6

Variance is requested to waive the centralizer requirements for the 7-5/8" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 5-1/2" casing by 7-5/8" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

Cementing Program:

Depth	No. Sacks	Wt. ppg	Yld Ft3/sk	Slurry Description
970' 9-5/8"	280	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	80	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 770')
11,170' 7-5/8"	460	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 7,250')
	1000	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)
20,596' 5-1/2"	860	14.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,670')

**Audacious 19 Fed Com 757H**

Additive	Purpose
Bentonite Gel	Lightweight/Lost circulation prevention
Calcium Chloride	Accelerator
Cello-flake	Lost circulation prevention
Sodium Metasilicate	Accelerator
MagOx	Expansive agent
Pre-Mag-M	Expansive agent
Sodium Chloride	Accelerator
FL-62	Fluid loss control
Halad-344	Fluid loss control
Halad-9	Fluid loss control
HR-601	Retarder
Microbond	Expansive Agent

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,450') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 970'	Fresh - Gel	8.6-8.8	28-34	N/c
970' – 11,170'	Brine	10.0-10.2	28-34	N/c
11,170' – 12,554'	Oil Base	8.7-9.4	58-68	N/c - 6
12,554' – 20,596'	Oil Base	10.0-14.0	58-68	4 - 6



Audacious 19 Fed Com 757H

Wellhead & Offline Cementing:

EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.a.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 30 days per Onshore Order No. 2.
- Function test BOP elements per Onshore Order No. 2.
- Break testing BOP and BOPE coupled with batch drilling operations and option to offline cement and/or remediate (if needed) any surface or intermediate sections, according to attached offline cementing support documentation.
- After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad.
- TA cap will also be installed per Wellhead vendor procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.
- See attached "EOG BLM Variance 3a -Offline Cement Intermediate Operational Procedure"



Audacious 19 Fed Com 757H

2389' FSL
902' FEL
Section 19
T-25-S, R-33-E

Revised Wellbore

API: 30-025-45041

KB: 3460'
GL: 3435'

Bit Size: 12-1/4"
9-5/8", 36#, J-55, LTC, 0' - 970'

Bit Size: 8-3/4"
7-5/8", 29.7#, HCP-110, FXL, 0' - 11,170'

Bit Size: 6-3/4"
5-1/2", 20#, P110-EC, DWC/C IS MS, @ 0' - 10,670'
5-1/2", 20#, P110-EC, Vam Sprint SF, @ 10,670' - 11,170'
5-1/2", 20#, P110-EC, DWC/C IS MS, @ 11,170' - 20,596'/13,030' TVD

TOC: 10,670'

Lateral: 20,596' MD, 13,030' TVD
Upper Most Perf:
2540' FSL & 870' FEL Sec. 19
Lower Most Perf:
100' FSL & 870' FEL Sec. 30
BH Location: 100' FSL & 870' FEL
Sec. 30
T-25-S R-33-E

KOP: 12,554'



Audacious 19 Fed Com 757H

Design B**4. CASING PROGRAM**

Hole Size	Interval TVD (MD for EOL)	Csg OD	Weight	Grade	Conn	DFmin Clps/Brst	DFmin Tension
13"	0' - 970'	10-3/4"	40.5#	J-55	STC	1.25	1.6
9-7/8"	0' - 11,170'	8-3/4"	38.5#	P110-EC	Vam Sprint-SF	1.25	1.6
7-7/8"	0' - 20,596'/13,030' TVD	6"	24#	P110-HP	Eagle SFH SC	1.25	1.6

Variance is requested to waive the centralizer requirements for the 8-3/4" casing in the 9-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 9-7/8" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 6" casing in the 7-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 7-7/8" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 6" casing by 8-3/4" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

Cementing Program:

Depth	No. Sacks	Wt. ppg	Yld Ft3/sk	Slurry Description
970' 10-3/4"	260	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	70	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 770')
11,170' 8-3/4"	520	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 7,250')
	1410	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)
20,596' 6"	1390	14.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,670')



Audacious 19 Fed Com 757H

Wellhead & Offline Cementing:

EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.a.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 30 days per Onshore Order No. 2.
- Function test BOP elements per Onshore Order No. 2.
- Break testing BOP and BOPE coupled with batch drilling operations and option to offline cement and/or remediate (if needed) any surface or intermediate sections, according to attached offline cementing support documentation.
- After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad.
- TA cap will also be installed per Wellhead vendor procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.
- See attached "EOG BLM Variance 3a -Offline Cement Intermediate Operational Procedure"



Audacious 19 Fed Com 757H

2389' FSL
902' FEL
Section 19
T-25-S, R-33-E

Proposed Wellbore

KB: 3460'
GL: 3435'

API: 30-025-45041

Bit Size: 13"
10-3/4", 40.5#, J-55, STC, 0' - 970'

Bit Size: 9-7/8"
8-3/4" 38.5#, P110-EC, Vam Sprint-SF, 0' - 11,170'

Bit Size: 7-7/8"
6", 24#, P110-HP, Eagle SFH SC,
@ 0' - 20,596'/13,030' TVD

TOC: 10,670'

Lateral: 20,596' MD, 13,030' TVD
Upper Most Perf:
2540' FSL & 870' FEL Sec. 19
Lower Most Perf:
100' FSL & 870' FEL Sec. 30
BH Location: 100' FSL & 870' FEL
Sec. 30
T-25-S R-33-E

KOP: 12,554'



Midland

Lea County, NM (NAD 83 NME)

Audacious 19 Fed Com

#757H

OH

Plan: Plan #0.1

Standard Planning Report

16 March, 2022



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #757H
Company:	Midland	TVD Reference:	KB = 25' @ 3460.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	KB = 25' @ 3460.0usft
Site:	Audacious 19 Fed Com	North Reference:	Grid
Well:	#757H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1		

Project	Lea County, NM (NAD 83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Audacious 19 Fed Com				
Site Position:		Northing:	406,706.00 usft	Latitude:	32.1160477°N
From:	Map	Easting:	765,298.00 usft	Longitude:	103.6099481°W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "		

Well	#757H					
Well Position	+N/-S	0.0 usft	Northing:	406,479.00 usft	Latitude:	32.1153997°N
	+E/-W	0.0 usft	Easting:	766,597.00 usft	Longitude:	103.6057576°W
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	3,435.0 usft
Grid Convergence:		0.39 °				

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	3/16/2022	6.46	59.77	47,347.97868602

Design	Plan #0.1				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	179.39	

Plan Survey Tool Program	Date	3/16/2022			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	20,596.2 Plan #0.1 (OH)	EOG MWD+IFR1		
			MWD + IFR1		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,055.5	1.11	8.77	2,055.5	0.5	0.1	2.00	2.00	0.00	8.77	
12,499.0	1.11	8.77	12,497.0	200.5	30.9	0.00	0.00	0.00	0.00	
12,554.5	0.00	0.00	12,552.5	201.0	31.0	2.00	-2.00	0.00	180.00	KOP (Audacious 19 F
13,304.5	90.00	179.65	13,030.0	-276.4	33.9	12.00	12.00	23.95	179.65	
15,417.1	90.00	179.65	13,030.0	-2,389.0	47.0	0.00	0.00	0.00	0.00	FPP (Audacious 19 F
20,596.2	90.00	179.62	13,030.0	-7,568.0	80.0	0.00	0.00	0.00	-85.10	PBHL (Audacious 19



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #757H
Company:	Midland	TVD Reference:	KB = 25' @ 3460.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	KB = 25' @ 3460.0usft
Site:	Audacious 19 Fed Com	North Reference:	Grid
Well:	#757H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
860.0	0.00	0.00	860.0	0.0	0.0	0.0	0.00	0.00	0.00
Rustler									
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
940.0	0.00	0.00	940.0	0.0	0.0	0.0	0.00	0.00	0.00
Tamarisk									
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,205.0	0.00	0.00	1,205.0	0.0	0.0	0.0	0.00	0.00	0.00
Top of Salt									
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,055.5	1.11	8.77	2,055.5	0.5	0.1	-0.5	2.00	2.00	0.00
2,100.0	1.11	8.77	2,100.0	1.4	0.2	-1.4	0.00	0.00	0.00
2,200.0	1.11	8.77	2,200.0	3.3	0.5	-3.3	0.00	0.00	0.00
2,300.0	1.11	8.77	2,300.0	5.2	0.8	-5.2	0.00	0.00	0.00
2,400.0	1.11	8.77	2,399.9	7.1	1.1	-7.1	0.00	0.00	0.00
2,500.0	1.11	8.77	2,499.9	9.0	1.4	-9.0	0.00	0.00	0.00
2,600.0	1.11	8.77	2,599.9	11.0	1.7	-10.9	0.00	0.00	0.00
2,700.0	1.11	8.77	2,699.9	12.9	2.0	-12.8	0.00	0.00	0.00
2,800.0	1.11	8.77	2,799.9	14.8	2.3	-14.8	0.00	0.00	0.00
2,900.0	1.11	8.77	2,899.8	16.7	2.6	-16.7	0.00	0.00	0.00
3,000.0	1.11	8.77	2,999.8	18.6	2.9	-18.6	0.00	0.00	0.00
3,100.0	1.11	8.77	3,099.8	20.5	3.2	-20.5	0.00	0.00	0.00
3,200.0	1.11	8.77	3,199.8	22.4	3.5	-22.4	0.00	0.00	0.00
3,300.0	1.11	8.77	3,299.8	24.4	3.8	-24.3	0.00	0.00	0.00
3,400.0	1.11	8.77	3,399.7	26.3	4.1	-26.2	0.00	0.00	0.00
3,500.0	1.11	8.77	3,499.7	28.2	4.3	-28.1	0.00	0.00	0.00
3,600.0	1.11	8.77	3,599.7	30.1	4.6	-30.0	0.00	0.00	0.00
3,700.0	1.11	8.77	3,699.7	32.0	4.9	-32.0	0.00	0.00	0.00
3,800.0	1.11	8.77	3,799.7	33.9	5.2	-33.9	0.00	0.00	0.00
3,900.0	1.11	8.77	3,899.7	35.8	5.5	-35.8	0.00	0.00	0.00
4,000.0	1.11	8.77	3,999.6	37.8	5.8	-37.7	0.00	0.00	0.00
4,100.0	1.11	8.77	4,099.6	39.7	6.1	-39.6	0.00	0.00	0.00
4,200.0	1.11	8.77	4,199.6	41.6	6.4	-41.5	0.00	0.00	0.00
4,300.0	1.11	8.77	4,299.6	43.5	6.7	-43.4	0.00	0.00	0.00
4,400.0	1.11	8.77	4,399.6	45.4	7.0	-45.3	0.00	0.00	0.00
4,500.0	1.11	8.77	4,499.5	47.3	7.3	-47.3	0.00	0.00	0.00



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #757H
Company:	Midland	TVD Reference:	KB = 25' @ 3460.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	KB = 25' @ 3460.0usft
Site:	Audacious 19 Fed Com	North Reference:	Grid
Well:	#757H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
4,595.5	1.11	8.77	4,595.0	49.2	7.6	-49.1	0.00	0.00	0.00	
Bottom of Salt										
4,600.0	1.11	8.77	4,599.5	49.2	7.6	-49.2	0.00	0.00	0.00	
4,700.0	1.11	8.77	4,699.5	51.2	7.9	-51.1	0.00	0.00	0.00	
4,800.0	1.11	8.77	4,799.5	53.1	8.2	-53.0	0.00	0.00	0.00	
4,835.5	1.11	8.77	4,835.0	53.8	8.3	-53.7	0.00	0.00	0.00	
Lamar										
4,860.5	1.11	8.77	4,860.0	54.2	8.4	-54.1	0.00	0.00	0.00	
Bell Canyon										
4,900.0	1.11	8.77	4,899.5	55.0	8.5	-54.9	0.00	0.00	0.00	
5,000.0	1.11	8.77	4,999.4	56.9	8.8	-56.8	0.00	0.00	0.00	
5,100.0	1.11	8.77	5,099.4	58.8	9.1	-58.7	0.00	0.00	0.00	
5,200.0	1.11	8.77	5,199.4	60.7	9.4	-60.6	0.00	0.00	0.00	
5,300.0	1.11	8.77	5,299.4	62.6	9.7	-62.5	0.00	0.00	0.00	
5,400.0	1.11	8.77	5,399.4	64.6	10.0	-64.5	0.00	0.00	0.00	
5,500.0	1.11	8.77	5,499.4	66.5	10.3	-66.4	0.00	0.00	0.00	
5,600.0	1.11	8.77	5,599.3	68.4	10.5	-68.3	0.00	0.00	0.00	
5,700.0	1.11	8.77	5,699.3	70.3	10.8	-70.2	0.00	0.00	0.00	
5,800.0	1.11	8.77	5,799.3	72.2	11.1	-72.1	0.00	0.00	0.00	
5,900.0	1.11	8.77	5,899.3	74.1	11.4	-74.0	0.00	0.00	0.00	
5,940.7	1.11	8.77	5,940.0	74.9	11.6	-74.8	0.00	0.00	0.00	
Cherry Canyon										
6,000.0	1.11	8.77	5,999.3	76.0	11.7	-75.9	0.00	0.00	0.00	
6,100.0	1.11	8.77	6,099.2	78.0	12.0	-77.8	0.00	0.00	0.00	
6,200.0	1.11	8.77	6,199.2	79.9	12.3	-79.7	0.00	0.00	0.00	
6,300.0	1.11	8.77	6,299.2	81.8	12.6	-81.7	0.00	0.00	0.00	
6,400.0	1.11	8.77	6,399.2	83.7	12.9	-83.6	0.00	0.00	0.00	
6,500.0	1.11	8.77	6,499.2	85.6	13.2	-85.5	0.00	0.00	0.00	
6,600.0	1.11	8.77	6,599.1	87.5	13.5	-87.4	0.00	0.00	0.00	
6,700.0	1.11	8.77	6,699.1	89.4	13.8	-89.3	0.00	0.00	0.00	
6,800.0	1.11	8.77	6,799.1	91.4	14.1	-91.2	0.00	0.00	0.00	
6,900.0	1.11	8.77	6,899.1	93.3	14.4	-93.1	0.00	0.00	0.00	
7,000.0	1.11	8.77	6,999.1	95.2	14.7	-95.0	0.00	0.00	0.00	
7,100.0	1.11	8.77	7,099.0	97.1	15.0	-96.9	0.00	0.00	0.00	
7,200.0	1.11	8.77	7,199.0	99.0	15.3	-98.9	0.00	0.00	0.00	
7,300.0	1.11	8.77	7,299.0	100.9	15.6	-100.8	0.00	0.00	0.00	
7,400.0	1.11	8.77	7,399.0	102.9	15.9	-102.7	0.00	0.00	0.00	
7,451.0	1.11	8.77	7,450.0	103.8	16.0	-103.7	0.00	0.00	0.00	
Brushy Canyon										
7,500.0	1.11	8.77	7,499.0	104.8	16.2	-104.6	0.00	0.00	0.00	
7,600.0	1.11	8.77	7,599.0	106.7	16.5	-106.5	0.00	0.00	0.00	
7,700.0	1.11	8.77	7,698.9	108.6	16.7	-108.4	0.00	0.00	0.00	
7,800.0	1.11	8.77	7,798.9	110.5	17.0	-110.3	0.00	0.00	0.00	
7,900.0	1.11	8.77	7,898.9	112.4	17.3	-112.2	0.00	0.00	0.00	
8,000.0	1.11	8.77	7,998.9	114.3	17.6	-114.1	0.00	0.00	0.00	
8,100.0	1.11	8.77	8,098.9	116.3	17.9	-116.1	0.00	0.00	0.00	
8,200.0	1.11	8.77	8,198.8	118.2	18.2	-118.0	0.00	0.00	0.00	
8,300.0	1.11	8.77	8,298.8	120.1	18.5	-119.9	0.00	0.00	0.00	
8,400.0	1.11	8.77	8,398.8	122.0	18.8	-121.8	0.00	0.00	0.00	
8,500.0	1.11	8.77	8,498.8	123.9	19.1	-123.7	0.00	0.00	0.00	
8,600.0	1.11	8.77	8,598.8	125.8	19.4	-125.6	0.00	0.00	0.00	
8,700.0	1.11	8.77	8,698.7	127.7	19.7	-127.5	0.00	0.00	0.00	
8,800.0	1.11	8.77	8,798.7	129.7	20.0	-129.4	0.00	0.00	0.00	
8,900.0	1.11	8.77	8,898.7	131.6	20.3	-131.3	0.00	0.00	0.00	



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #757H
Company:	Midland	TVD Reference:	KB = 25' @ 3460.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	KB = 25' @ 3460.0usft
Site:	Audacious 19 Fed Com	North Reference:	Grid
Well:	#757H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
9,000.0	1.11	8.77	8,998.7	133.5	20.6	-133.3	0.00	0.00	0.00	
9,021.3	1.11	8.77	9,020.0	133.9	20.6	-133.7	0.00	0.00	0.00	
Bone Spring Lime										
9,076.3	1.11	8.77	9,075.0	134.9	20.8	-134.7	0.00	0.00	0.00	
Leonard										
9,100.0	1.11	8.77	9,098.7	135.4	20.9	-135.2	0.00	0.00	0.00	
9,200.0	1.11	8.77	9,198.7	137.3	21.2	-137.1	0.00	0.00	0.00	
9,300.0	1.11	8.77	9,298.6	139.2	21.5	-139.0	0.00	0.00	0.00	
9,400.0	1.11	8.77	9,398.6	141.1	21.8	-140.9	0.00	0.00	0.00	
9,500.0	1.11	8.77	9,498.6	143.1	22.1	-142.8	0.00	0.00	0.00	
9,600.0	1.11	8.77	9,598.6	145.0	22.4	-144.7	0.00	0.00	0.00	
9,700.0	1.11	8.77	9,698.6	146.9	22.7	-146.6	0.00	0.00	0.00	
9,800.0	1.11	8.77	9,798.5	148.8	22.9	-148.5	0.00	0.00	0.00	
9,900.0	1.11	8.77	9,898.5	150.7	23.2	-150.5	0.00	0.00	0.00	
10,000.0	1.11	8.77	9,998.5	152.6	23.5	-152.4	0.00	0.00	0.00	
10,001.5	1.11	8.77	10,000.0	152.7	23.5	-152.4	0.00	0.00	0.00	
First Bone Springs										
10,100.0	1.11	8.77	10,098.5	154.5	23.8	-154.3	0.00	0.00	0.00	
10,200.0	1.11	8.77	10,198.5	156.5	24.1	-156.2	0.00	0.00	0.00	
10,216.5	1.11	8.77	10,215.0	156.8	24.2	-156.5	0.00	0.00	0.00	
Second Bone Springs Shale										
10,300.0	1.11	8.77	10,298.4	158.4	24.4	-158.1	0.00	0.00	0.00	
10,400.0	1.11	8.77	10,398.4	160.3	24.7	-160.0	0.00	0.00	0.00	
10,500.0	1.11	8.77	10,498.4	162.2	25.0	-161.9	0.00	0.00	0.00	
10,581.6	1.11	8.77	10,580.0	163.8	25.3	-163.5	0.00	0.00	0.00	
Second Bone Springs Sand										
10,600.0	1.11	8.77	10,598.4	164.1	25.3	-163.8	0.00	0.00	0.00	
10,700.0	1.11	8.77	10,698.4	166.0	25.6	-165.7	0.00	0.00	0.00	
10,800.0	1.11	8.77	10,798.4	167.9	25.9	-167.7	0.00	0.00	0.00	
10,900.0	1.11	8.77	10,898.3	169.9	26.2	-169.6	0.00	0.00	0.00	
11,000.0	1.11	8.77	10,998.3	171.8	26.5	-171.5	0.00	0.00	0.00	
11,066.7	1.11	8.77	11,065.0	173.0	26.7	-172.8	0.00	0.00	0.00	
Third Bone Springs Carbonate										
11,100.0	1.11	8.77	11,098.3	173.7	26.8	-173.4	0.00	0.00	0.00	
11,200.0	1.11	8.77	11,198.3	175.6	27.1	-175.3	0.00	0.00	0.00	
11,300.0	1.11	8.77	11,298.3	177.5	27.4	-177.2	0.00	0.00	0.00	
11,400.0	1.11	8.77	11,398.2	179.4	27.7	-179.1	0.00	0.00	0.00	
11,500.0	1.11	8.77	11,498.2	181.3	28.0	-181.0	0.00	0.00	0.00	
11,600.0	1.11	8.77	11,598.2	183.3	28.3	-182.9	0.00	0.00	0.00	
11,700.0	1.11	8.77	11,698.2	185.2	28.6	-184.9	0.00	0.00	0.00	
11,716.8	1.11	8.77	11,715.0	185.5	28.6	-185.2	0.00	0.00	0.00	
Third Bone Springs Sand										
11,800.0	1.11	8.77	11,798.2	187.1	28.9	-186.8	0.00	0.00	0.00	
11,900.0	1.11	8.77	11,898.1	189.0	29.1	-188.7	0.00	0.00	0.00	
12,000.0	1.11	8.77	11,998.1	190.9	29.4	-190.6	0.00	0.00	0.00	
12,100.0	1.11	8.77	12,098.1	192.8	29.7	-192.5	0.00	0.00	0.00	
12,171.9	1.11	8.77	12,170.0	194.2	30.0	-193.9	0.00	0.00	0.00	
Wolfcamp										
12,200.0	1.11	8.77	12,198.1	194.7	30.0	-194.4	0.00	0.00	0.00	
12,300.0	1.11	8.77	12,298.1	196.7	30.3	-196.3	0.00	0.00	0.00	
12,400.0	1.11	8.77	12,398.1	198.6	30.6	-198.2	0.00	0.00	0.00	
12,499.0	1.11	8.77	12,497.0	200.5	30.9	-200.1	0.00	0.00	0.00	
12,500.0	1.09	8.77	12,498.0	200.5	30.9	-200.2	2.00	-2.00	0.00	



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #757H
Company:	Midland	TVD Reference:	KB = 25' @ 3460.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	KB = 25' @ 3460.0usft
Site:	Audacious 19 Fed Com	North Reference:	Grid
Well:	#757H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,554.5	0.00	0.00	12,552.5	201.0	31.0	-200.7	2.00	-2.00	0.00
KOP (Audacious 19 Fed Com #757H)									
12,575.0	2.46	179.65	12,573.0	200.6	31.0	-200.2	12.00	12.00	0.00
12,600.0	5.46	179.65	12,598.0	198.8	31.0	-198.5	12.00	12.00	0.00
12,625.0	8.46	179.65	12,622.8	195.8	31.0	-195.5	12.00	12.00	0.00
12,650.0	11.46	179.65	12,647.4	191.5	31.1	-191.1	12.00	12.00	0.00
12,675.0	14.46	179.65	12,671.8	185.9	31.1	-185.5	12.00	12.00	0.00
12,700.0	17.46	179.65	12,695.8	179.0	31.1	-178.7	12.00	12.00	0.00
12,725.0	20.46	179.65	12,719.4	170.9	31.2	-170.5	12.00	12.00	0.00
12,750.0	23.46	179.65	12,742.6	161.5	31.2	-161.2	12.00	12.00	0.00
12,775.0	26.46	179.65	12,765.3	151.0	31.3	-150.6	12.00	12.00	0.00
12,800.0	29.46	179.65	12,787.4	139.2	31.4	-138.9	12.00	12.00	0.00
12,825.0	32.46	179.65	12,808.8	126.4	31.5	-126.0	12.00	12.00	0.00
12,850.0	35.46	179.65	12,829.5	112.4	31.5	-112.1	12.00	12.00	0.00
12,875.0	38.46	179.65	12,849.5	97.4	31.6	-97.1	12.00	12.00	0.00
12,900.0	41.46	179.65	12,868.7	81.3	31.7	-81.0	12.00	12.00	0.00
12,925.0	44.46	179.65	12,886.9	64.3	31.8	-64.0	12.00	12.00	0.00
12,950.0	47.46	179.65	12,904.3	46.3	32.0	-46.0	12.00	12.00	0.00
12,953.6	47.89	179.65	12,906.7	43.7	32.0	-43.4	12.00	12.00	0.00
FTP (Audacious 19 Fed Com #757H)									
12,975.0	50.46	179.65	12,920.7	27.5	32.1	-27.1	12.00	12.00	0.00
13,000.0	53.46	179.65	12,936.1	7.8	32.2	-7.4	12.00	12.00	0.00
13,025.0	56.46	179.65	12,950.5	-12.7	32.3	13.0	12.00	12.00	0.00
13,050.0	59.46	179.65	12,963.7	-33.9	32.5	34.2	12.00	12.00	0.00
13,075.0	62.46	179.65	12,975.9	-55.7	32.6	56.1	12.00	12.00	0.00
13,100.0	65.46	179.65	12,986.8	-78.2	32.7	78.5	12.00	12.00	0.00
13,125.0	68.46	179.65	12,996.6	-101.2	32.9	101.5	12.00	12.00	0.00
13,150.0	71.46	179.65	13,005.2	-124.7	33.0	125.0	12.00	12.00	0.00
13,175.0	74.46	179.65	13,012.5	-148.6	33.2	148.9	12.00	12.00	0.00
13,200.0	77.46	179.65	13,018.6	-172.8	33.3	173.2	12.00	12.00	0.00
13,225.0	80.46	179.65	13,023.4	-197.4	33.5	197.7	12.00	12.00	0.00
13,250.0	83.46	179.65	13,026.9	-222.1	33.6	222.5	12.00	12.00	0.00
13,275.0	86.46	179.65	13,029.1	-247.0	33.8	247.4	12.00	12.00	0.00
13,300.0	89.46	179.65	13,029.9	-272.0	33.9	272.3	12.00	12.00	0.00
13,304.5	90.00	179.65	13,030.0	-276.4	33.9	276.8	12.00	12.00	0.00
13,400.0	90.00	179.65	13,030.0	-372.0	34.5	372.3	0.00	0.00	0.00
13,500.0	90.00	179.65	13,030.0	-472.0	35.2	472.3	0.00	0.00	0.00
13,600.0	90.00	179.65	13,030.0	-572.0	35.8	572.3	0.00	0.00	0.00
13,700.0	90.00	179.65	13,030.0	-672.0	36.4	672.3	0.00	0.00	0.00
13,800.0	90.00	179.65	13,030.0	-772.0	37.0	772.3	0.00	0.00	0.00
13,900.0	90.00	179.65	13,030.0	-872.0	37.6	872.3	0.00	0.00	0.00
14,000.0	90.00	179.65	13,030.0	-972.0	38.2	972.3	0.00	0.00	0.00
14,100.0	90.00	179.65	13,030.0	-1,072.0	38.9	1,072.3	0.00	0.00	0.00
14,200.0	90.00	179.65	13,030.0	-1,172.0	39.5	1,172.3	0.00	0.00	0.00
14,300.0	90.00	179.65	13,030.0	-1,272.0	40.1	1,272.3	0.00	0.00	0.00
14,400.0	90.00	179.65	13,030.0	-1,372.0	40.7	1,372.3	0.00	0.00	0.00
14,500.0	90.00	179.65	13,030.0	-1,472.0	41.3	1,472.3	0.00	0.00	0.00
14,600.0	90.00	179.65	13,030.0	-1,572.0	42.0	1,572.3	0.00	0.00	0.00
14,700.0	90.00	179.65	13,030.0	-1,672.0	42.6	1,672.3	0.00	0.00	0.00
14,800.0	90.00	179.65	13,030.0	-1,772.0	43.2	1,772.3	0.00	0.00	0.00
14,900.0	90.00	179.65	13,030.0	-1,872.0	43.8	1,872.3	0.00	0.00	0.00
15,000.0	90.00	179.65	13,030.0	-1,972.0	44.4	1,972.3	0.00	0.00	0.00
15,100.0	90.00	179.65	13,030.0	-2,072.0	45.0	2,072.3	0.00	0.00	0.00



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #757H
Company:	Midland	TVD Reference:	KB = 25' @ 3460.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	KB = 25' @ 3460.0usft
Site:	Audacious 19 Fed Com	North Reference:	Grid
Well:	#757H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
15,200.0	90.00	179.65	13,030.0	-2,172.0	45.7	2,172.3	0.00	0.00	0.00
15,300.0	90.00	179.65	13,030.0	-2,272.0	46.3	2,272.3	0.00	0.00	0.00
15,400.0	90.00	179.65	13,030.0	-2,371.9	46.9	2,372.3	0.00	0.00	0.00
15,417.1	90.00	179.65	13,030.0	-2,389.0	47.0	2,389.4	0.00	0.00	0.00
FPP (Audacious 19 Fed Com #757H)									
15,500.0	90.00	179.65	13,030.0	-2,471.9	47.5	2,472.3	0.00	0.00	0.00
15,600.0	90.00	179.65	13,030.0	-2,571.9	48.1	2,572.3	0.00	0.00	0.00
15,700.0	90.00	179.64	13,030.0	-2,671.9	48.8	2,672.3	0.00	0.00	0.00
15,800.0	90.00	179.64	13,030.0	-2,771.9	49.4	2,772.3	0.00	0.00	0.00
15,900.0	90.00	179.64	13,030.0	-2,871.9	50.0	2,872.3	0.00	0.00	0.00
16,000.0	90.00	179.64	13,030.0	-2,971.9	50.6	2,972.3	0.00	0.00	0.00
16,100.0	90.00	179.64	13,030.0	-3,071.9	51.2	3,072.3	0.00	0.00	0.00
16,200.0	90.00	179.64	13,030.0	-3,171.9	51.9	3,172.3	0.00	0.00	0.00
16,300.0	90.00	179.64	13,030.0	-3,271.9	52.5	3,272.3	0.00	0.00	0.00
16,400.0	90.00	179.64	13,030.0	-3,371.9	53.1	3,372.3	0.00	0.00	0.00
16,500.0	90.00	179.64	13,030.0	-3,471.9	53.7	3,472.3	0.00	0.00	0.00
16,600.0	90.00	179.64	13,030.0	-3,571.9	54.4	3,572.3	0.00	0.00	0.00
16,700.0	90.00	179.64	13,030.0	-3,671.9	55.0	3,672.3	0.00	0.00	0.00
16,800.0	90.00	179.64	13,030.0	-3,771.9	55.6	3,772.3	0.00	0.00	0.00
16,900.0	90.00	179.64	13,030.0	-3,871.9	56.2	3,872.3	0.00	0.00	0.00
17,000.0	90.00	179.64	13,030.0	-3,971.9	56.9	3,972.3	0.00	0.00	0.00
17,100.0	90.00	179.64	13,030.0	-4,071.9	57.5	4,072.3	0.00	0.00	0.00
17,200.0	90.00	179.64	13,030.0	-4,171.9	58.1	4,172.3	0.00	0.00	0.00
17,300.0	90.00	179.64	13,030.0	-4,271.9	58.8	4,272.3	0.00	0.00	0.00
17,400.0	90.00	179.64	13,030.0	-4,371.9	59.4	4,372.3	0.00	0.00	0.00
17,500.0	90.00	179.64	13,030.0	-4,471.9	60.0	4,472.3	0.00	0.00	0.00
17,600.0	90.00	179.64	13,030.0	-4,571.9	60.7	4,572.3	0.00	0.00	0.00
17,700.0	90.00	179.64	13,030.0	-4,671.9	61.3	4,672.3	0.00	0.00	0.00
17,800.0	90.00	179.64	13,030.0	-4,771.9	61.9	4,772.3	0.00	0.00	0.00
17,900.0	90.00	179.64	13,030.0	-4,871.9	62.6	4,872.3	0.00	0.00	0.00
18,000.0	90.00	179.63	13,030.0	-4,971.9	63.2	4,972.3	0.00	0.00	0.00
18,100.0	90.00	179.63	13,030.0	-5,071.9	63.8	5,072.3	0.00	0.00	0.00
18,200.0	90.00	179.63	13,030.0	-5,171.9	64.5	5,172.3	0.00	0.00	0.00
18,300.0	90.00	179.63	13,030.0	-5,271.9	65.1	5,272.3	0.00	0.00	0.00
18,400.0	90.00	179.63	13,030.0	-5,371.9	65.8	5,372.3	0.00	0.00	0.00
18,500.0	90.00	179.63	13,030.0	-5,471.9	66.4	5,472.3	0.00	0.00	0.00
18,600.0	90.00	179.63	13,030.0	-5,571.9	67.0	5,572.3	0.00	0.00	0.00
18,700.0	90.00	179.63	13,030.0	-5,671.9	67.7	5,672.3	0.00	0.00	0.00
18,800.0	90.00	179.63	13,030.0	-5,771.9	68.3	5,772.3	0.00	0.00	0.00
18,900.0	90.00	179.63	13,030.0	-5,871.9	69.0	5,872.3	0.00	0.00	0.00
19,000.0	90.00	179.63	13,030.0	-5,971.9	69.6	5,972.3	0.00	0.00	0.00
19,100.0	90.00	179.63	13,030.0	-6,071.9	70.3	6,072.3	0.00	0.00	0.00
19,200.0	90.00	179.63	13,030.0	-6,171.9	70.9	6,172.3	0.00	0.00	0.00
19,300.0	90.00	179.63	13,030.0	-6,271.9	71.6	6,272.3	0.00	0.00	0.00
19,400.0	90.00	179.63	13,030.0	-6,371.9	72.2	6,372.3	0.00	0.00	0.00
19,500.0	90.00	179.63	13,030.0	-6,471.9	72.8	6,472.3	0.00	0.00	0.00
19,600.0	90.00	179.63	13,030.0	-6,571.9	73.5	6,572.3	0.00	0.00	0.00
19,700.0	90.00	179.63	13,030.0	-6,671.9	74.1	6,672.3	0.00	0.00	0.00
19,800.0	90.00	179.63	13,030.0	-6,771.9	74.8	6,772.3	0.00	0.00	0.00
19,900.0	90.00	179.63	13,030.0	-6,871.9	75.4	6,872.3	0.00	0.00	0.00
20,000.0	90.00	179.63	13,030.0	-6,971.9	76.1	6,972.3	0.00	0.00	0.00
20,100.0	90.00	179.63	13,030.0	-7,071.9	76.8	7,072.3	0.00	0.00	0.00
20,200.0	90.00	179.63	13,030.0	-7,171.9	77.4	7,172.3	0.00	0.00	0.00
20,300.0	90.00	179.63	13,030.0	-7,271.8	78.1	7,272.3	0.00	0.00	0.00




Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #757H
Company:	Midland	TVD Reference:	KB = 25' @ 3460.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	KB = 25' @ 3460.0usft
Site:	Audacious 19 Fed Com	North Reference:	Grid
Well:	#757H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
20,400.0	90.00	179.62	13,030.0	-7,371.8	78.7	7,372.3	0.00	0.00	0.00	
20,500.0	90.00	179.62	13,030.0	-7,471.8	79.4	7,472.3	0.00	0.00	0.00	
20,596.2	90.00	179.62	13,030.0	-7,568.0	80.0	7,568.4	0.00	0.00	0.00	
PBHL (Audacious 19 Fed Com #757H)										

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
KOP (Audacious 19 Fed - plan hits target center - Point	0.00	0.00	12,552.5	201.0	31.0	406,680.00	766,628.00	32.1159516°N	103.6056531°W
PBHL (Audacious 19 Fed - plan hits target center - Point	0.00	0.00	13,030.0	-7,568.0	80.0	398,911.00	766,677.00	32.0945958°N	103.6056642°W
FPP (Audacious 19 Fed - plan hits target center - Point	0.00	0.00	13,030.0	-2,389.0	47.0	404,090.00	766,644.00	32.1088321°N	103.6056579°W
FTP (Audacious 19 Fed - plan misses target center by 163.4usft at 12953.6usft MD (12906.7 TVD, 43.7 N, 32.0 E) - Point	0.00	0.00	13,030.0	151.0	31.0	406,630.00	766,628.00	32.1158142°N	103.6056542°W

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
860.0	860.0	Rustler				
940.0	940.0	Tamarisk				
1,205.0	1,205.0	Top of Salt				
4,595.5	4,595.0	Bottom of Salt				
4,835.5	4,835.0	Lamar				
4,860.5	4,860.0	Bell Canyon				
5,940.7	5,940.0	Cherry Canyon				
7,451.0	7,450.0	Brushy Canyon				
9,021.3	9,020.0	Bone Spring Lime				
9,076.3	9,075.0	Leonard				
10,001.5	10,000.0	First Bone Springs				
10,216.5	10,215.0	Second Bone Springs Shale				
10,581.6	10,580.0	Second Bone Springs Sand				
11,066.7	11,065.0	Third Bone Springs Carbonate				
11,716.8	11,715.0	Third Bone Springs Sand				
12,171.9	12,170.0	Wolfcamp				

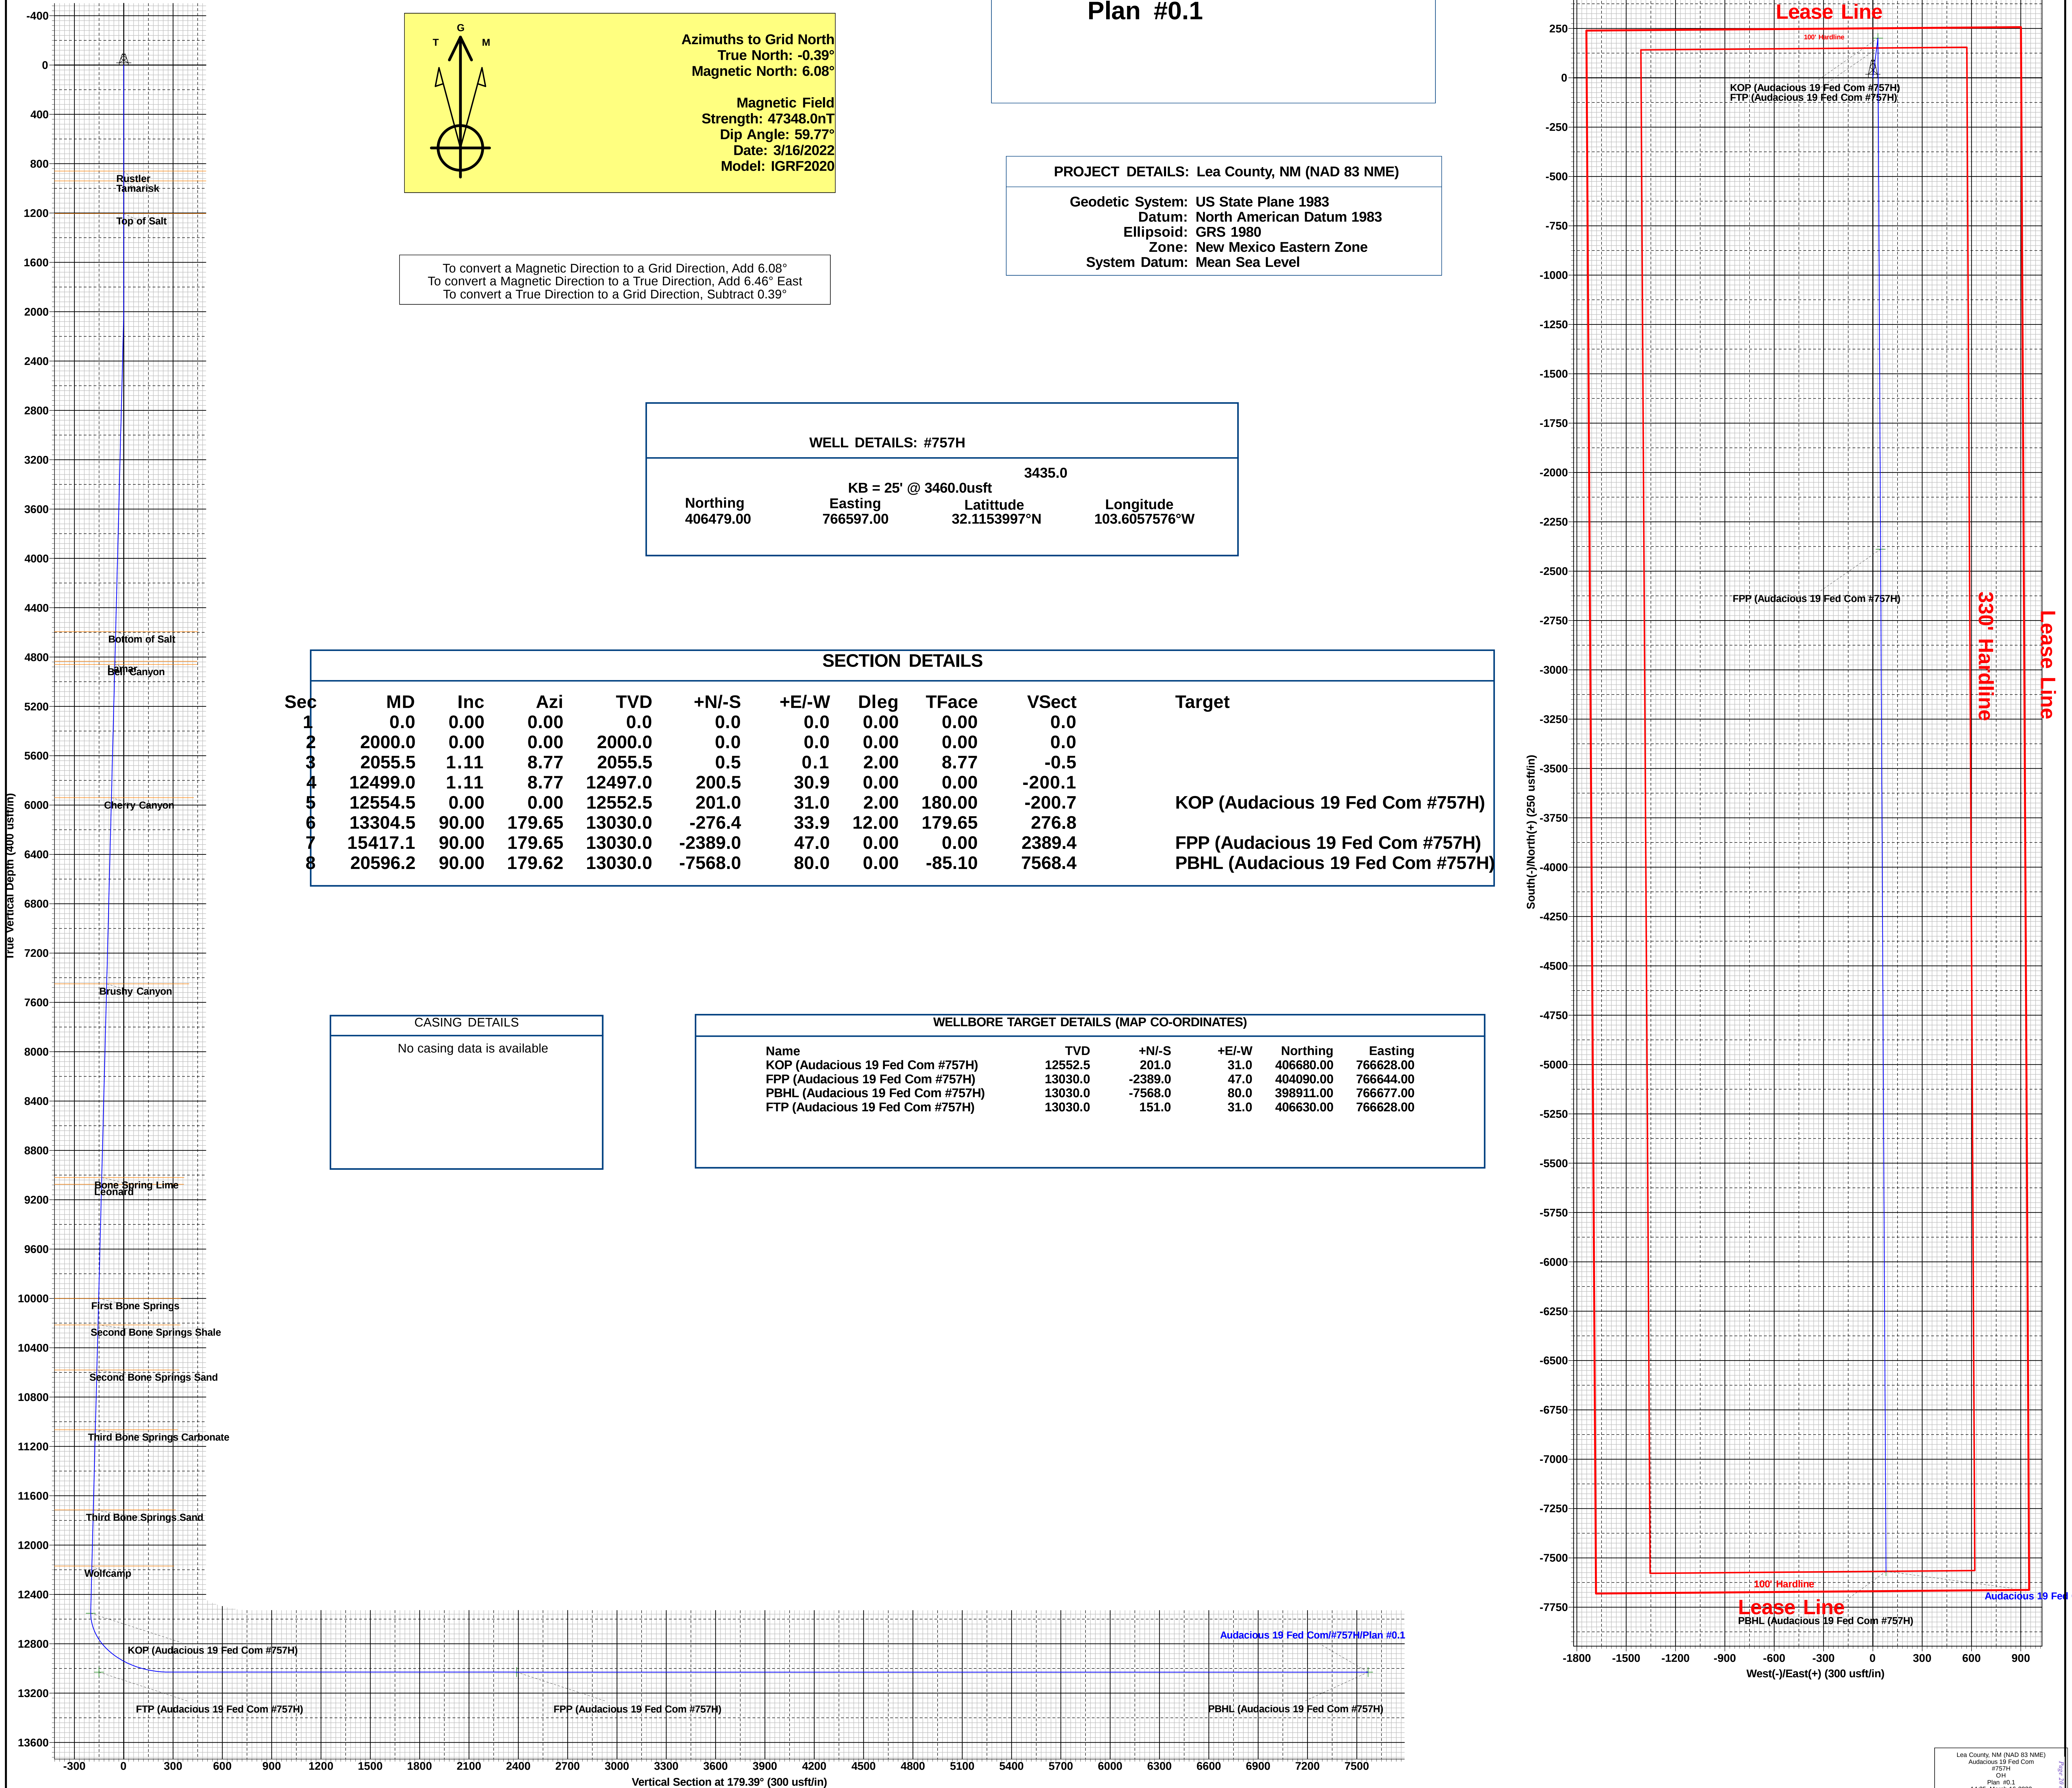

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 93338

CONDITIONS

Operator: EOG RESOURCES INC P.O. Box 2267 Midland, TX 79702	OGRID: 7377
	Action Number: 93338
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	ORIGINAL COA'S APPLY	4/14/2022