

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101

August 1, 2011

Permit 314637

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Redwood Operating LLC PO Box 1370 Artesia, NM 88210		2. OGRID Number 330211
		3. API Number 30-015-49486
4. Property Code 329504	5. Property Name LEAVITT 13	6. Well No. 005H

7. Surface Location

UL - Lot M	Section 18	Township 18S	Range 27E	Lot Idn	Feet From 380	N/S Line S	Feet From 330	E/W Line W	County Eddy
---------------	---------------	-----------------	--------------	---------	------------------	---------------	------------------	---------------	----------------

8. Proposed Bottom Hole Location

UL - Lot M	Section 13	Township 18S	Range 26E	Lot Idn M	Feet From 330	N/S Line S	Feet From 1	E/W Line W	County Eddy
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	----------------	---------------	----------------

9. Pool Information

RED LAKE;GLORIETA-YESO	51120
------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type Private	15. Ground Level Elevation 3290
16. Multiple N	17. Proposed Depth 8126	18. Formation Yeso	19. Contractor	20. Spud Date 9/1/2022
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits**21. Proposed Casing and Cement Program**

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	12.25	9.625	36	1230	450	0
Prod	8.75	7	26	3100	360	0
Prod	8.75	5.5	17	8126	1450	0

Casing/Cement Program: Additional Comments

Redwood Operating LLC proposed to drill 12 1/4" hole to 1230', run 9 5/8 csg/cmt. Drill 8 3/4" hole to 8126', run 7" & 5 1/2" csg/cmt. put well on production.
--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	3000	3000	

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC <input checked="" type="checkbox"/> and/or 19.15.14.9 (B) NMAC <input checked="" type="checkbox"/> if applicable.	OIL CONSERVATION DIVISION	
Signature:		
Printed Name: Electronically filed by Jerry Sherrell	Approved By: Katherine Pickford	
Title: Regulatory Supervisor	Title: Geoscientist	
Email Address: jerrys@mec.com	Approved Date: 4/28/2022	Expiration Date: 4/28/2024
Date: 4/21/2022	Phone: 575-748-1288	Conditions of Approval Attached

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-49486	² Pool Code 51120	³ Pool Name Red Lake; Glorieta Yeso
⁴ Property Code 329504	⁵ Property Name LEAVITT 13	⁶ Well Number 5H
⁷ OGRID No. 330211	⁸ Operator Name REDWOOD OPERATING, LLC	⁹ Elevation 3290.0

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	18	18 S	27 E		380	SOUTH	330	WEST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	13	18 S	26 E		330	SOUTH	1	WEST	EDDY

¹² Dedicated Acres 160	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

<p>17 OPERATOR CERTIFICATION</p> <p><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i></p> <p>Deana Weaver 4/20/2022</p> <p>Signature Date</p> <p>Deana Weaver</p> <p>Printed Name</p> <p>dweaver@mec.com</p> <p>E-mail Address</p>	
<p>18 SURVEYOR CERTIFICATION</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i></p> <p>APRIL 14, 2022</p> <p>Date of Survey</p> <p>Signature and Seal of Professional Surveyor: </p> <p>Certificate Number: 12797</p> <p>SURVEY NO. 3153A</p>	

Intent ☒ As Drilled ☐

API #		
Operator Name: REDWOOD OPERATING, LLC	Property Name: LEAVITT 13	Well Number 5H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL P	Section 13	Township 18S	Range 26E	Lot	Feet 330	From N/S SOUTH	Feet 100	From E/W EAST	County EDDY
Latitude 32.7414595					Longitude 104.3269890				NAD 83

Last Take Point (LTP)

UL M	Section 13	Township 18S	Range 26E	Lot	Feet 330	From N/S SOUTH	Feet 100	From E/W WEST	County EDDY
Latitude 32.7414908					Longitude 104.3435650				NAD 83

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 314637

PERMIT CONDITIONS OF APPROVAL


Operator Name and Address: Redwood Operating LLC [330211] PO Box 1370 Artesia, NM 88210	API Number: 30-015-49486
	Well: LEAVITT 13 #005H

OCD Reviewer	Condition
kpickford	Notify OCD 24 hours prior to casing & cement
kpickford	Will require a File As Drilled C-102 and a Directional Survey with the C-104
kpickford	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud
kpickford	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
kpickford	Cement is required to circulate on both surface and intermediate1 strings of casing
kpickford	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system

Mack Energy Corporation
Minimum Blowout Preventer Requirements
5000 psi Working Pressure
13 5/8 inch- 5 MWP
11 Inch - 5 MWP

Stack Requirements

NO.	Items	Min. I.D.	Min. Nominal
1	Flowline		2"
2	Fill up line		2"
3	Drilling nipple		
4	Annular preventer		
5	Two single or one dual hydraulically operated rams		
6a	Drilling spool with 2" min. kill line and 3" min choke line outlets		2" Choke
6b	2" min. kill line and 3" min. choke line outlets in ram. (Alternate to 6a above)		
7	Valve Gate Plug	3 1/8	
8	Gate valve-power operated	3 1/8	
9	Line to choke manifold		3"
10	Valve Gate Plug	2 1/16	
11	Check valve	2 1/16	
12	Casing head		
13	Valve Gate Plug	1 13/16	
14	Pressure gauge with needle valve		
15	Kill line to rig mud pump manifold		2"

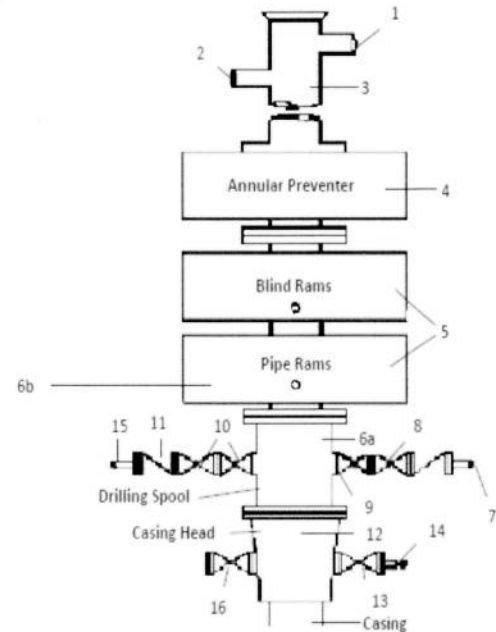

OPTIONAL

16	Flanged Valve	1 13/16	
----	---------------	---------	--

CONTRACTOR'S OPTION TO FURNISH:

1. All equipment and connections above bradenhead or casinghead. Working pressure of preventers to be 2000 psi minimum.
2. Automatic accumulator (80 gallons, minimum) capable of closing BOP in 30 seconds or less and, holding them closed against full rated working pressure.
3. BOP controls, to be located near drillers' position.
4. Kelly equipped with Kelly cock.
5. Inside blowout preventer or its equivalent on derrick floor at all times with proper threads to fit pipe being used.
6. Kelly saver-sub equipped with rubber casing protector at all times.
7. Plug type blowout preventer tester.
8. Extra set pipe rams to fit drill pipe in use on location at all times.
9. Type RX ring gaskets in place of Type R.

MEC TO FURNISH:

1. Bradenhead or casing head and side valves.
2. Wear bushing. If required.

10.

ME

GENERAL NOTES:

1. Deviations from this drawing may be made only with the express permission of MEC's Drilling Manager.
2. All connections, valves, fittings, piping, etc., subject to well or pump pressure must be flanged (suitable clamp connections acceptable) and have minimum working pressure equal to rated working pressure of preventers up through choke valves must be full opening and suitable for high pressure mud service.
3. Controls to be of standard design and each marked, showing opening and closing position
4. Chokes will be positioned so as not to hamper or delay changing of choke beans.

Replaceable parts for adjustable choke, or bean sizes, retainers, and choke wrenches to be conveniently located for immediate use.

5. All valves to be equipped with hand-wheels or handles ready for immediate use.
6. Choke lines must be suitably anchored.
7. Handwheels and extensions to be connected and ready for use.
8. Valves adjacent to drilling spool to be kept open. Use outside valves except for emergency.
9. All seamless steel control piping (2000 psi working pressure) to have flexible joints to avoid stress. Hoses will be permitted.
10. Casinghead connections shall not be used except in case of emergency.
11. Does not use kill line for routine fill up operations.

Intent ☒ As Drilled ☐

API #		
Operator Name: REDWOOD OPERATING, LLC	Property Name: LEAVITT 13	Well Number 5H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL P	Section 13	Township 18S	Range 26E	Lot	Feet 330	From N/S SOUTH	Feet 100	From E/W EAST	County EDDY
Latitude 32.7414595					Longitude 104.3269890				NAD 83

Last Take Point (LTP)

UL M	Section 13	Township 18S	Range 26E	Lot	Feet 330	From N/S SOUTH	Feet 100	From E/W WEST	County EDDY
Latitude 32.7414908					Longitude 104.3435650				NAD 83

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Leavitt 13 5H, Plan 1

Operator	Redwood Operating LLC			Units	feet, °/100ft		13:15 Wednesday, April 20, 2022 Page 1 of 4			
Field	Red Lake			County	Eddy		Vertical Section Azimuth	270.13		
Well Name	Leavitt 13 5H			State	New Mexico		Survey Calculation Method	Minimum Curvature		
Plan	1			Country	USA		Database	Access		
Location	SL: 380 FSL & 330 FWL Section 18-T18S-R27E BHL: 330 FSL & 1 FWL Section 13-T18S-26E					Map Zone	UTM		Lat Long Ref	
Site						Surface X	1847789.8		Surface Long	
Slot Name						Surface Y	11885294.5		Surface Lat	
Well Number						Surface Z	3308		Global Z Ref KB	
Project	MD/TVD Ref KB					Ground Level	3290		Local North Ref Grid	
DIRECTIONAL WELL PLAN										
MD*	INC*	AZI*	TVD*	N*	E*	DLS*	V. S.*	MapE*	MapN*	SysTVD*
ft	deg	deg	ft	ft	ft	°/100ft	ft	ft	ft	ft
*** TIE (at MD = 2007.00)										
2007.00	0.00	0.0	2007.00	0.00	0.00		0.00	1847789.80	11885294.50	1301.00
2050.00	0.00	0.0	2050.00	0.00	0.00	0.00	0.00	1847789.80	11885294.50	1258.00
2100.00	0.00	0.0	2100.00	0.00	0.00	0.00	0.00	1847789.80	11885294.50	1208.00
*** KOP 8 DEGREES (at MD = 2107.00)										
2107.00	0.00	0.0	2107.00	0.00	0.00	0.00	0.00	1847789.80	11885294.50	1201.00
2150.00	3.44	267.5	2149.97	-0.06	-1.29	8.00	1.29	1847788.51	11885294.44	1158.03
2200.00	7.44	267.5	2199.74	-0.26	-6.02	8.00	6.02	1847783.78	11885294.24	1108.26
2250.00	11.44	267.5	2249.05	-0.62	-14.22	8.00	14.21	1847775.58	11885293.88	1058.95
2300.00	15.44	267.5	2297.67	-1.13	-25.82	8.00	25.82	1847763.98	11885293.37	1010.33
2350.00	19.44	267.5	2345.36	-1.78	-40.79	8.00	40.79	1847749.01	11885292.72	962.64
2400.00	23.44	267.5	2391.90	-2.58	-59.05	8.00	59.04	1847730.75	11885291.92	916.11
2450.00	27.44	267.5	2437.04	-3.51	-80.50	8.00	80.49	1847709.30	11885290.99	870.96
2500.00	31.44	267.5	2480.57	-4.59	-105.05	8.00	105.04	1847684.75	11885289.91	827.43
2550.00	35.44	267.5	2522.29	-5.79	-132.57	8.00	132.56	1847657.23	11885288.71	785.71
2600.00	39.44	267.5	2561.98	-7.11	-162.93	8.00	162.91	1847626.87	11885287.39	746.02
2650.00	43.44	267.5	2599.45	-8.56	-195.98	8.00	195.96	1847593.82	11885285.94	708.55
2700.00	47.44	267.5	2634.53	-10.11	-231.57	8.00	231.54	1847558.23	11885284.39	673.47
2750.00	51.44	267.5	2667.03	-11.77	-269.51	8.00	269.48	1847520.29	11885282.73	640.97
*** 55 DEGREE TANGENT (at MD = 2794.50)										
2794.50	55.00	267.5	2693.67	-13.32	-305.11	8.00	305.08	1847484.69	11885281.18	614.33
2800.00	55.00	267.5	2696.83	-13.52	-309.61	0.00	309.58	1847480.19	11885280.98	611.17
2850.00	55.00	267.5	2725.51	-15.30	-350.53	0.00	350.50	1847439.27	11885279.20	582.49
2900.00	55.00	267.5	2754.19	-17.09	-391.45	0.00	391.41	1847398.35	11885277.41	553.81
2950.00	55.00	267.5	2782.87	-18.88	-432.37	0.00	432.33	1847357.43	11885275.62	525.13
3000.00	55.00	267.5	2811.54	-20.66	-473.29	0.00	473.24	1847316.51	11885273.84	496.46
*** 10 DEGREE BUILD (at MD = 3044.50)										
3044.50	55.00	267.5	2837.07	-22.25	-509.71	0.00	509.65	1847280.09	11885272.25	470.93
3050.00	55.55	267.5	2840.20	-22.45	-514.22	10.00	514.17	1847275.58	11885272.05	467.80
3100.00	60.54	267.9	2866.66	-24.12	-556.60	10.00	556.54	1847233.20	11885270.38	441.34
3150.00	65.53	268.3	2889.32	-25.61	-601.12	10.00	601.06	1847188.68	11885268.89	418.68
3200.00	70.52	268.6	2908.03	-26.89	-647.46	10.00	647.40	1847142.34	11885267.61	399.97
3250.00	75.51	268.9	2922.63	-27.95	-695.25	10.00	695.19	1847094.55	11885266.55	385.37
3300.00	80.51	269.2	2933.01	-28.80	-744.14	10.00	744.07	1847045.66	11885265.70	374.99
3350.00	85.50	269.4	2939.10	-29.41	-793.74	10.00	793.68	1846996.06	11885265.09	368.90
3400.00	90.49	269.7	2940.85	-29.80	-843.70	10.00	843.63	1846946.10	11885264.70	367.15
*** LANDING POINT (at MD = 3412.11)										
3412.11	91.70	269.8	2940.62	-29.85	-855.80	10.00	855.73	1846934.00	11885264.65	367.38
3450.00	91.70	269.8	2939.49	-30.01	-893.68	0.00	893.61	1846896.12	11885264.49	368.51

Leavitt 13 5H, Plan 1

Operator	Redwood Operating LLC	Units	feet, °/100ft	13:15 Wednesday, April 20, 2022	Page 2 of 4
Field	Red Lake	County	Eddy	Vertical Section Azimuth	270.13
Well Name	Leavitt 13 5H	State	New Mexico	Survey Calculation Method	Minimum Curvature
Plan	1	Country	USA	Database	Access

Location	SL: 380 FSL & 330 FWL Section 18-T18S-R27E BHL: 330 FSL & 1 FWL Section 13-T18S-26E	Map Zone	UTM	Lat Long Ref	
Site		Surface X	1847789.8	Surface Long	
Slot Name		Surface Y	11885294.5	Surface Lat	
Well Number		Surface Z	3308	Global Z Ref	KB
Project		Ground Level	3290	Local North Ref	Grid

DIRECTIONAL WELL PLAN

MD*	INC*	AZI*	TVD*	N*	E*	DLS*	V. S.*	MapE*	MapN*	SysTVD*
ft	deg	deg	ft	ft	ft	°/100ft	ft	ft	ft	ft
3500.00	91.70	269.8	2938.01	-30.22	-943.65	0.00	943.58	1846846.15	11885264.28	369.99
3550.00	91.70	269.8	2936.53	-30.43	-993.63	0.00	993.56	1846796.17	11885264.07	371.47
3600.00	91.70	269.8	2935.04	-30.64	-1043.61	0.00	1043.54	1846746.19	11885263.86	372.96
3650.00	91.70	269.8	2933.56	-30.85	-1093.59	0.00	1093.51	1846696.21	11885263.65	374.44
3700.00	91.70	269.8	2932.08	-31.06	-1143.56	0.00	1143.49	1846646.24	11885263.44	375.92
3750.00	91.70	269.8	2930.59	-31.27	-1193.54	0.00	1193.47	1846596.26	11885263.23	377.41
3800.00	91.70	269.8	2929.11	-31.48	-1243.52	0.00	1243.45	1846546.28	11885263.02	378.89
3850.00	91.70	269.8	2927.63	-31.69	-1293.50	0.00	1293.42	1846496.30	11885262.81	380.37
3900.00	91.70	269.8	2926.15	-31.90	-1343.48	0.00	1343.40	1846446.32	11885262.60	381.86
3950.00	91.70	269.8	2924.66	-32.11	-1393.45	0.00	1393.38	1846396.35	11885262.39	383.34
4000.00	91.70	269.8	2923.18	-32.32	-1443.43	0.00	1443.35	1846346.37	11885262.18	384.82
4050.00	91.70	269.8	2921.70	-32.52	-1493.41	0.00	1493.33	1846296.39	11885261.98	386.31
4100.00	91.70	269.8	2920.21	-32.73	-1543.39	0.00	1543.31	1846246.41	11885261.77	387.79
4150.00	91.70	269.8	2918.73	-32.94	-1593.36	0.00	1593.28	1846196.44	11885261.56	389.27
4200.00	91.70	269.8	2917.25	-33.15	-1643.34	0.00	1643.26	1846146.46	11885261.35	390.75
4250.00	91.70	269.8	2915.76	-33.36	-1693.32	0.00	1693.24	1846096.48	11885261.14	392.24
4300.00	91.70	269.8	2914.28	-33.57	-1743.30	0.00	1743.21	1846046.50	11885260.93	393.72
4350.00	91.70	269.8	2912.80	-33.78	-1793.27	0.00	1793.19	1845996.53	11885260.72	395.20
4400.00	91.70	269.8	2911.31	-33.99	-1843.25	0.00	1843.17	1845946.55	11885260.51	396.69
4450.00	91.70	269.8	2909.83	-34.20	-1893.23	0.00	1893.15	1845896.57	11885260.30	398.17
4500.00	91.70	269.8	2908.35	-34.41	-1943.21	0.00	1943.12	1845846.59	11885260.09	399.65
4550.00	91.70	269.8	2906.86	-34.62	-1993.18	0.00	1993.10	1845796.62	11885259.88	401.14
4600.00	91.70	269.8	2905.38	-34.83	-2043.16	0.00	2043.08	1845746.64	11885259.67	402.62
4650.00	91.70	269.8	2903.90	-35.04	-2093.14	0.00	2093.05	1845696.66	11885259.46	404.10
4700.00	91.70	269.8	2902.41	-35.25	-2143.12	0.00	2143.03	1845646.68	11885259.25	405.59
4750.00	91.70	269.8	2900.93	-35.46	-2193.09	0.00	2193.01	1845596.71	11885259.04	407.07
4800.00	91.70	269.8	2899.45	-35.66	-2243.07	0.00	2242.98	1845546.73	11885258.84	408.55
4850.00	91.70	269.8	2897.96	-35.87	-2293.05	0.00	2292.96	1845496.75	11885258.63	410.04
4900.00	91.70	269.8	2896.48	-36.08	-2343.03	0.00	2342.94	1845446.77	11885258.42	411.52
4950.00	91.70	269.8	2895.00	-36.29	-2393.00	0.00	2392.92	1845396.80	11885258.21	413.00
5000.00	91.70	269.8	2893.51	-36.50	-2442.98	0.00	2442.89	1845346.82	11885258.00	414.49
5050.00	91.70	269.8	2892.03	-36.71	-2492.96	0.00	2492.87	1845296.84	11885257.79	415.97
5100.00	91.70	269.8	2890.55	-36.92	-2542.94	0.00	2542.85	1845246.86	11885257.58	417.45
5150.00	91.70	269.8	2889.06	-37.13	-2592.91	0.00	2592.82	1845196.89	11885257.37	418.94
5200.00	91.70	269.8	2887.58	-37.34	-2642.89	0.00	2642.80	1845146.91	11885257.16	420.42
5250.00	91.70	269.8	2886.10	-37.55	-2692.87	0.00	2692.78	1845096.93	11885256.95	421.90
5300.00	91.70	269.8	2884.61	-37.76	-2742.85	0.00	2742.75	1845046.95	11885256.74	423.39

Leavitt 13 5H, Plan 1

Operator	Redwood Operating LLC	Units	feet, °/100ft	13:15 Wednesday, April 20, 2022	Page 3 of 4
Field	Red Lake	County	Eddy	Vertical Section Azimuth	270.13
Well Name	Leavitt 13 5H	State	New Mexico	Survey Calculation Method	Minimum Curvature
Plan	1	Country	USA	Database	Access

Location	SL: 380 FSL & 330 FWL Section 18-T18S-R27E BHL: 330 FSL & 1 FWL Section 13-T18S-26E	Map Zone	UTM	Lat Long Ref	
Site		Surface X	1847789.8	Surface Long	
Slot Name		Surface Y	11885294.5	Surface Lat	
Well Number		Surface Z	3308	Global Z Ref	KB
Project		Ground Level	3290	Local North Ref	Grid

DIRECTIONAL WELL PLAN

MD*	INC*	AZI*	TVD*	N*	E*	DLS*	V. S.*	MapE*	MapN*	SysTVD*
ft	deg	deg	ft	ft	ft	°/100ft	ft	ft	ft	ft
5350.00	91.70	269.8	2883.13	-37.97	-2792.82	0.00	2792.73	1844996.98	11885256.53	424.87
5400.00	91.70	269.8	2881.65	-38.18	-2842.80	0.00	2842.71	1844947.00	11885256.32	426.35
5450.00	91.70	269.8	2880.16	-38.39	-2892.78	0.00	2892.68	1844897.02	11885256.11	427.84
5500.00	91.70	269.8	2878.68	-38.60	-2942.76	0.00	2942.66	1844847.04	11885255.90	429.32
5550.00	91.70	269.8	2877.20	-38.81	-2992.73	0.00	2992.64	1844797.07	11885255.70	430.80
5600.00	91.70	269.8	2875.71	-39.01	-3042.71	0.00	3042.62	1844747.09	11885255.49	432.29
5650.00	91.70	269.8	2874.23	-39.22	-3092.69	0.00	3092.59	1844697.11	11885255.28	433.77
5700.00	91.70	269.8	2872.75	-39.43	-3142.67	0.00	3142.57	1844647.13	11885255.07	435.25
5750.00	91.70	269.8	2871.26	-39.64	-3192.64	0.00	3192.55	1844597.16	11885254.86	436.74
5800.00	91.70	269.8	2869.78	-39.85	-3242.62	0.00	3242.52	1844547.18	11885254.65	438.22
5850.00	91.70	269.8	2868.30	-40.06	-3292.60	0.00	3292.50	1844497.20	11885254.44	439.70
5900.00	91.70	269.8	2866.81	-40.27	-3342.58	0.00	3342.48	1844447.22	11885254.23	441.19
5950.00	91.70	269.8	2865.33	-40.48	-3392.55	0.00	3392.45	1844397.25	11885254.02	442.67
6000.00	91.70	269.8	2863.85	-40.69	-3442.53	0.00	3442.43	1844347.27	11885253.81	444.15
6050.00	91.70	269.8	2862.36	-40.90	-3492.51	0.00	3492.41	1844297.29	11885253.60	445.64
6100.00	91.70	269.8	2860.88	-41.11	-3542.49	0.00	3542.39	1844247.31	11885253.39	447.12
6150.00	91.70	269.8	2859.40	-41.32	-3592.47	0.00	3592.36	1844197.33	11885253.18	448.60
6200.00	91.70	269.8	2857.91	-41.53	-3642.44	0.00	3642.34	1844147.36	11885252.97	450.09
6250.00	91.70	269.8	2856.43	-41.74	-3692.42	0.00	3692.32	1844097.38	11885252.76	451.57
6300.00	91.70	269.8	2854.95	-41.95	-3742.40	0.00	3742.29	1844047.40	11885252.55	453.05
6350.00	91.70	269.8	2853.46	-42.15	-3792.38	0.00	3792.27	1843997.42	11885252.35	454.54
6400.00	91.70	269.8	2851.98	-42.36	-3842.35	0.00	3842.25	1843947.45	11885252.14	456.02
6450.00	91.70	269.8	2850.50	-42.57	-3892.33	0.00	3892.22	1843897.47	11885251.93	457.50
6500.00	91.70	269.8	2849.01	-42.78	-3942.31	0.00	3942.20	1843847.49	11885251.72	458.99
6550.00	91.70	269.8	2847.53	-42.99	-3992.29	0.00	3992.18	1843797.51	11885251.51	460.47
6600.00	91.70	269.8	2846.05	-43.20	-4042.26	0.00	4042.15	1843747.54	11885251.30	461.95
6650.00	91.70	269.8	2844.56	-43.41	-4092.24	0.00	4092.13	1843697.56	11885251.09	463.44
6700.00	91.70	269.8	2843.08	-43.62	-4142.22	0.00	4142.11	1843647.58	11885250.88	464.92
6750.00	91.70	269.8	2841.60	-43.83	-4192.20	0.00	4192.09	1843597.60	11885250.67	466.40
6800.00	91.70	269.8	2840.11	-44.04	-4242.17	0.00	4242.06	1843547.63	11885250.46	467.89
6850.00	91.70	269.8	2838.63	-44.25	-4292.15	0.00	4292.04	1843497.65	11885250.25	469.37
6900.00	91.70	269.8	2837.15	-44.46	-4342.13	0.00	4342.02	1843447.67	11885250.04	470.85
6950.00	91.70	269.8	2835.66	-44.67	-4392.11	0.00	4391.99	1843397.69	11885249.83	472.34
7000.00	91.70	269.8	2834.18	-44.88	-4442.08	0.00	4441.97	1843347.72	11885249.62	473.82
7050.00	91.70	269.8	2832.70	-45.09	-4492.06	0.00	4491.95	1843297.74	11885249.41	475.30
7100.00	91.70	269.8	2831.21	-45.29	-4542.04	0.00	4541.92	1843247.76	11885249.21	476.79
7150.00	91.70	269.8	2829.73	-45.50	-4592.02	0.00	4591.90	1843197.78	11885249.00	478.27

Leavitt 13 5H, Plan 1

Operator	Redwood Operating LLC	Units	feet, °/100ft	13:15 Wednesday, April 20, 2022 Page 4 of 4	
Field	Red Lake	County	Eddy	Vertical Section Azimuth	270.13
Well Name	Leavitt 13 5H	State	New Mexico	Survey Calculation Method	Minimum Curvature
Plan	1	Country	USA	Database	Access
Location	SL: 380 FSL & 330 FWL Section 18-T18S-R27E BHL: 330 FSL & 1 FWL Section 13-T18S-26E			Map Zone	UTM
Site				Surface X	1847789.8
Slot Name				Surface Y	11885294.5
Well Number				Surface Z	3308
Project				Ground Level	3290
				Lat Long Ref	
				Surface Long	
				Surface Lat	
				Global Z Ref	KB
				Local North Ref	Grid

DIRECTIONAL WELL PLAN

MD*	INC*	AZI*	TVD*	N*	E*	DLS*	V. S.*	MapE*	MapN*	SysTVD*
ft	deg	deg	ft	ft	ft	%/100ft	ft	ft	ft	ft
7200.00	91.70	269.8	2828.25	-45.71	-4641.99	0.00	4641.88	1843147.81	11885248.79	479.75
7250.00	91.70	269.8	2826.76	-45.92	-4691.97	0.00	4691.86	1843097.83	11885248.58	481.24
7300.00	91.70	269.8	2825.28	-46.13	-4741.95	0.00	4741.83	1843047.85	11885248.37	482.72
7350.00	91.70	269.8	2823.80	-46.34	-4791.93	0.00	4791.81	1842997.87	11885248.16	484.20
7400.00	91.70	269.8	2822.31	-46.55	-4841.90	0.00	4841.79	1842947.90	11885247.95	485.69
7450.00	91.70	269.8	2820.83	-46.76	-4891.88	0.00	4891.76	1842897.92	11885247.74	487.17
7500.00	91.70	269.8	2819.35	-46.97	-4941.86	0.00	4941.74	1842847.94	11885247.53	488.65
7550.00	91.70	269.8	2817.86	-47.18	-4991.84	0.00	4991.72	1842797.96	11885247.32	490.14
7600.00	91.70	269.8	2816.38	-47.39	-5041.81	0.00	5041.69	1842747.99	11885247.11	491.62
7650.00	91.70	269.8	2814.90	-47.60	-5091.79	0.00	5091.67	1842698.01	11885246.90	493.10
7700.00	91.70	269.8	2813.41	-47.81	-5141.77	0.00	5141.65	1842648.03	11885246.69	494.59
7750.00	91.70	269.8	2811.93	-48.02	-5191.75	0.00	5191.62	1842598.05	11885246.48	496.07
7800.00	91.70	269.8	2810.45	-48.23	-5241.72	0.00	5241.60	1842548.08	11885246.27	497.55
7850.00	91.70	269.8	2808.96	-48.44	-5291.70	0.00	5291.58	1842498.10	11885246.07	499.04
7900.00	91.70	269.8	2807.48	-48.64	-5341.68	0.00	5341.56	1842448.12	11885245.86	500.52
7950.00	91.70	269.8	2806.00	-48.85	-5391.66	0.00	5391.53	1842398.14	11885245.65	502.00
8000.00	91.70	269.8	2804.51	-49.06	-5441.63	0.00	5441.51	1842348.17	11885245.44	503.49
8050.00	91.70	269.8	2803.03	-49.27	-5491.61	0.00	5491.49	1842298.19	11885245.23	504.97
8100.00	91.70	269.8	2801.55	-49.48	-5541.59	0.00	5541.46	1842248.21	11885245.02	506.45
*** TD (at MD = 8125.11)										
8125.11	91.70	269.8	2800.80	-49.59	-5566.69	0.00	5566.56	1842223.11	11885244.91	507.20

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Redwood Operating LLC **OGRID:** 330211 **Date:** 4 / 20 / 2022

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Leavitt 13 #5H		Unit M Sec. 18 T18S R27E	380 FSL 330 FWL	100	100	1,000

IV. Central Delivery Point Name: DCP Midstream Linam Ranch Processing Plant/ Durango Midstream [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Leavitt 13 #5H		9/1/2022	9/20/2022	10/20/2022	10/20/2022	10/20/2022

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	<i>Deana Weaver</i>
Printed Name:	Deana Weaver
Title:	Regulatory Technician II
E-mail Address:	regulatory@redwoodoperating.com
Date:	4/20/2022
Phone:	575-748-1288
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	

VI. Separation Equipment:

Redwood Operating LLC production facilities include separation equipment designed to efficiently separate gas from liquid phases to optimize gas capture based on projected and estimated volumes from the targeted pool of our completion project. Redwood Operating LLC will utilize flowback separation equipment and production separation equipment designed and built to industry specifications after the completion to optimize gas capture and send gas to sales or flare based on analytical composition. Redwood Operating LLC operates facilities that are typically multi-well facilities. Redwood Operating LLC will upgrade production separation equipment, if necessary prior to new wells being completed, if determined to be undersized or inadequate. This equipment is already on-site and tied into our sales gas lines prior to the new drill operations.

VII. Operational Practices:

1. Subsection (A) Venting and Flaring of Natural Gas. Redwood Operating LLC understands the requirements of NMAC 19.15.27.8 which outlines that the venting and flaring of natural gas during drilling, completion or production operations that constitutes waste as defined in 19.15.2 are prohibited.
2. Subsection (B) Venting and Flaring during drilling operations. This gas capture plan is for a well being drilled.
3. Subsection (C) Venting and flaring during completion or recompletion. Flow lines will be routed for flow back fluids into a completion or storage tank and if feasible under well conditions, flare rather than vent and commence operation of a separator as soon as it is technically feasible for a separator to function.
 - At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.
4. Subsection (D) Venting and flaring during production operations
 - At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.
 - Monitor manual liquid unloading for wells on-site or in close proximity (<30 minutes' drive time), take reasonable actions to achieve a stabilized rate and pressure at the earliest practical time, and take reasonable actions to minimize venting to the maximum extent practicable.
 - Redwood Operating LLC will not vent or flare except during the approved activities listed in NMAC 19.15.27.8 (D) 14.
5. Subsection (E) Performance standards. All tanks and separation equipment are designed for maximum throughput and pressure to minimize waste.
 - If a flare is utilized during production operations it will have a continuous pilot and is located more than 100 feet from any known well or storage tanks.
 - At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D

of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.

6. Subsection (F) Measurement or estimation of vented and flared natural gas
 - Measurement equipment is installed to measure the volume of natural gas flared from process piping.
 - When measurement is not practicable, estimation of vented and flared natural gas will be completed as noted in 19.15.27.8 (F) 5-6.

VIII. Best Management Practices:

1. Redwood Operating LLC has adequate storage and takeaway capacity for wells it chooses to complete as the flow lines at the sites are already in place and tied into a gathering system.
2. Redwood Operating LLC will flare rather than vent vessel blowdown gas when technically feasible during active and/or planned maintenance to equipment on-site.
3. Redwood Operating LLC combusts natural gas that would otherwise be vented or flared, when technically feasible.
4. Redwood Operating LLC will shut in wells in the event of a takeaway disruption, emergency situations, or other operations where venting or flaring may occur due to equipment failures.