

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

2008 NOV 24 AM 11 49

Pit, Closed-Loop System, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application

- Type of action: ☒ Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
Existing BGT ☐ Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
BGT1 ☐ Modification to an existing permit
☐ Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
Operator: XTO Energy, Inc. OGRID #: 5380
Address: #382 County Road 3100, Aztec, NM 87410
Facility or well name: Ohio F Govt #1B
API Number: 3004530129 OCD Permit Number: _____
U/L or Qtr/Qtr E Section 20 Township 31N Range 12W County: San Juan
Center of Proposed Design: Latitude 36.8871 Longitude 108.12599 NAD: ☐ 1927 ☒ 1983
Surface Owner: ☒ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment

2.
☐ **Pit:** Subsection F or G of 19.15.17.11 NMAC
Temporary: ☐ Drilling ☐ Workover
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A
☐ Lined ☐ Unlined Liner type: Thickness _____ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☐ Welded ☐ Factory ☐ Other _____ Volume: _____ bbl Dimensions: L _____ x W _____ x D _____

3.
☐ **Closed-loop System:** Subsection H of 19.15.17.11 NMAC
Type of Operation: ☐ P&A ☐ Drilling a new well ☐ Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other _____
☐ Lined ☐ Unlined Liner type: Thickness _____ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
Liner Seams: ☐ Welded ☐ Factory ☐ Other _____

4.
☒ **Below-grade tank:** Subsection I of 19.15.17.11 NMAC
Volume: 95 bbl Type of fluid: Produced Water
Tank Construction material: Steel
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☒ Other Visible sidewalls, vaulted, automatic high-level shut off, no liner
Liner type: Thickness _____ mil ☐ HDPE ☐ PVC ☐ Other _____

5.
☐ **Alternative Method:**
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (*Applies to permanent pits, temporary pits, and below-grade tanks*)

- ☐ Chain link, six feet in height, two strands of barbed wire at top (*Required if located within 1000 feet of a permanent residence, school, hospital, institution or church*)
- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify Four foot height, steel mesh field fence (hogwire) with pipe top railing

7.

Netting: Subsection E of 19.15.17.11 NMAC (*Applies to permanent pits and permanent open top tanks*)

- ☐ Screen ☐ Netting ☒ Other Expanded metal or solid vaulted top
- ☐ Monthly inspections (If netting or screening is not physically feasible)

8.

Signs: Subsection C of 19.15.17.11 NMAC

- ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☒ Signed in compliance with 19.15.3.103 NMAC

9.

Administrative Approvals and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

- ☐ Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval.
- ☐ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

10.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.

Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within a 100-year floodplain. - FEMA map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

11. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☒ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC
☒ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
☒ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
☒ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
☒ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
☐ Previously Approved Design (attach copy of design) API Number: _____ or Permit Number: _____

12. Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
☐ Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
☐ Previously Approved Design (attach copy of design) API Number: _____
☐ Previously Approved Operating and Maintenance Plan API Number: _____ (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)

13. Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC
☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
☐ Climatological Factors Assessment
☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Quality Control/Quality Assurance Construction and Installation Plan
☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan
☐ Emergency Response Plan
☐ Oil Field Waste Stream Characterization
☐ Monitoring and Inspection Plan
☐ Erosion Control Plan
☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

14. Proposed Closure: 19.15.17.13 NMAC

Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.

Type: ☐ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ P&A ☐ Permanent Pit ☒ Below-grade Tank ☐ Closed-loop System
☐ Alternative

Proposed Closure Method: ☒ Waste Excavation and Removal
☐ Waste Removal (Closed-loop systems only)
☐ On-site Closure Method (Only for temporary pits and closed-loop systems)
☐ In-place Burial ☐ On-site Trench Burial
☐ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)

15. Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

- ☒ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
☒ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
☒ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
☒ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
☒ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
☒ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

16. Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC)
Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____
 Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Will any of the proposed closed-loop system operations and associated activities occur on or in areas that *will not* be used for future service and operations?
☐ Yes (If yes, please provide the information below) ☐ No

Required for impacted areas which will not be used for future service and operations:

- ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

17. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC

Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.

Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within a 100-year floodplain. - FEMA map	<input type="checkbox"/> Yes <input type="checkbox"/> No

18. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
☐ Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
☐ Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
☐ Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)
☐ Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

19. **Operator Application Certification:**

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): Kim Champlin Title: Environmental Representative
Signature: Kim Champlin Date: 11/19/2008
e-mail address: kim_champlin@xtoenergy.com Telephone: (505) 333-3100

20. **OCD Approval:** ☒ Permit Application (including closure plan) ☐ Closure Plan (only) ☐ OCD Conditions (see attachment)

OCD Representative Signature: Jaclyn Burdine Approval Date: 08/22/2022
Title: Environmental Specialist-A OCD Permit Number: BGT1

21. **Closure Report (required within 60 days of closure completion):** Subsection K of 19.15.17.13 NMAC

Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.

☐ Closure Completion Date: _____

22. **Closure Method:**

☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-loop systems only)
☐ If different from approved plan, please explain.

23. **Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:**

Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____
Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations?
☐ Yes (If yes, please demonstrate compliance to the items below) ☐ No

Required for impacted areas which will not be used for future service and operations:

☐ Site Reclamation (Photo Documentation)
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique

24. **Closure Report Attachment Checklist:** *Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.*

☐ Proof of Closure Notice (surface owner and division)
☐ Proof of Deed Notice (required for on-site closure)
☐ Plot Plan (for on-site closures and temporary pits)
☐ Confirmation Sampling Analytical Results (if applicable)
☐ Waste Material Sampling Analytical Results (required for on-site closure)
☐ Disposal Facility Name and Permit Number
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique
☐ Site Reclamation (Photo Documentation)

On-site Closure Location: Latitude _____ Longitude _____ NAD: ☐ 1927 ☐ 1983

25. **Operator Closure Certification:**

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): _____ Title: _____
Signature: _____ Date: _____
e-mail address: _____ Telephone: _____

February 17, 2000 10:13 AM P.O. Box 2088

From: Bill Mahnke,

505-326-1653 Ans. Serv. Page: 2 of 7

District I
PO Box 1986, Hobbs, NM 88241-1986
District II
PO Drawer 66, Azula, NM 88211-0719
District III
1000 Elm Branch Rd., Aztec, NM 87410
District IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
PO Box 2088
Santa Fe, NM 87504-2088

Form C-102

Revised February 21, 1994

Instructions on back

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 AM Number 30-04530129		2 Pool Code 72319		3 Pool Name BLANCO - MESA VERDE	
4 Property Code 25400		5 Property Name OHIO "F"			6 Well Number 1-8
7 OCRII No. 14021		8 Operator Name MARATHON OIL COMPANY			9 Elevation 6064

10 Surface Location

11 Ut. or lot no. E	12 Section 20	13 Township 31 N	14 Range 12 W	15 Lot Idn 1840	16 Feet from the 1840	17 North/South line North	18 Feet from the 710	19 East/West line West	20 County San Juan
------------------------	------------------	---------------------	------------------	--------------------	--------------------------	------------------------------	-------------------------	---------------------------	-----------------------

11 Bottom Hole Location If Different From Surface

21 Ut. or lot no.	22 Section	23 Township	24 Range	25 Lot Idn	26 Feet from the	27 North/South line	28 Feet from the	29 East/West line	30 County
-------------------	------------	-------------	----------	------------	------------------	---------------------	------------------	-------------------	-----------

31 Dedicated Acres	32 Joint or Infill	33 Consolidation Code	34 Order No.
--------------------	--------------------	-----------------------	--------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

<p>12 SURFACE LOCATION</p> <p>13 1840'</p> <p>14 710'</p> <p>15 1840'</p> <p>16 710'</p> <p>17 1840'</p> <p>18 710'</p> <p>19 1840'</p> <p>20 710'</p> <p>21 1840'</p> <p>22 710'</p> <p>23 1840'</p> <p>24 710'</p> <p>25 1840'</p> <p>26 710'</p> <p>27 1840'</p> <p>28 710'</p> <p>29 1840'</p> <p>30 710'</p> <p>31 1840'</p> <p>32 710'</p> <p>33 1840'</p> <p>34 710'</p> <p>35 1840'</p> <p>36 710'</p> <p>37 1840'</p> <p>38 710'</p> <p>39 1840'</p> <p>40 710'</p> <p>41 1840'</p> <p>42 710'</p> <p>43 1840'</p> <p>44 710'</p> <p>45 1840'</p> <p>46 710'</p> <p>47 1840'</p> <p>48 710'</p> <p>49 1840'</p> <p>50 710'</p> <p>51 1840'</p> <p>52 710'</p> <p>53 1840'</p> <p>54 710'</p> <p>55 1840'</p> <p>56 710'</p> <p>57 1840'</p> <p>58 710'</p> <p>59 1840'</p> <p>60 710'</p> <p>61 1840'</p> <p>62 710'</p> <p>63 1840'</p> <p>64 710'</p> <p>65 1840'</p> <p>66 710'</p> <p>67 1840'</p> <p>68 710'</p> <p>69 1840'</p> <p>70 710'</p> <p>71 1840'</p> <p>72 710'</p> <p>73 1840'</p> <p>74 710'</p> <p>75 1840'</p> <p>76 710'</p> <p>77 1840'</p> <p>78 710'</p> <p>79 1840'</p> <p>80 710'</p> <p>81 1840'</p> <p>82 710'</p> <p>83 1840'</p> <p>84 710'</p> <p>85 1840'</p> <p>86 710'</p> <p>87 1840'</p> <p>88 710'</p> <p>89 1840'</p> <p>90 710'</p> <p>91 1840'</p> <p>92 710'</p> <p>93 1840'</p> <p>94 710'</p> <p>95 1840'</p> <p>96 710'</p> <p>97 1840'</p> <p>98 710'</p> <p>99 1840'</p> <p>100 710'</p> <p>101 1840'</p> <p>102 710'</p> <p>103 1840'</p> <p>104 710'</p> <p>105 1840'</p> <p>106 710'</p> <p>107 1840'</p> <p>108 710'</p> <p>109 1840'</p> <p>110 710'</p> <p>111 1840'</p> <p>112 710'</p> <p>113 1840'</p> <p>114 710'</p> <p>115 1840'</p> <p>116 710'</p> <p>117 1840'</p> <p>118 710'</p> <p>119 1840'</p> <p>120 710'</p> <p>121 1840'</p> <p>122 710'</p> <p>123 1840'</p> <p>124 710'</p> <p>125 1840'</p> <p>126 710'</p> <p>127 1840'</p> <p>128 710'</p> <p>129 1840'</p> <p>130 710'</p> <p>131 1840'</p> <p>132 710'</p> <p>133 1840'</p> <p>134 710'</p> <p>135 1840'</p> <p>136 710'</p> <p>137 1840'</p> <p>138 710'</p> <p>139 1840'</p> <p>140 710'</p> <p>141 1840'</p> <p>142 710'</p> <p>143 1840'</p> <p>144 710'</p> <p>145 1840'</p> <p>146 710'</p> <p>147 1840'</p> <p>148 710'</p> <p>149 1840'</p> <p>150 710'</p> <p>151 1840'</p> <p>152 710'</p> <p>153 1840'</p> <p>154 710'</p> <p>155 1840'</p> <p>156 710'</p> <p>157 1840'</p> <p>158 710'</p> <p>159 1840'</p> <p>160 710'</p> <p>161 1840'</p> <p>162 710'</p> <p>163 1840'</p> <p>164 710'</p> <p>165 1840'</p> <p>166 710'</p> <p>167 1840'</p> <p>168 710'</p> <p>169 1840'</p> <p>170 710'</p> <p>171 1840'</p> <p>172 710'</p> <p>173 1840'</p> <p>174 710'</p> <p>175 1840'</p> <p>176 710'</p> <p>177 1840'</p> <p>178 710'</p> <p>179 1840'</p> <p>180 710'</p> <p>181 1840'</p> <p>182 710'</p> <p>183 1840'</p> <p>184 710'</p> <p>185 1840'</p> <p>186 710'</p> <p>187 1840'</p> <p>188 710'</p> <p>189 1840'</p> <p>190 710'</p> <p>191 1840'</p> <p>192 710'</p> <p>193 1840'</p> <p>194 710'</p> <p>195 1840'</p> <p>196 710'</p> <p>197 1840'</p> <p>198 710'</p> <p>199 1840'</p> <p>200 710'</p> <p>201 1840'</p> <p>202 710'</p> <p>203 1840'</p> <p>204 710'</p> <p>205 1840'</p> <p>206 710'</p> <p>207 1840'</p> <p>208 710'</p> <p>209 1840'</p> <p>210 710'</p> <p>211 1840'</p> <p>212 710'</p> <p>213 1840'</p> <p>214 710'</p> <p>215 1840'</p> <p>216 710'</p> <p>217 1840'</p> <p>218 710'</p> <p>219 1840'</p> <p>220 710'</p> <p>221 1840'</p> <p>222 710'</p> <p>223 1840'</p> <p>224 710'</p> <p>225 1840'</p> <p>226 710'</p> <p>227 1840'</p> <p>228 710'</p> <p>229 1840'</p> <p>230 710'</p> <p>231 1840'</p> <p>232 710'</p> <p>233 1840'</p> <p>234 710'</p> <p>235 1840'</p> <p>236 710'</p> <p>237 1840'</p> <p>238 710'</p> <p>239 1840'</p> <p>240 710'</p> <p>241 1840'</p> <p>242 710'</p> <p>243 1840'</p> <p>244 710'</p> <p>245 1840'</p> <p>246 710'</p> <p>247 1840'</p> <p>248 710'</p> <p>249 1840'</p> <p>250 710'</p> <p>251 1840'</p> <p>252 710'</p> <p>253 1840'</p> <p>254 710'</p> <p>255 1840'</p> <p>256 710'</p> <p>257 1840'</p> <p>258 710'</p> <p>259 1840'</p> <p>260 710'</p> <p>261 1840'</p> <p>262 710'</p> <p>263 1840'</p> <p>264 710'</p> <p>265 1840'</p> <p>266 710'</p> <p>267 1840'</p> <p>268 710'</p> <p>269 1840'</p> <p>270 710'</p> <p>271 1840'</p> <p>272 710'</p> <p>273 1840'</p> <p>274 710'</p> <p>275 1840'</p> <p>276 710'</p> <p>277 1840'</p> <p>278 710'</p> <p>279 1840'</p> <p>280 710'</p> <p>281 1840'</p> <p>282 710'</p> <p>283 1840'</p> <p>284 710'</p> <p>285 1840'</p> <p>286 710'</p> <p>287 1840'</p> <p>288 710'</p> <p>289 1840'</p> <p>290 710'</p> <p>291 1840'</p> <p>292 710'</p> <p>293 1840'</p> <p>294 710'</p> <p>295 1840'</p> <p>296 710'</p> <p>297 1840'</p> <p>298 710'</p> <p>299 1840'</p> <p>300 710'</p> <p>301 1840'</p> <p>302 710'</p> <p>303 1840'</p> <p>304 710'</p> <p>305 1840'</p> <p>306 710'</p> <p>307 1840'</p> <p>308 710'</p> <p>309 1840'</p> <p>310 710'</p> <p>311 1840'</p> <p>312 710'</p> <p>313 1840'</p> <p>314 710'</p> <p>315 1840'</p> <p>316 710'</p> <p>317 1840'</p> <p>318 710'</p> <p>319 1840'</p> <p>320 710'</p> <p>321 1840'</p> <p>322 710'</p> <p>323 1840'</p> <p>324 710'</p> <p>325 1840'</p> <p>326 710'</p> <p>327 1840'</p> <p>328 710'</p> <p>329 1840'</p> <p>330 710'</p> <p>331 1840'</p> <p>332 710'</p> <p>333 1840'</p> <p>334 710'</p> <p>335 1840'</p> <p>336 710'</p> <p>337 1840'</p> <p>338 710'</p> <p>339 1840'</p> <p>340 710'</p> <p>341 1840'</p> <p>342 710'</p> <p>343 1840'</p> <p>344 710'</p> <p>345 1840'</p> <p>346 710'</p> <p>347 1840'</p> <p>348 710'</p> <p>349 1840'</p> <p>350 710'</p> <p>351 1840'</p> <p>352 710'</p> <p>353 1840'</p> <p>354 710'</p> <p>355 1840'</p> <p>356 710'</p> <p>357 1840'</p> <p>358 710'</p> <p>359 1840'</p> <p>360 710'</p> <p>361 1840'</p> <p>362 710'</p> <p>363 1840'</p> <p>364 710'</p> <p>365 1840'</p> <p>366 710'</p> <p>367 1840'</p> <p>368 710'</p> <p>369 1840'</p> <p>370 710'</p> <p>371 1840'</p> <p>372 710'</p> <p>373 1840'</p> <p>374 710'</p> <p>375 1840'</p> <p>376 710'</p> <p>377 1840'</p> <p>378 710'</p> <p>379 1840'</p> <p>380 710'</p> <p>381 1840'</p> <p>382 710'</p> <p>383 1840'</p> <p>384 710'</p> <p>385 1840'</p> <p>386 710'</p> <p>387 1840'</p> <p>388 710'</p> <p>389 1840'</p> <p>390 710'</p> <p>391 1840'</p> <p>392 710'</p> <p>393 1840'</p> <p>394 710'</p> <p>395 1840'</p> <p>396 710'</p> <p>397 1840'</p> <p>398 710'</p> <p>399 1840'</p> <p>400 710'</p> <p>401 1840'</p> <p>402 710'</p> <p>403 1840'</p> <p>404 710'</p> <p>405 1840'</p> <p>406 710'</p> <p>407 1840'</p> <p>408 710'</p> <p>409 1840'</p> <p>410 710'</p> <p>411 1840'</p> <p>412 710'</p> <p>413 1840'</p> <p>414 710'</p> <p>415 1840'</p> <p>416 710'</p> <p>417 1840'</p> <p>418 710'</p> <p>419 1840'</p> <p>420 710'</p> <p>421 1840'</p> <p>422 710'</p> <p>423 1840'</p> <p>424 710'</p> <p>425 1840'</p> <p>426 710'</p> <p>427 1840'</p> <p>428 710'</p> <p>429 1840'</p> <p>430 710'</p> <p>431 1840'</p> <p>432 710'</p> <p>433 1840'</p> <p>434 710'</p> <p>435 1840'</p> <p>436 710'</p> <p>437 1840'</p> <p>438 710'</p> <p>439 1840'</p> <p>440 710'</p> <p>441 1840'</p> <p>442 710'</p> <p>443 1840'</p> <p>444 710'</p> <p>445 1840'</p> <p>446 710'</p> <p>447 1840'</p> <p>448 710'</p> <p>449 1840'</p> <p>450 710'</p> <p>451 1840'</p> <p>452 710'</p> <p>453 1840'</p> <p>454 710'</p> <p>455 1840'</p> <p>456 710'</p> <p>457 1840'</p> <p>458 710'</p> <p>459 1840'</p> <p>460 710'</p> <p>461 1840'</p> <p>462 710'</p> <p>463 1840'</p> <p>464 710'</p> <p>465 1840'</p> <p>466 710'</p> <p>467 1840'</p> <p>468 710'</p> <p>469 1840'</p> <p>470 710'</p> <p>471 1840'</p> <p>472 710'</p> <p>473 1840'</p> <p>474 710'</p> <p>475 1840'</p> <p>476 710'</p> <p>477 1840'</p> <p>478 710'</p> <p>479 1840'</p> <p>480 710'</p> <p>481 1840'</p> <p>482 710'</p> <p>483 1840'</p> <p>484 710'</p> <p>485 1840'</p> <p>486 710'</p> <p>487 1840'</p> <p>488 710'</p> <p>489 1840'</p> <p>490 710'</p> <p>491 1840'</p> <p>492 710'</p> <p>493 1840'</p> <p>494 710'</p> <p>495 1840'</p> <p>496 710'</p> <p>497 1840'</p> <p>498 710'</p> <p>499 1840'</p> <p>500 710'</p> <p>501 1840'</p> <p>502 710'</p> <p>503 1840'</p> <p>504 710'</p> <p>505 1840'</p> <p>506 710'</p> <p>507 1840'</p> <p>508 710'</p> <p>509 1840'</p> <p>510 710'</p> <p>511 1840'</p> <p>512 710'</p> <p>513 1840'</p> <p>514 710'</p> <p>515 1840'</p> <p>516 710'</p> <p>517 1840'</p> <p>518 710'</p> <p>519 1840'</p> <p>520 710'</p> <p>521 1840'</p> <p>522 710'</p> <p>523 1840'</p> <p>524 710'</p> <p>525 1840'</p> <p>526 710'</p> <p>527 1840'</p> <p>528 710'</p> <p>529 1840'</p> <p>530 710'</p> <p>531 1840'</p> <p>532 710'</p> <p>533 1840'</p> <p>534 710'</p> <p>535 1840'</p> <p>536 710'</p> <p>537 1840'</p> <p>538 710'</p> <p>539 1840'</p> <p>540 710'</p> <p>541 1840'</p> <p>542 710'</p> <p>543 1840'</p> <p>544 710'</p> <p>545 1840'</p> <p>546 710'</p> <p>547 1840'</p> <p>548 710'</p> <p>549 1840'</p> <p>550 710'</p> <p>551 1840'</p> <p>552 710'</p> <p>553 1840'</p> <p>554 710'</p> <p>555 1840'</p> <p>556 710'</p> <p>557 1840'</p> <p>558 710'</p> <p>559 1840'</p> <p>560 710'</p> <p>561 1840'</p> <p>562 710'</p> <p>563 1840'</p> <p>564 710'</p> <p>565 1840'</p> <p>566 710'</p> <p>567 1840'</p> <p>568 710'</p> <p>569 1840'</p> <p>570 710'</p> <p>571 1840'</p> <p>572 710'</p> <p>573 1840'</p> <p>574 710'</p> <p>575 1840'</p> <p>576 710'</p> <p>577 1840'</p> <p>578 710'</p> <p>579 1840'</p> <p>580 710'</p> <p>581 1840'</p> <p>582 710'</p> <p>583 1840'</p> <p>584 710'</p> <p>585 1840'</p> <p>586 710'</p> <p>587 1840'</p> <p>588 710'</p> <p>589 1840'</p> <p>590 710'</p> <p>591 1840'</p> <p>592 710'</p> <p>593 1840'</p> <p>594 710'</p> <p>595 1840'</p> <p>596 710'</p> <p>597 1840'</p> <p>598 710'</p> <p>599 1840'</p> <p>600 710'</p> <p>601 1840'</p> <p>602 710'</p> <p>603 1840'</p> <p>604 710'</p> <p>605 1840'</p> <p>606 710'</p> <p>607 1840'</p> <p>608 710'</p> <p>609 1840'</p> <p>610 710'</p> <p>611 1840'</p> <p>612 710'</p> <p>613 1840'</p> <p>614 710'</p> <p>615 1840'</p> <p>616 710'</p> <p>617 1840'</p> <p>618 710'</p> <p>619 1840'</p> <p>620 710'</p> <p>621 1840'</p> <p>622 710'</p> <p>623 1840'</p> <p>624 710'</p> <p>625 1840'</p> <p>626 710'</p> <p>627 1840'</p> <p>628 710'</p> <p>629 1840'</p> <p>630 710'</p> <p>631 1840'</p> <p>632 710'</p> <p>633 1840'</p> <p>634 710'</p> <p>635 1840'</p> <p>636 710'</p> <p>637 1840'</p> <p>638 710'</p> <p>639 1840'</p> <p>640 710'</p> <p>641 1840'</p> <p>642 710'</p> <p>643 1840'</p> <p>644 710'</p> <p>645 1840'</p> <p>646 710'</p> <p>647 1840'</p> <p>648 710'</p> <p>649 1840'</p> <p>650 710'</p> <p>651 1840'</p> <p>652 710'</p> <p>653 1840'</p> <p>654 710'</p> <p>655 1840'</p> <p>656 710'</p> <p>657 1840'</p> <p>658 710'</p> <p>659 1840'</p> <p>660 710'</p> <p>661 1840'</p> <p>662 710'</p> <p>663 1840'</p> <p>664 710'</p> <p>665 1840'</p> <p>666 710'</p> <p>667 1840'</p> <p>668 710'</p> <p>669 1840'</p> <p>670 710'</p> <p>671 1840'</p> <p>672 710'</p> <p>673 1840'</p> <p>674 710'</p> <p>675 1840'</p> <p>676 710'</p> <p>677 1840'</p> <p>678 710'</p> <p>679 1840'</p> <p>680 710'</p> <p>681 1840'</p> <p>682 710'</p> <p>683 1840'</p> <p>684 710'</p> <p>685 1840'</p> <p>686 710'</p> <p>687 1840'</p> <p>688 710'</p> <p>689 1840'</p> <p>690 710'</p> <p>691 1840'</p> <p>692 710'</p> <p>693 1840'</p> <p>694 710'</p> <p>695 1840'</p> <p>696 710'</p> <p>697 1840'</p> <p>698 710'</p> <p>699 1840'</p> <p>700 710'</p> <p>701 1840'</p> <p>702 710'</p> <p>703 1840'</p> <p>704 710'</p> <p>705 1840'</p> <p>706 710'</p> <p>707 1840'</p> <p>708 710'</p> <p>709 1840'</p> <p>710 710'</p> <p>711 1840'</p> <p>712 710'</p> <p>713 1840'</p> <p>714 710'</p> <p>715 1840'</p> <p>716 710'</p> <p>717 1840'</p> <p>718 710'</p> <p>719 1840'</p> <p>720 710'</p> <p>721 1840'</p> <p>722 710'</p> <p>723 1840'</p> <p>724 710'</p> <p>725 1840'</p> <p>726 710'</p> <p>727 1840'</p> <p>728 710'</p> <p>729 1840'</p> <p>730 710'</p> <p>731 1840'</p> <p>732 710'</p> <p>733 1840'</p> <p>734 710'</p> <p>735 1840'</p> <p>736 710'</p> <p>737 1840'</p> <p>738 710'</p> <p>739 1840'</p> <p>740 710'</p> <p>741 1840'</p> <p>742 710'</p> <p>743 1840'</p> <p>744 710'</p> <p>745 1840'</p> <p>746 710'</p> <p>747 1840'</p> <p>748 710'</p> <p>749 1840'</p> <p>750 710'</p> <p>751 1840'</p> <p>752 710'</p> <p>753 1840'</p> <p>754 710'</p> <p>755 1840'</p> <p>756 710'</p> <p>757 1840'</p> <p>758 710'</p> <p>759 1840'</p> <p>760 710'</p> <p>761 1840'</p> <p>762 710'</p> <p>763 1840'</p> <p>764 710'</p> <p>765 1840'</p> <p>766 710'</p> <p>767 1840'</p> <p>768 710'</p> <p>769 1840'</p> <p>770 710'</p> <p>771 1840'</p> <p>772 710'</p> <p>773 1840'</p> <p>774 710'</p> <p>775 1840'</p> <p>776 710'</p> <p>777 1840'</p> <p>778 710'</p> <p>779 1840'</p> <p>780 710'</p> <p>781 1840'</p> <p>782 710'</p> <p>783 1840'</p> <p>784 710'</p> <p>785 1840'</p> <p>786 710'</p> <p>787 1840'</p> <p>788 710'</p> <p>789 1840'</p> <p>790 710'</p> <p>791 1840'</p> <p>792 710'</p> <p>793 1840'</p> <p>794 710'</p> <p>795 1840'</p> <p>796 710'</p> <p>797 1840'</p> <p>798 710'</p> <p>799 1840'</p> <p>800 710'</p> <p>801 1840'</p> <p>802 710'</p> <p>803 1840'</p> <p>804 710'</p> <p>805 1840'</p> <p>806 710'</p> <p>807 1840'</p> <p>808 710'</p> <p>809 1840'</p> <p>810 710'</p> <p>811 1840'</p> <p>812 710'</p> <p>813 1840'</p> <p>814 710'</p> <p>815 1840'</p> <p>816 710'</p> <p>817 1840'</p> <p>818 710'</p> <p>819 1840'</p> <p>820 710'</p> <p>821 1840'</p> <p>822 710'</p> <p>823 1840'</p> <p>824 710'</p> <p>825 1840'</p> <p>826 710'</p> <p>827 1840'</p> <p>828 710'</p> <p>829 1840'</p> <p>830 710'</p> <p>831 1840'</p> <p>832 710'</p> <p>833 1840'</p> <p>834 710'</p> <p>835 1840'</p> <p>836 710'</p> <p>837 1840'</p> <p>838 710'</p> <p>839 1840'</p> <p>840 710'</p> <p>841 1840'</p> <p>842 710'</p> <p>843 1840'</p> <p>844 710'</p> <p>845 1840'</p> <p>846 710'</p> <p>847 1840'</p> <p>848 710'</p> <p>849 1840'</p> <p>850 710'</p> <p>851 1840'</p> <p>852 710'</p> <p>853 1840'</p> <p>854 710'</p> <p>855 1840'</p> <p>856 710'</p> <p>857 1840'</p> <p>858 710'</p> <p>859 1840'</p> <p>860 710'</p> <p>861 1840'</p> <p>862 710'</p> <p>863 1840'</p> <p>864 710'</p> <p>865 1840'</p> <p>866 710'</p> <p>867 1840'</p> <p>868 710'</p> <p>869 1840'</p> <p>870 710'</p> <p>871 1840'</p> <p>872 710'</p> <p>873 1840'</p> <p>874 710'</p> <p>875 1840'</p> <p>876 710'</p> <p>877 1840'</p> <p>878 710'</p> <p>879 1840'</p> <p>880 710'</p> <p>881 1840'</p> <p>882 710'</p> <p>883 1840'</p> <p>884 710'</p> <p>885 184</p>			
--	--	--	--



Lodestar Services, Inc.
PO Box 4465, Durango, CO 81302

Pit Permit Siting Criteria Information Sheet

Client:	XTO Energy
Project:	Pit Permits
Revised:	11-Sep-08
Prepared by:	Brooke Herb

API#: 3004530129

USPLSS: T31N,R12W,S20E

Name: OHIO F GOVT-1B

Lat/Long: 36.8871, -108.12599

Depth to groundwater: 50-100'

Geologic formation: Nacimiento Formation

Distance to closest continuously flowing watercourse: 2.7 miles to La Plata River

Distance to closest significant watercourse, lakebed, playa lake, or sinkhole: 600 feet to tributary of Thompson Arroyo

Permanent residence, school, hospital, institution or church within 300' No

Soil Type: Entisols

Domestic fresh water well or spring within 500' No

Annual Precipitation: 9.77 inches (Aztec)

Any other fresh water well or spring within 1000' No

Precipitation Notes: no significant precip events

Within incorporated municipal boundaries No

Within defined municipal fresh water well field No

Attached Documents:
Groundwater report and Data; FEMA Flood Zone Map

Aerial Photo, Topo Map, Mines Mills and Quarries Map

Wetland within 500' No

Mining Activity: none near
2.17 miles to Kenneth Huggins Pit

Within unstable area No

Within 100 year flood plain No - FEMA Zone X

Additional Notes:

OHIO F GOVT #1B Below Ground Tank Siting Criteria and Closure Plan

Well Site Location

Legals: T31N, R12W, Section 20, Quarter Section E

Latitude/Longitude: approximately 36.8871, -108.12599

County: San Juan County, NM

General Description: near Glade Run

General Geology and Hydrology

The San Juan Basin is a typical Rocky Mountain basin with a gently dipping southern flank and a steeply dipping northern flank. Asymmetrically layered Tertiary sandstones and shales, along with Quaternary alluvial deposits dominate surficial geology (Dane and Bachman, 1965). The proposed below ground tank location will be located on the flanks of the Farmington Glade between Aztec and La Plata, New Mexico. Within the Farmington Glade, the Tertiary Nacimiento Formation is exposed, along with Quaternary alluvial and aeolian sands surrounding the center of the wash.

Cretaceous and Tertiary sandstones, as well as Quaternary alluvial deposits serve as the primary aquifers in the San Juan basin (Stone et al., 1983). In most of the proposed area, the Nacimiento Formation lies at the surface. Thickness of the Nacimiento ranges from 418 to 2232 feet (Stone et al., 1983). Aquifers within the coarser and continuous sandstone bodies of the Nacimiento Formation are between 0 and 1000' deep in this section of the basin (Stone et al., 1983). Groundwater within these aquifers flows toward the nearby San Juan River and its tributaries.

The prominent soil type at the proposed site is entisols, which are defined as soils that do not show any profile development. Soils are basically unaltered from their parent rock. Miles of arroyos, washes and intermittent streams exist as part of the drainage network towards the La Plata River (www.emnrd.state.nm.us). These features often cut into soil and other unconsolidated materials, contributing to sedimentation downstream. The sudden influx of water from storm events easily erodes soils that cover the area.

The climate of the region is arid, averaging just over 8 inches of rainfall annually. As is typical of the southwestern United States monsoonal weather patterns, most precipitation falls from August through October. The heaviest rainfall occurs in the summer in isolated, intense cloudbursts. November through June is relatively dry. Snow generally falls from December to mid-February and averages less than one-half inch in depth. However, most recharge occurs during the winter months during snowmelt periods from the upper elevations (Western Regional Climate Center www.wrcc.dri.edu).

The predominant vegetation is sagebrush and grasses with a more restricted pinon-juniper association (Dick-Peddie, 1993).

Site Specific Hydrogeology


Depth to groundwater is estimated to be between 50 and 100 feet. This estimation is based on data from Stone and others, 1983 and depth to groundwater data published on the New Mexico State Engineer's iWaters Database website. Local topography and proximity to surface hydrologic features are also taken into consideration.

Local aquifers include sandstones within the Naciminto Formation, which ranges from 0 to 1000 feet deep in this area, as well as shallow aquifers within Quaternary alluvial deposits (Stone et al., 1983). The 1000-foot depth range for Naciminto aquifers covers an area over 20 miles wide, and depth decreases towards the margin of the San Juan Basin. The site in question is more centrally located, and depth to the aquifer is expected to be closer to 1000 feet. It is well known that groundwater close to the Farmington Glade can be shallow, as the Quaternary deposits near the wash itself form shallow aquifers. However, the proposed site is situated 4470 feet to the west and is approximately 75 feet higher in elevation from Glade Wash (Google Earth).

Groundwater data available from the NM State Engineer's iWaters Database for wells near the proposed site are attached. A map showing the location of wells in reference to the proposed pit location is also included. Pinpoints show locations of wells and the labels for each pinpoint indicate depth to groundwater in feet. A well to the northeast of the proposed site has a depth to groundwater of 142 feet, and is approximately the same elevation as the site.



<p>Lodestar Services, Inc PO Box 4465 Durango, CO 81302</p>	<p>OHIO F GOVT-1B T31N, R12W, S20E San Juan County, NM</p>	<p>Topographic Map</p>
---	--	------------------------

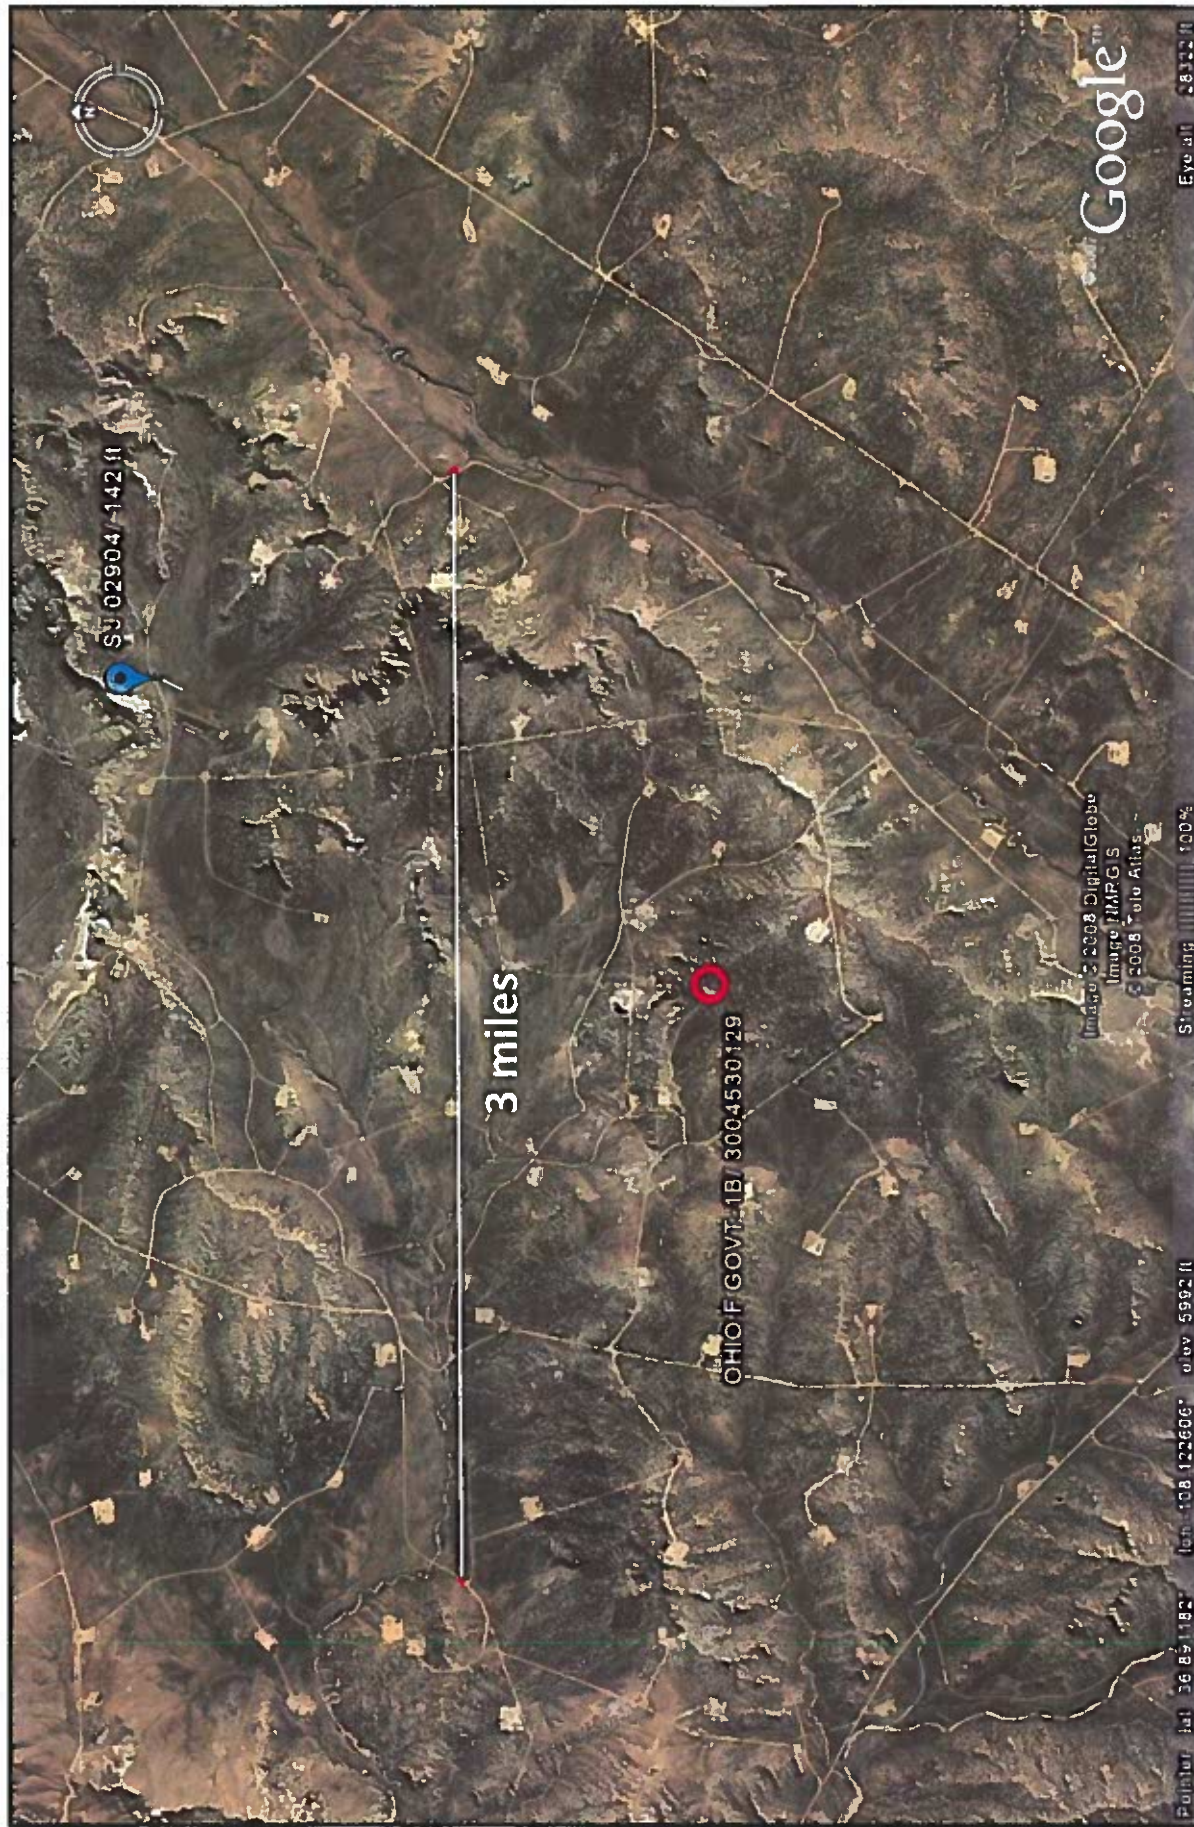

Lodestar Services, Inc PO Box 4465 Durango, CO 81302	OHIO F GOVT - 1B T31N, R12W, S20E San Juan County, NM	iWaters Groundwater Data Map
--	---	---------------------------------

New Mexico Office of the State Engineer
POD Reports and Downloads

Township: 31^N Range: 12^W Sections: 8

POD / Surface Data Report Avg Depth to Water Report Water Column Report

WATER COLUMN REPORT 09/10/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)
(quarters are biggest to smallest)

POD Number	Tws	Rng	Sec	q	q	q	q	Zone	X	Y	Depth Well	Depth Water	Water Column	Water (in feet)
SJ 02904	31N	12W	08	4	4	4	4				325	142	183	


Record Count: 1




Lodestar Services, Inc
PO Box 4465
Durango, CO 81302

OHIO F GOVT - 1B
T31N, R12W, S20E
San Juan County, NM

Aerial Photograph

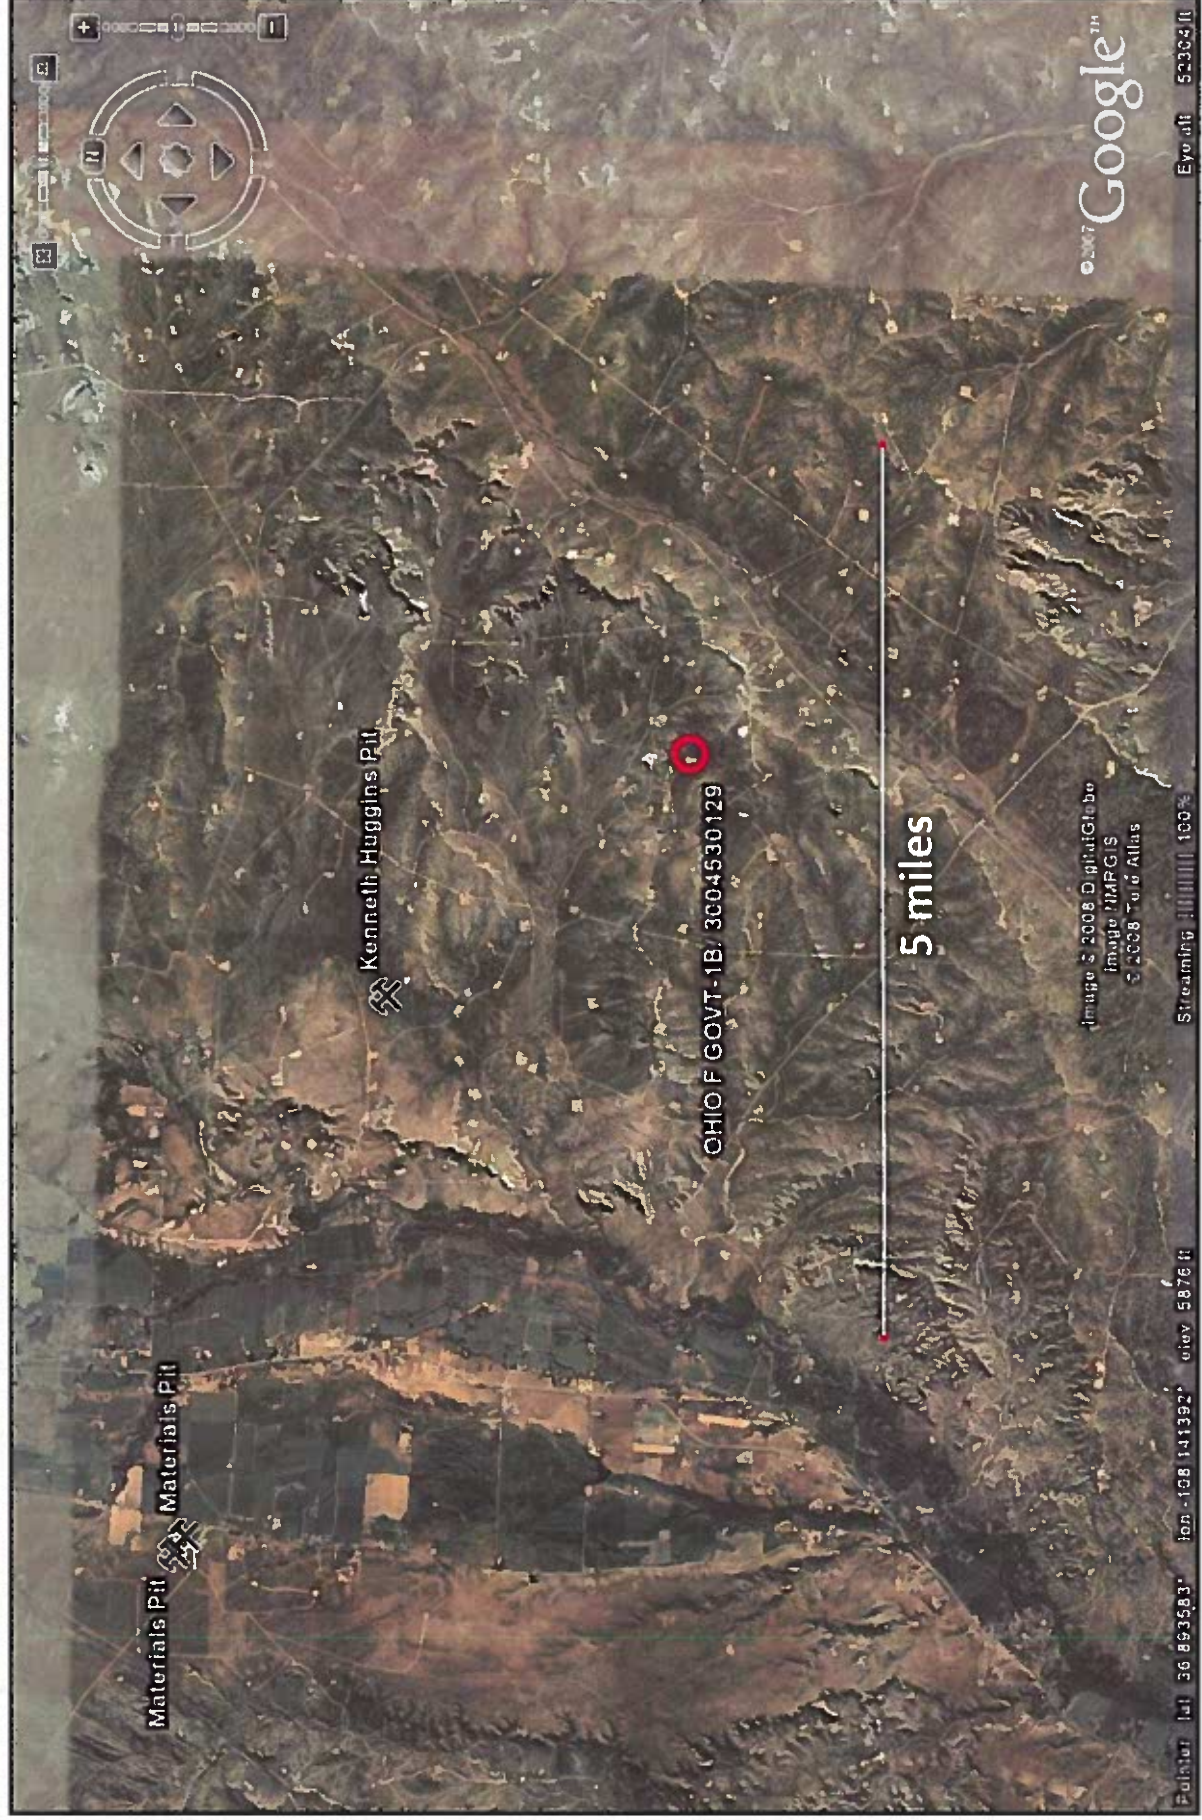

<p>Lodestar Services, Inc PO Box 4465 Durango, CO 81302</p>	<p>OHIO F GOVT-1B T31N, R12W, S20E San Juan County, NM</p>	<p>Mines, Mills, and Quarries Map</p>
---	--	---

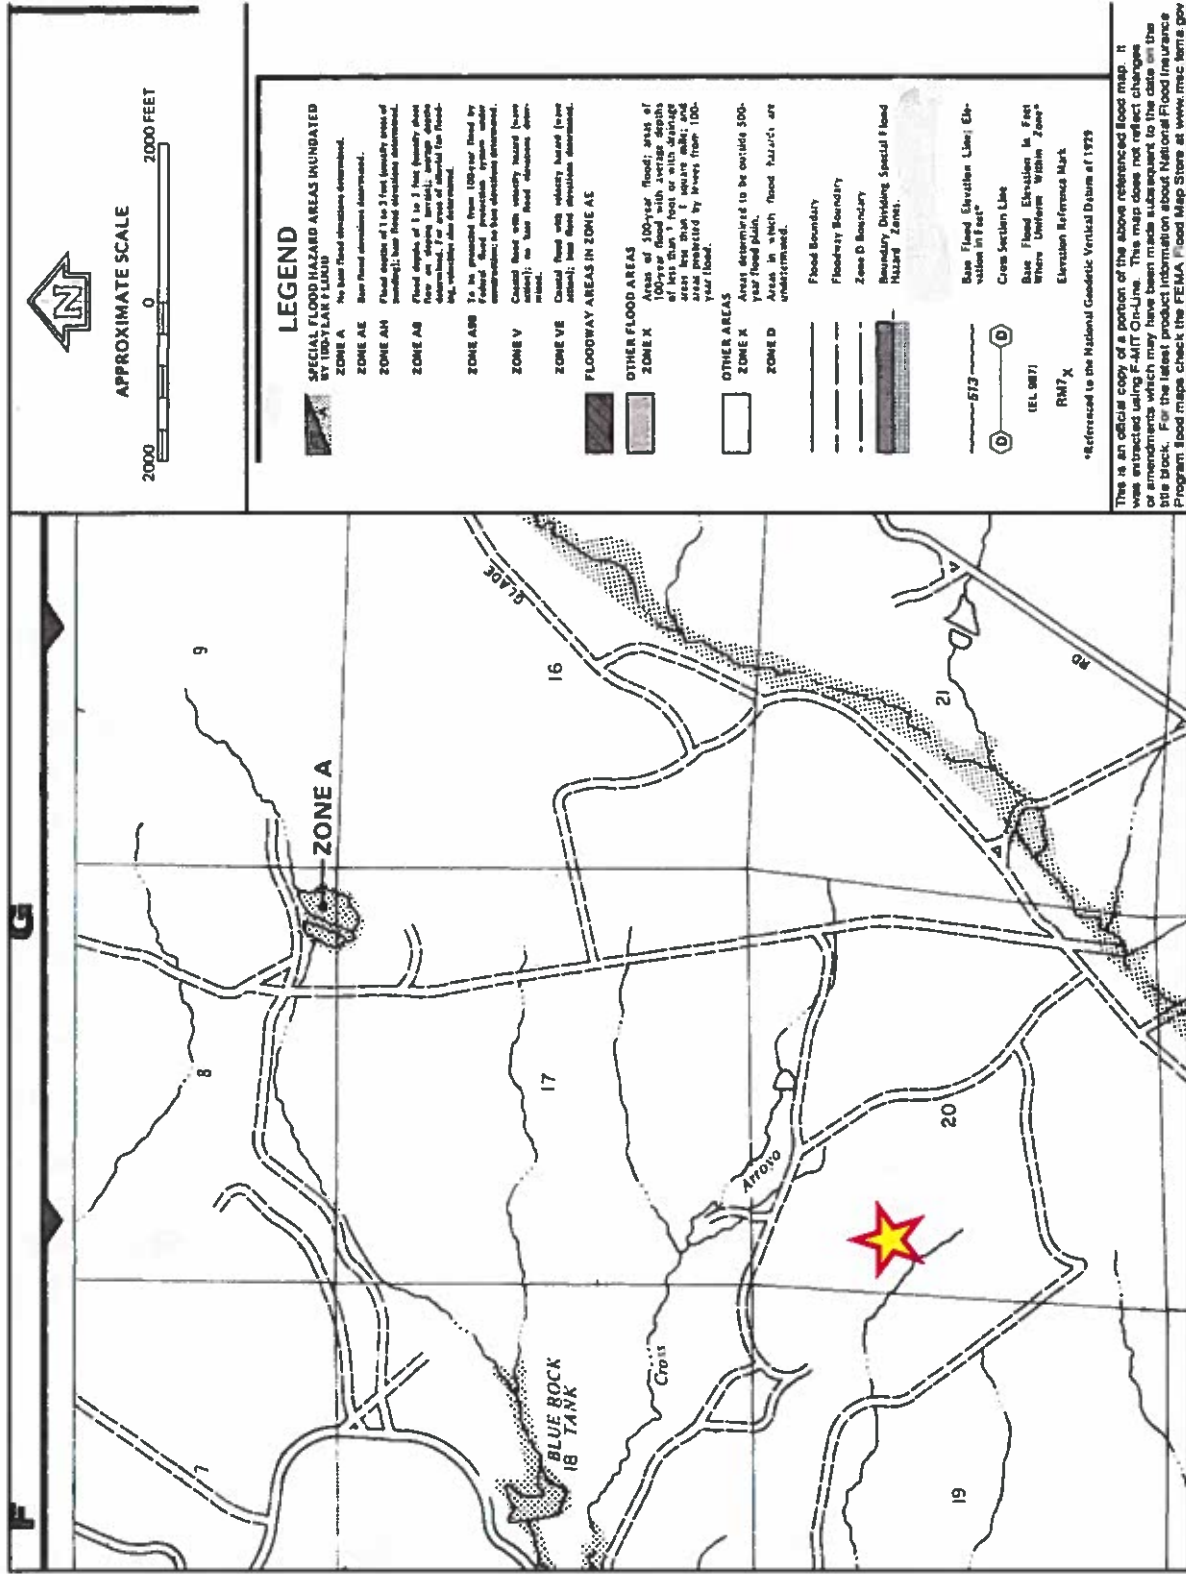

Lodestar Services, Inc
PO Box 4465
Durango, CO 81302

OHIO F GOVT- 1B
T31N, R12W, S20E
San Juan County, NM

FEMA Flood Zone Map

This is an official copy of a portion of the above referenced flood map. It was extracted using F44IT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.fema.gov

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Design and Construction Plan
For Below-Grade Tanks

In accordance with Rule 19.15.17.11 NMAC the following information describes the design and construction of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

1. XTO will design and construct below-grade tanks to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
2. XTO will post a well sign, in compliance with 19.15.3.103 NMAC, on the existing well site operated by XTO where the existing below-grade tank is located. The sign will list the Operator on record as the operator, the location of the well site by unit letter, section, township, range, and emergency telephone numbers.
3. XTO is requesting approval of an alternative fencing to be used on below-grade tank locations. Below-grade tank locations will be fenced utilizing 48" steel mesh field-fence (hogwire) with pipe railing along the top. A 6' chain link fence will be utilized around the well pad if the well site is within a city limits or ¼ mile of a permanent residence, school, hospital, institution or church. Below-grade tanks located within 1000' of a permanent residence, school, hospital, institution or church will be fenced by 6' chain link fence with at least two strands of barbed wire at the top. All gates associated with below-grade tanks will remain closed and locked when responsible individuals are not on site.
4. XTO shall construct below-grade tanks with an expanded metal covering or solid vaulted top on the top of the below-grade tank.
5. XTO will ensure that below-grade tanks are constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight. Tanks will be constructed of A36 carbon steel with 3/16" sides and ¼" bottom. (See attached drawing).
6. The below-grade tank system will have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom. Sand bedding (4") will be placed on top of a level foundation to ensure prevention of punctures, cracks or indentations of the liner or tank bottom.
7. XTO will construct a berm and/or diversion ditch in a manner that prevents the collection of surface water run-on. Below-grade tanks will be equipped with automatic high level shut-off devices as well as manually operated shut-off valves. (See attached drawing).
8. XTO will construct and use below-grade tanks that do not have double walls. The below-grade tank sidewalls will be open for visual inspection for leaks. The sidewalls of the cellar will be constructed with 2" X 12" pine sidewalls and 4" X 4" pine brace posts. The below-grade tank

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Design and Construction Plan
For Below-Grade Tanks
Page 2

bottom will be elevated a minimum of 6" above the underlying ground surface and the below-grade tank will be underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected. (See attached drawing).

9. XTO will equip below-grade tanks designed in this manner with a properly functioning automatic high-level shut-off control device and manual controls to prevent overflows. (See attached drawing).
10. XTO will demonstrate to the OCD that the geomembrane liner complies with the specifications of Subparagraph (a) of Paragraph (4) of Subsection I of 19.15.17.11 NMAC and obtain approval from OCD prior to the installation of the design. The geomembrane liner shall have a hydraulic conductivity no greater than 1×10^{-9} cm/sec. The geomembrane liner shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acids and alkaline solutions. The liner material shall be resistant to ultraviolet light. Liner compatibility shall comply with EPA SW-846 method 9090A. (See attached drawing).
11. The general specifications for design and construction are attached.



XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Maintenance and Operating Plan
For Below-Grade Tanks

In accordance with Rule 19.15.17.12 NMAC the following information describes the operation and maintenance of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

1. XTO will operate and maintain below-grade tanks to contain liquids and solids, maintain the integrity of the liner and secondary containment system, prevent contamination of fresh water and protect public health and the environment. Fluid levels will be monitored weekly and high levels will be removed as necessary. Monthly inspections will be conducted to monitor integrity of below-grade tank systems and below-grade tanks will be equipped with automatic high-level shut-off devices.
2. XTO will not allow below-grade tanks to overflow and will use berms and/or diversion ditch to prevent surface run on to enter the below-grade tank. Below-grade tanks will be equipped with automatic high-level shut-off control devices as well as manually operated shut-off valves. See attached drawing for vault design and placement of diversion berms and shut-off devices.
3. XTO will continuously remove any visible or measurable layer of oil from the fluid surface of below-grade tanks in order to prevent significant accumulation of oil.
4. XTO will inspect the below-grade tank monthly and maintain written records for five years. Monthly inspections will consist of documenting the following: (see attached template),
 - Well Name
 - API #
 - Sec., Twn., Rng.
 - XTO Inspector's name
 - Inspection date and time
 - Visible tears in liner
 - Visible signs of tank overflow
 - Collection of surface run on
 - Visible layer of oil
 - Visible signs of tank leak
 - Estimated freeboard
5. XTO will maintain adequate freeboard to prevent over topping of the below-grade tank. High level shut-off devices control the freeboard at an average of 28" beneath the top of the tank.
6. XTO will not discharge into or store any hazardous waste in any below-grade tank.
7. If a below-grade tank develops a leak, or if any penetration of a below-grade tank occurs below the liquids surface, XTO will remove all liquids above the damage or leak line within 48 hours,

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Maintenance and Operating Plan
For Below-Grade Tanks
Page 2

notify the appropriate division district office within 48 hours of the discovery and repair the damage or replace the below-grade tank. If an existing below-grade tank does not meet current requirements of Paragraphs 1-4 of Subsection I of 19.15.17.11 NMAC the tank will be modified or retrofitted to comply. If compliance can not be achieved XTO will implement the approved closure plan.

MONTHLY BELOW GRADE TANK INSPECTION FORM

Well Name:

API No.:

Legals

See

Township:

Range:

Range: 1

[illegible]

Notes:

Provide Detailed Description:

Misc:

**XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Closure Plan
For Below-Grade Tanks**

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

1. XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.
4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:
 - Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B
 - Soil contaminated by exempt petroleum hydrocarbons
 - Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes
 - Basin Disposal Permit No. NM01-005
 - Produced water
5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office has approved prior to removal. Any associated liners will be removed, properly cleaned and disposed of per 19.15.9.712 NMAC at San Juan County Landfill. Documentation of the final disposition will be included in the closure report.
6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.
7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be

XTO Energy Inc.
 San Juan Basin (Northwest New Mexico)
 General Closure Plan
 For Below-Grade Tanks
 Page 2

analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.
9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.
10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally.
 The notification will include the following:
 - i. Operator's name
 - ii. Well Name and API Number
 - iii. Location by Unit Letter, Section, Township, and Range

The surface owner shall also be notified prior to the implementation of any closure operations of below-grade tanks as per the approved closure plan using certified mail, return receipt requested.

11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. Soil cover will be constructed to the site's existing grade and ponding of water and erosion of the cover material will be prevented with drainage control, natural drainages and silt traps where needed.
13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Closure Plan
For Below-Grade Tanks
Page 3

14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
- i. Proof of closure notice to division and surface owner;
 - ii. Details on capping and covering, where applicable;
 - iii. Inspection reports;
 - iv. Confirmation sampling analytical results;
 - v. Disposal facility name(s) and permit number(s);
 - vi. Soil backfilling and cover installation;
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable);
 - viii. Photo documentation of the site reclamation.

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS

Action 134607

QUESTIONS

Operator: HILCORP ENERGY COMPANY 1111 Travis Street Houston, TX 77002	OGRID: 372171
	Action Number: 134607
	Action Type: [C-144] Legacy Below Grade Tank Plan (C-144LB)

QUESTIONS

Facility and Ground Water	
<i>Please answer as many of these questions as possible in this group. More information will help us identify the appropriate associations in the system.</i>	
Facility or Site Name	OHIO F GOVT 1B
Facility ID (##), if known	Not answered.
Facility Type	Below Grade Tank - (BGT)
Well Name, include well number	OHIO F GOVT 1B
Well API, if associated with a well	3004530129
Pit / Tank Type	Not answered.
Pit / Tank Name or Identifier	Not answered.
Pit / Tank Opened Date, if known	Not answered.
Pit / Tank Dimensions, Length (ft)	Not answered.
Pit / Tank Dimensions, Width or Diameter (ft)	Not answered.
Pit / Tank Dimensions, Depth (ft)	Not answered.
Ground Water Depth (ft)	Not answered.
Ground Water Impact	Not answered.
Ground Water Quality (TDS)	Not answered.

Below-Grade Tank

Subsection I of 19.15.17.11 NMAC

Volume / Capacity (bbls)	95
Type of Fluid	Produced Water
Pit / Tank Construction Material	Steel
Secondary containment with leak detection	Not answered.
Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	Not answered.
Visible sidewalls and liner	Not answered.
Visible sidewalls only	True
Tank installed prior to June 18, 2008	True
Other, Visible Notation. Please specify	Not answered.
Liner Thickness (mil)	Not answered.
HDPE (Liner Type)	Not answered.
PVC (Liner Type)	Not answered.
Other, Liner Type. Please specify (Variance Required)	Not answered.

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS, Page 2

Action 134607

QUESTIONS (continued)

Operator: HILCORP ENERGY COMPANY 1111 Travis Street Houston, TX 77002	OGRID:	372171
	Action Number:	134607
	Action Type:	[C-144] Legacy Below Grade Tank Plan (C-144LB)

QUESTIONS

Fencing	
<i>Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)</i>	
Chain link, six feet in height, two strands of barbed wire at top <i>(Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)</i>	Not answered.
Four foot height, four strands of barbed wire evenly spaced between one and four feet	Not answered.
Alternate, Fencing. Please specify (Variance Required)	4' hogwire

Netting	
<i>Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)</i>	
Screen	Not answered.
Netting	Not answered.
Other, Netting. Please specify (Variance May Be Needed)	expanded metal or solid vaulted top

Signs	
<i>Subsection C of 19.15.17.11 NMAC (If there are multiple operators at a site, each operator must have their own sign in compliance with Subsection C of 19.15.17.11 NMAC.)</i>	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	Not answered.
Signed in compliance with 19.15.16.8 NMAC	True

Variances and Exceptions	
<i>Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.</i>	
Please check a box if one or more of the following is requested, if not leave blank:	
Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.	Not answered.
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval	Not answered.

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS, Page 3

Action 134607

QUESTIONS (continued)

Operator: HILCORP ENERGY COMPANY 1111 Travis Street Houston, TX 77002	OGRID:	372171
	Action Number:	134607
	Action Type:	[C-144] Legacy Below Grade Tank Plan (C-144LB)

QUESTIONS

Siting Criteria (regarding permitting)
19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.

Siting Criteria, General Siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank	No
NM Office of the State Engineer - iWATERS database search	True
USGS	Not answered.
Data obtained from nearby wells	Not answered.

Siting Criteria, Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lakebed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark)	No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption	No

Proposed Closure Method	
Below-grade Tank	Below Grade Tank - (BGT)
Waste Excavation and Removal	True
Alternate Closure Method. Please specify (Variance Required)	Not answered.

Operator Application Certification	
Registered / Signature Date	11/19/2008

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 134607

ACKNOWLEDGMENTS

Operator: HILCORP ENERGY COMPANY 1111 Travis Street Houston, TX 77002	OGRID: 372171
	Action Number: 134607
	Action Type: [C-144] Legacy Below Grade Tank Plan (C-144LB)

ACKNOWLEDGMENTS

<input checked="" type="checkbox"/>	I acknowledge that I have received prior approval from the OCD to submit documentation of a legacy below-grade tank on behalf of my operator.
<input checked="" type="checkbox"/>	I hereby certify that the information submitted with this documentation is true, accurate and complete to the best of my knowledge and belief.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 134607

CONDITIONS

Operator: HILCORP ENERGY COMPANY 1111 Travis Street Houston, TX 77002	OGRID: 372171
	Action Number: 134607
	Action Type: [C-144] Legacy Below Grade Tank Plan (C-144LB)

CONDITIONS

Created By	Condition	Condition Date
jburdine	None	8/22/2022