
Page 1 of 9	Office <u>District I</u> – (575 1625 N. French <u>District II</u> – (57 811 S. First St., <u>District III</u> – (50 1000 Rio Brazo <u>District IV</u> – (50 1220 S. St. Frar 87505 (DO NOT USE DIFFERENT R PROPOSALS.) 1. Type of V 2. Name of O Endeav 3. Address of 110 N. 4. Well Locc Uni	Dr., Hobbs, NM 88240 5) 748-1283 Artesia, NM 88210 05) 334-6178 s Rd., Aztec, NM 8741 05) 476-3460 icis Dr., Santa Fe, NM SUNDRY N THIS FORM FOR PR ESERVOIR. USE "AF Vell: Oil Well X Operator /or Energy Re of Operator Marienfeld Stration t Letter M	Energy, OIL Co 12 OTICES AND RE OPOSALS TO DRILL PPLICATION FOR PER Gas Well Sources, LP. reet, Midland, : 554 fee	OR TO DEEPEN OR RMIT" (FORM C-10) Other Texas 79701 t from the <u>S</u>	Antural Con D Francis 8750 LLS PLUG I D FOR S	Resources IVISION 5 Dr. 5 BACK TO A UCH line and	 5. Indicate STA 6. State Oi 7. Lease N Radc 8. Well Nu 9. OGRID 1905 10. Pool na Peters 554 fet 	NO. 41-20408 Type of Leas TE ame or Lease ame or Unit A liff mber 1 Number 95 ame or Wildca son Penn A eet from the _	FEE X PNO. Agreement Name Agreement Name U line
	Sec	tion 17	11. Elevation	vnship 5S n <i>(Show whether</i>)	Ran DR, RI	<u>ge 33E</u> (B, RT, GR, etc.)	NMP	M	County Roosevelt
				4422' GL					
		12. Chec	ek Appropriate I	Box to Indicate	e Natu	re of Notice, I	Report or (Other Data	
	TEMPORAR PULL OR AL DOWNHOLE	NOTICE OF REMEDIAL WORK ILY ABANDON TER CASING COMMINGLE OOP SYSTEM	INTENTION PLUG AND CHANGE PL MULTIPLE C	ABANDON 🛛	C C	SUBS EMEDIAL WORK OMMENCE DRIL ASING/CEMENT THER:	(LING OPNS		
	13. Desc		ompleted operation d work). SEE RUL		all pert	inent details, and			ding estimated date
		osed completion or		E 19.15.7.14 NW	IAC. I	for Multiple Con	ipietions: A	ttach wellbore	diagram of
			04'. Circ hole v		ure te	est csg. Spot	25 sx cm	t @ 7704'-	7504'.
			x cmt @ 5000' x cmt @ 2925'		C & T	ag (B/Salt)			
			x cmt @ 2220' x cmt @ 200'-		C & T	ag (T/Salt &	8 5/8" Sh	oe)	
	6. C	ut off well head	d, verify cmt @) surface, we	ld on	Dry Hole ,Ma	ark		
	<mark>4" dia</mark> er.	ameter 4' tall Abo	ove Ground Marl	ker			PROVAL	CONDITION	IS
11/29/2022 7:34:16 AM	Spud Date:			Rig Release	Date:				
7:34	I hereby certif	y that the informat	ion above is true a	nd complete to th	e best	of my knowledge	and belief.		
/2022		$\langle -$		4					
1/29	SIGNATURE	Le f	WALLI -	TITLE Se	nior F	Regulatory A	nalyst		/28/2022
ä	Type or print For State Use			E-mail add	ress: js	outh@eeron	line.com	PHONE:4	32-687-1575
id by	APPROVED		y Fortner	TITLEC	omplia	ance Officer A		DATE1	1/29/22
Received b	Conditions of	Approval (if any):	đ	57	5-263	-6633			
2									

•

Endeavor			PROPO	SED	Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Author:	Abby @ BCM				Surface Csg	8 5/8	K55	24#	2 037	12 1/4	1,000	0
Well Name	Radcliff	Well No.		#1	Oundee obg	0 0/0	1100	4 -411	2,007	12 1/4	1,000	v
Field/Pool	Peterson-Penn	API #:	30-04	1-20408	Prod Csg	5 1/2	J55 &	15.5-17#	7 056	7 7/8	475	
County	Roosevelt	Location:	Sec 17, 1	05S,R33E	Pilou Csy	51/2	K55	15.5-17#	7,950	1 110	4/5	
State	NM		554 FSL	554 FWL								
Spud Date	12/31/1975	GL:	44	422								
											Formation	Тор
											T/Salt	2170
		5. Perf &	Sqz 50 sx cm	t @ 200' to surfac	е.						B/Salt	2873
											San Andres	3142
											Glorieta	4394
											Yeso Abo	4468 6549
											Wolfcamp	7236
											Cisco	7598
											Canyon	7860
			8 5/8 24#	CSG @ 2,037							Fusselman	7908
			Hole Size:	12 1/4								
		4. Berf &	Sqz 55 sx cm	t @ 2220-1987'. W	/OC & Tag (T/Salt	& 8 5/8'	' Shoe)				
		3. Perf &	Sqz 50 sx cm	t @ 2925-2725'. W	/OC & Tag (B/Sal	t)						
		📕 2. Perf &	Sqz 50 sx cm	t @ 5000-4800'.								
				•								
							_					
		1. Set CI	BP @ 7704'. Ci	irc hole w/ MLF. F	Pressure test csg.	Spot 2	5 sx cm	nt @ 7704	-7504'.			
		Dorfo @	7754-7762									
		rens @	1104-1102									
		G										
			5 1/2 15.5-17	# CSG @ 7,956								
	PB @ 7951		Hole Size:	7 7/8								
Т	D@ 7956											

•

Page 3 of 9

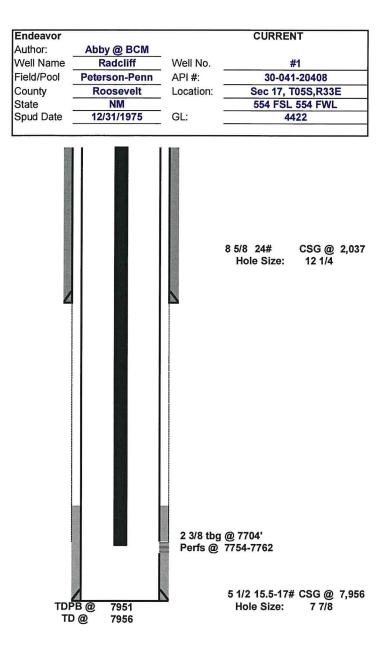

Description	0.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8	K55	24#	2,037	12 1/4	1,000	0
Prod Csg	5 1/2	J55 & K55	15. <mark>5-1</mark> 7#	7,956	7 7/8	475	

Formation	Тор
T/Salt	2170
B/Salt	2873
San Andres	3142
Glorieta	4394
Yeso	4468
Abo	6549
Wolfcamp	7236
Cisco	7598
Canyon	7860
Fusselman	7908

CONDITIONS OF APPROVAL FOR PLUGGING AND ABANDONMENT OCD - Southern District

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, Notify NMOCD District Office I (Hobbs) at (575)-263-6633 at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down.

Company representative will be on location during plugging procedures.

1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.

2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.

3. Trucking companies being used to haul oilfield waste fluids to a disposal - commercial or private- shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.

4. Filing a subsequent C-103 will serve as notification that the well has been plugged.

5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can +be released.

6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.

7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.

8. Produced water will not be used during any part of the plugging operation.

9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.

10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.

11. Class 'C' cement will be used above 7500 feet.

12. Class 'H' cement will be used below 7500 feet.

13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged

14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.

16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set

17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.

18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).

19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.

20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops

- A) Fusselman
- B) Devonian
- C) Morrow
- D) Wolfcamp
- E) Bone Springs
- F) Delaware
- G) Any salt sections
- H) Abo
- I) Glorieta
- J) Yates.

K) Potash---(In the R-111-P Area (Potash Mine Area),

A solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.

21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing.

DRY HOLE MARKER REQ.UIRMENTS

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:


- 1. Operator name
- 2. Lease and Well Number
- 3. API Number
- 4. Unit letter
- 5. Quarter Section (feet from the North, South, East or West)
- 6. Section, Township and Range
- 7. Plugging Date
- 8. County

SPECIAL CASES -----AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)

SITE REMEDIATION DUE WITHIN ONE YEAR OF WELL PLUGGING COMPLETION

Page 6 of 9

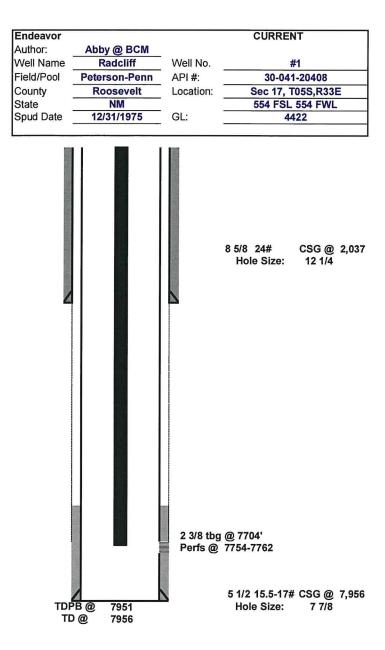

Description	0.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg					12 1/4		0
Prod Csg	5 1/2	J55 & K55	15.5-17#	7,956	7 7/8	475	

Formation	Тор
T/Salt	2170
B/Salt	2873
San Andres	3142
Glorieta	4394
Yeso	4468
Abo	6549
Wolfcamp	7236
Cisco	7598
Canyon	7860
Fusselman	7908

Page 7 of 9	Submit 1 Copy To Appropriate District Office <u>District I</u> – (575) 393-6161 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> – (575) 748-1283 811 S. First St., Artesia, NM 88210 <u>District III</u> – (505) 334-6178 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> – (505) 476-3460 1220 S. St. Francis Dr., Santa Fe, NM 87505 <u>SUNDRY NOT</u> (DO NOT USE THIS FORM FOR PROP DIFFERENT RESERVOIR. USE "APPL PROPOSALS.) 1. Type of Well: Oil Well X 2. Name of Operator <u>Endeavor Energy Resc</u> 3. Address of Operator 110 N. Marienfeld Street 4. Well Location Unit Letter M	Energy, Min OIL CON 1220 Sa TICES AND REPOR OSALS TO DRILL OR T JCATION FOR PERMIT Gas Well Oth Durces, LP.	TO DEEPEN OR PLU T" (FORM C-101) FO her	ral Resources DIVISION cis Dr. 505	 Lease Name Radcliff Well Numb OGRID Nu 190595 Pool name Peterson 	Revised Ju O. -20408 pe of Lease Gas Lease No. e or Unit Agreemen ^{per} 1 mber	<u><</u>
	Section 17	Townsh	nip 5S R		<u>NMPM</u>		Roosevelt
			422' GL				
	12. Check	Appropriate Box	to Indicate Na	ature of Notice, I	Report or Oth	er Data	
	NOTICE OF II PERFORM REMEDIAL WORK [TEMPORARILY ABANDON [PULL OR ALTER CASING [DOWNHOLE COMMINGLE [CLOSED-LOOP SYSTEM [OTHER:	CHANGE PLAN MULTIPLE COM	NDON 🛛	SUBS REMEDIAL WORK COMMENCE DRIL CASING/CEMENT OTHER:			
	13. Describe proposed or com of starting any proposed w proposed completion or re	ork). SEE RULE 1	9.15.7.14 NMAC	. For Multiple Com	pletions: Attac	h wellbore diagram	of
	1. Set CIBP @ 7704 2. Perf & Sqz 50 sx 3. Perf & Sqz 50 sx 4. Perf & Sqz 55 sx 5. Perf & Sqz 50 sx 6. Cut off well head,	cmt @ 5000'- 4 cmt @ 2925' - 2 cmt @ 2220' - 1 cmt @ 200'- to s	800'. 2725'. WOC 8 1987'. WOC 8 surface.	& Tag (B/Salt) & Tag (T/Salt &	8 5/8" Shoe	-	
	er.						
4:16 AM	Spud Date:		Rig Release Dat	te:			
2 7:3	I hereby certify that the information	n above is true and c	omplete to the be	st of my knowledge	and belief.		
11/29/2022 7:34:16 AM		South		r Regulatory A	nalyst	date <u>11/28/20</u> 2	22
ä	Type or print name For State Use Only		_ E-mail address	jsouth@eeron	line.com	PHONE: 432-687	7-1575
	APPROVED BY:		_TITLE]	DATE	
Received by	Conditions of Approval (if any):						

Released to Imaging: 11/29/2022 10:14:32 AM

•

District I 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410

Phone:(505) 334-6178 Fax:(505) 334-6170

District IV 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3470 Fax: (505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

COMMENTS

Operator:	OGRID:
ENDEAVOR ENERGY RESOURCES, LP	190595
110 North Marienfeld	Action Number:
Midland, TX 79701	161906
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

COMMENTS

Created By Comment DATA ENTRY PM plmartinez

COMMENTS

Action 161906

Comment Date

11/29/2022

District I 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3470 Fax: (505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Operator:	OGRID:
ENDEAVOR ENERGY RESOURCES, LP	190595
110 North Marienfeld	Action Number:
Midland, TX 79701	161906
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kfortner	See attached COA	11/29/2022

Action 161906

Page 9 of 9 CONDITIONS