

Well Name: AMOCO A	Well Location: T30N / R12W / SEC 21 / NWNW / 36.803787 / -108.107715	County or Parish/State: SAN JUAN / NM
Well Number: 2	Type of Well: OTHER	Allottee or Tribe Name:
Lease Number: NMNM024158	Unit or CA Name: AMOCO A	Unit or CA Number: NMNM91287
US Well Number: 3004530643	Well Status: Temporarily Abandoned	Operator: HILCORP ENERGY COMPANY

Notice of Intent

Sundry ID: 2706613

Type of Submission: Notice of Intent	Type of Action: Plug and Abandonment
Date Sundry Submitted: 12/09/2022	Time Sundry Submitted: 09:35
Date proposed operation will begin: 01/30/2023	

**Procedure Description:** Hilcorp Energy Company requests permission to P&A the subject well per the attached procedures, current and proposed wellbore schematics. The Pre-Disturbance Site Visit was not conducted as the surface is FEE. A closed loop system will be used.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Amoco\_A\_2\_P\_A\_NOI\_2023\_20221209093515.pdf

Well Name: AMOCO A	Well Location: T30N / R12W / SEC 21 / NWNW / 36.803787 / -108.107715	County or Parish/State: SAN JUAN / NM
Well Number: 2	Type of Well: OTHER	Allottee or Tribe Name:
Lease Number: NMNM024158	Unit or CA Name: AMOCO A	Unit or CA Number: NMNM91287
US Well Number: 3004530643	Well Status: Temporarily Abandoned	Operator: HILCORP ENERGY COMPANY

Conditions of Approval

Additional  
30N12W31DKpc\_Amoco\_A\_002\_20221214133753.pdf

Authorized  
2706613\_NOIA\_2\_3004530643\_KR\_12152022\_20221215111148.pdf  
General\_Requirement\_PxA\_20221215111133.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: AMANDA WALKER	Signed on: DEC 09, 2022 09:35 AM
Name: HILCORP ENERGY COMPANY	
Title: Operations/Regulatory Technician	
Street Address: 1111 TRAVIS ST.	
City: HOUSTON	State: TX
Phone: (346) 237-2177	
Email address: mwalker@hilcorp.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5055647742	BLM POC Email Address: krennick@blm.gov
Disposition: Approved	Disposition Date: 12/15/2022
Signature: Kenneth Rennick	



**HILCORP ENERGY COMPANY**  
**Amoco A 2**  
**NOTICE OF INTENT TO PERMANENTLY ABANDON**

API #:

3004530643


**JOB PROCEDURES**

- ☒ NMOCD **Contact OCD (where applicable) 24 hrs prior to MIRU. Comply with all NMOCD, BLM (where applicable), and HEC safety and environmental regulations.**
- ☒
1. MIRU service rig and associated equipment, record all pressures on wellbore.
  2. Load well, ND tree, NU BOPs and test.
  3. Load well with inhibited brine & circulate clean. Pressure test the csg to 560 psi. Monitor for 30 minutes.
  4. RIH w/ 2-3/8" work string, tag CIBP in place @ 1,775'.
  5. **Plug #1 | 1,424' - 1,775' (CIBP @ 1,775' | PC Top Perf 1,844', FRC Perfs 1,809' - 1,833' | Fruitland Top 1,524')** Pump 23sx of Class III "Select" cement and spot an inside plug over CIBP & Fruitland Top.
  6. PUH w/ 2-3/8" work string to 600'.
  7. **Plug #2 | 600' - Surface (Surface Shoe @ 550', Kirtland Top @ 435')** Pump 39sx of Class III "Select" cement and spot an inside plug to cover the surface shoe & Kirtland Top to surface.
  8. **Plug #2 | 5,468' - 5,618' (Gallup Top @ 5,568')** Pump 12sx of Class G cement and spot an inside plug to cover the Gallup Top.
  9. LD tubing. ND BOP, WOC, cut off wellhead 5' below surface as per NMOCD. Top off cement at surface as needed - specifically the 7" x 4-1/2" annulus +/-30'. Weld new P&A maker.



**HILCORP ENERGY COMPANY**  
**Amoco A 2**  
**NOTICE OF INTENT TO PERMANENTLY ABANDON**


**Amoco A 2 - CURRENT WELLBORE SCHEMATIC**

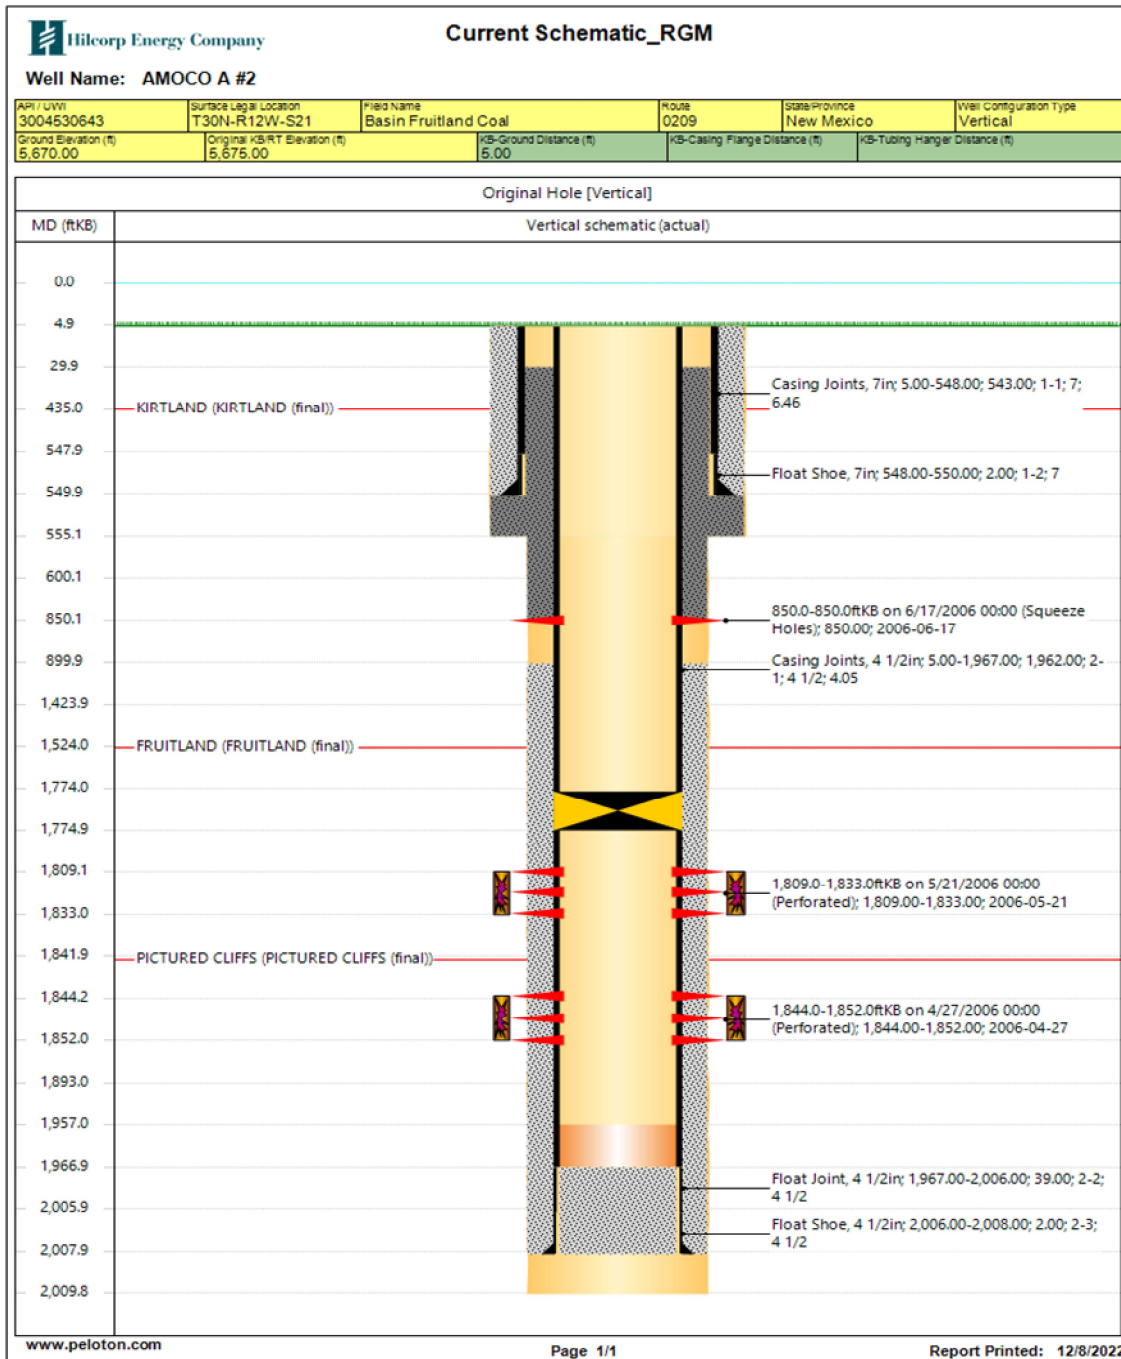



**HILCORP ENERGY COMPANY**  
**Amoco A 2**  
**NOTICE OF INTENT TO PERMANENTLY ABANDON**

**Amoco A 2 - PROPOSED P&A SCHEMATIC**

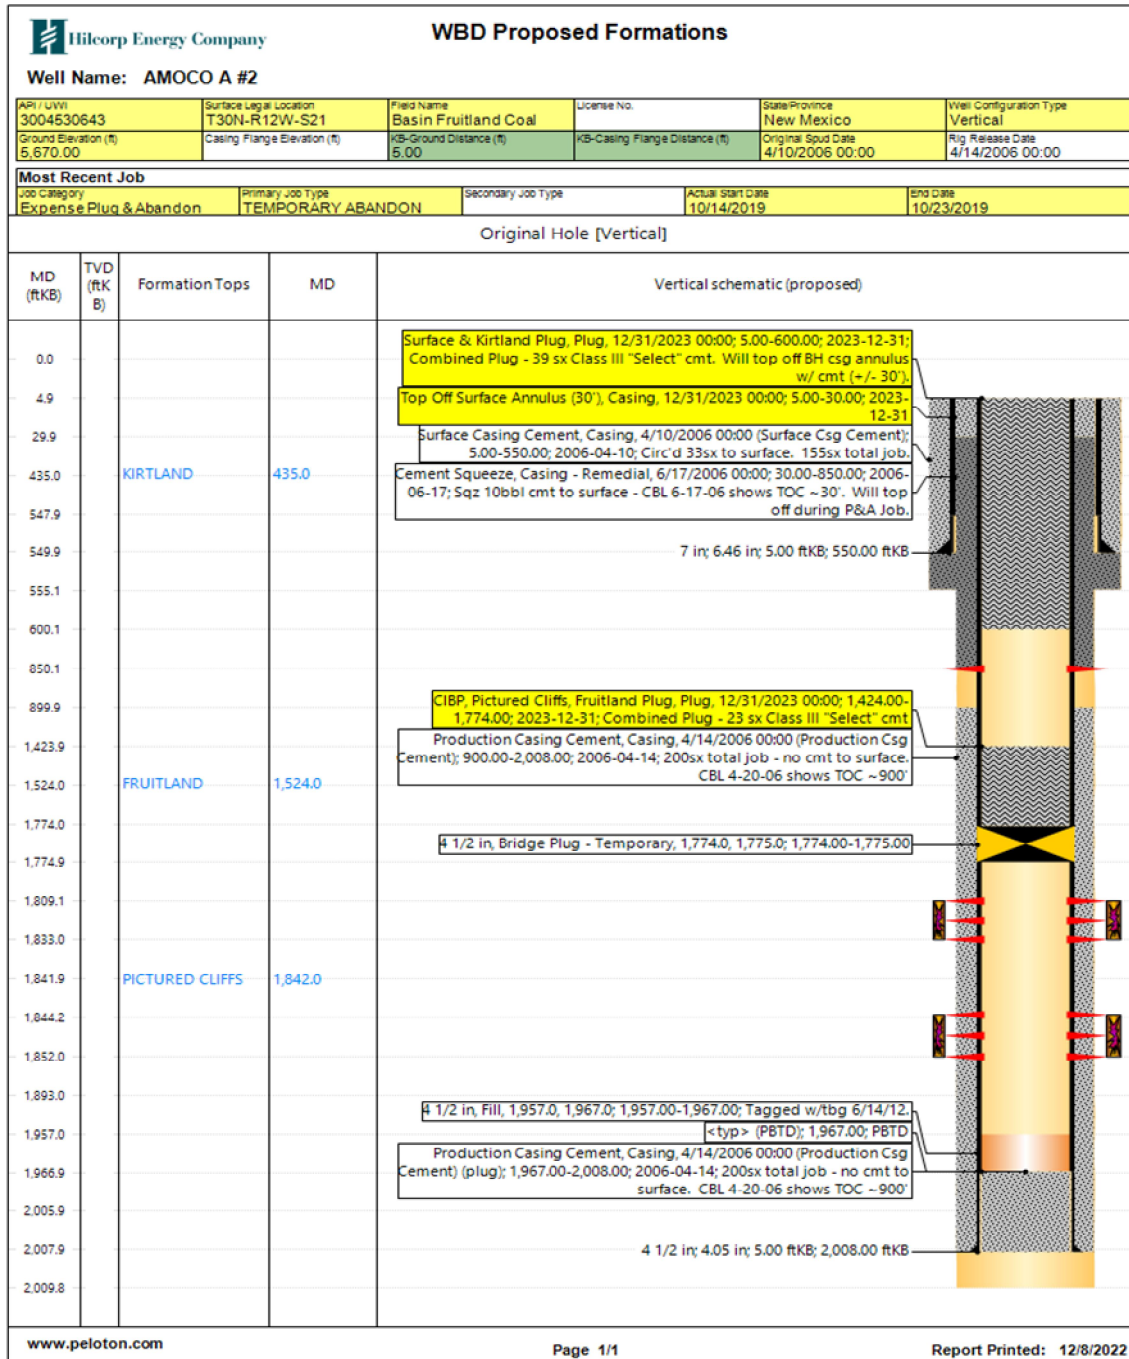

**GENERAL REQUIREMENTS FOR  
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES  
FARMINGTON FIELD OFFICE**

1.0 The approved plugging plans may contain variances from the following minimum general requirements.

1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.

1.2 Requirements may be added to address specific well conditions.

2.0 Materials used must be accurately measured. (densometer/scales)

3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.

3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.

4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.

4.1 The cement shall be as specified in the approved plugging plan.

4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.3 Surface plugs may be no less than 50' in length.

4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.

**4.6 A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**



5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H<sub>2</sub>S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), five copies, with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

(October 2012 Revision)

**UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
FARMINGTON DISTRICT OFFICE  
6251 COLLEGE BLVD.  
FARMINGTON, NEW MEXICO 87402**

AFMSS 2 Sundry ID 2706613

Attachment to notice of Intention to Abandon

Well: Amoco A 2

**CONDITIONS OF APPROVAL**

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. Farmington Office is to be notified at least 24 hours before the plugging operations commence at (505) 564-7750.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.

K. Rennick 12/15/2022



# BLM FLUID MINERALS P&A Geologic Report

**Date Completed:** 12/14/2022

Well No. Amoco A #002 (API# 30-045-30643)	Location	685	FNL	&	1223	FWL
Lease No. NMNM024158	Sec. 21	T30N			R12W	
Operator Hilcorp Energy Company	County	San Juan			State	New Mexico
Total Depth 2010'	PBTD 1967'	Formation Pictured Cliffs/Fruitland Coal				
Elevation (GL)		Elevation (KB) 5675'				

Geologic Formations	Est. Top	Est. Bottom	Log Top	Log Bottom	Remarks
San Jose					
Nacimiento			Surface	bsc	Surface/freshwater sands
Ojo Alamo Ss			Behind surface casing	435	Aquifer (possible freshwater)
Kirtland Shale			435	1524	Possible Gas
Fruitland			1524	1842	Coal/Gas/Water
Pictured Cliffs Ss			1842	PBTD	Gas
Lewis Shale					
Chacra					
Cliff House Ss					
Menefee					
Point Lookout Ss					
Mancos Shale					
Gallup					
Greenhorn					
Graneros Shale					
Dakota Ss					
Morrison					

Remarks:

P & A

- Fruitland perfs 1809' – 1833'.
- Pictured Cliffs perfs 1844' – 1852'.

Reference Well:

1) **Formation Tops**  
Same

Prepared by: Chris Wenman

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS  
  
Action 167508

CONDITIONS

Operator: HILCORP ENERGY COMPANY 1111 Travis Street Houston, TX 77002	OGRID: 372171
	Action Number: 167508
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kpickford	Notify NMOCD 24 Hours Prior to beginning operations	12/21/2022
kpickford	Adhere to BLM approved COAs and plugs. See BLM COAs and GEO report.	12/21/2022