Form 3160-5 (June 2019)

UNITED STATES

FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021

DDV NOTICES AND DEDODTS ON WELLS	
BUREAU OF LAND MANAGEMENT	
DEPARTMENT OF THE INTERIOR	

BUREAU OF LAND MANAGEMENT		5. Lease Serial No.	MULTIPLE
SUNDRY NOTICES AND REPORTS ON W	/ELLS	6. If Indian, Allottee	or Tribe Name
Do not use this form for proposals to drill or to abandoned well. Use Form 3160-3 (APD) for suc	MULTIPLE		
SUBMIT IN TRIPLICATE - Other instructions on pag	e 2	7. If Unit of CA/Agree	eement, Name and/or No.
1. Type of Well		_	
Oil Well Gas Well Other		8. Well Name and No	MULTIPLE
2. Name of Operator EOG RESOURCES INCORPORATED		9. API Well No. MUL	TIPLE
3a. Address 1111 BAGBY SKY LOBBY 2, HOUSTON, TX 77(3b. Phone No. (713) 651-70		10. Field and Pool or MULTIPLE	Exploratory Area
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) MULTIPLE		11. Country or Parish MULTIPLE	ı, State
12. CHECK THE APPROPRIATE BOX(ES) TO INI	DICATE NATURE OF NOT	ICE, REPORT OR OT	HER DATA
TYPE OF SUBMISSION	TYPE OF AC	TION	
✓ Notice of Intent ☐ Acidize ☐ Deep ☐ Alter Casing ☐ Hydn	=	luction (Start/Resume) amation	Water Shut-Off Well Integrity
Subsequent Report		omplete porarily Abandon	✓ Other
Final Abandonment Notice Convert to Injection Plug	Back Wate	er Disposal	
completion of the involved operations. If the operation results in a multiple con completed. Final Abandonment Notices must be filed only after all requirement is ready for final inspection.) EOG Resources Inc. (EOG) respectfully submits a batch sundry for the 30-025-48857 Jefe 29 Fed Com #715H 30-025-48858 Jefe 29 Fed Com #716H 30-025-48843 Jefe 29 Fed Com #736H 30-025-48850 Jefe 29 Fed Com #737H Casing Change: Change production casing design from 6" x 5.5" taper to full 5.5" string	s, including reclamation, hav		
14. I hereby certify that the foregoing is true and correct. Name (<i>Printed/Typed</i>) STAR HARRELL / Ph: (432) 848-9161	Regulatory Speciali	st	
Signature	Date	12/05/2	2022
THE SPACE FOR FED	ERAL OR STATE OF	ICE USE	
Approved by			
KEITH P IMMATTY / Ph: (575) 988-4722 / Approved	ENGINEER Title		12/05/2022 Date
Conditions of approval, if any, are attached. Approval of this notice does not warran certify that the applicant holds legal or equitable title to those rights in the subject lewhich would entitle the applicant to conduct operations thereon.			
Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for an	ny person knowingly and wil	Ifully to make to any d	lepartment or agency of the United States

any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Batch Well Data

JEFE 29 FED COM 737H, US Well Number: 3002548850, Case Number: NMNM108971, Lease Number: NMNM108971, Operator: EOG RESOURCES INCORPORATED

JEFE 29 FED COM 736H, US Well Number: 3002548843, Case Number: NMNM108971, Lease Number: NMNM108971, Operator:EOG RESOURCES INCORPORATED

JEFE 29 FED COM 715H, US Well Number: 3002548857, Case Number: NMNM108971, Lease Number: NMNM108971, Operator: EOG RESOURCES INCORPORATED

JEFE 29 FED COM 716H, US Well Number: 3002548858, Case Number: NMNM108971, Lease Number: NMNM108971, Operator:EOG RESOURCES INCORPORATED



Jefe 29 Fed Com Batch

Revised Permit Information 12/02/2022:

Well Name: Jefe 29 Fed Com Batch

Location: SHL: Section 29, T-25-S, R-32-E, Lea Co., N.M. BHL: Section 32, T-25-S, R-32-E, Lea Co., N.M.

Casing Design A

Hole	Interv	al MD	Interva	al TVD	Csg			
Size	From (ft)	To (ft)	From (ft)	To (ft)	OD	Weight	Grade	Conn
12-1/4"	0	1,190	0	1,190	9-5/8"	36#	J-55	LTC
8-3/4"	0	10,982	0	10,900	7-5/8"	29.7#	HCP-110	FXL
6-3/4"	0	10,482	0	10,400	5-1/2"	20#	P110-EC	DWC/C IS MS
6-3/4"	10,482	10,982	10,400	10,900	5-1/2"	20#	P110-EC	Vam Sprint SF
6-3/4"	10,982	19,616	10,900	11,970	5-1/2"	20#	P110-EC	DWC/C IS MS

Variance is requested to waive the centralizer requirements for the 7-5/8" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4 hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 5-1/2" casing by 7-5/8" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

Cementing Program:

	Cementing 1 regram.								
		Wt.	Yld	Slurry Description					
Depth	No. Sacks	ppg	Ft3/sk						
1,190' 9-5/8"	330	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk Cello- Flake (TOC @ Surface)					
	80	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 990')					
10,900' 7-5/8"	500	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 6,675')					
	1140	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)					
19,616' 5-1/2"	800	14.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,400')					



Jefe 29 Fed Com Batch

Additive	Purpose
Bentonite Gel	Lightweight/Lost circulation prevention
Calcium Chloride	Accelerator
Cello-flake	Lost circulation prevention
Sodium Metasilicate	Accelerator
MagOx	Expansive agent
Pre-Mag-M	Expansive agent
Sodium Chloride	Accelerator
FL-62	Fluid loss control
Halad-344	Fluid loss control
Halad-9	Fluid loss control
HR-601	Retarder
Microbond	Expansive Agent

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (6,875') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 143 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Mud Program:

Depth	Type Weight (ppg)		Viscosity	Water Loss
0 – 1,190'	Fresh - Gel	8.6-8.8	28-34	N/c
1,190' – 10,900'	Brine	10.0-10.2	28-34	N/c
10,900' - 11,579'	Oil Base	8.7-9.4	58-68	N/c - 6
11,579' – 19,616'	Oil Base	10.0-14.0	58-68	4 - 6



Jefe 29 Fed Com Batch

Wellhead & Offline Cementing:

EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.a.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 30 days per Onshore Order No. 2.
- Function test BOP elements per Onshore Order No. 2.
- Break testing BOP and BOPE coupled with batch drilling operations and option to
 offline cement and/or remediate (if needed) any surface or intermediate sections,
 according to attached offline cementing support documentation.
- After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad.
- TA cap will also be installed per Wellhead vendor procedure and pressure inside
 the casing will be monitored via the valve on the TA cap as per standard batch
 drilling ops.
- See attached "EOG BLM Variance 3a -Offline Cement Intermediate Operational Procedure"



Jefe 29 Fed Com Batch

Revised Wellbore


KB: 3371'

GL: 3346'

Section 29

T-25-S, R-32-E

API: 30-025-****

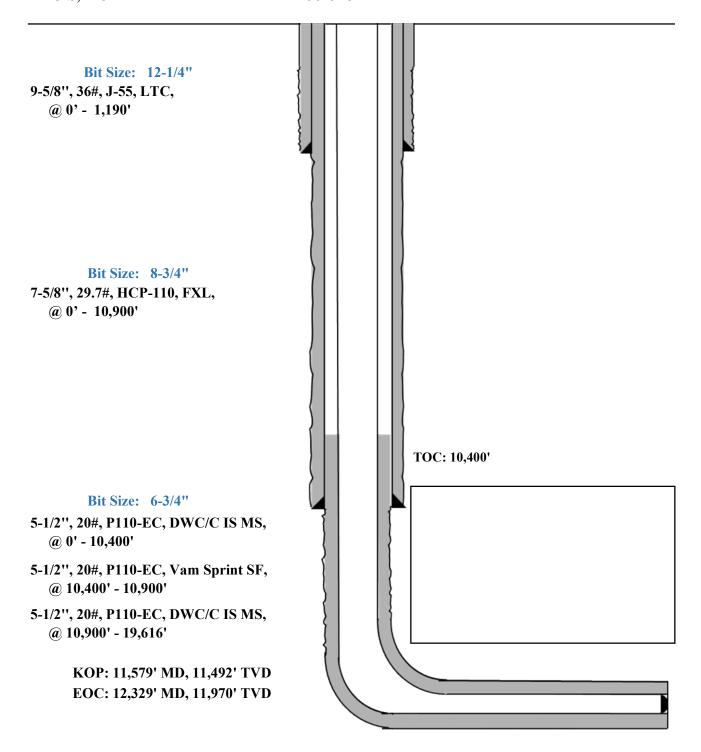

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 163835

CONDITIONS

Operator:	OGRID:
EOG RESOURCES INC	7377
P.O. Box 2267	Action Number:
Midland, TX 79702	163835
·	Action Type:
· I	[C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	None	12/23/2022