

Well Name: BUCK 17 FEDERAL	Well Location: T26S / R32E / SEC 20 / NENE /	County or Parish/State: LEA / NM
Well Number: 5H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC068281B	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002540840	Well Status: Oil Well Shut In	Operator: CONOCOPHILLIPS COMPANY

Accepted for Record Only

SUBJECT TO LIKE APPROVAL BY BLM

NMOCD 3/20/23

X 7

Notice of Intent

Sundry ID: 2669892

Type of Submission: Notice of Intent

Date Sundry Submitted: 05/04/2022

Date proposed operation will begin: 05/04/2022

Type of Action: Plug and Abandonment

Time Sundry Submitted: 06:37

Procedure Description: 1. Set 4 1/2" CIBP @ 9882'. Circ hole w/ MLF. Pressure test csg. Spotted 25 sx cmt @ 9882-9582'. 2. Spot 50 sx cmt @ 9255-8604'. WOC & Tag (7" Shoe & Top of Liner) 3. Spot 25 sx cmt @ 7200-7100'. 4. Spot 75 sx cmt @ 4498-4080'. WOC & Tag (9 5/8" Shoe & B/Salt) 5. Perf & Sqz 70 Sx cmt @ 1080-890'. WOC & Tag (13 3/8" Shoe & T/Salt) 6. Perf & Sqz 70 sx cmt @ 200' to surface. 7. Cut of well head, verify cmt @ surface, weld on Dry Hole Marker

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

- Procedure Description
- Buck_17_Federal_5H_Proposed_WBD_20220504063709.pdf
 - Buck_17_Federal_5H_Current_WBD_20220504063653.pdf

Well Name: BUCK 17 FEDERAL	Well Location: T26S / R32E / SEC 20 / NENE /	County or Parish/State: LEA / NM
Well Number: 5H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC068281B	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002540840	Well Status: Oil Well Shut In	Operator: CONOCOPHILLIPS COMPANY

Conditions of Approval

Specialist Review

Buck_17_Federal_5H_Sundry_ID_2669892_P_A_20220514100533.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: RUTH SHOCKENCY
Signed on: MAY 04, 2022 06:37 AM
Name: CONOCOPHILLIPS COMPANY
Title: Regulatory Analyst
Street Address: 600 W. ILLINOIS AVE.
City: MIDLAND State: TX
Phone: (575) 703-8321
Email address: RUTH.SHOCKENCY@CONOCOPHILLIPS.COM

Field

Representative Name:
Street Address:
City: State: Zip:
Phone:
Email address:

BLM Point of Contact

BLM POC Name: LONG VO
BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972
BLM POC Email Address: LVO@BLM.GOV
Disposition: Approved
Disposition Date: 05/14/2022
Signature: Long Vo

ConocoPhillips		CURRENT	
Author:	LSG	Well No.	5H
Well Name	Buck Federal 17	API #:	30-025-40840
Field	Red Hills West	Location	Sec 20, T26S, R32E
County	Lea		
State	NM		
Spud Date	11/13/2012	GL	3150'

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	13.3875	J55	54.5	1,030	17 1/2	900	Surf
Inter Csg	9.625	J55	36	4,448	12 1/4	1,405	Surf
Inter Csg 2	7	P110	29	9,205	8 3/4	482	3900'
Liner	4.5	P110	11.6	8654' to 14286'	6 1/8	Swell pkrs	NA

Formation Tops	
Quaternary	Surface
Rustler	No log coverage
Delaware Top	4,325
Bone Spring	8,137
Bone Spring 1st Carbonate Top	8,412
Bone Spring 1st Carbonate Base	8,462
Avalon A Shale Top	8,671
Avalon A Shale Horizontal	8,824
TD (MD)	14,446

13.3875 csg set @ 1,030 with 900 cmt sx

9.625 csg set @ 4,448 with 1,405 cmt sx

7 csg set @ 9,205 with 482 cmt sx

Perfs @ 9932-14263


32.0332642,-103.6921539

4.5 Liner set @ 8654' to 14286' with Swell pkrs cmt sx

TDPB
TD

ConocoPhillips		PROPOSED	
Author:	LSG	Well No.	5H
Well Name	Buck Federal 17	API #:	30-025-40840
Field	Red Hills West	Location	Sec 20, T26S, R32E
County	Lea		
State	NM		
Spud Date	11/13/2012	GL	3150'

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	13.3875	J55	54.5	1,030	17 1/2	900	Surf
Inter Csg	9.625	J55	36	4,448	12 1/4	1,405	Surf
Inter Csg 2	7	P110	29	9,205	8 3/4	482	3900'
Liner	4.5	P110	11.6	8654' to 14286'	6 1/8	Swell pkrs	NA

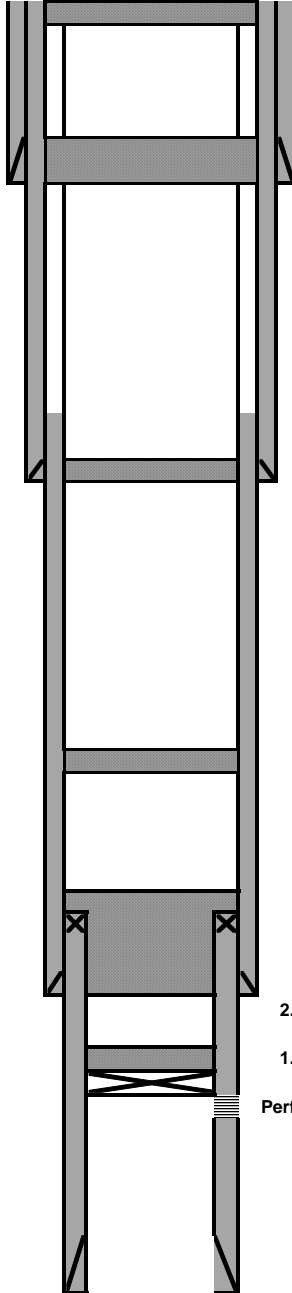

6. Perf & Sqz 70 sx cmt @ 200' to surface.

13.3875 csg set @ 1,030 with 900 cmt sx

5. Perf & Sqz 70 Sx cmt @ 1080-890'. WOC & Tag (13 3/8" Shoe & T/Salt)

9.625 csg set @ 4,448 with 1,405 cmt sx

4. Spot 75 sx cmt @ 4498-4080'. WOC & Tag (9 5/8" Shoe & B/Salt)

3. Spot 25 sx cmt @ 7200-7100'.

7 csg set @ 9,205 with 482 cmt sx

2. Spot 50 sx cmt @ 9255-8604'. WOC & Tag (7" Shoe & Top of Liner)

1. Set 4 1/2" CIBP @ 9882'. Circ hole w/ MLF. Pressure test csg. Spotted 25 sx cmt @ 9882-9582'.

Perfs @ 9932-14263

32.0332642,-103.6921539

4.5 Liner set 8654' to 14286' with Swell pkrs cmt sx

Formation Tops	
Quaternary	Surface
Rustler	No log coverage
Delaware Top	4,325
Bone Spring	8,137
Bone Spring 1st Carbonate Top	8,412
Bone Spring 1st Carbonate Base	8,462
Avalon A Shale Top	8,671
Avalon A Shale Horizontal	8,824
TD (MD)	14,446

Well Name: BUCK 17 FEDERAL	Well Location: T26S / R32E / SEC 20 / NENE /	County or Parish/State: LEA / NM
Well Number: 5H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC068281B	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002540840	Well Status: Oil Well Shut In	Operator: CONOCOPHILLIPS COMPANY

LONG VO

Digitally signed by LONG VO
Date: 2022.05.07 15:10:53 -05'00'

Notice of Intent

Sundry ID: 2669892

Type of Submission: Notice of Intent

Date Sundry Submitted: 05/04/2022

Date proposed operation will begin: 05/04/2022

Type of Action: Plug and Abandonment

Time Sundry Submitted: 06:37

Procedure Description: 1. Set 4 1/2" CIBP @ 9882'. Circ hole w/ MLF. Pressure test csg. Spotted 25 sx cmt @ 9882-9582'. 2. Spot 77 sx cmt @ 9255-8517'. WOC & Tag (7" Shoe & Top of Liner) 3. Spot 132 sx cmt @ 8170-7497'. 4. Spot 77 sx cmt @ 4498-4010'. WOC & Tag (9 5/8" Shoe & B/Salt) 5. Perf & Sqz 392 Sx cmt @ 1394' to surface. Verify at surface (13 3/8" Shoe & T/Salt) 7. Cut of well head, verify cmt @ surface, weld on Dry Hole Marker

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

- Procedure Description
- Buck_17_Federal_5H_Proposed_WBD_20220504063709.pdf
 - Buck_17_Federal_5H_Current_WBD_20220504063653.pdf

Received by OCD: 3/9/2023 1:18:52 PM

Page 6 of 18

Well Name: BUCK 17 FEDERAL	Well Location: T26S / R32E / SEC 20 / NENE /	County or Parish/State: LEA / NM
Well Number: 5H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC068281B	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002540840	Well Status: Oil Well Shut In	Operator: CONOCOPHILLIPS COMPANY

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: RUTH SHOCKENCY

Signed on: MAY 04, 2022 06:37 AM

Name: CONOCOPHILLIPS COMPANY

Title: Regulatory Analyst

Street Address: 600 W. ILLINOIS AVE.

City: MIDLANDState: TX

Phone: (575) 703-8321

Email address: RUTH.SHOCKENCY@CONOCOPHILLIPS.COM

Field

Representative Name:

Street Address:

City:State:Zip:


Phone:

Email address:

Cave/Karst: Medium
Sundry ID: 2669892

ConocoPhillips		PROPOSED	
Author:	LSG	Well No.	5H
Well Name	Buck Federal 17	API #:	30-025-40840
Field	Red Hills West	Location	Sec 20, T26S, R32E
County	Lea		
State	NM		
Spud Date	11/13/2012	GL	3150'

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	13.3875	J55	54.5	1,030	17 1/2	900	Surf
Inter Csg	9.625	J55	36	4,448	12 1/4	1,405	Surf
Inter Csg 2	7	P110	29	9,205	8 3/4	482	3900'
Liner	4.5	P110	11.6	8654' to 14286'	6 1/8	Swell pkrs	NA

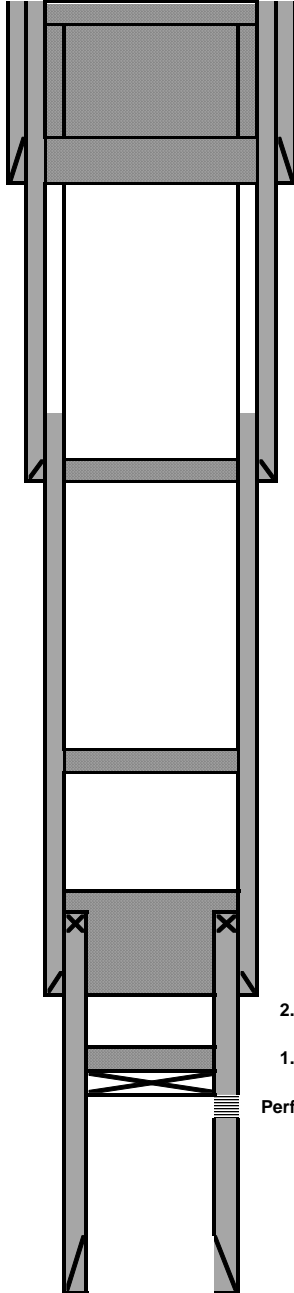

13.3875 csg set @ 1,030 with 900 cmt sx

5. Perf & Sqz 392 Sx cmt @ 1394' to surface. Verify at surface, (In/Out) (13 3/8" Shoe & T/Salt)

9.625 csg set @ 4,448 with 1,405 cmt sx

4. Spot 77 sx cmt @ 4498-4010'. WOC & Tag (9 5/8" Shoe & B/Salt)

3. Spot 132 sx cmt @ 8170-7497'.

7 csg set @ 9,205 with 482 cmt sx

2. Spot 77 sx cmt @ 9255-8517'. WOC & Tag (7" Shoe & Top of Liner)

1. Set 4 1/2" CIBP @ 9882'. Circ hole w/ MLF. Pressure test csg. Spotted 25 sx cmt @ 9882-9582'.

Perfs @ 9932-14263

32.0332642,-103.6921539

4.5 Liner set 8654' to 14286' with Swell pkrs cmt sx

Formation Tops	
Quaternary	Surface
Rustler	No log coverage
Delaware Top	4,325
Bone Spring	8,137
Bone Spring 1st Carbonate Top	8,412
Bone Spring 1st Carbonate Base	8,462
Avalon A Shale Top	8,671
Avalon A Shale Horizontal	8,824
TD (MD)	14,446

ConocoPhillips		CURRENT	
Author:	LSG	Well No.	5H
Well Name	Buck Federal 17	API #:	30-025-40840
Field	Red Hills West	Location	Sec 20, T26S, R32E
County	Lea		
State	NM		
Spud Date	11/13/2012	GL	3150'

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	13.3875	J55	54.5	1,030	17 1/2	900	Surf
Inter Csg	9.625	J55	36	4,448	12 1/4	1,405	Surf
Inter Csg 2	7	P110	29	9,205	8 3/4	482	3900'
Liner	4.5	P110	11.6	8654' to 14286'	6 1/8	Swell pkrs	NA

Formation Tops	
Quaternary	Surface
Rustler	No log coverage
Delaware Top	4,325
Bone Spring	8,137
Bone Spring 1st Carbonate Top	8,412
Bone Spring 1st Carbonate Base	8,462
Avalon A Shale Top	8,671
Avalon A Shale Horizontal	8,824
TD (MD)	14,446

13.3875 csg set @ 1,030 with 900 cmt sx

9.625 csg set @ 4,448 with 1,405 cmt sx

7 csg set @ 9,205 with 482 cmt sx

Perfs @ 9932-14263

32.0332642,-103.6921539

4.5 Liner set @ 8654' to 14286' with Swell pkrs cmt sx

TDPB
TD

Sundry ID		2669892				
Plug Type	Top	Bottom	Length	Tag	Sacks	Notes
Surface Plug	0.00	1080.00	1080.00	Tag/Verify		
Shoe Plug	969.70	1080.00	110.30	Tag/Verify		
Top of Salt @ 1344	1280.56	1394.00	113.44	Tag/Verify	392.00	Perf and Squeeze from 1394' to surface. (In/Out) Verify at Surface.
Base of Salt @ 4102	4010.98	4152.00	141.02	Tag/Verify		
Delaware @ 4326	4232.74	4376.00	143.26	If solid base no		
Shoe Plug	4353.52	4498.00	144.48	Tag/Verify	77.00	Spot from 4498' to 4010'. WOC and Tag.
Bonesprings @ 8120	7497.00	8170.00	673.00	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations	132.00	Spot from 8170' to 7497'.
Top of Liner @ 8654	8517.46	8704.00	186.54	If solid		
Shoe Plug	9062.95	9255.00	192.05	Tag/Verify	77.00	Spot from 9255' to 8517'. WOC and Tag.
CIBP Plug	9847.00	9882.00	35.00	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations	25.00	Set CIBP at 9882'. Spot from 9882' to 9582'. Leak test CIBP.
Perforations Plug (If No CIBP)	9882.00	14313.00	4431.00	Tag/Verify		
Wolfcamp @ 11453	11288.47	11503.00	214.53	If solid		

Shoe Plug	14093.14	14336.00	242.86	Tag/Verify		Not Necessary
-----------	----------	----------	--------	------------	--	---------------

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole.

Class H >7500'

Class C <7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Critical, High, Medium, Secretary : Top of salt to surface If no salt take the deepest fresh water.

R111P: 50' from bottom of salt to surface

Class C: 1.32 ft³/sx

Class H: 1.06 ft³/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

Cave Karst/Potash Cement		Medium	Top of Salt to surface	
Shoe @	1030.00			
Shoe @	4448.00			
Shoe @	9205.00		TOC @	3900.00
Shoe @	14286.00		TOC @	8654.00
Perforatons Top @	9932.00		Perforation s Bottom @	14263.00
			CIBP @	9882.00

**BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972**

**Permanent Abandonment of Federal Wells
Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.**

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office
620 E. Greene St.
Carlsbad, New Mexico 88220-6292
www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo “interim” reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo “final” reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines (**Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure**). Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. **This will apply to well pads, facilities, and access roads.** Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you

- have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.
5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos
Supervisory Petroleum Engineering Tech/Environmental Protection Specialist
575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias
Environmental Protection Specialist
575-234-6230

Crisha Morgan
Environmental Protection Specialist
575-234-5987

Jose Martinez-Colon
Environmental Protection Specialist
575-234-5951

Mark Mattozzi
Environmental Protection Specialist
575-234-5713

Trishia Bad Bear, Hobbs Field Station
Natural Resource Specialist
575-393-3612

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

COMMENTS

Action 195459

COMMENTS

Operator: CONOCOPHILLIPS COMPANY 600 W. Illinois Avenue Midland, TX 79701	OGRID: 217817
	Action Number: 195459
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

COMMENTS

Created By	Comment	Comment Date
plmartinez	DATA ENTRY PM	3/21/2023

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 195459

CONDITIONS

Operator: CONOCOPHILLIPS COMPANY 600 W. Illinois Avenue Midland, TX 79701	OGRID: 217817
	Action Number: 195459
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kfortner	Like approval from BLM	3/20/2023