

## Energy, Minerals and Natural Resources

Revised August 1, 2011

Office  
District I - (575) 393-6161  
1625 N. French Dr., Hobbs, NM 88240  
District II - (575) 748-1283  
811 S. First St., Artesia, NM 88210  
District III - (505) 334-6178  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV - (505) 476-3460  
1220 S. St. Francis Dr., Santa Fe, NM  
87505

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO.

30-015-33939

5. Indicate Type of Lease

STATE X FEE

6. State Oil &amp; Gas Lease No.

7. Lease Name or Unit Agreement Name

SALT DRAW 10 STATE

8. Well Number

001

9. OGRID Number

372137

10. Pool name or Wildcat

UNDESIGNATED; MORROW

## SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well X Other

2. Name of Operator

EARTHSTONE OPERATING LLC

3. Address of Operator

1400 WOODLOCH FOREST DR., SUITE 300, THE WOODLANDS, TX 77380

4. Well Location

Unit Letter A : 840 feet from the NORTH line and 660 feet from the EAST line  
Section 10 Township 25S Range 28E NMPM EDDY County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

2,962' - GR

## 12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

## NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON X  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐

OTHER:

Failed MIT for TA - Find leak in casing before proceeding

## SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A  
CASING/CEMENT JOB ☐

OTHER:

Notify OCD 24 hrs. prior to any work done

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- well plugged in 2019 - reported production in 2021 & 2022
- 1) TAG EXISTING CIBP = CMT. @ +/-12,495'; CIRC. WELL W/ M.L.F. Run CBL to TOC
- 2) PUMP (100) SXS. CLASS "H" CMT. @ 11,890'-11,282' (T/ATOKA, 4-1/2" LNR.TOP, T/PENN.).
- 3) PUMP (50) SXS. CLASS "H" CMT. @ 9,595'-9,310' (T/WLCP.). spot 40 sx @ 50' below to 50' above TOC minimum - see CBL WOC & tag
- 4) PUMP (45) SXS. CLASS "C" CMT. @ 6,510'-6,350' (T/BNSG.).
- 5) PERF. X ATTEMPT TO SQZ. (60) SXS. CLASS "C" CMT. @ 5,185'-5,035' (9-5/8" CSG. SHOE); WOC X TAG TOC.
- 6) CUT X PULL 7" CSG. @ +/-3,500'.
- 7) PUMP (50) SXS. CLASS "C" CMT. @ 3,560'-3,430' (7" CSG.STUB); WOC X TAG TOC.
- 8) PUMP (110) SXS. CLASS "C" CMT. @ 2,624'-2,330' (T/DLWR., B/SALT); WOC X TAG TOC.
- 9) PUMP (45) SXS. CLASS "C" CMT. @ 960'-860' (T/SALT); WOC X TAG CMT. PLUG.
- 10) PERF. X ATTEMPT TO SQZ. (90) SXS. CLASS "C" CMT. @ 625'-525' (13-3/8" CSG.SHOE); WOC X TAG TOC.
- 11) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, (100) SXS. CLASS "C" CMT. @ 150'-3'.
- 12) DIG OUT/CUT OFF WELLHEAD 3' B.G.L.; VERIFY CMT. TO SURF. ON ALL ANNULI; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.


DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

\*\*\*\*SEE ATTACHED COA's\*\*\*\*

MUST BE PLUGGED BY 11/30/2023

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE



TITLE: AGENT

DATE: 04/25/2023

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM PHONE: 432.687.3033

For State Use Only

APPROVED BY:



TITLE

Staff Manager

DATE

5/4/23

Conditions of Approval (if any):

## CONDITIONS FOR PLUGGING AND ABANDONMENT

### OCD - Southern District

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, **Notify NMOCD District Office II at (575)-748-1283 at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down. Company representative will be on location during plugging procedures.**

1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
3. Trucking companies being used to haul oilfield waste fluids to a disposal – commercial or private – shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.
8. Produced water **will not** be used during any part of the plugging operation.
9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
11. Class 'C' cement will be used above 7500 feet.
12. Class 'H' cement will be used below 7500 feet.
13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged
14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.

16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.
18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).
19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.
20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
  - A) Fusselman
  - B) Devonian
  - C) Morrow
  - D) Wolfcamp
  - E) Bone Springs
  - F) Delaware
  - G) Any salt sections
  - H) Abo
  - I) Glorieta
  - J) Yates.
  - K) Cherry Canyon - Eddy County
  - L) Potash---(In the R-111-P Area (Page 3 & 4), a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing

#### DRY HOLE MARKER REQUIREMENTS

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

1. Operator name 2. Lease and Well Number 3.API Number 4. Unit Letter 5. Quarter Section (feet from the North, South, East or West) 6. Section, Township and Range 7. Plugging Date 8. County (SPECIAL CASES)-----AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)

#### SITE REMEDIATION DUE WITHIN ONE YEAR OF WELL PLUGGING COMPLETION



## R-111-P Area

### T 18S – R 30E

Sec 10 Unit P. Sec 11 Unit M,N. Sec 13 Unit L,M,N. Sec 14 Unit C -P. Sec 15 Unit A G,H,I,J,K,N,O,P. Sec 22 Unit All except for M. Sec 23, Sec 24 Unit C,D,E,L, Sec 26 Unit A-G, Sec 27 Unit A,B,C

### T 19S – R 29E

Sec 11 Unit P. Sec 12 Unit H-P. Sec 13. Sec 14 Unit A,B,F-P. Sec 15 Unit P. Sec 22 Unit A,B,C,F,G,H,I,J K,N,O,P. Sec 23. Sec 24. Sec 25 Unit D. Sec 26 Unit A- F. Sec 27 Unit A,B,C,F,G,H.

### T 19S – R 30E

Sec 2 Unit K,L,M,N. Sec 3 Unit I,L,M,N,O,P. Sec 4 Unit C,D,E,F,G,I-P. Sec 5 Unit A,B,C,E-P. Sec 6 Unit I,O,P. Sec 7 – Sec 10. Sec 11 Unit D, G—P. Sec 12 Unit A,B,E-P. Sec 13 Unit A-O. Sec 14-Sec 18. Sec 19 Unit A-L, P. Sec 20 – Sec 23. Sec 24 Unit C,D,E,F,L,M,N. Sec 25 Unit D. Sec 26 Unit A-G, I-P. Sec 27, Sec 28, Sec 29 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 32 Unit A,B,G,H,I,J,N,O,P. Sec 33. Sec 34. Sec 35. Sec 36 Unit D,E,F,I-P.

### T 19S – R 31E

Sec 7 Unit C,D,E,F,L. Sec 18 Unit C,D,E,F,G,K,L. Sec 31 Unit M. Sec 34 Unit P. Sec 35 Unit M,N,O. Sec 36 Unit O,P.

### T 20S – R 29E

Sec 1 Unit H,I,P. Sec 13 Unit E,L,M,N. Sec 14 Unit B-P. Sec 15 Unit A,H,I,J,N,O,P. Sec 22 Unit A,B,C,F,G,H,I,J,O,P. Sec 23. Sec 24 Unit C,D,E,F,G,J-P. Sec 25 Unit A-O. Sec 26. Sec 27 Unit A,B,G,H,I,J,O,P. Sec 34 Unit A,B,G,H. Sec 35 Unit A-H. Sec 36 Unit B-G.

### T 20S – R 30E

Sec 1 – Sec 4. Sec 5 Unit A,B,C,E-P. Sec 6 Unit E,G-P. Sec 7 Unit A-H,I,J,O,P. Sec 8 – 17. Sec 18 Unit A,B,G,H,I,J,O,P. Sec 19 Unit A,B,G,H,I,J,O,P. Sec 20 – 29. Sec 30 Unit A-L,N,O,P. Sec 31 Unit A,B,G,H,I,P. Sec 32 – Sec 36.

### T 20S – R 31E

Sec 1 Unit A,B,C,E-P. Sec 2. Sec 3 Unit A,B,G,H,I,J,O,P. Sec 6 Unit D,E,F,J-P. Sec 7. Sec 8 Unit E-P. Sec 9 Unit E,F,J-P. Sec 10 Unit A,B,G-P. Sec 11 – Sec 36.

### T 21S – R 29E

Sec 1 – Sec 3. Sec 4 Unit L1 – L16,I,J,K,O,P. Sec 5 Unit L1. Sec 10 Unit A,B,H,P. Sec 11 – Sec 14. Sec 15 Unit A,H,I. Sec 23 Unit A,B. Sec 24 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 25 Unit A,O,P. Sec 35 Unit G,H,I,J,K,N,O,P. Sec 36 A,B,C,F – P.

### T 21S – R 30E

Sec 1 – Sec 36

### T 21S – R 31E

Sec 1 – Sec 36

### T 22S – R 28E

Sec 36 Unit A,H,I,P.

**T 22S – R 29E**

Sec 1. Sec2. Sec 3 Unit I,J,N,O,P. Sec 9 Unit G – P. Sec 10 – Sec 16. Sec 19 Unit H,I,J. Sec 20 – Sec 28. Sec 29 Unit A,B,C,D,G,H,I,J,O,P. Sec 30 Unit A. Section 31 Unit C – P. Sec 32 – Sec 36

**T 22S – R 30E**

Sec 1 – Sec 36

**T 22S – R 31E**

Sec 1 – Sec 11. Sec 12 Unit B,C,D,E,F,L. Sec 13 Unit E,F,K,L,M,N. Sec 14 – Sec 23. Sec 24 Unit C,D,E,F,K,L,M,N. Sec 25 Unit A,B,C,D. Sec 26 Unit A,BC,D,G,H. Sec 27 – Sec 34.

**T 23S – R 28E**

Sec 1 Unit A

**T 23S – R 29E**

Sec 1 – Sec 5. Sec 6 Unit A – I, N,O,P. Sec 7 Unit A,B,C,G,H,I,P. Sec 8 Unit A – L, N,O,P. Sec 9 – Sec 16. Sec 17 Unit A,B,G,H,I,P. Sec 21 – Sec 23. Sec 24 Unit A – N. Sec 25 Unit D,E,L. Sec 26. Sec 27. Sec 28 Unit A – J, N,O,P. Sec 33 Unit A,B,C. Sec 34 Unit A,B,C,D,F,G,H. Sec 35. Sec 36 Unit B,C,D,E,F,G,K,L.

**T 23S – R 30E**

Sec 1 – Sec 18. Sec 19 Unit A – I,N,O,P. Sec 20, Sec 21. Sec 22 Unit A – N, P. Sec 23, Sec 24, Sec 25. Sec 26 Unit A,B,F-P. Sec 27 Unit C,D,E,I,N,O,P. Sec 28 Unit A – H, K,L,M,N. Sec 29 Unit A – J, O,P. Sec 30 Unit A,B. Sec 32 A,B. Sec 33 Unit C,D,H,I,O,P. Sec 34, Sec 35, Sec 36.

**T 23S – R 31E**

Sec 2 Unit D,E,J,O. Sec 3 – Sec 7. Sec 8 Unit A – G, K – N. Sec 9 Unit A,B,C,D. Sec 10 Unit D,P. Sec 11 Unit G,H,I,J,M,N,O,P. Sec 12 Unit E,L,K,M,N. Sec 13 Unit C,D,E,F,G,J,K,L,M,N,O. Sec 14. Sec 15 Unit A,B,E – P. Sec 16 Unit I, K – P. Sec 17 Unit B,C,D,E, I – P. Sec 18 – Sec 23. Sec 24 Unit B – G, K,L,M,N. Sec 25 Unit B – G, J,K,L. Sec 26 – Sec 34. Sec 35 Unit C,D,E.

**T 24S – R 29E**

Sec 2 Unit A, B, C, D. Sec 3 Unit A

**T 24S – R 30E**

Sec 1 Unit A – H, J – N. Sec 2, Sec 3. Sec 4 Unit A,B,F – K, M,N,O,P. Sec 9 Unit A – L. Sec 10 Unit A – L, O,P. Sec 11. Sec 12 Unit D,E,L. Sec 14 Unit B – G. Sec 15 Unit A,B,G,H.

**T 24S – R 31E**

Sec 3 Unit B – G, J – O. Sec 4. Sec 5 Unit A – L, P. Sec 6 Unit A – L. Sec 9 Unit A – J, O,P. Sec 10 Unit B – G, K – N. Sec 35 Unit E – P. Sec 36 Unit E,K,L,M,N.

**T 25S – R 31E**

Sec 1 Unit C,D,E,F. Sec 2 Unit A – H.

TEMORARILY ABANDONED  
WELLBORE DIAGRAM

CURRENT

LEASE:	Salt Draw 10 State	WELL:	1	FIELD:	Salt Draw	API:	30-015-33939
LOC:	840 FN & 660 FE	SEC:	10	BLK:	T25S R28E	Reservoir	Morrow
SVY:	0	GL:	2961	CTY/ST	Eddy Co., NM	SPUD:	2/27/2005
CURRENT STATUS:	Producing	KB:	2980	DF:	2979	TD DATE:	4/27/2005
						COMP. DATE:	1/10/2006

FRESH WATER  
DEPTH:

HOLE SIZE:	0	COMMENTS:
SURF CSG & SIZE:	13-3/8" 54.5# K-55	
SET @:	555'	
SXS CMT:	220 sx 35/65 Poz tail w/200 sx C	
CIRC:	yes	
TOC AT:	surface	
TOC BY:	Circ.	

## \*\*\*\*\*GEOLOGY\*\*\*\*\*

TOPS OF ALL ZONES  
PRODUCTIVE OF HYDRO-  
CARBONS:TBG:  
JTS:  
SN:  
TAC:  
ROD SIZE:TA-09/12/2019  
TOC @ 12495'  
35' DUMP BAIL CLASS C CMNT  
CIBP SET @ 12530  
CUT TBNG @ 12585  
PKR @ 12604'PKR:  
TYPE:OH ID:  
COTD:  
PBTD: 12815  
TD: 13400

HOLE SIZE:	
INT. CSG & SIZE:	9-5/8" 40# S&P & J-55
SET @:	5015'
SXS CMT:	Lead=350 sx 35/65 Poz tail=200 sx C
SXS CMT:	Lead=1050 sx 35/65 Poz tail=100 sx C
CIRC:	Circ off DV tool 2nd to surface
TOC AT:	Surface
TOC BY:	circ.

## SQUEEZE JOBS:

12689-12,697  
12,760-12,764  
CIBP @ 12,850 w/35' cmt on top  
12,864-12,884  
12,966-12,972  
12,997-13,000  
  
13,106-10'  
13170-74'  
13,180-84'  
13,214-24'

LINER:

HOLE SIZE:	0
PROD. CSG & SIZE	7" 26&29# P-110 & N-80
SET @:	11,700'
SXS CMT:	lead=735 sx 35/65 Poz tail=400 sx
CIRC:	no
TOC AT:	4100'
TOC BY:	TS

HOLE SIZE:  
PROD. CSG & SIZE 4-1/2" 15.1# P-110

Top @:	11,409'
Btm @:	13398'
SXS CMT:	300 sx H
CIRC:	Tested liner top to 1000#

OPEN HOLE:

**PROPOSED**

LEASE: Salt Draw 10 State	WELL: 1	FIELD: Salt Draw	API: 30-015-33939
LOC: 840 FN & 660 FE	SEC: 10	BLK: T25S R28E	Reservoir: Morrow
SVY: 0	GL: 2961	CTY/ST: Eddy Co., NM	SPUD: 2/27/2005
CURRENT STATUS: Producing	KB: 2980	DF: 2979	TD DATE: 4/27/2005
			COMP. DATE: 1/10/2006


FRESH WATER  
DEPTH:  
T/SALT ~ 910'  
B/SALT ~ 2,380'  
T/DLWR. ~ 2,574'  
T/BNSG. ~ 4,430'  
T/WLCP. ~ 7,500'  
T/DENN. ~ 11,332'  
T/ATOKA. ~ 11,840'  
T/MRPW. ~ 12,530'

TBG:  
JTS:  
SN:  
TAC:  
ROD SIZE:

PKR:  
TYPE:

OH ID:  
COTD:  
PBTD: 12815  
TD: 13400

OPEN HOLE:

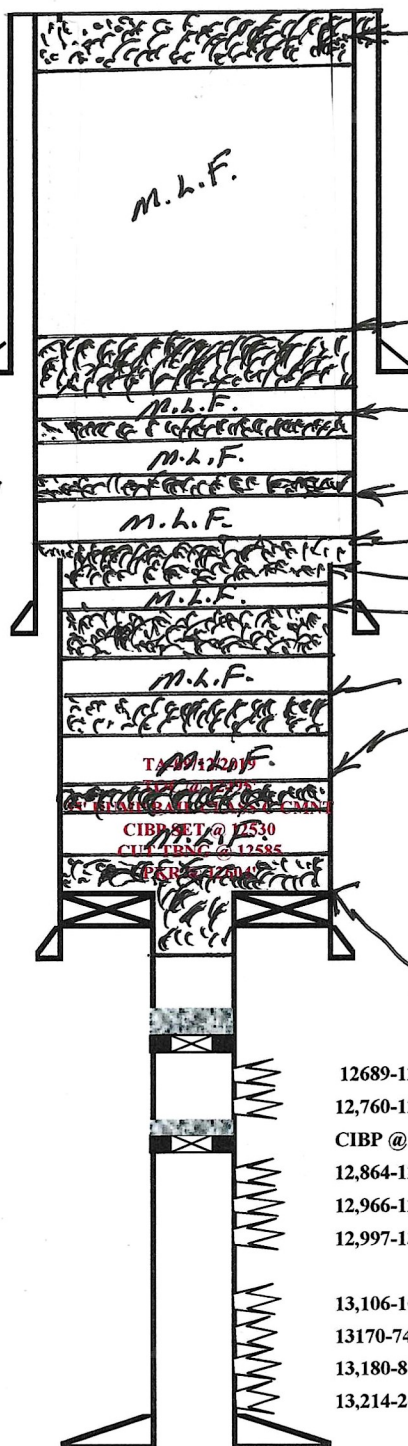

HOLE SIZE: 0 17-1/2  
SURF CSG & SIZE: 13-3/8" 54.5# K-55  
SET @: 558' 575'  
SXS CMT: 220 sx 35/65 Poz tail w/200 sx C  
CIRC: yes  
TOC AT: surface  
TOC BY: Circ.

PERF. X SQZ. SXS. @ 625'-525' - TAG

Pump 45 SXS. @ 960'-860' - TAG

Pump 110 SXS. @ 2,624'-2,330' - TAG  
Pump 50 SXS. @ 3,560'-3,430' - TAG  
CUT X PULL 7" CSG. @ +1-3,500'  
Pump 45 SXS. @ 5,210'-5,060' - TAG  
Pump 45 SXS. @ 6,510'-6,350'  
Pump 50 SXS. @ 9,595'-9,310'

HOLE SIZE: 12-1/4"  
INT. CSG & SIZE: 9-5/8" 40# S&P & J-55  
SET @: 5015' 5,135'  
SXS CMT: Lead=350 sx 35/65 Poz tail=200 sx C  
SXS CMT: Lead=1050 sx 35/65 Poz tail=100 sx C  
CIRC: Circ off DV tool 2nd to surface  
TOC AT: Surface  
TOC BY: circ.

Pump 100 SXS. @ 11,890'-11,282'

12689-12,697  
12,760-12,764  
CIBP @ 12,850 w/35' cmt on top  
12,864-12,884  
12,966-12,972  
12,997-13,000  
13,106-10'  
13170-74'  
13,180-84'  
13,214-24'

LINER:

HOLE SIZE: 0 8 3/4"  
PROD. CSG & SIZE: 7" 26&29# P-110 & N-80  
SET @: 11,700'  
SXS CMT: lead=735 sx 35/65 Poz tail=400 sx  
CIRC: no  
TOC AT: 4100' ✓  
TOC BY: TS

HOLE SIZE: 6-1/4"  
PROD. CSG & SIZE: 4-1/2" 15.1# P-110  
Top @: 11,409'  
Btm @: 13398'  
SXS CMT: 300 sx H  
CIRC: Tested liner top to 1000#

DATE 04/24/23

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS

Action 211071

CONDITIONS

Operator: Earthstone Operating, LLC 1400 Woodloch Forest; Ste 300 The Woodlands, TX 77380	OGRID: 331165
	Action Number: 211071
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	5/4/2023