Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB No. 1004-0137 Expires: July 31, 2010

5. Lease Serial No. NMNM-17037

			NMNM-17037	
SUNDRY N		6. If Indian, Allottee	6. If Indian, Allottee or Tribe Name	
	orm for proposals to drill or to Jse Form 3160-3 (APD) for suc			
SUBMIT	page 2.	7. If Unit of CA/Agre NMNM-72428	eement, Name and/or No.	
1. Type of Well				
Oil Well Gas W		8. Well Name and No. Grynberg 17 Federal Com #001		
2. Name of Operator Jack J. Grynberg		9. API Well No. 30-005-61302		
3a. Address	3b. Phone No.	(include area code)	10. Field and Pool or	Exploratory Area
3773 Cherry Creek N. Dr., Denver, CO 80202		Pecos Slope, Abo		
4. Location of Well (Footage, Sec., T., F Sec 17 T6S R25E		11. Country or Parish, State Chaves, New Mexico		
12. CHEC	K THE APPROPRIATE BOX(ES) TO INDI	ICATE NATURE OF NOT	ICE, REPORT OR OTH	HER DATA
TYPE OF SUBMISSION TYPE OF ACTION			CTION	
Notice of Intent	Acidize Deepe	en Pro	oduction (Start/Resume)	Water Shut-Off
Twitee of ment	Alter Casing Fractu	re Treat Re	clamation	Well Integrity
✓ Subsequent Report	Casing Repair New C	Construction Re	complete	Other
	Change Plans Plug a	and Abandon	mporarily Abandon	
Final Abandonment Notice	Convert to Injection Plug I	Back Wa	ater Disposal	
determined that the site is ready for Subsequent P&A Report: Pulled and LD 113 joints of the exis Set CIBP at 3,590'. (3-23-2023) Loaded 4-1/2" casing with gel. Fail Pressure tested below 913' to 610 Spotted 25 sack balanced plug on Perforated at 2,500'. Attempted to Spotted 25 sack balanced plug at 2 Perforated at 1,365'. Achieved inject Squeezed 47 sack plug through perforated at 948'. Achieved inject Squeezed 64 sack plug through perforated at 60'. Circulated 60 sacks down 4-1/2" ar	sting 2-3/8" production tubing. (3-22-202: led pressure test. Found HIC #1 b/w 47: psi for 30 min. Good test on CIBP. (3-23: top of CIBP. Tagged TOC at 3,199'. (3-29: establish injection. Pressured up to 1,26; 2,550'. Tagged TOC at 2,275'. (3/27/202: estion. rfs. Tagged TOC at 1,170'. (3/28/2023) ion. rfs. Tagged TOC at 768'. (3/28/2023) and up 10-3/4" until good cement returns a elow ground. Marker joint welding on to at 4,234' to surface.	3) 2' and 504'. (3-23-2023) 3-2023) 24-2023) 00 psi. Held for 5 min. U 3)	Jnsuccessful. propriate well informa	tion. (3/28/2023)
14. I hereby certify that the foregoing is tr	ue and correct. Name (Printed/Typed)			
Adam Pfeifer		Title Consultant Production Engineer		
Signature Adam P	lufn	Date 04/11/2023		
	THIS SPACE FOR FEDE	RAL OR STATE O	FFICE USE	
Approved by		Title Petroleum En	gineer	Date 04/11/2023
	. Approval of this notice does not warrant or co tle to those rights in the subject lease which wo hereon			

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13 - Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment.

NOTICES

The Privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and grantingapproval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)


Grynberg 17 Federal Com #001 API # 30-005-61302

Plugging Summary:

- Pulled and LD 113 joints of the existing 2-3/8" production tubing. (3-22-2023)
- Set CIBP at 3,590'. (3-23-2023)
- Loaded 4-1/2" casing with gel. Failed pressure test. Found HIC #1 b/w 472' and 504'. (3-23-2023)
- Pressure tested below 913' to 610 psi for 30 min. Good test on CIBP. (3-23-2023)
- Spotted 25 sack balanced plug on top of CIBP. Tagged TOC at 3,199'. (3-24-2023)
- Perforated at 2,500'. Attempted to establish injection. Pressured up to 1,200 psi. Held for 5 min. Unsuccessful.
- Spotted 25 sack balanced plug at 2,550'. Tagged TOC at 2,275'. (3/27/2023)
- Perforated at 1,365'. Achieved injection.
- Squeezed 47 sack plug through perfs. Tagged TOC at 1,170'. (3/28/2023)
- Perforated at 948'. Achieved injection.
- Squeezed 64 sack plug through perfs. Tagged TOC at 768'. (3/28/2023)
- Perforated at 60'.
- Circulated 60 sacks down 4-1/2" and up 10-3/4" until good cement returns at surface. (3/28/2023)
- Well plugged. Wellhead cut off 4' below ground. Marker joint welding on to 4' above ground with appropriate well information. (3/28/2023)

Casing Left in the Well:

- 4-1/2" 10.5# production casing from 4,234' to surface.
- 10-3/4" 32.75# surface casing from 898' to surface.

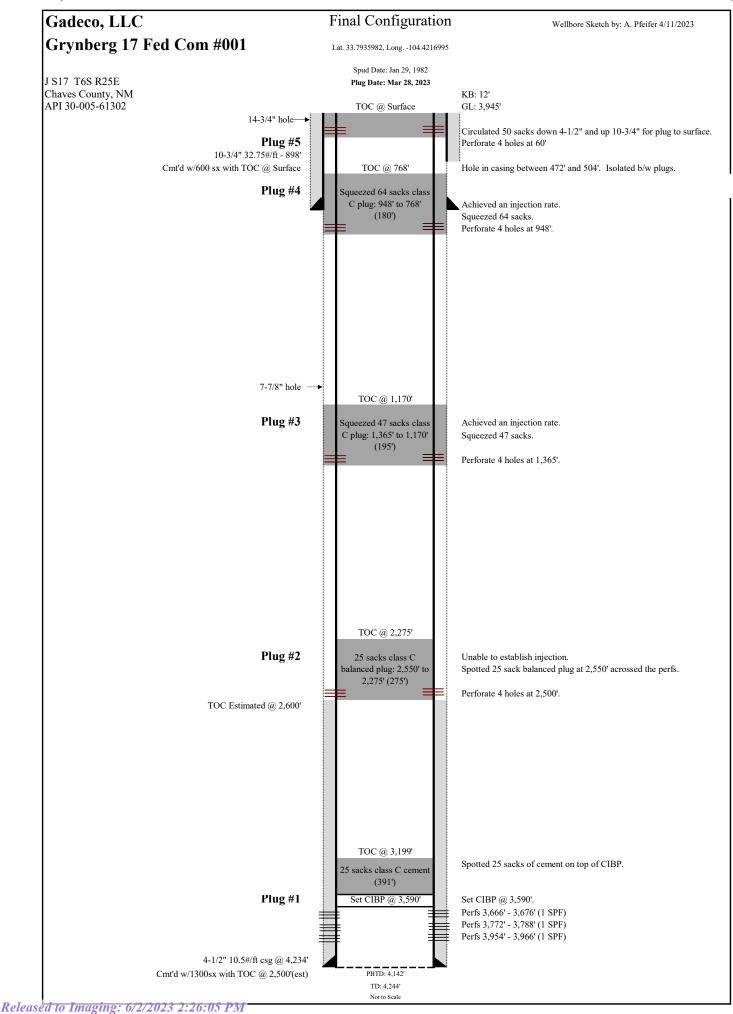

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 217534

CONDITIONS

Operator:	OGRID:
JACK J. GRYNBERG	11492
C/O 3773 Cherry Creek N. Drive	Action Number:
Denver, CO 80202	217534
	Action Type:
	[C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
john.harriso	Accepted for record - NMOCD JRH 6/2/23. Well P&A'd 3/28/23	6/2/2023