

Well Name: YOUNG DEEP UNIT	Well Location: T18S / R32E / SEC 10 / SENW /	County or Parish/State: LEA / NM
Well Number: 26	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM14789A	Unit or CA Name: YOUNG DEEP UNIT - BONE SP	Unit or CA Number: NMNM71067B
US Well Number: 3002530952	Well Status: Producing Oil Well	Operator: MATADOR PRODUCTION COMPANY

Notice of Intent

Sundry ID: 2741691

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 07/19/2023

Time Sundry Submitted: 08:14

Date proposed operation will begin: 08/05/2023

**Procedure Description:** Matador is requesting to plug and abandon the Young Deep Unit #026, per the required BLM COAs, following the procedure below: Notify BLM 24 hrs before MIRU. Safety mtg, MIRU, check pressures, ND wellhead, NU & test BOPs, POOH w/ rods & tbq. RIH & set CIBP at 8,250'; Pressure test csg to 500 psi for 30 minutes; Circulate and displace hole w/ MLF. Spot 25 sks Class H cmt on top of CIBP; WOC & Tag (Isolate perforations). Spot 25 sks Class C cmt at 6304' to 6141'; WOC & Tag (Bone Spring). Spot a 25 sk balanced plug of Class C cmt at 5,375' to 5218' (Delaware). Spot cement 25 sks Class C cmt at 4472' to 4327'; WOC & Tag (Capitan Reef). Spot cement 42 sks Class C cmt at 2848' to 2425'; WOC & Tag (Shoe, Yates, Base of Salt). Perf @ 1455' and squeeze to 1340' Sqz CI C cmt to 1340' on all strings. (Top of salt) WOC and Tag. Perf @ 395' and squeeze to surface Sqz CI C cmt to surface on all strings. (Shoe, Surface Plug) WOC and Tag.

Cut off wellhead and ensure cmt to surface on all csg strings. Install dry hole marker per BLM/NMOCD specifications. \*Current and proposed wellbore diagrams attached \*\*Mud laden fluid (MLF) mixed at 25sx/100 bbls water will be spotted between each plug.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

- Young\_Deep\_Unit\_\_026\_Planned\_P\_A\_WBD\_20230719081120.pdf
- Young\_Deep\_Unit\_\_026\_Current\_WBD\_20230719081108.pdf

Received by OCD: 8/14/2023 7:53:13 AM

Page 2 of 16

Well Name: YOUNG DEEP UNIT	Well Location: T18S / R32E / SEC 10 / SENW /	County or Parish/State: LEA / NM
Well Number: 26	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM14789A	Unit or CA Name: YOUNG DEEP UNIT - BONE SP	Unit or CA Number: NMNM71067B
US Well Number: 3002530952	Well Status: Producing Oil Well	Operator: MATADOR PRODUCTION COMPANY

Operator


I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: BRETT JENNINGS	Signed on: JUL 19, 2023 08:13 AM
Name: MATADOR PRODUCTION COMPANY	
Title: Regulatory Analyst	
Street Address: 5400 LBJ FREEWAY, STE 1500	
City: DALLAS	State: TX
Phone: (972) 629-2160	
Email address: BRETT.JENNINGS@MATADORRESOURCES.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

Young Deep Unit #026  
1650' FNL & 1650' FWL Sec. 10-T18S-R32E  
Lea County, NM  
API: 30-025-30952  
Planned P&A WELLBORE SCHEMATIC  
Spudded: 7/25/90

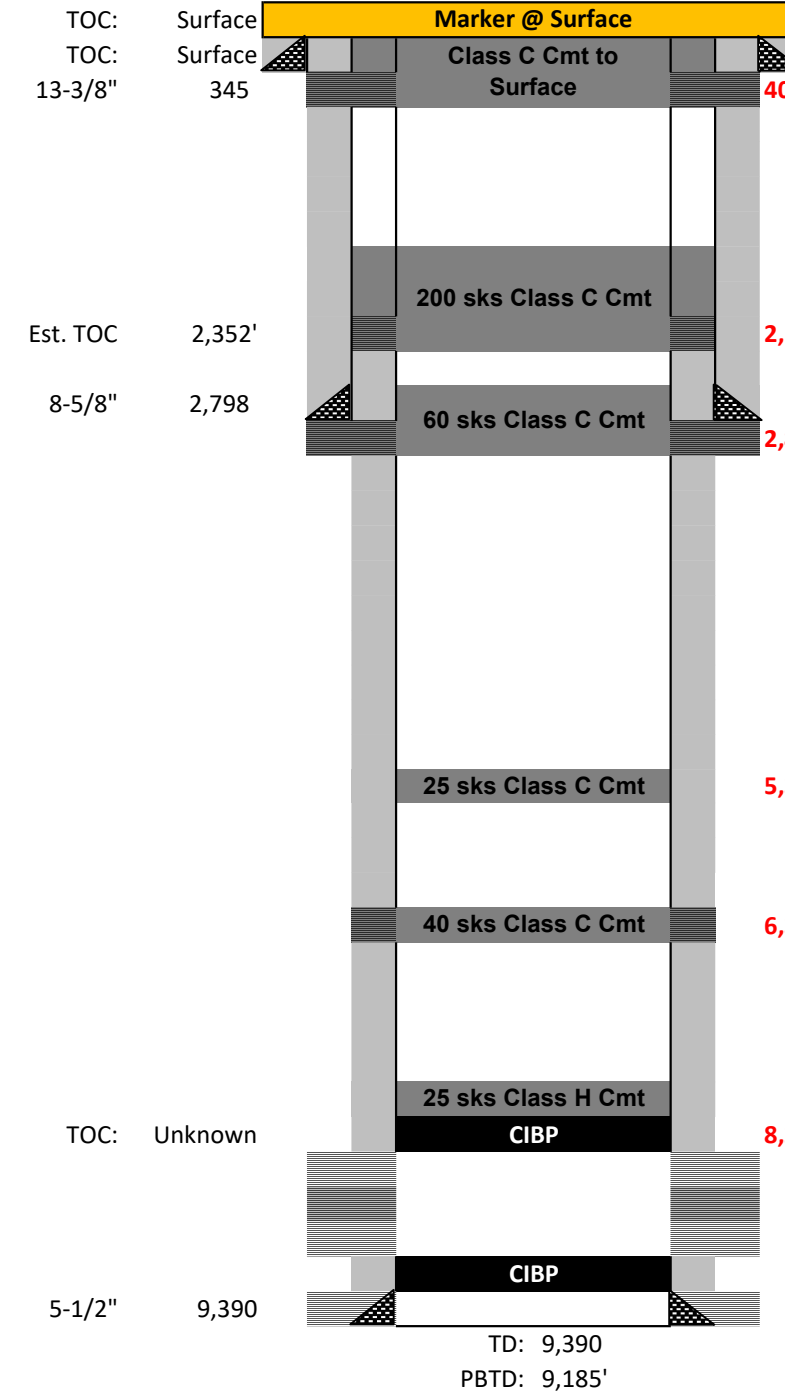

400': Perf & Sqz Class C cmt to surface on all strings (Est. 375 sks)

2,175': Perf & Sqz 200 sks Class C cmt (Req. 1,450'/Est. 1,403') (Salt Section); WOC & Tag

2,850': Perf & Sqz 60 sks Class C cmt (Req. 2,650') (Intermediate Shoe & Yates); WOC & Tag  
(Spot a 55 sk Class C cmt Balanced Plug @ 2,900' if no injection is established (Req. 2,300'/Est. 2,263') (Intermediate Shoe, Yates, Est. TOC))

5,375': Spot a 25 sk Class C cmt balanced plug (Est. 5,122' / Req. 5,272') (Delaware)  
(If circulation established at Bone Spring, discuss Perf & Squeeze)

6,305': Perf & Sqz 40 sks Class C cmt (Est. 6,155' / Req. 6,204') (Bone Springs); WOC & tag

8,250': Set CIBP @ Spot 25 sks Class H cmt of top of CIBP; Load Casing & Pressure test to 500 psi for 30 minutes

9/12/1990 Bone Spring perfs (8,316')  
9/7/1990 Abrasa jet 2 cuts (8,486') Sqz'd  
9/27/1990 Bone Spring perfs (8,935'-8,994')  
8/30/1990 CIBP (9,185')  
8/25/1990 Abrasa jet 2 cuts (9,235')

	Casing Information		Type	Weight (lb/ft)	Joints	Depth Set
	Hole Size	Casing Size				
Surface	17-1/2"	13-3/8"	J-55	54.5#	8	345
Intermediate	12-1/4"	8-5/8"	J-55	32#	67	2,798
Production	7-7/8"	5-1/2"	J-55, N-80	17#	219	9,390
DV Tool						

	Cementing Record			Geologic Markers	
	Type	TOC	Date Run		
Surface	375 sks CI C	Surface	7/22/1990	Rustler	1,220
Intermediate	1400 sks x 200 sks CI C	Surface	7/28/1990	Top Salt	1,500
Production	350 sks x 1100 sks CI H	2352	8/11/1990	Bottom Salt	2,120
				Yates	2,700
				7 Rivers	3,148
				Bowers	3,617
				Queen	3,884
				Penrose	4,129
				Grayburg	4,420
				Delaware	5,322
				Bone Spring	6,254
				Shingle	8,300

Approval Subject to

General Requirements and

Special Stipulations

Attached

See Procedure for Corrections

Perforation Information		
Date	Formation	Depth
9/12/1990	Bone Spring perfs	(8,316')
9/27/1990	Bone Spring perfs	(8,935'-8,994')
Plugging Information		
Date	Type	Depth
8/30/1990	CIBP	(9,185')

## Young Deep Unit #026


**1650' FNL & 1650' FWL Sec. 10-T18S-R32E**

## Lea County, NM

**API: 30-025-30952**

## CURRENT WELLBORE SCHEMATIC

**Spudded: 7/25/90**

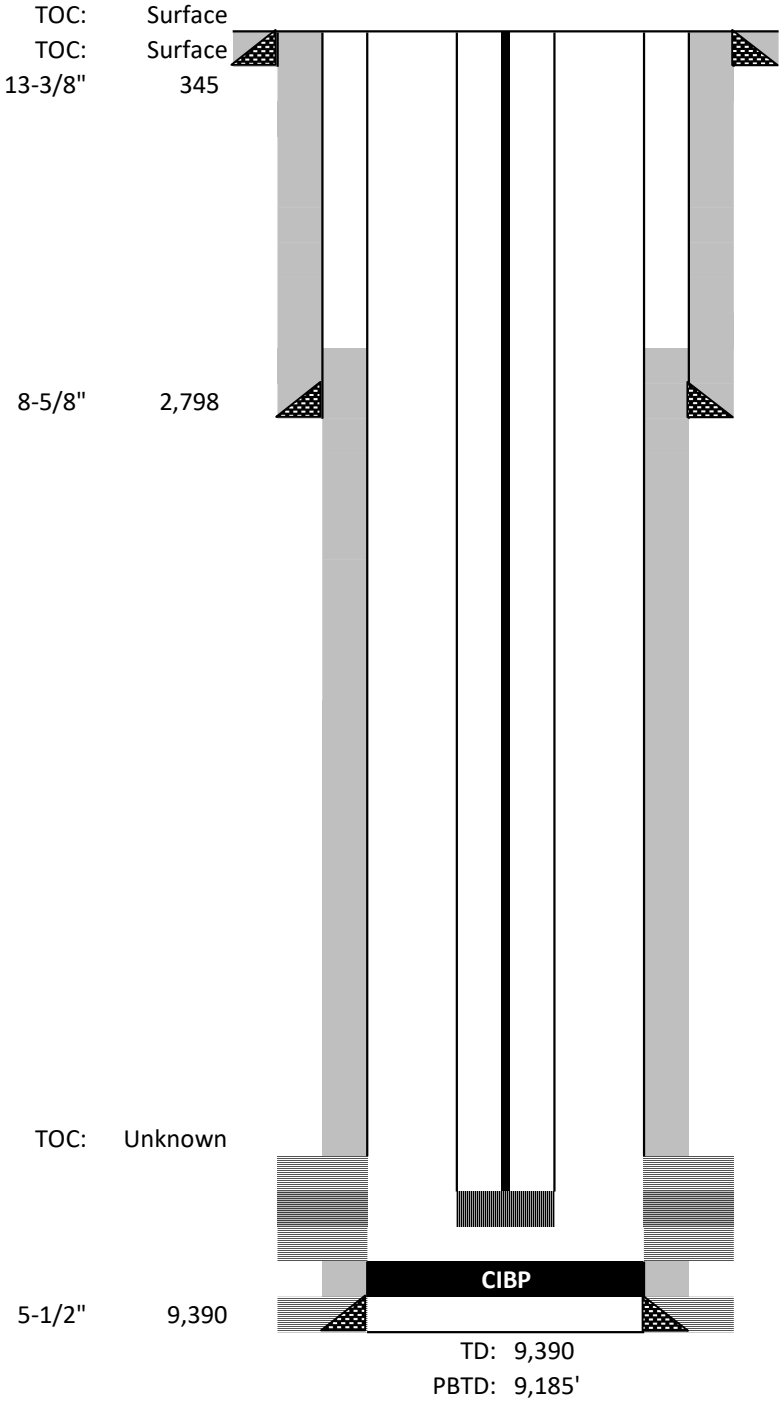

9/12/1990 Bone Spring perfs (8,316')  
 9/7/1990 Abrasa jet 2 cuts (8,486') Sqz'd  
 9/27/1990 Bone Spring perfs (8,935'-8,994')  
 8/30/1990 CIBP (9,185')  
 8/25/1990 Abrasa jet 2 cuts (9,235')

	Casing Information					
	Hole Size	Casing Size	Type	Weight (lb/ft)	Joints	Depth Set
Surface	17-1/2"	13-3/8"	J-55	54.5#	8	345
Intermediate	12-1/4"	8-5/8"	J-55	32#	67	2,798
Production	7-7/8"	5-1/2"	J-55, N-80	17#	219	9,390
DV Tool						

	Cementing Record		
	Type	TOC	Date Run
Surface	375 sks Cl C	Surface	7/22/1990
Intermediate	1400 sks x 200 sks Cl C	Surface	7/28/1990
Production	350 sks x 1100 sks Cl H	2352	8/11/1990

	Tubing Information	
Item	Notes	Depth
Tubing	(247) 2-3/8" J-55 tubing	
Tubing Anchor	TAC	8,078'
Tubing	(28) 2-3/8" J-55 tubing	
Seating Nipple	SN	8,993'
Sand Screen	2-3/8" X 25' SND SCRIN	
Bull Plug	2-3/8" BP	9,017'
Plug Back Total Depth	PBTD	9,185'

Geologic Markers	
Rustler	1,220
Top Salt	1,500
Bottom Salt	2,120
Yates	2,700
7 Rivers	3,148
Bowers	3,617
Queen	3,884
Penrose	4,129
Grayburg	4,420
Delaware	5,322
Bone Spring	6,254
Shingle	8,300

	Rod String Information
Item	Notes
Pony Rod	4' Pony Rod
Rod	(117) 7/8" Rods
Rod	(219) 3/4" Rods
Rod	(21) 7/8" Rods
Pump	2" x 1.25" x 24' W/BOC

	Perforation Information	
Date	Formation	Depth
9/12/1990	Bone Spring perms	(8,316')
9/27/1990	Bone Spring perms	(8,935'-8,994')

	Plugging Information	
Date	Type	Depth
8/30/1990	CIBP	(9,185')

**BUREAU OF LAND MANAGEMENT  
Carlsbad Field Office  
620 East Greene Street  
Carlsbad, New Mexico 88220  
575-234-5972**

**Permanent Abandonment of Federal Wells  
Conditions of Approval (LPC Habitat)**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

**If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.**

**The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.**

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off.** Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

**Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:**

From March 1<sup>st</sup> through June 15<sup>th</sup> annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted





# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Carlsbad Field Office  
620 E. Greene St.  
Carlsbad, New Mexico 88220-6292  
www.blm.gov/nm



In Reply Refer To: 1310

### Reclamation Objectives and Procedures

**Reclamation Objective:** Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo “interim” reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo “final” reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines **(Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure)**. Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. **This will apply to well pads, facilities, and access roads.** Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you

have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos  
Supervisory Petroleum Engineering Tech/Environmental Protection Specialist  
575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias  
Environmental Protection Specialist  
575-234-6230

Crisha Morgan  
Environmental Protection Specialist  
575-234-5987

Jose Martinez-Colon  
Environmental Protection Specialist  
575-234-5951

Mark Mattozzi  
Environmental Protection Specialist  
575-234-5713

Robert Duenas  
Environmental Protection Specialist  
575-234-2229



Sundry ID		2741691					
Plug Type	Top	Bottom	Length	Tag	Sacks	Cement Class	Notes
Surface Plug	0.00	100.00	100.00	Tag/Verify			
Shoe Plug	291.55	395.00	103.45	Tag/Verify	93.00	C	Perf and squeeze from 395' to surface. (In 40 sxs/Out 53 sxs) Verify at surface.
Top of Salt @ 1405	1340.95	1455.00	114.05	Tag/Verify	28.00	C	Perf and squeeze from 1455' to 1340'. (In 12 sxs/Out 16 sxs) WOC and Tag.
Base of Salt @ 2500	2425.00	2550.00	125.00	Tag/Verify			
Yates @ 2700	2623.00	2750.00	127.00	If solid			
Shoe Plug	2720.02	2848.00	127.98	Tag/Verify	42.00	C	Spot cement from 2848' to 2425'. WOC and Tag.
Capitan Reef @ 4422	4327.78	4472.00	144.22	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations	25.00	C	Spot cement from 4472' to 4327'.
Delaware @ 5322	5218.78	5372.00	153.22	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations	25.00	C	Spot cement form 5372' to 5218'.

				If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations			
<b>Bonesprings @ 6254</b>	6141.46	6304.00	162.54	ns	25.00	C	Spot cement from 6304' to 6141'.
				If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations			
<b>CIBP Plug</b>	8215.00	8250.00	35.00	ns	25.00	H	Set CIBP at 8250'. Leak Test CIBP. 25 sxs on top.
<b>Perforations Plug (If No CIBP)</b>	8266.00	9044.00	778.00	Tag/Verify			
<b>Shoe Plug</b>	9246.10	9440.00	193.90	Tag/Verify			

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole.

Class H >7500'

Class C <7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater

R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft<sup>3</sup>/sx

Class H: 1.06 ft<sup>3</sup>/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

Cave Karst/Potash Cement	Low		
Shoe @	345.00		
Shoe @	2798.00		
Shoe @	9390.00	TOC @	2352.00
Perforatons Top @	8316.00	Perforations	8994.00
		CIBP @	8250.00

Matador is requesting to plug and abandon the Young Deep Unit #026, per the required BLM COAs, following the procedure below:

Notify BLM 24 hrs before MIRU.

Safety mtg, MIRU, check pressures, ND wellhead, NU & test BOPs, POOH w/ rods & tbg.

RIH & set CIBP at 8,250'; Pressure test csg to 500 psi for 30 minutes; Circulate and displace hole w/ MLF.

Spot 25 sks Class H cmt on top of CIBP; WOC & Tag (Isolate perforations).

Perf & Sqz 40 sks Class C cmt at 6,305; WOC & Tag (Bone Spring).

Spot a 25 sk balanced plug of Class C cmt at 5,375' (Delaware).

Perf & Sqz 60 sks Class C cmt at 2,850'; WOC & Tag (Intermediate shoe & Yates).

Perf & Sqz 200 sks Class C cmt at 2,175'; WOC & Tag (Salt Section).

Perf @ 400' & Sqz Cl C cmt to surface on all strings. (Surface shoe)


Cut off wellhead and ensure cmt to surface on all csg strings.

Install dry hole marker per BLM/NMOCD specifications.

\*Current and proposed wellbore diagrams attached

\*\*Mud laden fluid (MLF) mixed at 25sx/100 bbls water will be spotted between each plug.

**Young Deep Unit #026**  
**1650' FNL & 1650' FWL Sec. 10-T18S-R32E**  
**Lea County, NM**  
**API: 30-025-30952**  
**CURRENT WELLBORE SCHEMATIC**  
**Spudded: 7/25/90**

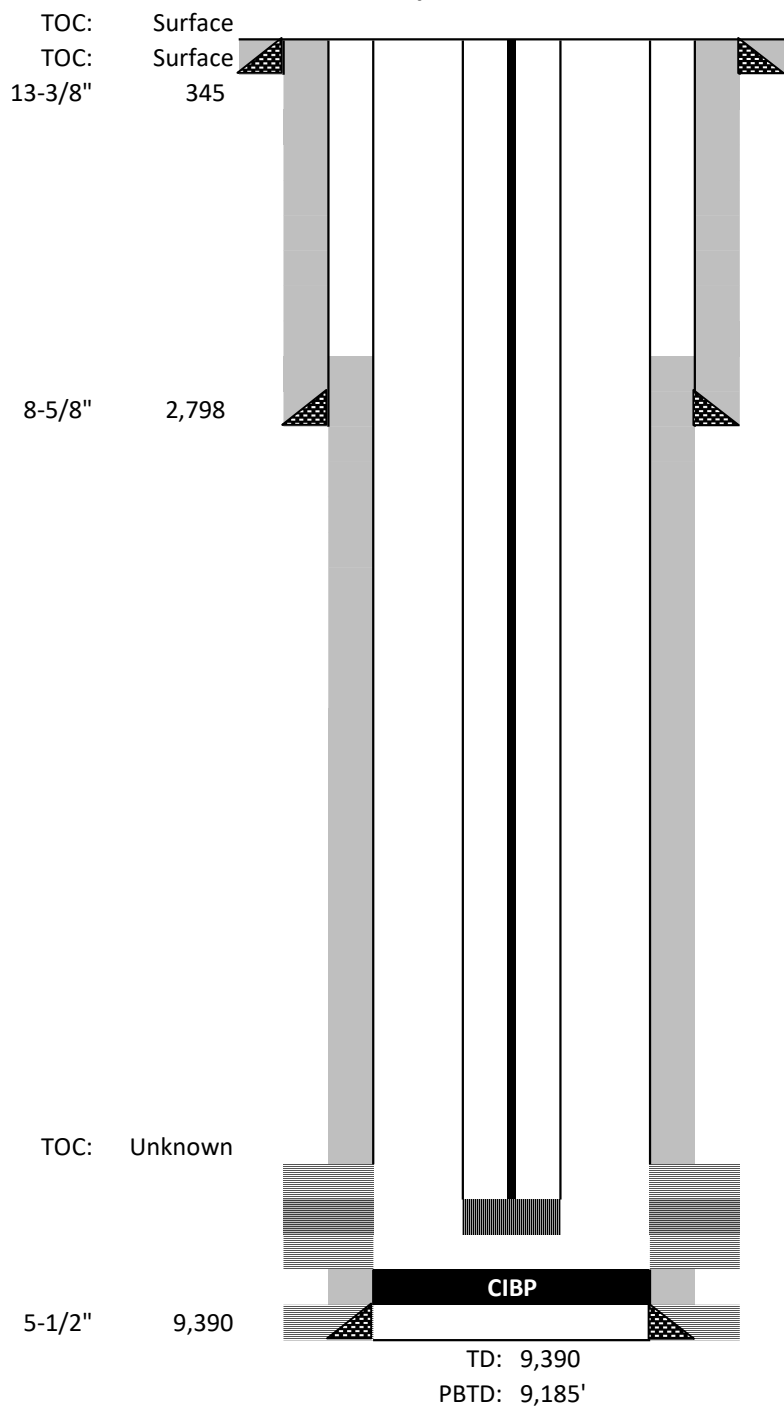

9/12/1990 Bone Spring perfs (8,316')  
 9/7/1990 Abrasa jet 2 cuts (8,486') Sqz'd  
 9/27/1990 Bone Spring perfs (8,935'-8,994')  
 8/30/1990 CIBP (9,185')  
 8/25/1990 Abrasa jet 2 cuts (9,235')

	Casing Information		Type	Weight (lb/ft)	Joints	Depth Set
	Hole Size	Casing Size				
Surface	17-1/2"	13-3/8"	J-55	54.5#	8	345
Intermediate	12-1/4"	8-5/8"	J-55	32#	67	2,798
Production	7-7/8"	5-1/2"	J-55, N-80	17#	219	9,390
DV Tool						

	Cementing Record		
	Type	TOC	Date Run
Surface	375 sks CI C	Surface	7/22/1990
Intermediate	1400 sks x 200 sks CI C	Surface	7/28/1990
Production	350 sks x 1100 sks CI H	2352	8/11/1990


	Tubing Information	
Item	Notes	Depth
Tubing	(247) 2-3/8" J-55 tubing	
Tubing Anchor	TAC	8,078'
Tubing	(28) 2-3/8" J-55 tubing	
Seating Nipple	SN	8,993'
Sand Screen	2-3/8" X 25' SND SCRIN	
Bull Plug	2-3/8" BP	9,017'
Plug Back Total Depth	PBTD	9,185'

Geologic Markers	
Rustler	1,220
Top Salt	1,500
Bottom Salt	2,120
Yates	2,700
7 Rivers	3,148
Bowers	3,617
Queen	3,884
Penrose	4,129
Grayburg	4,420
Delaware	5,322
Bone Spring	6,254
Shingle	8,300

	Rod String Information
Item	Notes
Pony Rod	4' Pony Rod
Rod	(117) 7/8" Rods
Rod	(219) 3/4" Rods
Rod	(21) 7/8" Rods
Pump	2" x 1.25" x 24' W/BOC

	Perforation Information	
Date	Formation	Depth
9/12/1990	Bone Spring perms	(8,316')
9/27/1990	Bone Spring perms	(8,935'-8,994')

	Plugging Information	
Date	Type	Depth
8/30/1990	CIBP	(9,185')

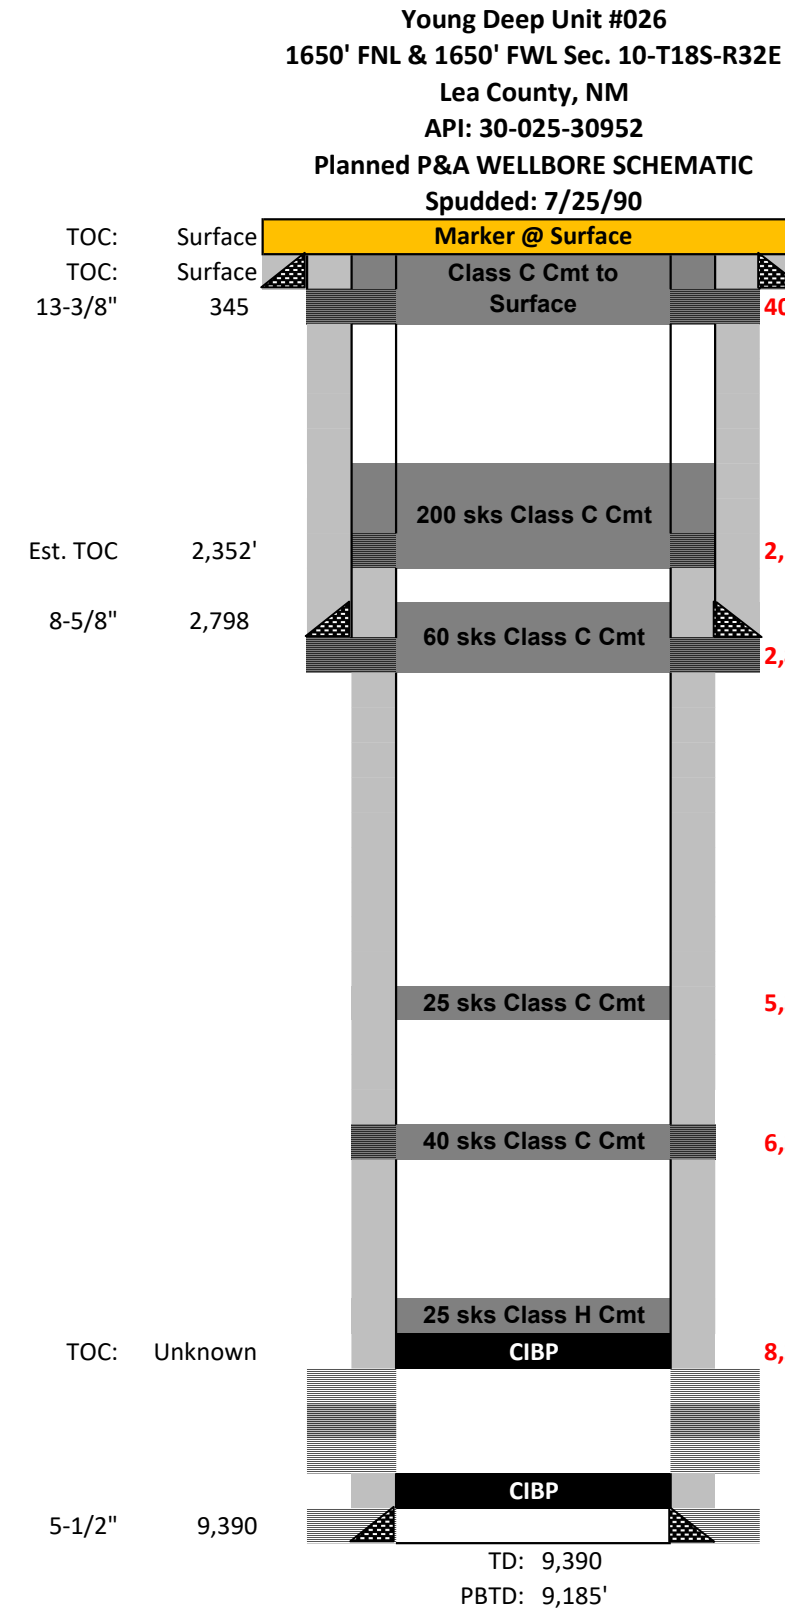

	Casing Information		Type	Weight (lb/ft)	Joints	Depth Set
	Hole Size	Casing Size				
Surface	17-1/2"	13-3/8"	J-55	54.5#	8	345
Intermediate	12-1/4"	8-5/8"	J-55	32#	67	2,798
Production	7-7/8"	5-1/2"	J-55, N-80	17#	219	9,390
DV Tool						

	Cementing Record	Geologic Markers			
	Type	TOC	Date Run		
Surface	375 sks CI C	Surface	7/22/1990	Rustler	1,220
Intermediate	1400 sks x 200 sks CI C	Surface	7/28/1990	Top Salt	1,500
Production	350 sks x 1100 sks CI H	2352	8/11/1990	Bottom Salt	2,120
				Yates	2,700
				7 Rivers	3,148
				Bowers	3,617
				Queen	3,884
				Penrose	4,129
				Grayburg	4,420
				Delaware	5,322
				Bone Spring	6,254
				Shingle	8,300

Perforation Information		
Date	Formation	Depth
9/12/1990	Bone Spring perfs	(8,316')
9/27/1990	Bone Spring perfs	(8,935'-8,994')
Plugging Information		
Date	Type	Depth
8/30/1990	CIBP	(9,185')

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

COMMENTS  
  
Action 251560

COMMENTS

Operator: MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240	OGRID: 228937
	Action Number: 251560
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

COMMENTS

Created By	Comment	Comment Date
plmartinez	DATA ENTRY PM.	8/14/2023



**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS  
  
Action 251560

CONDITIONS

Operator: MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240	OGRID: 228937
	Action Number: 251560
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kfortner	Like approval from BLM	8/14/2023