

Well Name: POKER LAKE	Well Location: T24S / R30E / SEC 21 / SWNE / 32.2050281 / -103.8839389	County or Parish/State: EDDY / NM
Well Number: 41	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC068431	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001520933	Well Status: Producing Oil Well	Operator: XTO PERMIAN OPERATING LLC

See OCD Conditions of Approval
gc 3/27/24

Notice of Intent

Sundry ID: 2779207

Type of Submission: Notice of Intent	Type of Action: Plug and Abandonment
Date Sundry Submitted: 03/12/2024	Time Sundry Submitted: 07:10
Date proposed operation will begin: 04/12/2024	

Procedure Description: XTO Permian Operating LLC respectfully requests approval for plug and abandonment of the above mentioned well. Please see the attached procedure with current and proposed WBD's for your review.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Poker_Lake_Unit_41_PA_Procedure_WBDs_Current_and_Proposed_20240312070924.pdf

Received by OCD: 3/25/2024 8:27:46 AM

Page 2 of 22

Well Name: POKER LAKE	Well Location: T24S / R30E / SEC 21 / SWNE / 32.2050281 / -103.8839389	County or Parish/State: EDDY / NM
Well Number: 41	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC068431	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001520933	Well Status: Producing Oil Well	Operator: XTO PERMIAN OPERATING LLC

Conditions of Approval

Specialist Review
Poker_Lake_41_Sundry_ID_2779207_P_A_20240323102459.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHERRY MORROW	Signed on: MAR 12, 2024 07:10 AM
Name: XTO PERMIAN OPERATING LLC	
Title: Regulatory Analyst	
Street Address: 6401 HOLIDAY HILL ROAD BLDG 5	
City: MIDLAND	State: TX
Phone: (432) 218-3671	
Email address: SHERRY.MORROW@EXXONMOBIL.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: LONG VO	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5759885402	BLM POC Email Address: LVO@BLM.GOV
Disposition: Approved	Disposition Date: 03/23/2024
Signature: Long Vo	

PLUG AND ABANDON WELLBORE
POKER LAKE UNIT 041
Class II

MASIP	MAOP	MAWP	Surface Csg Yield
1,000 psi	1,000 psi	3,000 psi	1530 PSI

SUMMARY: Plug and abandon wellbore according to BLM regulations.


- 1) MIRU plugging company. Set open top steel pit for plugging.
- 2) POOH LD rods and pump.
- 3) ND WH and NU 3K manual BOP. Function test BOP.
- 4) Unset TAC at 7,272.1'. POOH tbq.
- 5) MIRU WLU, tag to verify the top of CIBP at 7,578.5'.
- 6) RIH GR to 7450'; RIH set CIBP at 7,420', pressure test to 500 PSI for 30 minutes; spot 40 SKS **Class H** cement from 7,420' to 7,320'. WOC and tag to verify TOC. (T/ Perf)
- 7) Spot 80 SKS **Class H** cement from 6,420' to 6,220'. (T/Brushy Canyon)
- 8) Spot 65 SKS Class C cement from 4,800' to 4,600'. (T/ Cherry Canyon)
- 9) Spot 130 SKS Class C cement from 3,900' to 3,500'. WOC and tag to verify TOC. (Intermediate Casing Shoe 1, T/Delaware, DV Tool)
- 10) Spot Class C cement from 600' to surface. (~183 SKS) (Surface Casing Shoe)
- 11) ND BOP and cut off wellhead 5' below surface. RDMO PU, transport trucks, and pump truck.
- 12) Set P&A marker.
- 13) Pull fluid from steel tank and haul to disposal. Release steel tank.



Downhole Well Profile - with Schematic

Well Name: Poker Lake Unit 041

API/UWI 3001520933	SAP Cost Center ID 1135591001	Permit Number	State/Province New Mexico	County Eddy			
Surface Location T24S-R30E-S21			Spud Date 9/30/1973 00:00	Original KB Elevation (ft) 3,391.25	Ground Elevation (ft) 3,360.00	KB-Ground Distance (ft) 31.25	Surface Casing Flange Elevation (ft)

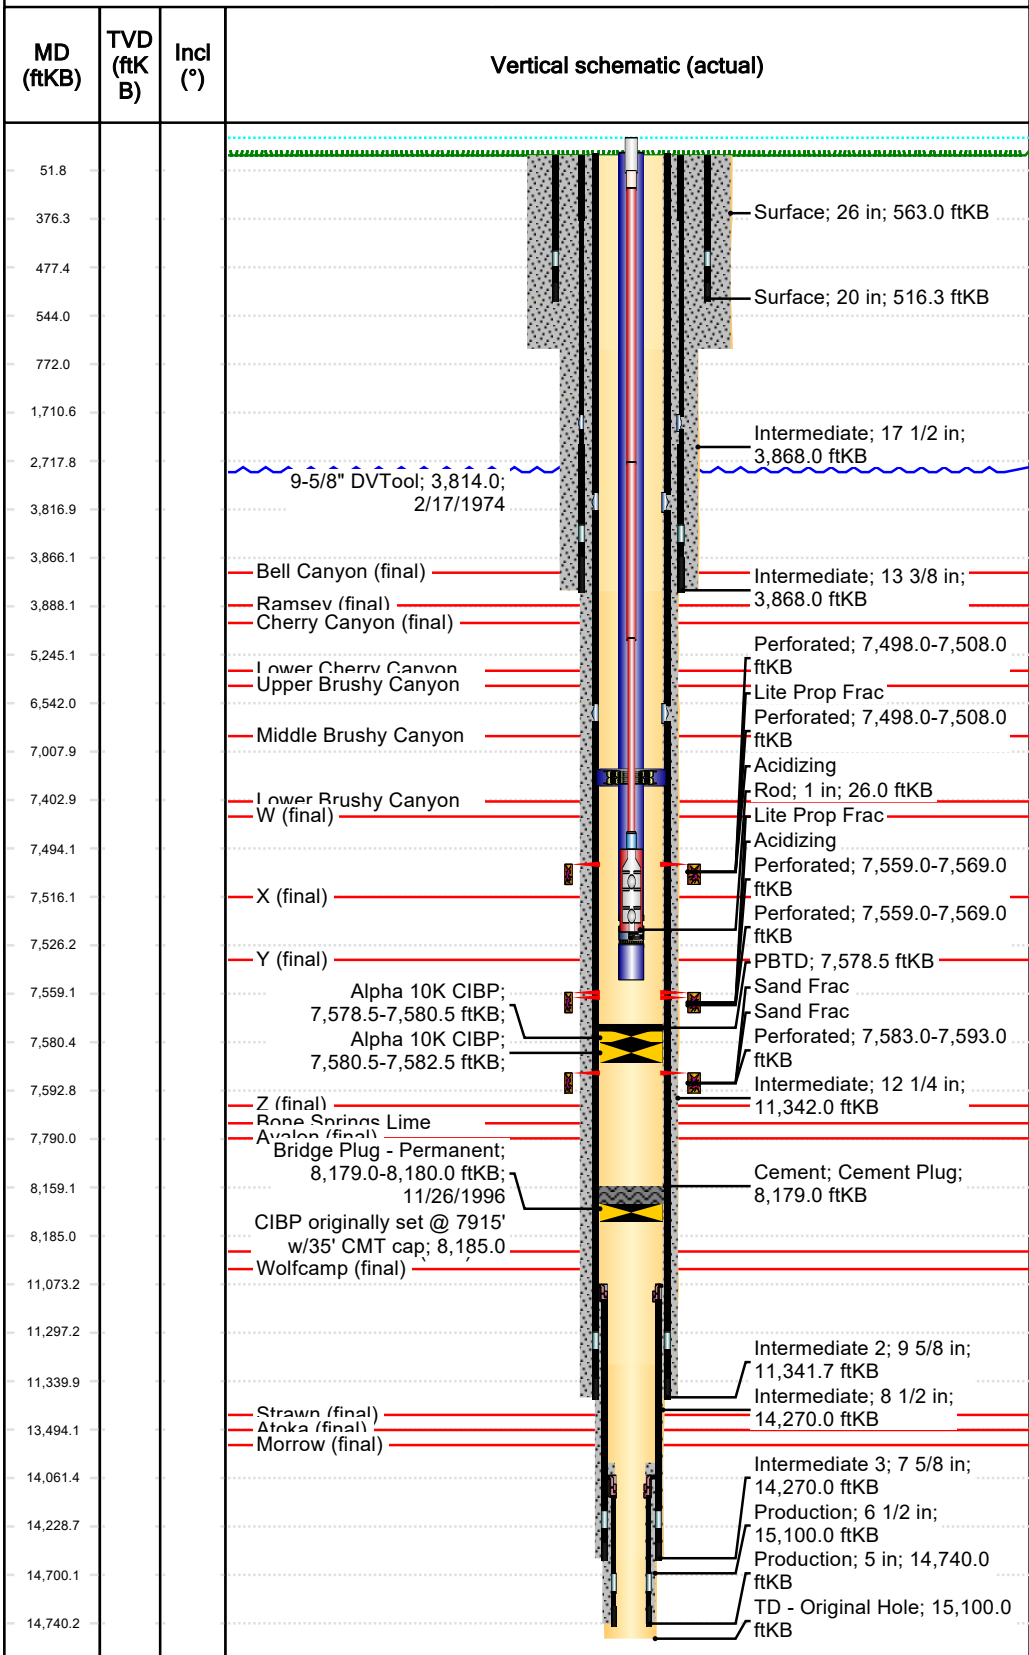


Wellbores				
Wellbore Name Original Hole		Parent Wellbore Original Hole		Wellbore API/UWI 30/015/20933
Start Depth (ftKB) 31.0			Profile Type Vertical	
Section Des	Hole Sz (in)	Act Top (ftKB)	Act Btm (ftKB)	
Surface	26	31.3	563.0	
Intermediate	17 1/2	563.0	3,868.0	
Intermediate	12 1/4	3,868.0	11,342.0	
Intermediate	8 1/2	11,338.0	14,270.0	
Production	6 1/2	14,270.0	15,100.0	
Zones				
Zone Name	Top (ftKB)	Btm (ftKB)	Current Status	
Lwr Brushy Canyon W				
Lwr Brushy Canyon Y				
Delaware				
Casing Strings				
Csg Des	Set Depth (ftKB)	OD (in)	Wt/Len (lb/ft)	Grade
Surface	516.3	20	94.00	H-40
Intermediate	3,868.0	13 3/8	68.00	K-55
Intermediate 2	11,341.7	9 5/8	43.50	L-95
Intermediate 3	14,270.0	7 5/8	39.00	L-95
Production	14,740.0	5	18.00	P-110
Cement				
Des	Type	Start Date	Top (ftKB)	Btm (ftKB)
Surface Casing Cement	Casing	10/3/1973	31.3	516.3
Intermediate Casing Cement	Casing	10/20/1973	1,710.0	3,868.0
Intermediate Casing Cement	Casing	10/20/1973	31.3	1,710.0
2nd Intermediate Casing Cement	Casing	11/22/1973	6,542.0	11,342.0
2nd Intermediate Casing Cement	Casing	11/22/1973	3,814.0	6,542.0
2nd Intermediate Casing Cement	Casing	11/22/1973	31.3	3,814.0
3rd Intermediate Casing Cement	Casing	1/17/1974	11,073.0	14,270.0
Production Casing Cement	Casing	2/17/1974	14,061.0	14,740.0
Cement Plug	Plug	11/3/1992	7,915.0	7,880.0
Cement Plug	Plug	11/25/1996	8,159.0	8,179.0
Other In Hole				
Run Date	Des	OD (in)	Top (ftKB)	Btm (ftKB)
11/26/1996	Bridge Plug - Permanent	7.71	8,179.0	8,180.0
7/24/2007	Alpha 10K CIBP	7.71	7,578.5	7,580.5
7/24/2007	Alpha 10K CIBP	7.71	7,580.5	7,582.5
Perforations				
Date	Top (ftKB)	Btm (ftKB)	Linked Zone	
7/24/2007	7,498.0	7,508.0		
7/30/2007	7,498.0	7,508.0		
7/24/2007	7,559.0	7,569.0		
7/30/2007	7,559.0	7,569.0		



Downhole Well Profile - with Schematic

Well Name: Poker Lake Unit 041

API/UWI 3001520933	SAP Cost Center ID 1135591001	Permit Number	State/Province New Mexico	County Eddy			
Surface Location T24S-R30E-S21			Spud Date 9/30/1973 00:00	Original KB Elevation (ft) 3,391.25	Ground Elevation (ft) 3,360.00	KB-Ground Distance (ft) 31.25	Surface Casing Flange Elevation (ft)

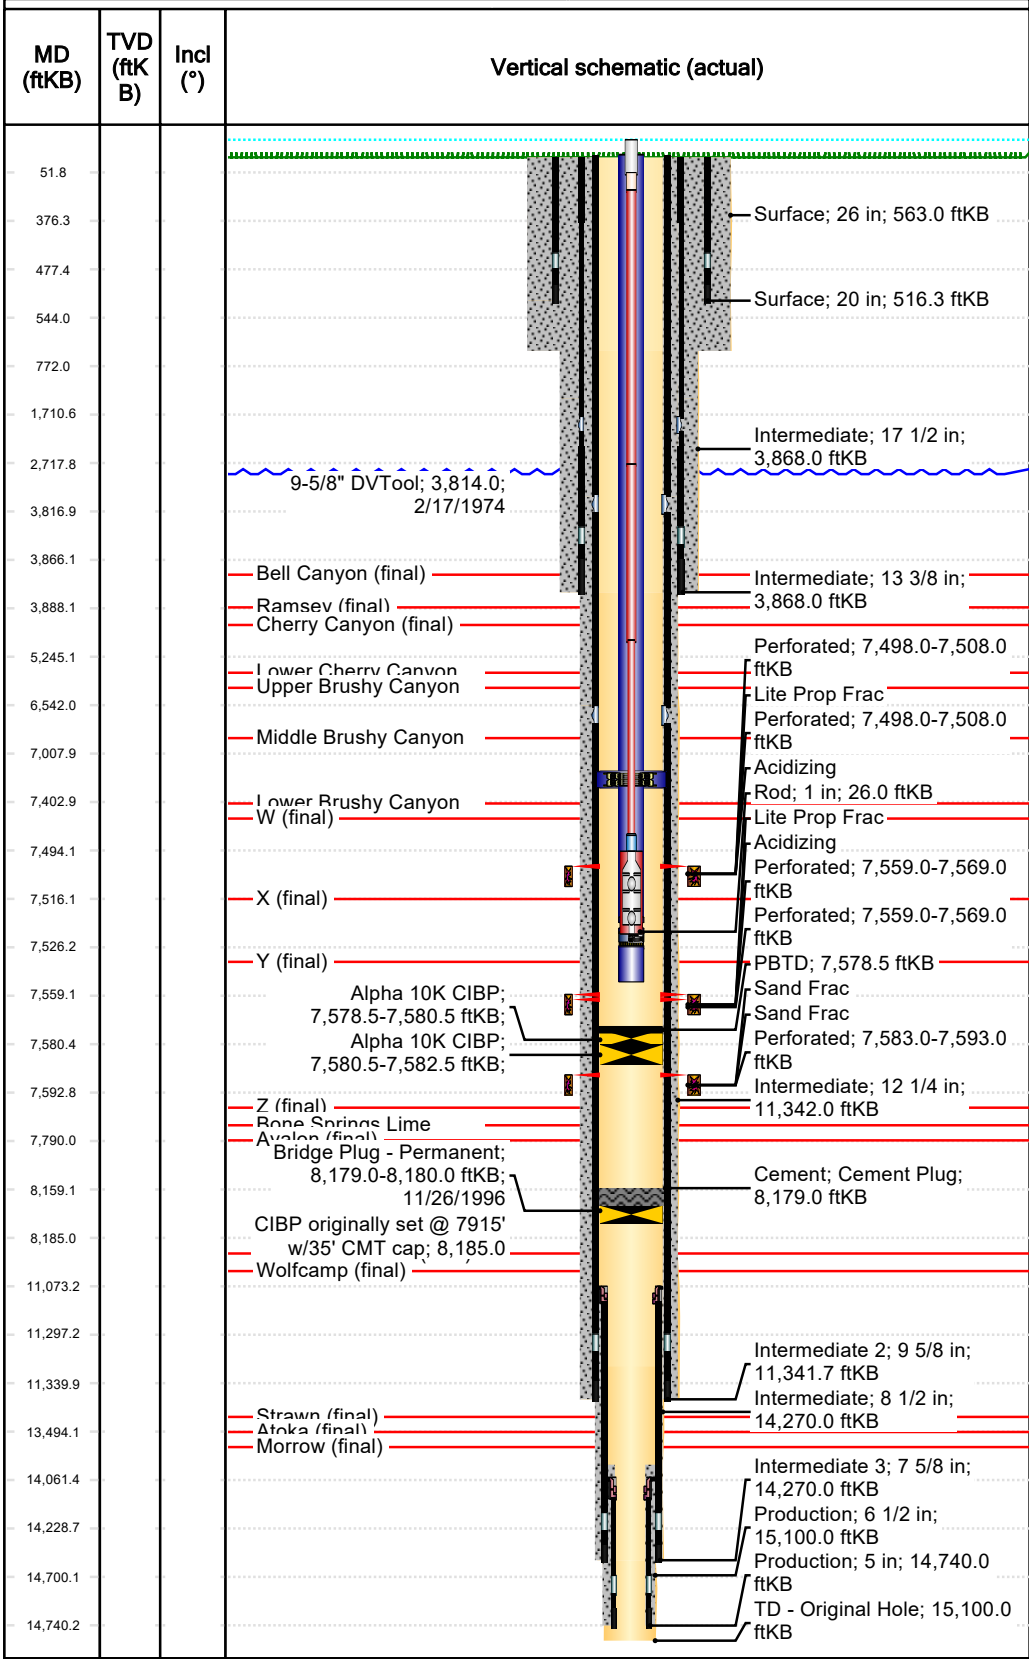

Perforations					
Date	Top (ftKB)	Btm (ftKB)	Linked Zone		
11/9/1992	7,583.0	7,593.0			
Stimulation Intervals					
Interval Number	Top (ftKB)	Btm (ftKB)	AIR (bbl/min)	MIR (bbl/min)	Proppant Total (lb)
1	7,583.0	7,593.0			0.0
1	7,559.0	7,569.0			0.0
1	7,559.0	7,569.0			0.0
2	7,583.0	7,593.0			0.0
2	7,498.0	7,508.0			0.0
2	7,498.0	7,508.0			0.0

PLU 041 - Proposed WBD

516' Surface Casing Shoe

3814' DV Tool

3836' Intermediate Casing Shoe 1


3840' T/Delaware

4738' T/Cherry Canyon

6361' T/Brushy Canyon

7498' T/Perfs

7578.5' T/CIBP

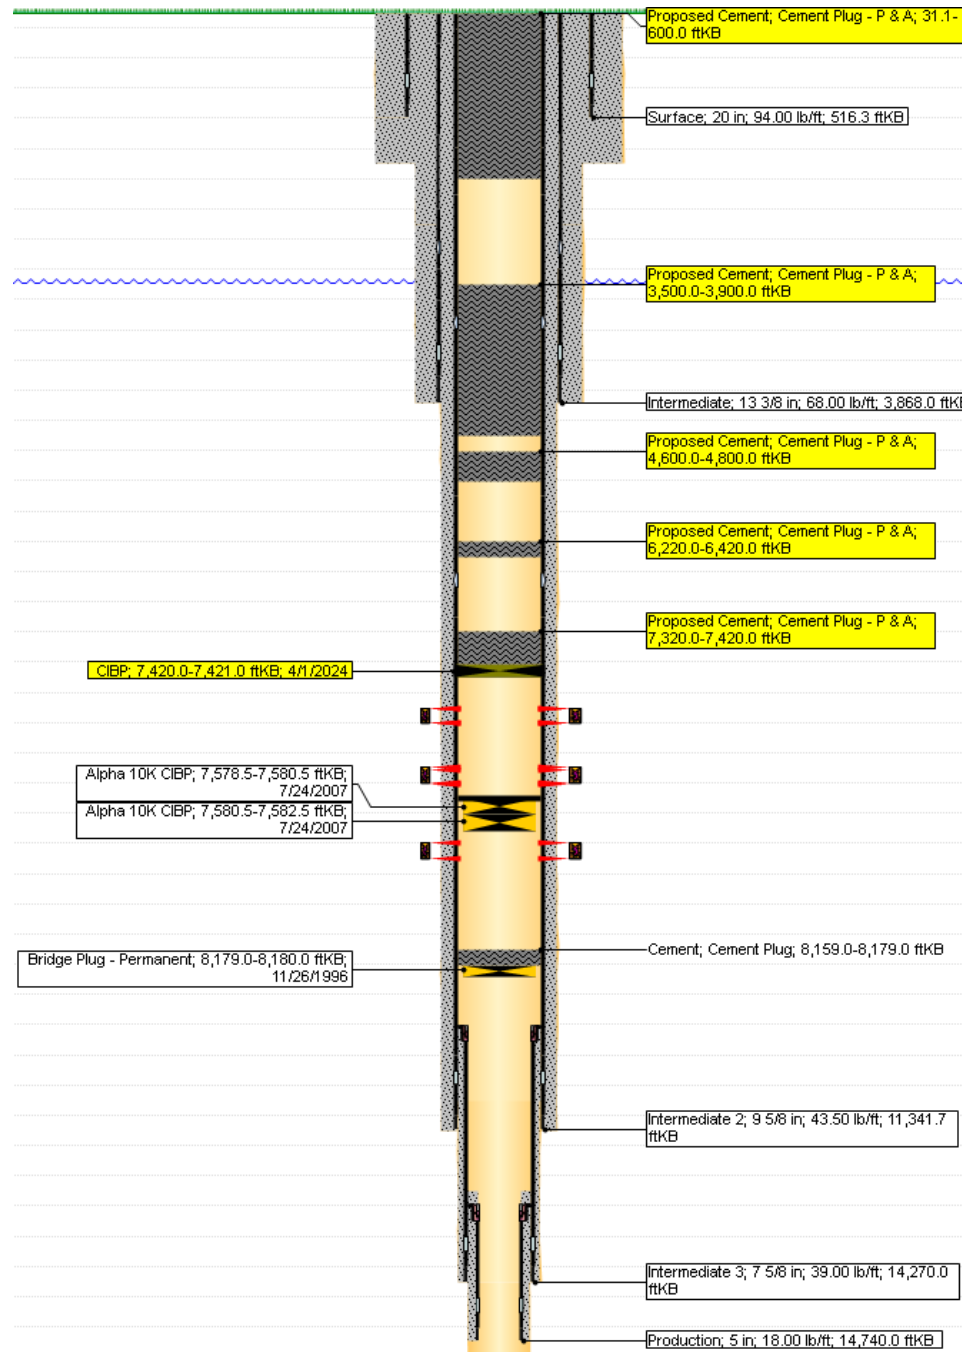

Circulate 600' to surface.

Spot 130 SKS Class C: 3,900' to 3,500'. WOC and Tag.

Spot 65 SKS Class C: 4,800' to 4,600'. WOC and Tag.

Spot 80 SKS **Class H**: 6,420' to 6,220'. WOC and Tag.

Spot 40 SKS **Class H** atop CIBP: 7,420' to 7,320'. PT CIBP to 500 PSIG for 30 min. WOC and Tag.

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Sundry Print Report

03/23/2024

Well Name: POKER LAKE	Well Location: T24S / R30E / SEC 21 / SWNE / 32.2050281 / -103.8839389	County or Parish/State: EDDY / NM
Well Number: 41	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC068431	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001520933	Well Status: Producing Oil Well	Operator: XTO PERMIAN OPERATING LLC

LONG VO

Digitally signed by
LONG VO
Date: 2024.03.23
11:21:17 -05'00'

Notice of Intent

Sundry ID: 2779207

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 03/12/2024

Time Sundry Submitted: 07:10

Date proposed operation will begin: 04/12/2024

Procedure Description: XTO Permian Operating LLC respectfully requests approval for plug and abandonment of the above mentioned well. Please see the attached procedure with current and proposed WBD's for your review.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Poker_Lake_Unit_41_PA_Procedure_WBDs_Current_and_Proposed_20240312070924.pdf

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

Well Name: POKER LAKE	Well Location: T24S / R30E / SEC 21 / SWNE / 32.2050281 / -103.8839389	County or Parish/State: EDDY / NM
Well Number: 41	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC068431	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001520933	Well Status: Producing Oil Well	Operator: XTO PERMIAN OPERATING LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHERRY MORROW**Signed on:** MAR 12, 2024 07:10 AM**Name:** XTO PERMIAN OPERATING LLC**Title:** Regulatory Analyst**Street Address:** 6401 HOLIDAY HILL ROAD BLDG 5**City:** MIDLAND**State:** TX**Phone:** (432) 218-3671**Email address:** SHERRY.MORROW@EXXONMOBIL.COM**Field****Representative Name:****Street Address:****City:****State:****Zip:****Phone:****Email address:**

Form 3160-5
(June 2019)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021**SUNDRY NOTICES AND REPORTS ON WELLS**
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.5. Lease Serial No. **NMLC068431**

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

XTO PERMIAN OPERATING LLC3a. Address **6401 HOLIDAY HILL ROAD BLDG 5, MIDLAND,**3b. Phone No. (include area code)
(432) 683-2277

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEC 21/T24S/R30E/NMP

7. If Unit of CA/Agreement, Name and/or No.

8. Well Name and No. **POKER LAKE/41**9. API Well No. **3001520933**10. Field and Pool or Exploratory Area
DOG TOWN DRAW/DOG TOWN DRAW

11. Country or Parish, State

EDDY/NM**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

XTO Permian Operating LLC respectfully requests approval for plug and abandonment of the above mentioned well. Please see the attached procedure with current and proposed WBD's for your review.

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)

SHERRY MORROW / Ph: (432) 218-3671Title **Regulatory Analyst**

Signature (Electronic Submission)

Date **03/12/2024****THE SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

Long VoTitle **Petroleum Engineer**Date **3/23/2024**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office **CFO**

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

PLUG AND ABANDON WELLBORE
POKER LAKE UNIT 041
Class II

MASIP	MAOP	MAWP	Surface Csg Yield
1,000 psi	1,000 psi	3,000 psi	1530 PSI


SUMMARY: Plug and abandon wellbore according to BLM regulations.

- 1) MIRU plugging company. Set open top steel pit for plugging.
- 2) POOH LD rods and pump.
- 3) ND WH and NU 3K manual BOP. Function test BOP.
- 4) Unset TAC at 7,272.1'. POOH tbq.
- 5) MIRU WLU, tag to verify the top of CIBP at 7,578.5'. *TAG @ 7543'*
- 6) RIH GR to 7450'; RIH set CIBP at 7,420', pressure test to 500 PSI for 30 minutes; spot 40 SKS **Class H** cement from 7,420' to 7,320'. WOC and tag to verify TOC. (T/ Perf)
- 7) Spot 80 SKS **Class H** cement from 6,420' to 6,220'. (T/Brushy Canyon)
- 8) Spot 65 SKS Class C cement from 4,800' to 4,600'. (T/ Cherry Canyon)
- 9) Spot ¹⁸⁷130 SKS Class C cement from ^{3918'}3,900' to ^{3454'}3,500'. WOC and tag to verify TOC. (Intermediate Casing Shoe 1, T/Delaware, DV Tool)
- 10) Spot Class C cement from ^{1312'}600' to surface. (⁵²⁷~183 SKS) (Surface Casing Shoe)
- 11) ND BOP and cut off wellhead 5' below surface. RDMO PU, transport trucks, and pump truck.
- 12) Set P&A marker.
- 13) Pull fluid from steel tank and haul to disposal. Release steel tank.


Downhole Well Profile - with Schematic																																																																
Well Name: Poker Lake Unit 041																																																																
API/OWI 3001520933		SAP Cost Center ID 1135591001		Permit Number		State/Province New Mexico		County Eddy																																																								
Surface Location T24S-R30E-S21		Spud Date 9/30/1973 00:00		Original KB Elevation (ft) 3,391.25		Ground Elevation (ft) 3,360.00		KB-Ground Distance (ft) 31.25																																																								
Surface Casing Flange Elevation (ft) 31.25																																																																
<div> <div>Wellbores</div> <table border="1"> <thead> <tr> <th>Wellbore Name</th> <th>Parent Wellbore</th> <th>Original Hole</th> <th>Wellbore API/OWI</th> </tr> </thead> <tbody> <tr> <td>Original Hole</td> <td>Original Hole</td> <td>Original Hole</td> <td>30/015/20933</td> </tr> </tbody> </table> </div>										Wellbore Name	Parent Wellbore	Original Hole	Wellbore API/OWI	Original Hole	Original Hole	Original Hole	30/015/20933																																															
Wellbore Name	Parent Wellbore	Original Hole	Wellbore API/OWI																																																													
Original Hole	Original Hole	Original Hole	30/015/20933																																																													
<div> <div>Start Depth (ftKB)</div> <table border="1"> <thead> <tr> <th>Section Des</th> <th>Hole Sz (in)</th> <th>Act Top (ftKB)</th> <th>Act Btm (ftKB)</th> </tr> </thead> <tbody> <tr> <td>Surface</td> <td>26</td> <td>31.3</td> <td>563.0</td> </tr> <tr> <td>Intermediate</td> <td>17 1/2</td> <td>563.0</td> <td>3,868.0</td> </tr> <tr> <td>Intermediate</td> <td>12 1/4</td> <td>3,868.0</td> <td>11,342.0</td> </tr> <tr> <td>Intermediate</td> <td>8 1/2</td> <td>11,338.0</td> <td>14,270.0</td> </tr> <tr> <td>Production</td> <td>6 1/2</td> <td>14,270.0</td> <td>15,100.0</td> </tr> </tbody> </table> </div>										Section Des	Hole Sz (in)	Act Top (ftKB)	Act Btm (ftKB)	Surface	26	31.3	563.0	Intermediate	17 1/2	563.0	3,868.0	Intermediate	12 1/4	3,868.0	11,342.0	Intermediate	8 1/2	11,338.0	14,270.0	Production	6 1/2	14,270.0	15,100.0																															
Section Des	Hole Sz (in)	Act Top (ftKB)	Act Btm (ftKB)																																																													
Surface	26	31.3	563.0																																																													
Intermediate	17 1/2	563.0	3,868.0																																																													
Intermediate	12 1/4	3,868.0	11,342.0																																																													
Intermediate	8 1/2	11,338.0	14,270.0																																																													
Production	6 1/2	14,270.0	15,100.0																																																													
<div> <div>Zones</div> <table border="1"> <thead> <tr> <th>Zone Name</th> <th>Top (ftKB)</th> <th>Btm (ftKB)</th> <th>Current Status</th> </tr> </thead> <tbody> <tr> <td>Lwr Brushy Canyon W</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Lwr Brushy Canyon Y</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Delaware</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> </div>										Zone Name	Top (ftKB)	Btm (ftKB)	Current Status	Lwr Brushy Canyon W				Lwr Brushy Canyon Y				Delaware																																										
Zone Name	Top (ftKB)	Btm (ftKB)	Current Status																																																													
Lwr Brushy Canyon W																																																																
Lwr Brushy Canyon Y																																																																
Delaware																																																																
<div> <div>Casing Strings</div> <table border="1"> <thead> <tr> <th>Csg Des</th> <th>Set Depth (ftKB)</th> <th>OD (in)</th> <th>Wt/Len (lb/ft)</th> <th>Grade</th> </tr> </thead> <tbody> <tr> <td>Surface</td> <td>516.3</td> <td>20</td> <td>94.00</td> <td>H-40</td> </tr> <tr> <td>Intermediate</td> <td>3,868.0</td> <td>13 3/8</td> <td>68.00</td> <td>K-55</td> </tr> <tr> <td>Intermediate 2</td> <td>11,341.7</td> <td>9 5/8</td> <td>43.50</td> <td>L-95</td> </tr> <tr> <td>Intermediate 3</td> <td>14,270.0</td> <td>7 5/8</td> <td>39.00</td> <td>L-95</td> </tr> <tr> <td>Production</td> <td>14,740.0</td> <td>5</td> <td>18.00</td> <td>P-110</td> </tr> </tbody> </table> </div>										Csg Des	Set Depth (ftKB)	OD (in)	Wt/Len (lb/ft)	Grade	Surface	516.3	20	94.00	H-40	Intermediate	3,868.0	13 3/8	68.00	K-55	Intermediate 2	11,341.7	9 5/8	43.50	L-95	Intermediate 3	14,270.0	7 5/8	39.00	L-95	Production	14,740.0	5	18.00	P-110																									
Csg Des	Set Depth (ftKB)	OD (in)	Wt/Len (lb/ft)	Grade																																																												
Surface	516.3	20	94.00	H-40																																																												
Intermediate	3,868.0	13 3/8	68.00	K-55																																																												
Intermediate 2	11,341.7	9 5/8	43.50	L-95																																																												
Intermediate 3	14,270.0	7 5/8	39.00	L-95																																																												
Production	14,740.0	5	18.00	P-110																																																												
<div> <div>Cement</div> <table border="1"> <thead> <tr> <th>Des</th> <th>Type</th> <th>Start Date</th> <th>Top (ftKB)</th> <th>Btm (ftKB)</th> </tr> </thead> <tbody> <tr> <td>Surface Casing Cement</td> <td>Casing</td> <td>10/3/1973</td> <td>31.3</td> <td>516.3</td> </tr> <tr> <td>Intermediate Casing Cement</td> <td>Casing</td> <td>10/20/1973</td> <td>1,710.0</td> <td>3,868.0</td> </tr> <tr> <td>Intermediate Casing Cement</td> <td>Casing</td> <td>10/20/1973</td> <td>31.3</td> <td>1,710.0</td> </tr> <tr> <td>2nd Intermediate Casing Cement</td> <td>Casing</td> <td>11/22/1973</td> <td>6,542.0</td> <td>11,342.0</td> </tr> <tr> <td>2nd Intermediate Casing Cement</td> <td>Casing</td> <td>11/22/1973</td> <td>3,814.0</td> <td>6,542.0</td> </tr> <tr> <td>2nd Intermediate Casing Cement</td> <td>Casing</td> <td>11/22/1973</td> <td>31.3</td> <td>3,814.0</td> </tr> <tr> <td>3rd Intermediate Casing Cement</td> <td>Casing</td> <td>1/17/1974</td> <td>11,073.0</td> <td>14,270.0</td> </tr> <tr> <td>Production Casing Cement</td> <td>Casing</td> <td>2/17/1974</td> <td>14,061.0</td> <td>14,740.0</td> </tr> <tr> <td>Cement Plug</td> <td>Plug</td> <td>11/3/1992</td> <td>7,915.0</td> <td>7,880.0</td> </tr> <tr> <td>Cement Plug</td> <td>Plug</td> <td>11/25/1996</td> <td>8,159.0</td> <td>8,179.0</td> </tr> </tbody> </table> </div>										Des	Type	Start Date	Top (ftKB)	Btm (ftKB)	Surface Casing Cement	Casing	10/3/1973	31.3	516.3	Intermediate Casing Cement	Casing	10/20/1973	1,710.0	3,868.0	Intermediate Casing Cement	Casing	10/20/1973	31.3	1,710.0	2nd Intermediate Casing Cement	Casing	11/22/1973	6,542.0	11,342.0	2nd Intermediate Casing Cement	Casing	11/22/1973	3,814.0	6,542.0	2nd Intermediate Casing Cement	Casing	11/22/1973	31.3	3,814.0	3rd Intermediate Casing Cement	Casing	1/17/1974	11,073.0	14,270.0	Production Casing Cement	Casing	2/17/1974	14,061.0	14,740.0	Cement Plug	Plug	11/3/1992	7,915.0	7,880.0	Cement Plug	Plug	11/25/1996	8,159.0	8,179.0
Des	Type	Start Date	Top (ftKB)	Btm (ftKB)																																																												
Surface Casing Cement	Casing	10/3/1973	31.3	516.3																																																												
Intermediate Casing Cement	Casing	10/20/1973	1,710.0	3,868.0																																																												
Intermediate Casing Cement	Casing	10/20/1973	31.3	1,710.0																																																												
2nd Intermediate Casing Cement	Casing	11/22/1973	6,542.0	11,342.0																																																												
2nd Intermediate Casing Cement	Casing	11/22/1973	3,814.0	6,542.0																																																												
2nd Intermediate Casing Cement	Casing	11/22/1973	31.3	3,814.0																																																												
3rd Intermediate Casing Cement	Casing	1/17/1974	11,073.0	14,270.0																																																												
Production Casing Cement	Casing	2/17/1974	14,061.0	14,740.0																																																												
Cement Plug	Plug	11/3/1992	7,915.0	7,880.0																																																												
Cement Plug	Plug	11/25/1996	8,159.0	8,179.0																																																												
<div> <div>Other in Hole</div> <table border="1"> <thead> <tr> <th>Run Date</th> <th>Des</th> <th>OD (in)</th> <th>Top (ftKB)</th> <th>Btm (ftKB)</th> </tr> </thead> <tbody> <tr> <td>11/26/1996</td> <td>Bridge Plug - Permanent</td> <td>7.71</td> <td>8,179.0</td> <td>8,180.0</td> </tr> <tr> <td>7/24/2007</td> <td>Alpha 10K CIBP</td> <td>7.71</td> <td>7,578.5</td> <td>7,580.5</td> </tr> <tr> <td>7/24/2007</td> <td>Alpha 10K CIBP</td> <td>7.71</td> <td>7,580.5</td> <td>7,582.5</td> </tr> </tbody> </table> </div>										Run Date	Des	OD (in)	Top (ftKB)	Btm (ftKB)	11/26/1996	Bridge Plug - Permanent	7.71	8,179.0	8,180.0	7/24/2007	Alpha 10K CIBP	7.71	7,578.5	7,580.5	7/24/2007	Alpha 10K CIBP	7.71	7,580.5	7,582.5																																			
Run Date	Des	OD (in)	Top (ftKB)	Btm (ftKB)																																																												
11/26/1996	Bridge Plug - Permanent	7.71	8,179.0	8,180.0																																																												
7/24/2007	Alpha 10K CIBP	7.71	7,578.5	7,580.5																																																												
7/24/2007	Alpha 10K CIBP	7.71	7,580.5	7,582.5																																																												
<div> <div>Perforations</div> <table border="1"> <thead> <tr> <th>Date</th> <th>Top (ftKB)</th> <th>Btm (ftKB)</th> <th>Linked Zone</th> </tr> </thead> <tbody> <tr> <td>7/24/2007</td> <td>7,498.0</td> <td>7,508.0</td> <td></td> </tr> <tr> <td>7/30/2007</td> <td>7,498.0</td> <td>7,508.0</td> <td></td> </tr> <tr> <td>7/24/2007</td> <td>7,559.0</td> <td>7,569.0</td> <td></td> </tr> <tr> <td>7/30/2007</td> <td>7,559.0</td> <td>7,569.0</td> <td></td> </tr> </tbody> </table> </div>										Date	Top (ftKB)	Btm (ftKB)	Linked Zone	7/24/2007	7,498.0	7,508.0		7/30/2007	7,498.0	7,508.0		7/24/2007	7,559.0	7,569.0		7/30/2007	7,559.0	7,569.0																																				
Date	Top (ftKB)	Btm (ftKB)	Linked Zone																																																													
7/24/2007	7,498.0	7,508.0																																																														
7/30/2007	7,498.0	7,508.0																																																														
7/24/2007	7,559.0	7,569.0																																																														
7/30/2007	7,559.0	7,569.0																																																														

Vertical schematic (actual)

MD (ftKB)	TVD (ftKB)	Ind (°)
51.8		
376.3		
477.4		
564.0		
772.0		
1,710.8		
2,717.8		
3,818.8		
3,868.1		
3,868.1		
5,246.1		
8,542.0		
7,007.8		
7,402.9		
7,494.1		
7,516.1		
7,559.2		
7,559.1		
7,580.4		
7,582.8		
7,960.0		
8,156.1		
8,165.0		
11,073.2		
11,297.2		
11,339.9		
13,494.1		
14,081.4		
14,228.7		
14,700.1		
14,740.2		

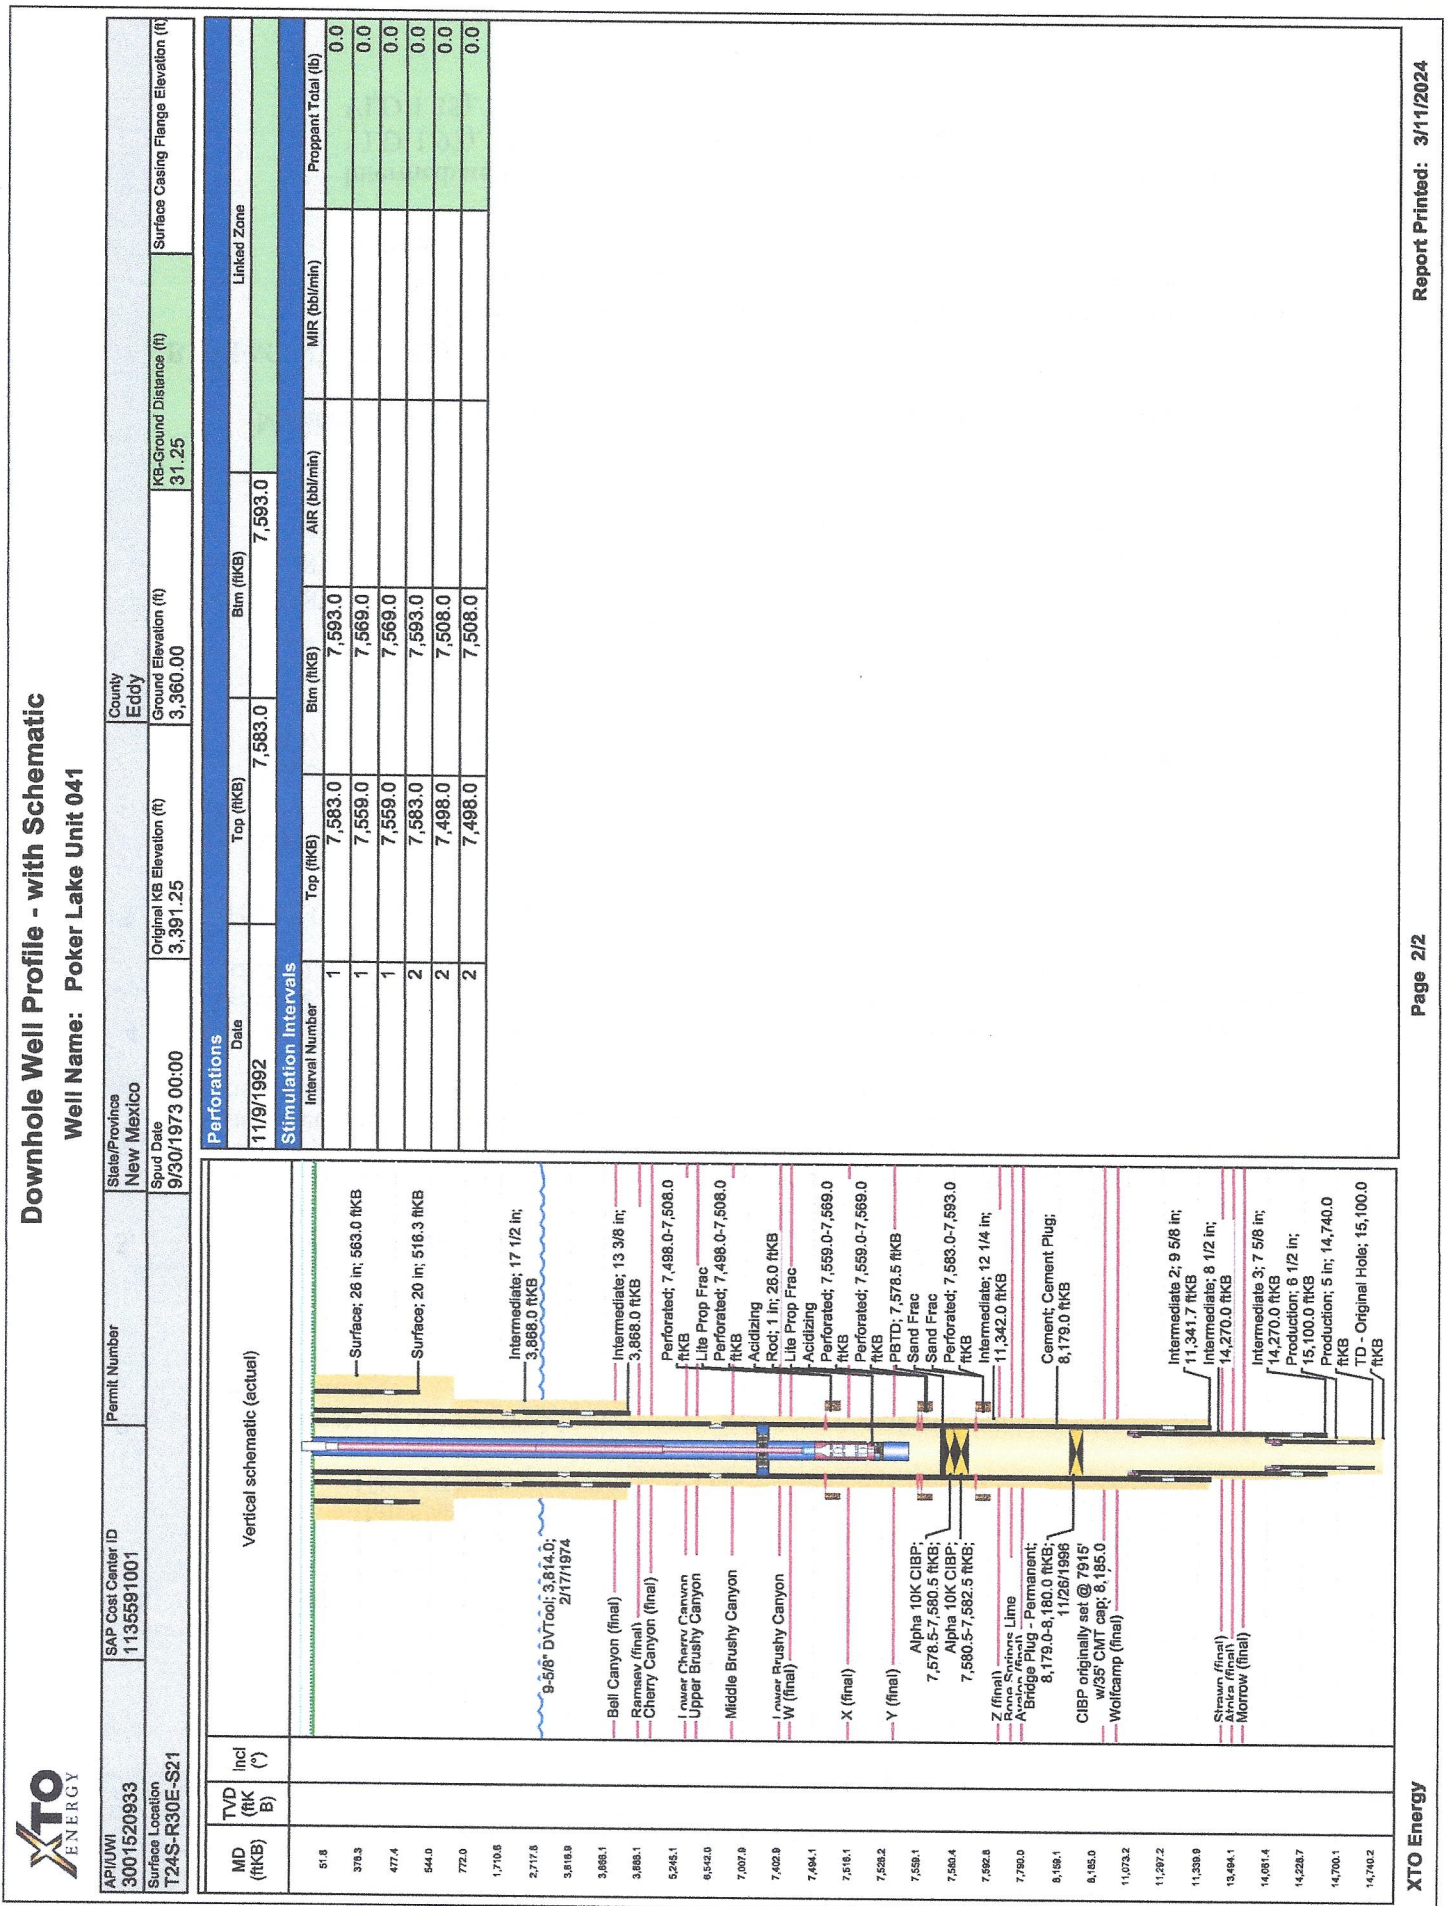

PLU 041 - Proposed WBD

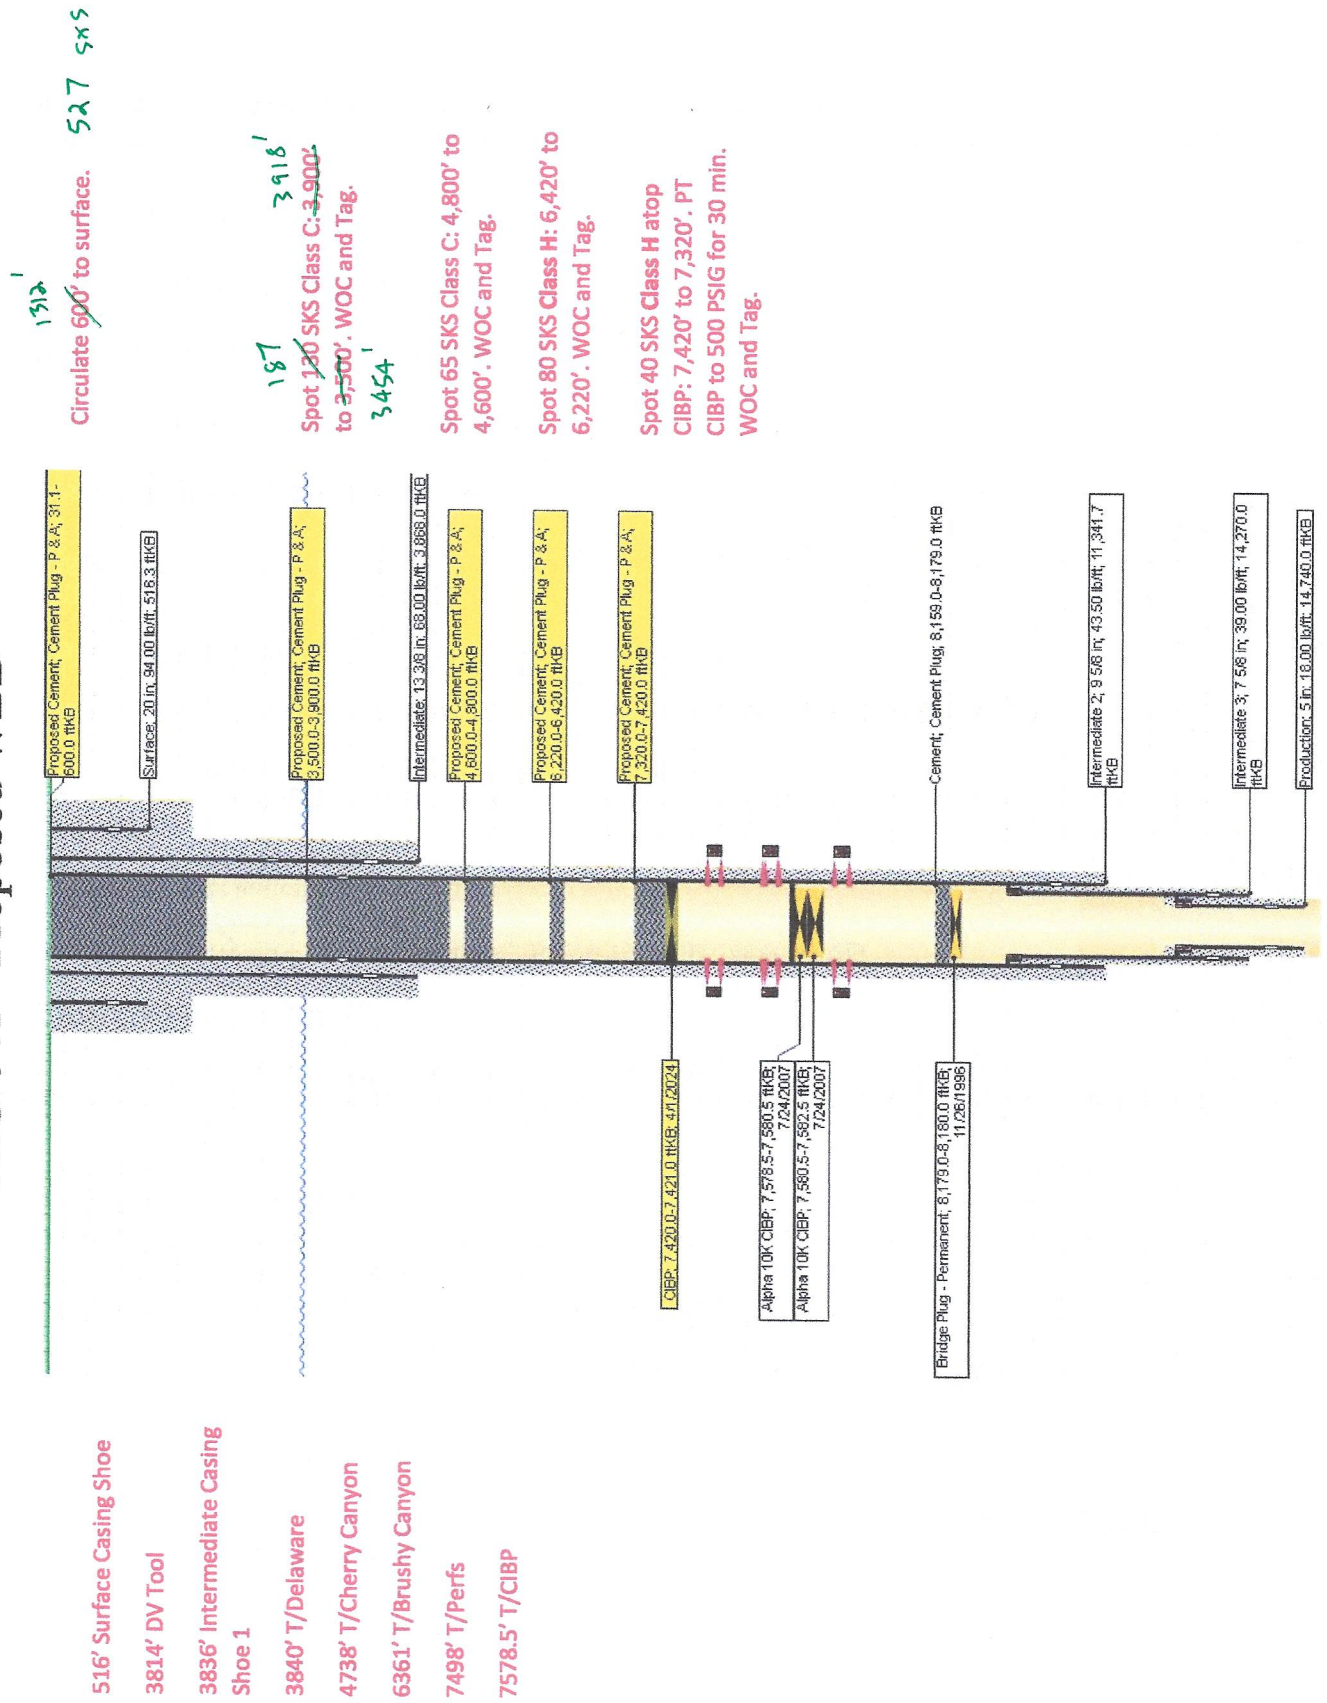

**BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972**

**Permanent Abandonment of Federal Wells
Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified *BY PHONE* (numbers listed in 2. Notifications) minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.**

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds). A weep hole shall be left if a metal plate is welded in place.

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office
620 E. Greene St.
Carlsbad, New Mexico 88220-6292
www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo “interim” reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo “final” reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines **(Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure)**. Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. **This will apply to well pads, facilities, and access roads.** Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you

- have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.
5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos
Supervisory Petroleum Engineering Tech/Environmental Protection Specialist
575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias
Environmental Protection Specialist
575-234-6230

Crisha Morgan
Environmental Protection Specialist
575-234-5987

Jose Martinez-Colon
Environmental Protection Specialist
575-234-5951

Mark Mattozzi
Environmental Protection Specialist
575-234-5713

Robert Duenas
Environmental Protection Specialist
575-234-2229

Doris Lauger Martinez
Environmental Protection Specialist
575-234-5926

Jaden Johnston
Environmental Protection Asst. (Intern)
575-234-6252

Sundry ID		2779207					
Plug Type	Top	Bottom	Length	Tag	Sacks	Cement Class	Notes
Surface Plug	0.00	100.00	100.00	Tag/Verify			
20 inch- Shoe Plug	460.84	566.00	105.16	Tag/Verify			
Fresh Water @ 1040	979.60	1090.00	110.40	If solid base no need to			
Top of Salt @ 1262	1199.38	1312.00	112.62	Tag/Verify	527.00	C	Spot cement from 1312' to surface. Verify at surface.
Base of Salt @ 3540	3454.60	3590.00	135.40	Tag/Verify			
DV tool plug	3725.86	3864.00	138.14	Tag/Verify			
Delaware @ 3840	3751.60	3890.00	138.40	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations			
13.375 inch- Shoe Plug	3779.32	3918.00	138.68	Tag/Verify	187.00	C	Spot cement from 3918' to 3454'. WOC and Tag.
CIBP Plug	7413.00	7448.00	35.00	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations	25.00	H	Set CIBP at 7448'. Leak test CIBP. Spot 25 sxs on top.
Perforations Plug (If No CIBP)	7448.00	7643.00	195.00	Tag/Verify			
Bonesprings @ 7646	7519.54	7696.00	176.46	If solid			

					If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio ns			
CIBP Plug	7543.00	7578.00	35.00					Tag CIBP at 7543'.
9.625 inch- Shoe Plug	11178.58	11392.00	213.42	Tag/Verify				

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole.

Class H >7500'

Class C <7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater
R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft³/sx

Class H: 1.06 ft³/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

<u>Cave Karst/Potash Cement Requirement:</u>	<u>Medium</u>	<u>Top of Salt to surface</u>	
20 inch- Shoe Plug @	516.00		
13.375 inch- Shoe Plug @	3868.00		
9.625 inch- Shoe Plug @	11342.00		
Perforatons Top @	7498.00	Perforations	7593.00
DV Tool @	3814.00	CIBP @	7578.00
		CIBP @	7448.00

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 326248

CONDITIONS

Operator: XTO ENERGY, INC 6401 Holiday Hill Road Midland, TX 79707	OGRID: 5380
	Action Number: 326248
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	Must Clean out to 14740' - Run CBL on 5" casing, 7 5/8" casing and 9 5/8" casing to surface. Spot 40 sacks CI H Cement at 14740' - 14200' - TD and Casing Shoe Spot 260 sacks CI H Cement at 14000' - 12725' - T Morrow, Atoka, Strawn, and Penn Spot 30 sacks CI H Cement at 11390' - 11290' - Casing Shoe Spot 50 sacks CI H Cement at 10995' - 10895' - T Wolfcamp Spot 50 sacks CI H Cement at 8000' - Spacer Set CIBP at 7575'	3/27/2024