

Submit 1 Copy To Appropriate District Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-35222
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Apache Corporation		6. State Oil & Gas Lease No. 308898
3. Address of Operator 303 Veterans Airpark Lane, Suite 1000 Midland, TX 79705		7. Lease Name or Unit Agreement Name Red Lake 36 A STATE
4. Well Location Unit Letter <u>A</u> : <u>330</u> feet from the <u>N</u> line and <u>465</u> feet from the <u>E</u> line Section <u>36</u> Township <u>17S</u> Range <u>27E</u> NMPM County <u>EDDY</u>		8. Well Number <u>4</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3568		9. OGRID Number 873
		10. Pool name or Wildcat RED LAKE GLORIETA-YESO NE (96836)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
TEMPORARILY ABANDON ☒	ALTERING CASING ☐
PULL OR ALTER CASING ☐	COMMENCE DRILLING OPNS. ☐
DOWNHOLE COMMINGLE ☐	P AND A ☐
CLOSED-LOOP SYSTEM ☐	CASING/CEMENT JOB ☐
OTHER: ☐	OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

APACHE REQUEST TO TA THE CURRENT WELLBORE -CORRECTED PROCEDURES

Disconnect, isolate, lock-out surface mechanical and electrical equipment.
 POOH all equipment. Run Ring Gauge
 Set CIBP @ 3220' - test plug 500psi/30min
 Set CIBP @ 3100' DB 35' cmt - WOC & tag - test plug 500psi/30min
 Set CIBP @ 1,992 ft.
 Dump bail 35 ft of cement on top of CIBP.
 Tag Cement – notify NMOCD ready to conduct MIT.
 Circulate pkr fluid.
 24 hr prior notification to NMOCD

TA status may be granted after a successful MIT test is performed. Contact the OCD to schedule the test so it may be witnessed.

Conduct MIT, increase pressure within prod csg up to 500 psig, and hold for 30min. Pressure must stabilize for last 15 minutes

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE alicia fulton TITLE Reg Analyst DATE 4/22/2024

Type or print name Alicia Fulton E-mail address: alicia.fulton@apachecorp.com PHONE: (432) 818-1088

For State Use Only

APPROVED BY: [Signature] TITLE Staff Manager DATE 4/23/24
 Conditions of Approval (if any):



WBD Current


Well Name: RED LAKE 36 A ST 4

Reference Datum: KB

API/Surface Loc 3001535222	Surface Legal Location A-36-17S-27E 330 FNL 465 FEL	Field Name Red Lake (Mariner)	State/Province New Mexico	Well Purpose Production
Spud Date 12/6/2006 00:00	Original KB Elevation (ft) 3,626.0	Ground Elevation (ft) 3,620.0	KB-Ground Distance (ft) 6.0	
PBTD (All) (ftKB)		Total Depth All (TVD) (ftKB) Original Hole - 3,649.6		

Production, RED LAKE 36 A ST #4 - Original Hole, 8/10/2023
11:52:54 AM

Vertical schematic (actual)

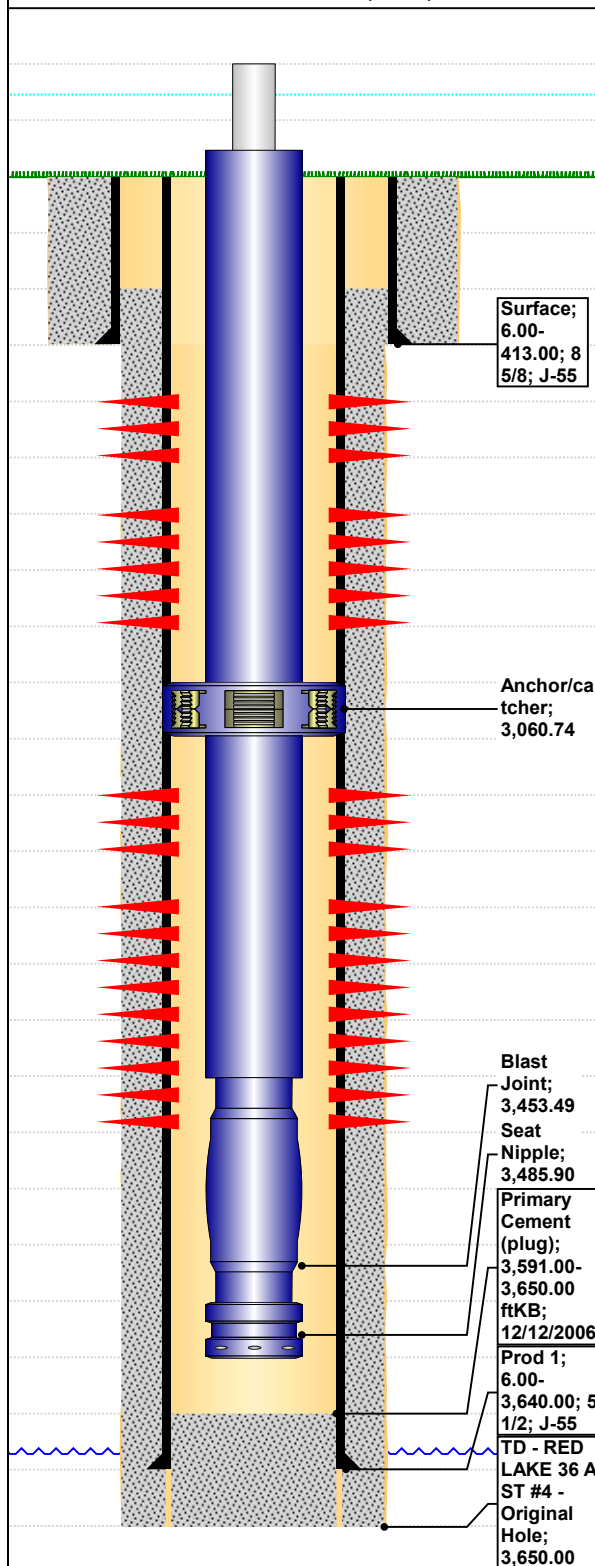

Wellbore Sections

Section Description Surface	Size (in) 12 1/4	Act Top (ftKB) 6.0	Act Btm (ftKB) 413.0	Start Date 12/6/2006
Section Description Prod 1	Size (in) 7 7/8	Act Top (ftKB) 413.0	Act Btm (ftKB) 3,650.0	Start Date 12/7/2006

Casing Strings

Csg Des	OD (in)	Wt/Len (lb/ft)	Grade	Set Depth (ftKB)
Surface	8 5/8	24.00	J-55	413.00
Prod 1	5 1/2	15.50	J-55	3,640.00

Cement Stages

String Surface, 413.00ftKB, 8 5/8	Top Depth (ftKB) 6.00	Bottom Depth (ftKB) 413.00
String Prod 1, 3,640.00ftKB, 5 1/2	Top Depth (ftKB) 126.00	Bottom Depth (ftKB) 3,650.00

Tubing Strings

Tubing Description Tubing - Rod Pump		Run Date 3/26/2018	String Length (ft) 3,481.26		Set Depth (ftKB) 3,487.0		
Item Des	Jts	Make/Manufacturer	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)
Tubing	94		T&C Upset	2 7/8	6.50	J-55	3,055.00
Anchor/catcher	1		Baker	5 1/2	23.00	N-80	2.75
Tubing	12		T&C Upset	2 7/8	6.50	J-55	390.00
Blast Joint	1		Endura	2 7/8	6.50	J-55	32.41
Seat Nipple	1		Seat Nipple	2 7/8	7.20	N-80	1.10

Rod Strings

Rod Description Rod	Run Date 3/26/2018		String Length (ft) 3,466.7	Set Depth (ftKB) 3,460.0			
Item Des	Jts	Make/Mfg.	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)
Polished Rod	1		Chromed	1 1/4	4.20	PRC	24.00
Sucker Rod	11 7		S87 W/T CPLG/FULL	7/8	2.15	KD	2,925 .00
Sucker Rod	20		S87 W/SM CPLG/FULL	1	2.88	KD	500.0 0
Right Hand Release	1			7/8	0.00	RHR	0.70
Rod Insert Pump	1	Garner	25-125-RHBC -16-5	1 1/2	0.00	0	16.00
Strainer Nipple	1			1 1/2	0.00	0	1.00

Other In Hole

Description	OD (in)	Top (ftKB)	Btm (ftKB)	Run Date
-------------	---------	------------	------------	----------

Perforations

Date	Type	Top (ftKB)	Btm (ftKB)	Prop?	Shot Dens (shots/ft)	Entered Shot Total
1/15/2010	San Andres	2,042	2,440	No	1.0	
1/15/2010	San Andres	2,500	2,950	No	1.0	
12/20/2006	Glorietta	3,139	3,209	No	1.0	7
12/20/2006	Yeso	3,243	3,455	No	1.0	30

Plug Back Total Depths

Date	Type	Depth (ftKB)	Depth (TVD) (ftKB)
------	------	--------------	--------------------

Schematic Annotations

Start Date	Depth (ftKB)	Annotation
------------	--------------	------------

Stimulation Jobs

<typ1> on <dtmstart>									
Min Top...	Max Bt...	R Treat...	P Treat...	P Treat...	Vol Clea...	Vol Clea...	Vol Slurr...	Vol Slurr...	Mass Pr...




WBD Proposed - TA

Well Name: RED LAKE 36 A ST 4

Reference Datum: KB

API/Surface Loc 3001535222	Surface Legal Location A-36-17S-27E 330 FNL 465 FEL	Field Name Red Lake (Mariner)	State/Province New Mexico	Well Purpose Production
Spud Date 12/6/2006 00:00	Original KB Elevation (ft) 3,626.0	Ground Elevation (ft) 3,620.0	KB-Ground Distance (ft) 6.0	
PBTD (All) (ftKB)		Total Depth All (TVD) (ftKB) Original Hole - 3,649.6		

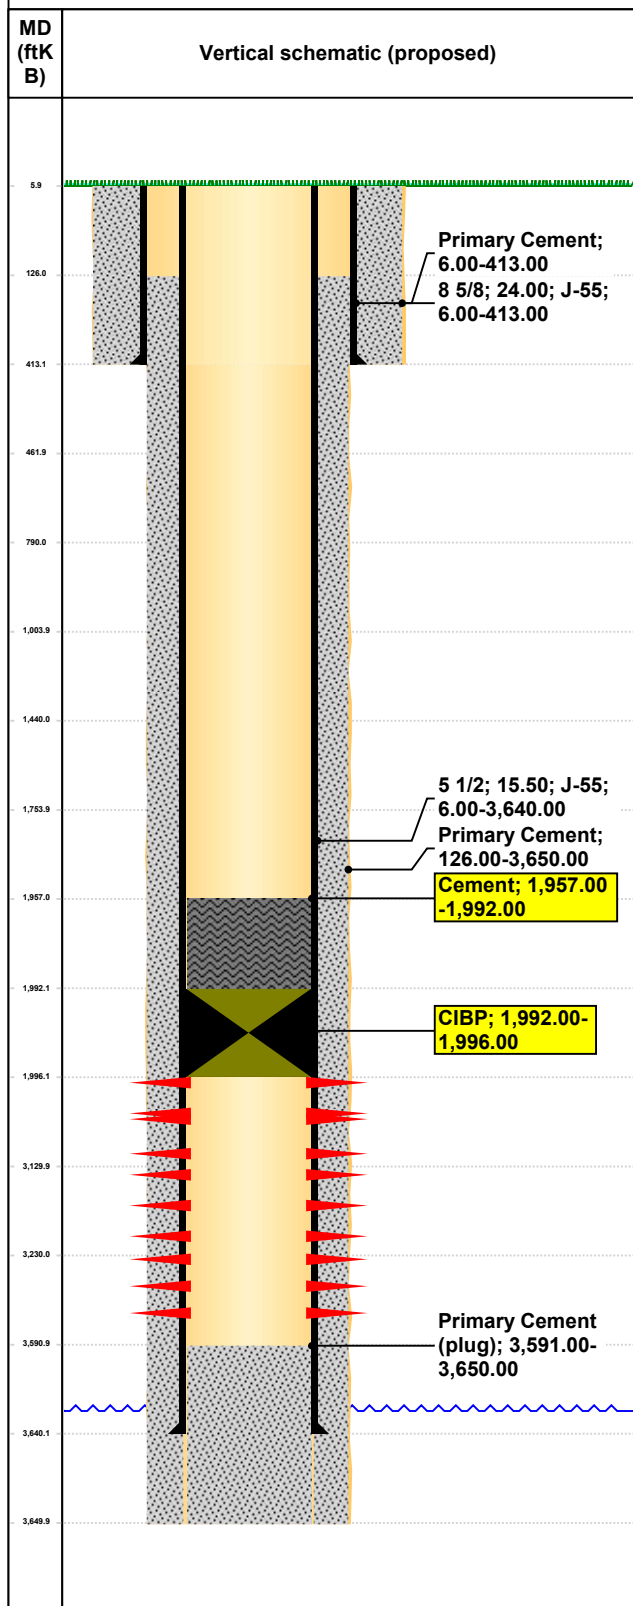Production, RED LAKE 36 A ST #4 - Original Hole, 8/10/2023
11:55:05 AM

Wellbore Sections

Section Des	Size (in)	Act Top (ftKB)	Act Btm (ftKB)	Start Date
Surface	12 1/4	6.0	413.0	12/6/2006
Prod 1	7 7/8	413.0	3,650.0	12/7/2006

Casing Strings

Csg Des	OD (in)	Wt/Len (lb/ft)	Grade	Set Depth (ftKB)
Surface	8 5/8	24.00	J-55	413.00
Prod 1	5 1/2	15.50	J-55	3,640.00

Cement Stages

Des	String	Top (ftKB)	Btm (ftKB)	Start Date
Primary Cement	Surface, 413.00ftKB, 8 5/8	6.00	413.00	12/6/2006
Primary Cement	Prod 1, 3,640.00ftKB, 5 1/2	126.00	3,650.00	12/12/2006
Abandonment Plug	Prod 1, 3,640.00ftKB, 5 1/2	1,957.00	1,992.00	

Tubing Strings

Tubing String							
Tubing Description	Run Date		String Length (ft)	Set Depth (ftKB)			
Item Des	Jts	Make/Manufacturer	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)

Rod Strings

Rod Strings							
Rod Description	Run Date		String Length (ft)		Set Depth (ftKB)		
Item Des	Jts	Make/Mfg.	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)

Other In Hole

Des	Icon	OD (in)	Top (ftKB)	Btm (ftKB)	Run Date
CIBP		4.95	1,992	1,996	8/10/2023

Perforations

Date	Type	Top (ftKB)	Btm (ftKB)	Prop?	Shot Dens (shots/ft)	Entered Shot Total
1/15/2010	San Andres	2,042	2,440	No	1.0	
1/15/2010	San Andres	2,500	2,950	No	1.0	
12/20/2006	Glorietta	3,139	3,209	No	1.0	7
12/20/2006	Yeso	3,243	3,455	No	1.0	30

Plug Back Total Depths

Date	Type	Depth (ftKB)	Depth (TVD) (ftKB)
------	------	--------------	--------------------

Schematic Annotations

Start Date	Depth (ftKB)	Annotation
------------	--------------	------------

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 335815

CONDITIONS

Operator: APACHE CORPORATION 303 Veterans Airpark Ln Midland, TX 79705	OGRID: 873
	Action Number: 335815
	Action Type: [C-103] NOI Temporary Abandonment (C-103I)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	4/23/2024