

Well Name: JAMES RANCH	Well Location: T23S / R31E / SEC 6 / NWSE / 32.3316997 / -103.8158702	County or Parish/State: EDDY / NM
Well Number: 30	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM04473	Unit or CA Name:	Unit or CA Number: NMNM70965O
US Well Number: 3001527704	Operator: XTO PERMIAN OPERATING LLC	

Notice of Intent

Sundry ID: 2800253

Type of Submission: Notice of Intent	Type of Action: Plug and Abandonment
Date Sundry Submitted: 07/11/2024	Time Sundry Submitted: 12:00
Date proposed operation will begin: 08/11/2024	

Procedure Description: XTO Permian Operating LLC., respectfully requests approval for plug and abandonment of the above mentioned well. Please see the attached P&A procedure, with current and proposed WBD's for your review.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

JRU\_30\_P\_A\_Procedure\_Current\_and\_Proposed\_WBDs\_20240711115951.pdf

Received by OCD: 9/18/2024 11:12:21 AM

Page 2 of 25

Well Name: JAMES RANCH	Well Location: T23S / R31E / SEC 6 / NWSE / 32.3316997 / -103.8158702	County or Parish/State: EDDY / NM
Well Number: 30	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM04473	Unit or CA Name:	Unit or CA Number: NMNM70965O
US Well Number: 3001527704	Operator: XTO PERMIAN OPERATING LLC	

Conditions of Approval

Specialist Review  
James\_Ranch\_30\_Sundry\_ID\_2800253\_P\_A\_202409171134539.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHERRY MORROW  
Signed on: JUL 11, 2024 12:00 PM  
Name: XTO PERMIAN OPERATING LLC  
Title: Regulatory Analyst  
Street Address: 6401 HOLIDAY HILL ROAD BLDG 5  
City: MIDLAND State: TX  
Phone: (432) 218-3671  
Email address: SHERRY.MORROW@EXXONMOBIL.COM

Field

Representative Name:  
Street Address:  
City: State: Zip:  
Phone:  
Email address:

BLM Point of Contact

BLM POC Name: LONG VO  
BLM POC Title: Petroleum Engineer  
BLM POC Phone: 5759885402  
BLM POC Email Address: LVO@BLM.GOV

Disposition: Approved  
Disposition Date: 09/17/2024

Signature: Long Vo

PLUG AND ABANDON WELLBORE  
JAMES RANCH UNIT 030  
EDDY COUNTY, NEW MEXICO  
Class II

MASIP	MAOP	MAWP	Surface Csg Yield
1,000 psi	1,000 psi	3,000 psi	1980 PSI

**SUMMARY:** Plug and abandon wellbore according to BLM regulations.


- 1) MIRU plugging company. Set open top steel pit for plugging.
- 2) POOH LD rods and pump.
- 3) ND WH and NU 3K manual BOP. Function test BOP.
- 4) Unset the TAC at 10,420.1'. POOH tbg and rods.
- 5) MIRU WLU, RIH GR to 11,000'; RIH set CIBP at 10,950', pressure test to 500 PSI for 30 minutes; dump bail 35' **Class H** cement from 10,950' to 10,915'. WOC and tag to verify TOC. (T/ Perf)
- 6) Spot 200 SKS **Class H** cement from 7,950' to 6,400'. WOC and tag to verify TOC. (T/Bone Spring, DV Tool, T/Brushy Canyon)
- 7) Run CBL from 6,000' to surface. (estimated TOC at 3,600')
- 8) MIRU WLU, perforate at TOC.
- 9) Spot 155 SKS **Class H** cement from 5,150' to TOC. WOC and tag to verify TOC. (T/Cherry Canyon, T/Bell Canyon, T/Delaware, Intermediate Casing Shoe, B/Salt)
- 10) Pull up hole, shut casing and circulate casing and annulus volume (down casing up annulus) through perfs. WOC and tag. Squeeze cement to surface. (~850 SKS) (T/Salt, Surface Casing Shoe)
- 11) ND BOP and cut off wellhead 5' below surface. RDMO PU, transport trucks, and pump truck.
- 12) Set P&A marker.
- 13) Pull fluid from steel tank and haul to disposal. Release steel tank.



# Downhole Well Profile - with Schematic

Well Name: James Ranch Unit 030

API/UWI 3001527704	SAP Cost Center ID 1136592001	Permit Number	State/Province New Mexico	County Eddy
Surface Location	Spud Date	Orig KB Elev (ft)	Ground Elevation (ft)	KB-Grd (ft)
				Surface Casing Flange

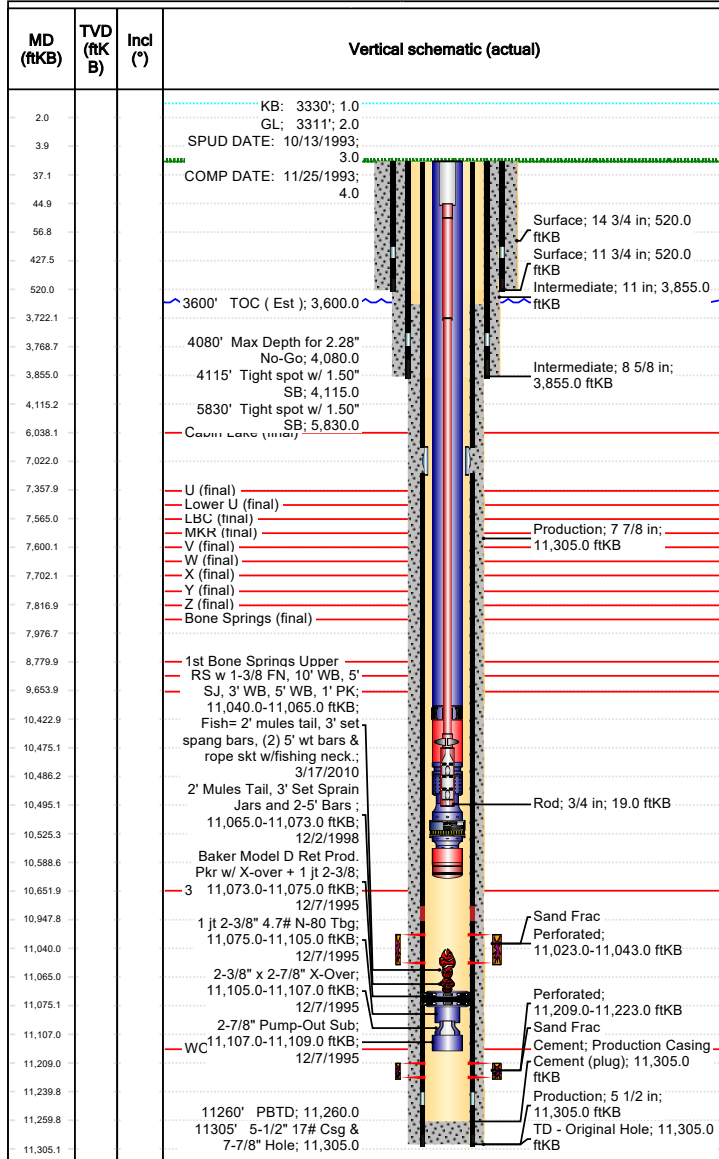

Wellbores							
Wellbore Name Original Hole		Parent Wellbore		Wellbore API/UWI			
Start Depth (ftKB)			Profile Type				
Section Des	Hole Sz (in)	Act Top (ftKB)		Act Btm (ftKB)			
Surface	14 3/4	19.0		520.0			
Intermediate	11	520.0		3,855.0			
Production	7 7/8	3,855.0		11,305.0			
Zones							
Zone Name	Top (ftKB)	Btm (ftKB)		Current Status			
Wolfcamp							
Casing Strings							
Csg Des	Set Depth (ftKB)	OD (in)	Wt/Len (lb/ft)	Grade			
Surface	520.0	11 3/4	42.00	H40			
Intermediate	3,855.0	8 5/8	32.00	K55			
Production	11,305.0	5 1/2	17.00	K55			
Cement							
Des	Type	Start Date	Top (ftKB)	Btm (ftKB)			
Surface Casing Cement	Casing	10/14/1993	19.0	520.0			
Intermediate Casing Cement	Casing	10/19/1993	19.0	3,855.0			
Production Casing Cement	Casing	11/9/1993	7,022.0	11,305.0			
Production Casing Cement	Casing	11/9/1993	3,600.0	7,022.0			
Tubing Strings							
Tubing Description Tubing - production		Run Date 2/8/2013		Set Depth (ftKB) 10,589.2			
Item Des	OD (in)	Wt (lb/ft)	Grade	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)
2-7/8" 6.5 ppf N-80 8RD Tubing	2 7/8	6.50	N-80	336	10,401.14	19.0	10,420.1
2-7/8" x 5-1/2" Baker moldel "B" TAC / 40000 #	2 7/8			1	2.85	10,420.1	10,423.0






# Downhole Well Profile - with Schematic

Well Name: James Ranch Unit 030

API/UWI 3001527704	SAP Cost Center ID 1136592001	Permit Number	State/Province New Mexico		County Eddy		
Surface Location			Spud Date	Orig KB Elev (ft)	Ground Elevation (ft)	KB-Grd (ft)	Surface Casing Flange

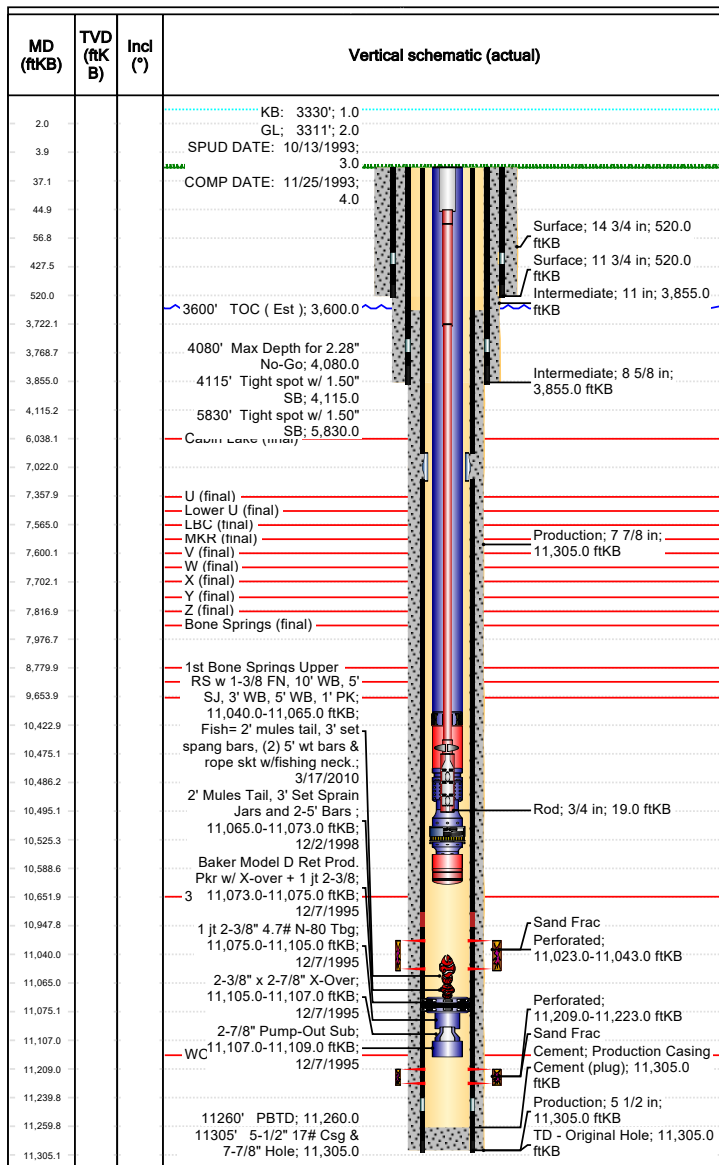

Item Des	OD (in)	Wt (lb/ft)	Grade	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)
2-7/8" EUE 8rd 6.5 ppf N-80 Tubing	2 7/8	6.50	N-80	2	62.12	10,423.0	10,485.1
2-7/8" MSN w/ 1-1/4" x 16' diptube	2 7/8			1	1.00	10,485.1	10,486.1
2-7/8" x 4' Perf 6.5# tbg sub	2 7/8	6.50	N-80	1	8.40	10,486.1	10,494.5
2-7/8" EUE 8rd x 3" LP (12V) swedge	2 7/8			1	0.90	10,494.5	10,495.4
3-1/2" Gas Separator	3 1/2			1	30.00	10,495.4	10,525.4
2-7/8" EUE 8rd x 3" LP (12V) swedge	2 7/8	6.50		1	0.90	10,525.4	10,526.3
2-7/8" EUE 8rd 6.5 ppf N-80 Tubing	2 7/8	6.50	N-80	2	62.12	10,526.3	10,588.4
2-7/8" Bull Plug	2 7/8			1	0.80	10,588.4	10,589.2


## Rod Strings

Rod Description		Run Date			Set Depth (ftKB)		
Rod		11/15/2013			10,495.0		
Item Des	OD (in)	Wt (lb/ft)	Grade	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)
Spray Metal Polished Rod	1 1/2			1	26.00	19.0	45.0
Pony Rod	7/8	2.22	non-AP 	1	2.00	45.0	47.0
Sucker Rod D-90	7/8	2.22	non-AP 	147	3,675.00	47.0	3,722.0
Sucker Rod D-90	3/4	1.63	non-AP 	270	6,750.00	3,722.0	10,472.0
7/8"X3' Rod Guide	7/8			1	3.00	10,472.0	10,475.0
Rod Insert Pump (2-1/2"x1-1/4"x24' RHBM #B553)	1 1/4		RHBM	1	20.00	10,475.0	10,495.0



Downhole Well Profile - with Schematic  
Well Name: James Ranch Unit 030

API/UWI 3001527704	SAP Cost Center ID 1136592001	Permit Number	State/Province New Mexico		County Eddy		
Surface Location			Spud Date	Orig KB Elev (ft)	Ground Elevation (ft)	KB-Grd (ft)	Surface Casing Flange

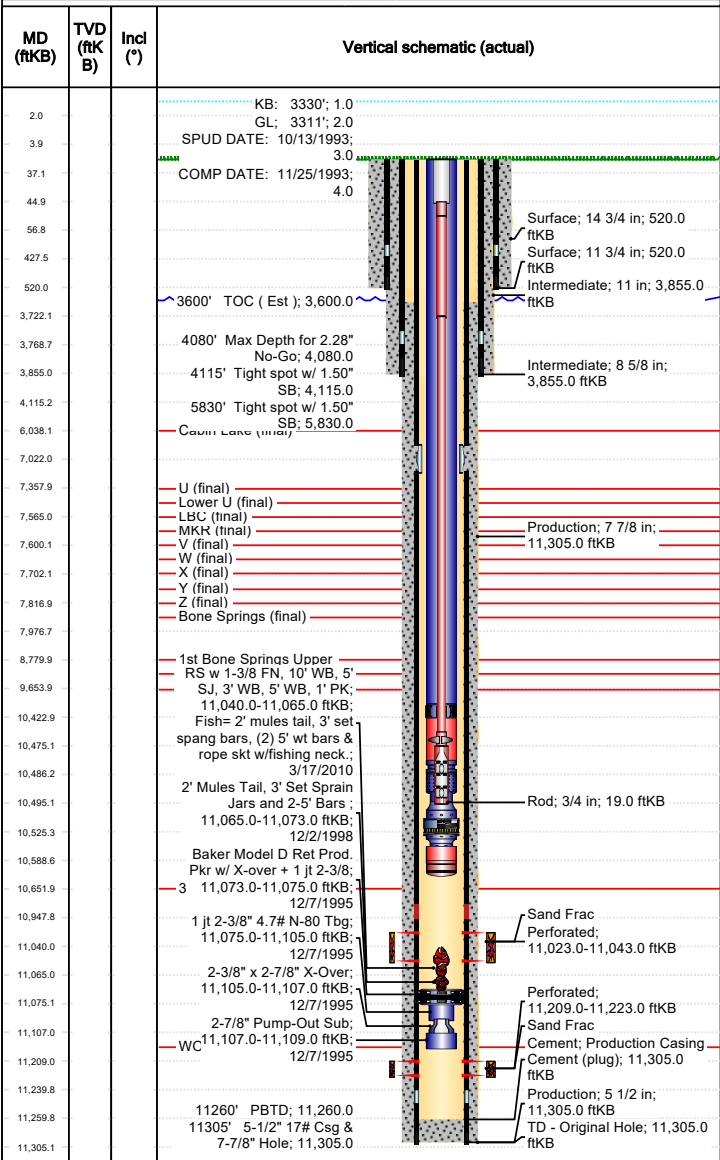

Other In Hole				
Run Date	Des	OD (in)	Top (ftKB)	Btm (ftKB)
12/7/1995	Baker Model D Ret Prod. Pkr w/ X-over + 1 jt 2-3/8	4 1/2	11,073.0	11,075.0
12/7/1995	2-3/8" x 2-7/8" X-Over	2 3/8	11,105.0	11,107.0
12/7/1995	2-7/8" Pump-Out Sub	2 7/8	11,107.0	11,109.0
12/7/1995	1 jt 2-3/8" 4.7# N-80 Tbg	2 3/8	11,075.0	11,105.0
12/2/1998	2' Mules Tail, 3' Set Sprain Jars and 2-5' Bars	1 1/4	11,065.0	11,073.0
3/17/2010	RS w 1-3/8 FN, 10' WB, 5' SJ, 3' WB, 5' WB, 1' PK	1 1/2	11,040.0	11,065.0

Perforations			
Date	Top (ftKB)	Btm (ftKB)	Linked Zone
11/18/1993	11,023.0	11,043.0	
12/7/1995	11,209.0	11,223.0	

Stimulation Intervals					
Interval Number	Top (ftKB)	Btm (ftKB)	Pump Power Max (bbl/min)	MIR (bbl/min)	Proppant Total (lb)
1					0.0
1	11,023.0	11,043.0			0.0
2	11,209.0	11,223.0			0.0

--	--	--	--	--	--

# JRU 030 - Proposed WBD

520' Surface Casing Shoe

613' T/Salt

3600' TOC

3713' B/Salt

3855' Intermediate Casing Shoe

3954' T/Delaware

3996' T/Bell Canyon

5056' T/Cherry Canyon


6517' T/Brushy Canyon

7021' DV Tool

7841' T/Bone Spring

11023' T/Perfs

11097' T/Wolfcamp

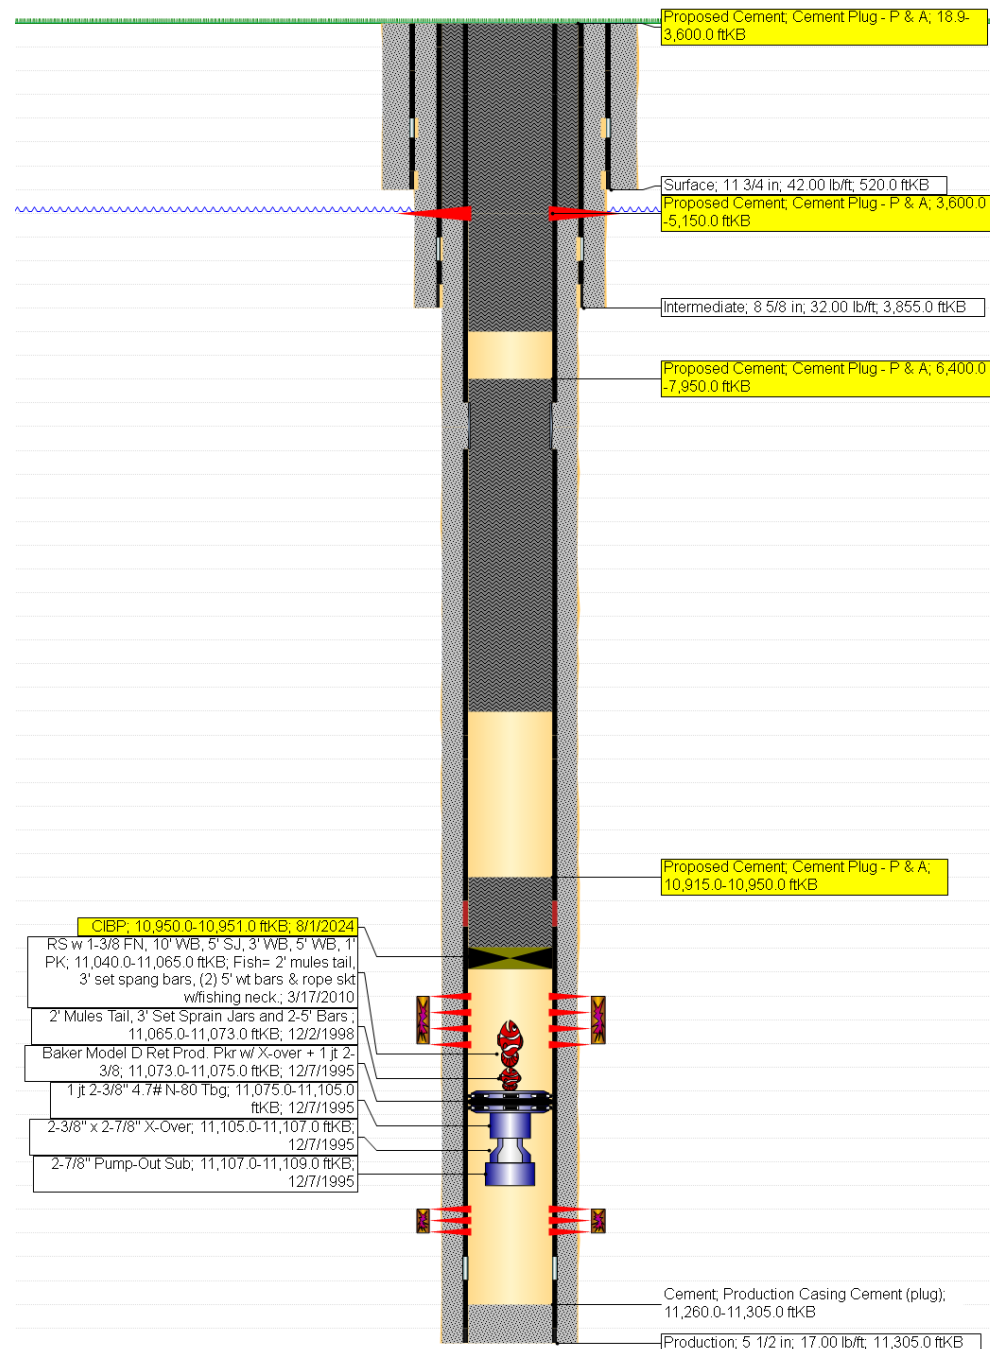

Perf and circulate from TOC to surface.

Spot 155 SKS Class C: 5,150' to TOC. WOC and Tag

Spot 200 SKS Class H: 7,950' to 6,400'. WOC and Tag

Dump bail 35' **Class H** atop CIBP: 10,950' to 10,915'. PT CIBP to 500 PSIG for 30 min. WOC and Tag.

U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

## Sundry Print Report

08/19/2024

Well Name: JAMES RANCH	Well Location: T23S / R31E / SEC 6 / NWSE / 32.3316997 / -103.8158702	County or Parish/State: EDDY / NM
Well Number: 30	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM04473	Unit or CA Name:	Unit or CA Number: NMNM709650
US Well Number: 3001527704	Operator: XTO PERMIAN OPERATING LLC	

## Notice of Intent

Sundry ID: 2800253

Type of Submission: Notice of Intent

Date Sundry Submitted: 07/11/2024

Date proposed operation will begin: 08/11/2024

LONG  
VODigitally signed  
by LONG VO  
Date: 2024.09.17  
14:38:19 -05'00'

Type of Action: Plug and Abandonment

Time Sundry Submitted: 12:00

Procedure Description: XTO Permian Operating LLC., respectfully requests approval for plug and abandonment of the above mentioned well. Please see the attached P&A procedure, with current and proposed WBD's for your review.

## Surface Disturbance

Is any additional surface disturbance proposed?: No

## NOI Attachments

Procedure Description

JRU\_30\_P\_A\_Procedure\_Current\_and\_Proposed\_WBDs\_20240711115951.pdf

APPROVAL SUBJECT TO  
GENERAL REQUIREMENTS AND  
SPECIAL STIPULATIONS  
ATTACHED

<b>Well Name:</b> JAMES RANCH	<b>Well Location:</b> T23S / R31E / SEC 6 / NWSE / 32.3316997 / -103.8158702	<b>County or Parish/State:</b> EDDY / NM
<b>Well Number:</b> 30	<b>Type of Well:</b> OIL WELL	<b>Allottee or Tribe Name:</b>
<b>Lease Number:</b> NMNM04473	<b>Unit or CA Name:</b>	<b>Unit or CA Number:</b> NMNM709650
<b>US Well Number:</b> 3001527704	<b>Operator:</b> XTO PERMIAN OPERATING LLC	

**Operator**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

**Operator Electronic Signature:** SHERRY MORROW**Signed on:** JUL 11, 2024 12:00 PM**Name:** XTO PERMIAN OPERATING LLC**Title:** Regulatory Analyst**Street Address:** 6401 HOLIDAY HILL ROAD BLDG 5**City:** MIDLAND**State:** TX**Phone:** (432) 218-3671**Email address:** SHERRY.MORROW@EXXONMOBIL.COM**Field****Representative Name:****Street Address:****City:****State:****Zip:****Phone:****Email address:**



R111P, Chicken

Form 3160-5  
(June 2019)UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTFORM APPROVED  
OMB No. 1004-0137  
Expires: October 31, 2021**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an**  
**abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No. NMNM04473

6. If Indian, Allottee or Tribe Name

**SUBMIT IN TRIPLICATE - Other instructions on page 2**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

XTO PERMIAN OPERATING LLC

3a. Address 6401 HOLIDAY HILL ROAD BLDG 5, MIDLAND,

3b. Phone No. (include area code)  
(432) 683-2277

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEC 6/T23S/R31E/NMP

7. If Unit of CA/Agreement, Name and/or No.

NMNM709650

8. Well Name and No.

JAMES RANCH/30

9. API Well No.

3001527704

10. Field and Pool or Exploratory Area

LOS MEDANOS/LOS MEDANOS

11. Country or Parish, State

EDDY/NM

## 12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

XTO Permian Operating LLC., respectfully requests approval for plug and abandonment of the above mentioned well. Please see the attached P&A procedure, with current and proposed WBD's for your review.

14. I hereby certify that the foregoing is true and correct. Name (Printed Typed)

SHERRY MORROW / Ph: (432) 218-3671

Regulatory Analyst

Title

Signature (Electronic Submission)

Date

07/11/2024

## THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Long Vo



Title Petroleum Engineer

Date

9/16/2024

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

CFO

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)



## GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

## SPECIFIC INSTRUCTIONS

*Item 4* - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

*Item 13*: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

## NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240



## Additional Information

### Location of Well

0. SHL: NWSE / 0 / 0 / TWSP: 23S / RANGE: 31E / SECTION: 6 / LAT: 32.3316997 / LONG: -103.8158702 ( TVD: 0 feet, MD: 0 feet )

BHL: NWSE / 0 / 0 / TWSP: 23S / SECTION: / LAT: 0.0 / LONG: 0.0 ( TVD: 0 feet, MD: 0 feet )

PLUG AND ABANDON WELLBORE  
JAMES RANCH UNIT 030  
EDDY COUNTY, NEW MEXICO  
Class II

MASIP	MAOP	MAWP	Surface Csg Yield
1,000 psi	1,000 psi	3,000 psi	1980 PSI

**SUMMARY:** Plug and abandon wellbore according to BLM regulations.

- 1) MIRU plugging company. Set open top steel pit for plugging.
- 2) POOH LD rods and pump.
- 3) ND WH and NU 3K manual BOP. Function test BOP.
- 4) Unset the TAC at 10,420.1'. POOH tbg and rods.
- 5) MIRU WLU, RIH GR to 11,000'; RIH set CIBP at 10,950', pressure test to 500 PSI for 30 minutes; dump bail 35' **Class H** cement from 10,950' to 10,915'. WOC and tag to verify TOC. (T/ Perf)
- 6) Spot 200 SKS **Class H** cement from 7,950' to 6,400'. WOC and tag to verify TOC. (T/Bone Spring, DV Tool, T/Brushy Canyon)
- 7) Run CBL from 6,000' to surface. (estimated TOC at 3,600')
- 8) MIRU WLU, perforate at TOC.
- 9) Spot 155 SKS **Class H** cement from 5,150' to TOC. WOC and tag to verify TOC. (T/Cherry Canyon, T/Bell Canyon, T/Delaware, Intermediate Casing Shoe, B/Salt)
- 10) Pull up hole, shut casing and circulate casing and annulus volume (down casing up annulus) through perfs. WOC and tag. Squeeze cement to surface. (~850 SKS) (T/Salt, Surface Casing Shoe)
- 11) ND BOP and cut off wellhead 5' below surface. RDMO PU, transport trucks, and pump truck.
- 12) Set P&A marker.
- 13) Pull fluid from steel tank and haul to disposal. Release steel tank.



**XTO Energy**



XTO ENERGY				Downhole Well Profile - with Schematic				County			
API/OWI		SAP Cost Center ID		Permit Number		State/Province		County		Eddy	
3001527704		1136592001				New Mexico		Eddy			
Surface Location				Spud Date		Orig KB Elev (ft)		Ground Elevation (ft)		KB-Grd (ft)	
										Surface Casing Flange	
MD (ftKB)	Incl (°)	Vertical schematic (actual)									
2.0		<p>KB: 3330'; 1.0 GL: 3311'; 2.0 SPUD DATE: 10/13/1993 COMP DATE: 11/25/1993 3600' TOC (Est): 3,600.0</p> <p>4080' Max Depth for 2.28" No-Go: 4,080.0 4115' Tight spot w/ 1.50" SB: 4,115.0 5630' Tight spot w/ 1.50" SB: 5,630.0</p> <p>U (final) L (final) MKK (final) V (final) W (final) X (final) Y (final) Z (final) Bone Springs (final)</p> <p>1st Bone Springs Upper RS w 1-3/8 FN, 10' WB, 5' SJ, 3' WB, 5' WB, 1' PK, 11,040.0-11,065.0 RKB; Field= 2' mules tail, 3' set spang bars, (2) 5' wt bars &amp; rope skt w/ fishing neck; 3/17/2010</p> <p>2' Mules Tail, 3' Set Sprain Jars and 2-5' Bars; 11,065.0-11,073.0 RKB; 12/27/1998</p> <p>Baker Model D Ret Prod, Pkr w/ X-over + 1 ft 2-3/8; 11,073.0-11,075.0 RKB; 12/7/1995</p> <p>1 ft 2-3/8" 4.7# N-80 Tbg; 11,075.0-11,105.0 RKB; 12/7/1995</p> <p>2-3/8" x 2-7/8" X-Over; 11,105.0-11,107.0 RKB; 12/7/1995</p> <p>2-7/8" Pump-Out Sub; WC 1,107.0-11,109.0 RKB; 12/7/1995</p> <p>11360' PETD: 11,260.0 11305' 5-1/2" 17# Csg &amp; 7-7/8" Hole; 11,305.0 RKB</p>									
3.0		<p>Surface: 14 3/4 in; 520.0 RKB Surface: 11 3/4 in; 520.0 RKB Intermediate: 11 in; 3,855.0 RKB Intermediate: 8 5/8 in; 3,855.0 RKB Production: 7 7/8 in; 11,305.0 RKB</p>									
37.1											
44.9											
96.8											
427.5											
520.0											
3,722.1											
3,765.7											
3,885.0											
4,115.2											
6,030.1											
7,022.0											
7,357.5											
7,565.9											
7,600.1											
7,702.1											
7,816.9											
7,917.7											
8,778.9											
9,665.9											
10,422.9											
10,475.1											
10,485.2											
10,495.1											
10,525.3											
10,588.6											
10,651.9											
10,947.9											
11,040.0											
11,065.0											
11,075.1											
11,167.0											
11,200.0											
11,239.8											
11,265.8											
11,305.1											

Item Des	OD (in)	Wt (lb/ft)	Grade	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)
2-7/8" EUE 8rd 6.5 ppf N-80 Tubing	2 7/8	6.50	N-80	2	62.12	10,423.0	10,485.1
2-7/8" MSN w/ 1-1/4" x 16' diptube	2 7/8			1	1.00	10,485.1	10,486.1
2-7/8" x 4' Perf 6.5# tbg sub	2 7/8	6.50	N-80	1	8.40	10,486.1	10,494.5
2-7/8" EUE 8rd x 3" LP (12V) swedge	2 7/8			1	0.90	10,494.5	10,495.4
3-1/2" Gas Separator	3 1/2			1	30.00	10,495.4	10,525.4
2-7/8" EUE 8rd x 3" LP (12V) swedge	2 7/8	6.50		1	0.90	10,525.4	10,526.3
2-7/8" EUE 8rd 6.5 ppf N-80 Tubing	2 7/8	6.50	N-80	2	62.12	10,526.3	10,588.4
2-7/8" Bull Plug	2 7/8			1	0.80	10,588.4	10,589.2


Rod Strings				Run Date	Set Depth (ftKB)		
Rod Description	OD (in)	Wt (lb/ft)	Grade	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)
Spray Metal Polished Rod	1 1/2			1	26.00	19.0	45.0
Pony Rod	7/8	2.22	non-AP	1	2.00	45.0	47.0
Sucker Rod D-90	7/8	2.22	non-AP	147	3,675.00	47.0	3,722.0
Sucker Rod D-90	3/4	1.63	non-AP	270	6,750.00	3,722.0	10,472.0
7/8"X3' Rod Guide	7/8			1	3.00	10,472.0	10,475.0
Rod Insert Pump (2-1/2"x1-1/4"x24' RHBM #B553)	1 1/4		RHBM	1	20.00	10,475.0	10,495.0

Report Printed:

Page 2/3

XTO Energy




 <b>Downhole Well Profile - with Schematic</b> <b>Well Name: James Ranch Unit 030</b>				State/Province New Mexico		County Eddy	
API/UVI 3001527704		SAP Cost Center ID 1136592001		Permit Number		Surface Location	
MD (ftKB) 2.0 3.0 37.1 44.9 56.8 427.5 520.0 3,722.1 3,768.7 3,889.0 4,116.2 6,030.1 7,022.0 7,357.9 7,582.9 7,800.1 7,702.1 7,816.9 7,976.7 8,779.9 9,653.9 10,422.9 10,475.1 10,485.2 10,495.1 10,505.2 10,508.6 10,513.9 10,947.9 11,040.9 11,065.0 11,075.1 11,107.9 11,200.0 11,233.8 11,253.8 11,305.1		Incl (°) 2.0 3.0 37.1 44.9 56.8 427.5 520.0 3,722.1 3,768.7 3,889.0 4,116.2 6,030.1 7,022.0 7,357.9 7,582.9 7,800.1 7,702.1 7,816.9 7,976.7 8,779.9 9,653.9 10,422.9 10,475.1 10,485.2 10,495.1 10,505.2 10,508.6 10,513.9 10,947.9 11,040.9 11,065.0 11,075.1 11,107.9 11,200.0 11,233.8 11,253.8 11,305.1		Vertical schematic (actual)			
				KB: 3330'; 1.0 GL: 3311'; 2.0 SPUD DATE: 10/13/1993; 3.0 COMP DATE: 11/25/1993; 4.0 3600' TOC (Est): 3,600.0 4090' Max Depth for 2.28" No-Go: 4,060.0 4115' Tight spot w/ 1.50" SB: 4,115.0 5630' Tight spot w/ 1.50" SB: 5,630.0 1st Bone Springs Upper RS w 1-3/8 FN, 10' WB, 5' SJ, 3' WB, 5' WB, 1' PK; 11,040.0-11,065.0 RKB; Fish= 2' mules tail, 3' set sprang bars, (2) 5' wt bars & rope skt w/ fishing neck; 3/17/2010 2' Mules Tail, 3' Set Sprain Jars and 2-5' Bars; 11,065.0-11,073.0 RKB; 12/2/1998 Baker Model D Ret Prod, Pkr w/ X-over + 1 jt 2-3/8; 11,073.0-11,075.0 RKB; 12/7/1995 1 jt 2-3/8" 4.7# N-80 Tbg; 11,075.0-11,105.0 RKB; 12/7/1995 2-3/8" x 2-7/8" X-Over; 11,105.0-11,107.0 RKB; 12/7/1995 2-7/8" Pump-Out Sub; WC 1, 107.0-11,109.0 RKB; 12/7/1995 11260' PBTD; 11,260.0 11305' 5-1/2" 17# Csg & 7-7/8" Hole; 11,305.0 RKB Surface: 14 3/4 in; 520.0 RKB Springs: 11 3/4 in; 520.0 RKB Intermediate: 11 in; 3,855.0 RKB Intermediate: 6 5/8 in; 3,855.0 RKB Production: 7 7/8 in; 11,305.0 RKB Sand Frac Perforated; 11,023.0-11,043.0 RKB Sand Frac Perforated; 11,209.0-11,223.0 RKB Cement; Production Casing Cement (plug); 11,305.0 RKB Production; 5 1/2 in; 11,305.0 RKB TD - Original Hole; 11,305.0 RKB			
Other In Hole				Run Date			
				Des			
				OD (in)			
				Top (ftKB)			
				Btm (ftKB)			
				12/7/1995			
				Baker Model D Ret Prod, Pkr w/ X-over + 1 jt 2-3/8			
				4 1/2			
				11,073.0			
				11,075.0			
				12/7/1995			
				2-3/8" x 2-7/8" X-Over			
				2 3/8			
				11,105.0			
				12/7/1995			
				2-7/8" Pump-Out Sub			
				2 7/8			
				11,107.0			
				12/7/1995			
				1 jt 2-3/8" 4.7# N-80 Tbg			
				2 3/8			
				11,075.0			
				12/2/1998			
				2' Mules Tail, 3' Set Sprain Jars and 2-5' Bars			
				1 1/4			
				11,065.0			
				3/17/2010			
				RS w 1-3/8 FN, 10' WB, 5' SJ, 3' WB, 5' WB, 1' PK			
				1 1/2			
				11,040.0			
				11,065.0			
Perforations				Date			
				Top (ftKB)			
				Btm (ftKB)			
				11/18/1993			
				11,023.0			
				11,043.0			
				12/7/1995			
				11,209.0			
				11,223.0			
Stimulation Intervals				Interval Number			
				Top (ftKB)			
				Btm (ftKB)			
				Pump Power Max (bbl/min)			
				MIR (bbl/min)			
				Proppant Total (lb)			
				1			
				11,023.0			
				11,043.0			
				0.0			
				2			
				11,209.0			
				11,223.0			
				0.0			

Report Printed:

Page 3/3

XTO Energy

## JRU 030 - Proposed WBD

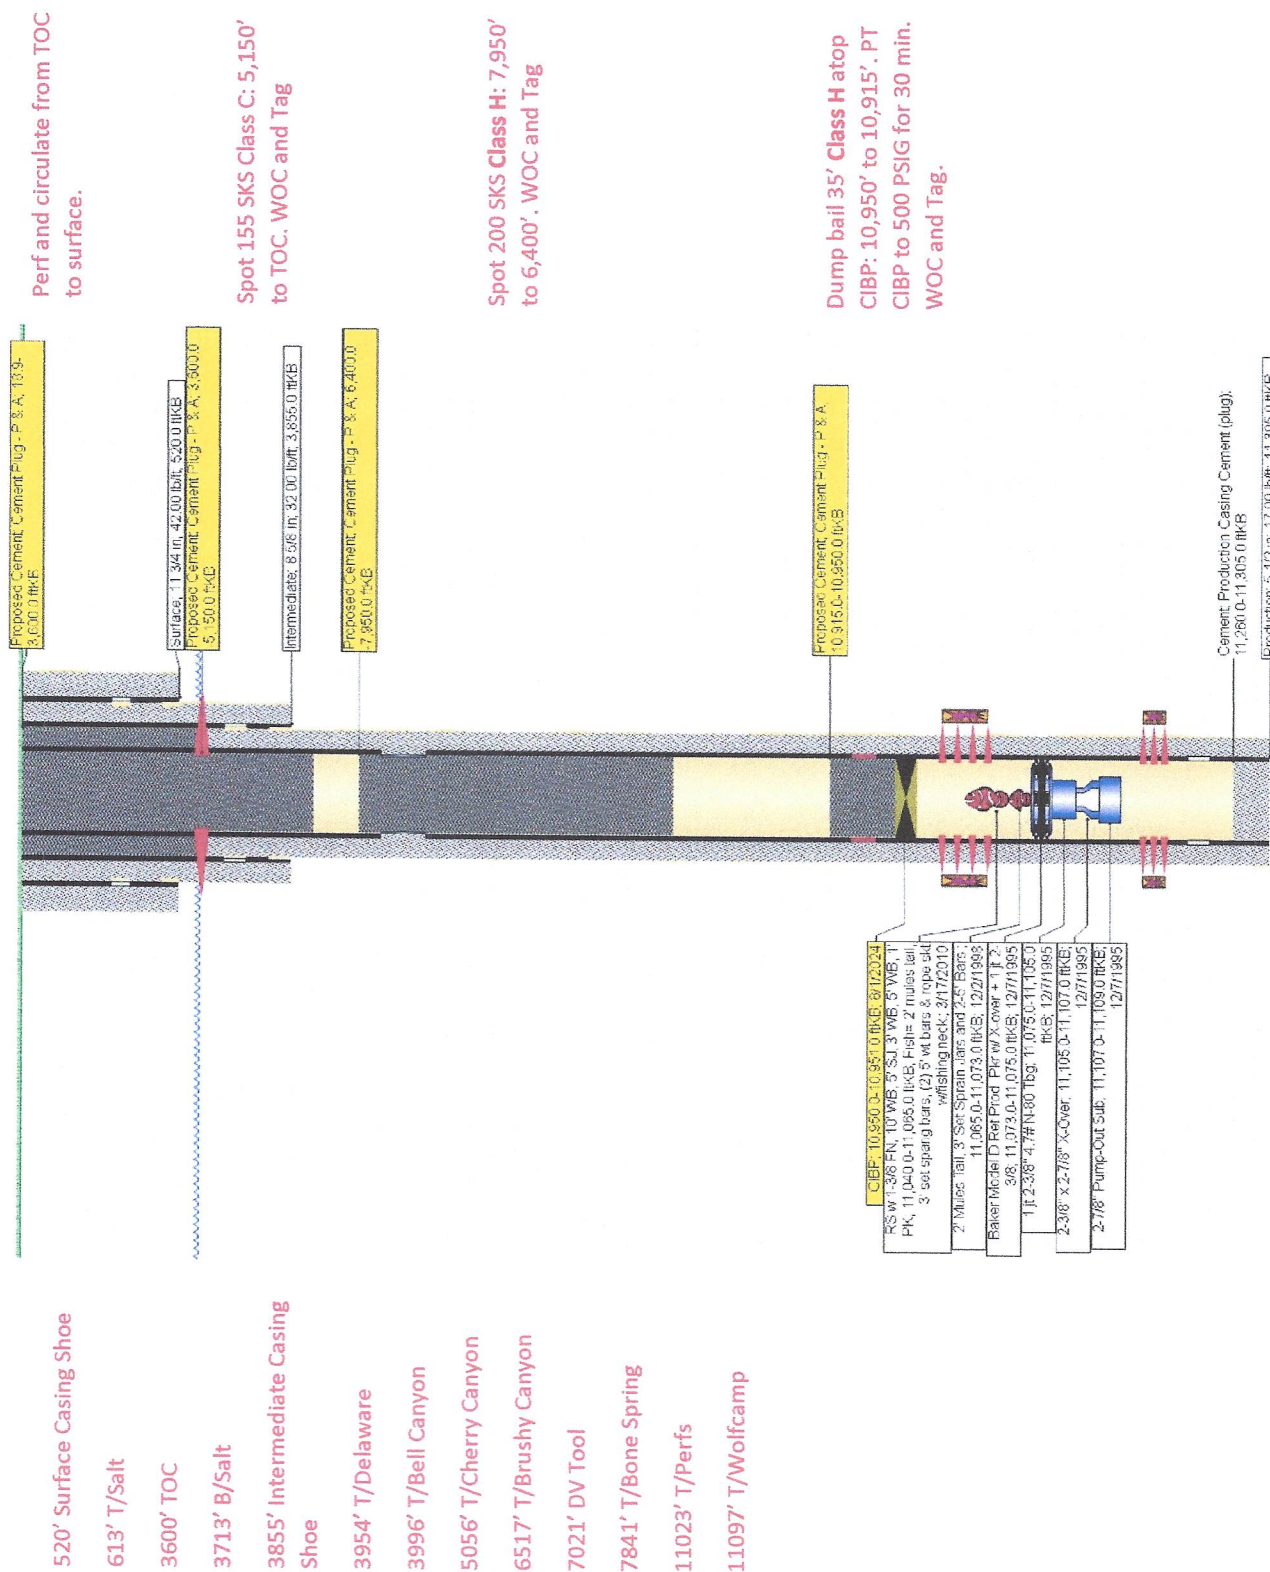



**BUREAU OF LAND MANAGEMENT  
Carlsbad Field Office  
620 East Greene Street  
Carlsbad, New Mexico 88220  
575-234-5972**

**Permanent Abandonment of Federal Wells  
Conditions of Approval (LPC Habitat)**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

**If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.**

**The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.**

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **fresh** water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours for Class C or accelerated cement (calcium chloride) and 6 hours for Class H. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a



bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

Fluid used to mix the cement in R111Q shall be saturated with the salts common to the section penetrated, and in suitable proportions but not less than 1% and not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified *BY PHONE* (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off.**

Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing. The following information shall be permanently inscribed on the plate: well name and number, name of operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well.

**Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

**Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:**

From March 1<sup>st</sup> through June 15<sup>th</sup> annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Carlsbad Field Office  
620 E. Greene St.  
Carlsbad, New Mexico 88220-6292  
[www.blm.gov/nm](http://www.blm.gov/nm)



In Reply Refer To: 1310

### Reclamation Objectives and Procedures

**Reclamation Objective:** Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo “interim” reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo “final” reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines (**Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure**). Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. **This will apply to well pads, facilities, and access roads.** Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry

Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos  
Supervisory Petroleum Engineering Tech/Environmental Protection Specialist  
575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias  
Environmental Protection Specialist  
575-234-6230

Crisha Morgan  
Environmental Protection Specialist  
575-234-5987

Jose Martinez-Colon  
Environmental Protection Specialist  
575-234-5951

Mark Mattozzi  
Environmental Protection Specialist  
575-234-5713

Robert Duenas  
Environmental Protection Specialist  
575-234-2229

Doris Lauger Martinez  
Environmental Protection Specialist  
575-234-5926

Jaden Johnston  
Environmental Protection Asst. (Intern)  
575-234-6252

Sundry ID

2800253

Plug Type	Top	Bottom	Length	Tag	Sacks	Cement Class	Notes
Surface Plug	0.00	100.00	100.00	Tag/Verify			
Fresh Water @ 345	291.55	395.00	103.45	If solid			
11.75 inch- Shoe Plug	464.80	570.00	105.20	Tag/Verify			
Top of Salt @ 577	521.23	627.00	105.77	Tag/Verify			
Base of Salt @ 3670	3583.30	3720.00	136.70	Tag/Verify			
8.625 inch- Shoe Plug	3766.45	3905.00	138.55	Tag/Verify	840.00	C	Perf and squeeze from 3600' to surface. Verify at surface. (In 356 sxs/Out 484 sxs)
Delaware @ 3997	3907.03	4047.00	139.97	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations	153.00	C	Spot cement from 5150' to 3600'. WOC and Tag.
DV tool plug	6900.79	7071.00	170.21	Tag/Verify			
Bonesprings @ 7814	7685.86	7950.00	264.14	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations	104.00	C	Spot cement from 7950' to 6900'. WOC and Tag.
Perforations Plug (If No CIBP)	10882.57	11093.00	210.43	Tag/Verify			

				If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio ns			
<b>CIBP Plug</b>	10915.00	10950.00	35.00		4.00	C	Set CIBP at 10950'. Dump bail 35' on top. Leak test CIBP.
<b>Wolfcamp @ 11095</b>	10934.05	11145.00	210.95	If solid			
<b>Perforations Plug (If No CIBP)</b>	11060.77	11273.00	212.23	Tag/Verify			
<b>5.5 inch- Shoe Plug</b>	11141.95	11355.00	213.05	Tag/Verify			

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole.  
Class H >7500'  
Class C <7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater  
R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft^3/sx  
Class H: 1.06 ft^3/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

		<u>50 Feet from Base of Salt to surface</u>	
<u>Cave Karst/Potash Cement Requirement:</u>	<u>R111</u>		
11.75 inch- Shoe Plug @	520.00		
8.625 inch- Shoe Plug @	3855.00		
5.5 inch- Shoe Plug @	11305.00	TOC @	3600.00
Perforatons Top @	11023.00	Perforations	11043.00
Perforatons Top @	11209.00	Perforations	11223.00
DV Tool @	7021.00	CIBP @	10950.00

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS  
  
Action 384627

CONDITIONS

Operator: XTO PERMIAN OPERATING LLC. 6401 HOLIDAY HILL ROAD MIDLAND, TX 79707	OGRID: 373075
	Action Number: 384627
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	Run CBL from 10950' to surface....CBL must be submitted to OCD via OCD Permitting prior to submitting C-103P	10/1/2024