

Well Name: POKER LAKE UNIT 30 BS	Well Location: T25S / R31E / SEC 30 / LOT 2 / 32.101829 / -103.82455	County or Parish/State: EDDY / NM
Well Number: 108H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC061634B	Unit or CA Name: POKER LAKE UNIT	Unit or CA Number: NMNM71016X
US Well Number:	Operator: XTO PERMIAN OPERATING LLC	

Notice of Intent

Sundry ID: 2830589

Type of Submission: Notice of Intent	Type of Action: APD Change
Date Sundry Submitted: 01/07/2025	Time Sundry Submitted: 04:09
Date proposed operation will begin: 01/21/2025	

Procedure Description: XTO Permian Operating, LLC. respectfully requests approval to make the following changes to the approved APD. Changes to include KOP, FTP, LTP, BHL, Proposed Total Depth, Pool. There is a dedicated acreage change. There is no new surface disturbance. The API number for this well is 30-015-55950 FROM: TO: KOP: 2435' FNL & 455' FWL OF SECTION 30 -T25S-R31E 2046' FNL & 354' FWL OF SECTION 30-T25S-R31E FTP: 2435' FNL & 330' FWL OF SECTION 30-T25S-R31E 2554' FSL & 350' FWL OF SECTION 30-T25S-R31E LTP: 100' FSL & 330' FWL OF SECTION 6-T26S-R31E 100' FSL & 350' FWL OF SECTION 31-T25S-R31E BHL: 50' FSL & 330' FWL OF SECTION 6-T26S-R31E 10' FSL & 350' FWL OF SECTION 31-T25S-R31E The proposed total depth is changing from 23467' MD; 9736' TVD to 16992' MD; 8709' TVD. Pool Code is changing FROM 97975 / WC-015 G-06 S243229C; Bone Spring TO 97814 / Wildcat G-015 S263001O; Bone Spring There will be no changes required to the facilities/surface usage that was approved along with the APD. See attached drilling program for the updated casing design, cement program & mud circulation system. Attachments: C-102, Drilling Program, Directional Drilling Plan, Choke Manifold Diagram, BOP Diagram, Non-API Spec documents for Intermediate & Production Casing, Flex Hose Variance, Spudder Rig Request

NOI Attachments

Procedure Description

Sundry_Attachments_PLU_30_BS_108H_20250107160657.pdf

Well Name: POKER LAKE UNIT 30 BS	Well Location: T25S / R31E / SEC 30 / LOT 2 / 32.101829 / -103.82455	County or Parish/State: EDDY / NM
Well Number: 108H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC061634B	Unit or CA Name: POKER LAKE UNIT	Unit or CA Number: NMNM71016X
US Well Number:	Operator: XTO PERMIAN OPERATING LLC	

Conditions of Approval

Additional

PLU_30_BS_108H_COA_20250130152843.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: VISHAL RAJAN	Signed on: JAN 07, 2025 04:07 PM
Name: XTO PERMIAN OPERATING LLC	
Title: Regulatory Clerk	
Street Address: 6401 HOLIDAY HILL ROAD BLDG 5	
City: MIDLAND	State: TX
Phone: (432) 620-6704	
Email address: VISHAL.RAJAN@EXXONMOBIL.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: CHRISTOPHER WALLS	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752342234	BLM POC Email Address: cwalls@blm.gov
Disposition: Approved	Disposition Date: 01/30/2025
Signature: Chris Walls	

Form 3160-5 (June 2019)	UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT	FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021
SUNDRY NOTICES AND REPORTS ON WELLS <i>Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.</i>		5. Lease Serial No.
		6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2		7. If Unit of CA/Agreement, Name and/or No.
1. Type of Well <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		8. Well Name and No.
2. Name of Operator		9. API Well No.
3a. Address	3b. Phone No. (include area code)	10. Field and Pool or Exploratory Area
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)		11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA				
TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)		
	Title	
Signature	Date	

THE SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Additional Remarks

Pool Code is changing FROM 97975 / WC-015 G-06 S243229C; Bone Spring TO 97814 / Wildcat G-015 S263001O; Bone Spring

There will be no changes required to the facilities/surface usage that was approved along with the APD.

See attached drilling program for the updated casing design, cement program & mud circulation system.

Attachments: C-102, Drilling Program, Directional Drilling Plan, Choke Manifold Diagram, BOP Diagram, Non-API Spec documents for Intermediate & Production Casing, Flex Hose Variance, Spudder Rig Request

Location of Well

0. SHL: LOT 2 / 2435 FNL / 455 FWL / TWSP: 25S / RANGE: 31E / SECTION: 30 / LAT: 32.101829 / LONG: -103.82455 (TVD: 0 feet, MD: 0 feet)

PPP: LOT 2 / 2435 FNL / 330 FWL / TWSP: 25S / RANGE: 31E / SECTION: 30 / LAT: 32.101828 / LONG: -103.824954 (TVD: 9736 feet, MD: 10100 feet)

BHL: LOT 4 / 50 FSL / 330 FWL / TWSP: 26S / RANGE: 31E / SECTION: 6 / LAT: 32.064782 / LONG: -103.825101 (TVD: 9736 feet, MD: 23467 feet)

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	XTO
LEASE NO.:	NMNM0157756A
LOCATION:	Sec. 30, T.25 S, R 31 E
COUNTY:	Eddy County, New Mexico ▼
WELL NAME & NO.:	Poker Lake Unit 30 BS 108H
SURFACE HOLE FOOTAGE:	2435'/N & 455'/E
BOTTOM HOLE FOOTAGE:	10'/S & 350'/E

*Changes approved through engineering via **Sundry 2830589** on 1-30-2025. Any previous COAs not addressed within the updated COAs still apply.*

COA

H ₂ S	<input checked="" type="radio"/> No	<input type="radio"/> Yes
Potash / WIPP	<input checked="" type="radio"/> None <input type="radio"/> Secretary <input type="radio"/> R-111-Q <input type="checkbox"/> Open Annulus Choose an option (including blank option.)	<input type="checkbox"/> WIPP
Cave / Karst	<input type="radio"/> Low	<input checked="" type="radio"/> Medium <input type="radio"/> High <input type="radio"/> Critical
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl <input type="radio"/> Both <input type="radio"/> Diverter
Cementing	<input checked="" type="checkbox"/> Primary Squeeze <input type="checkbox"/> Cont. Squeeze	<input checked="" type="checkbox"/> EchoMeter <input type="checkbox"/> DV Tool
Special Req	<input type="checkbox"/> Capitan Reef <input type="checkbox"/> Water Disposal	<input type="checkbox"/> COM <input checked="" type="checkbox"/> Unit
Waste Prev.	<input type="radio"/> Self-Certification <input type="radio"/> Waste Min. Plan	<input checked="" type="radio"/> APD Submitted prior to 06/10/2024
Additional Language	<input checked="" type="checkbox"/> Flex Hose <input checked="" type="checkbox"/> Casing Clearance <input type="checkbox"/> Pilot Hole <input checked="" type="checkbox"/> Break Testing <input type="checkbox"/> Four-String <input checked="" type="checkbox"/> Offline Cementing <input type="checkbox"/> Fluid-Filled	

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet 43 CFR 3176 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **9-5/8** inch surface casing shall be set at approximately **1084** feet (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be

- notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 pounds compressive strength**, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is: Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.
- a. **First stage:** Operator will cement with intent to reach the top of the **Brushy Canyon at 7795'**.
 - b. **Second stage:** Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.**
- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

Operator has proposed to pump down **Surface X Intermediate 1** annulus after primary cementing stage. **Operator must run Echo-meter to verify Cement Slurry/Fluid top in the annulus OR operator shall run a CBL from TD of the Surface casing to tieback requirements listed above after the second stage BH to verify TOC.** Submit results to the BLM. No displacement fluid/wash out shall be utilized at the top of the cement slurry between second stage BH and top out. Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

If cement does not reach surface, the next casing string must come to surface.

3. The minimum required fill of cement behind the **5-1/2** inch production casing **P-110 Wedge 441 and TPN** is:
 - Cement should tie-back **200 feet** into the previous casing. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. Operator has proposed a multi-bowl wellhead assembly. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.

D. SPECIAL REQUIREMENT (S)

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

Commercial Well Determination

A commercial well determination shall be submitted after production has been established for at least six months. **(This is not necessary for secondary recovery unit wells)**

Engineer may elect to vary this language. Speak with Chris about implementing changes and whether that change seems reasonable.

Casing Clearance

String does not meet 0.422" clearance requirement per 43 CFR 3172. Cement tieback requirement increased 100' for Production casing tieback. Operator may contact approving engineer to discuss changing casing set depth or grade to meet clearance requirement.

BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for intervals utilizing a 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP.)**
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer **(575-706-2779)** prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted **(575-361-2822 Eddy County)** 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per **43 CFR 3172**.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

Offline Cementing

Contact the BLM prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Eddy County Petroleum Engineering Inspection Staff:

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220;
[BLM NM CFO DrillingNotifications@BLM.GOV](mailto:BLM_NM_CFO_DrillingNotifications@BLM.GOV); (575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's

requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii. Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve

- open. (only applies to single stage cement jobs, prior to the cement setting up.)
- iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - iv. The test shall be run on a 5000-psi chart for a 2-3M BOP/BOP, on a 10000-psi chart for a 5M BOP/BOPE and on a 15000-psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one-hour chart. A circular chart shall have a maximum 2-hour clock. If a twelve hour or twenty-four-hour chart is used, tester shall make a notation that it is run with a two-hour clock.
 - v. The results of the test shall be reported to the appropriate BLM office.
 - vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - vii. The BOP/BOPE test shall include a low-pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
 - viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be

disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

Approved by Zota Stevens on 1/30/2025
575-234-5998 / zstevens@blm.gov

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	<input type="checkbox"/> Initial Submittal
			<input checked="" type="checkbox"/> Amended Report
		<input type="checkbox"/> As Drilled	

WELL LOCATION INFORMATION			
API Number 30-015	Pool Code 97814	Pool Name Wildcat G-015 S263001O; Bone Spring	
Property Code	Property Name POKER LAKE UNIT 30 BS	Well Number 108H	
ORGID No. 373075	Operator Name XTO PERMIAN OPERATING, LLC.	Ground Level Elevation 3,371'	
Surface Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal		Mineral Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal	

Surface Location									
UL	Section 30	Township 25 S	Range 31 E	Lot 2	Ft. from N/S 2,435' FNL	Ft. from E/W 455' FWL	Latitude 32.101829	Longitude -103.824550	County EDDY

Bottom Hole Location									
UL	Section 31	Township 25 S	Range 31 E	Lot 4	Ft. from N/S 10' FSL	Ft. from E/W 350' FWL	Latitude 32.079324	Longitude -103.825042	County EDDY

Dedicated Acres 239.90	Infill or Defining Well DEFINING	Defining Well API	Overlapping Spacing Unit (Y/N) N	Consolidation Code U
Order Numbers.			Well setbacks are under Common Ownership: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	

Kick Off Point (KOP)									
UL	Section 30	Township 25 S	Range 31 E	Lot 2	Ft. from N/S 2,046' FNL	Ft. from E/W 354' FWL	Latitude 32.102898	Longitude -103.824879	County EDDY

First Take Point (FTP)									
UL	Section 30	Township 25 S	Range 31 E	Lot 3	Ft. from N/S 2,554' FSL	Ft. from E/W 350' FWL	Latitude 32.100929	Longitude -103.824893	County EDDY

Last Take Point (LTP)									
UL	Section 31	Township 25 S	Range 31 E	Lot 4	Ft. from N/S 100' FSL	Ft. from E/W 350' FWL	Latitude 32.079572	Longitude -103.825040	County EDDY

Unitized Area or Area of Uniform Interest NMNM-071016X	Spacing Unit Type <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical	Ground Floor Elevation: 3,371'
-----------------------------------------------------------	----------------------------------------------------------------------------------------------------	--------------------------------

OPERATOR CERTIFICATIONS		SURVEYOR CERTIFICATIONS	
<p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling form the division.</p> <p>Terra Sebastian 1/06/2025</p>		<p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.</p> <p>6 Jan 2025</p> <p>TIM C. PAPPAS REGISTERED PROFESSIONAL LAND SURVEYOR STATE OF NEW MEXICO NO. 21209</p>	
Signature Terra Sebastian		Signature and Seal of Professional Surveyor	
Printed Name terra.b.sebastian@exxonmobil.com		Certificate Number TIM C. PAPPAS 21209	Date of Survey 01/04/2025
Email Address			

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.



2821 West 7th Street., Ste 200 - Fort Worth, TX 76107
Ph: 817.349.9800 - Fax: 979.732.5271
TBPE Firm 17957 | TBPLS Firm 10193887
www.fscinc.net

© COPYRIGHT 2024 - ALL RIGHTS RESERVED

DATE:	1-4-2025	PROJECT NO:	2023040182
DRAWN BY:	LM	SCALE:	
CHECKED BY:	CH	SHEET:	1 OF 2
FIELD CREW:	IR	REVISION:	

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or a larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is the closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

LEGEND


- SECTION LINE
- PROPOSED WELLBORE
- NEW MEXICO MINERAL LEASE LINE
- 330' BUFFER
- DEDICATED ACREAGE

LINE TABLE		
LINE	AZIMUTH	LENGTH
L1	345° 03'21"	401.89'
L2	180° 04'12"	716.16'
L3	180° 03'57"	7,859.54'

LOT ACREAGE TABLE	
SECTION 30	
LOT 2	40.27 ACRES
LOT 3	40.13 ACRES
LOT 4	39.97 ACRES
SECTION 31	
LOT 1	39.91 ACRES
LOT 2	39.94 ACRES
LOT 3	39.96 ACRES
LOT 4	39.99 ACRES

COORDINATE TABLE					
SHL (NAD 83 NME)			LTP (NAD 83 NME)		
Y =	401,153.7	N	Y =	393,056.3	N
X =	698,880.5	E	X =	698,767.0	E
LAT. =	32.101829	°N	LAT. =	32.079572	°N
LONG. =	103.824550	°W	LONG. =	103.825040	°W
KOP (NAD 83 NME)			BHL (NAD 83 NME)		
Y =	401,542.0	N	Y =	392,966.3	N
X =	698,776.9	E	X =	698,767.0	E
LAT. =	32.102898	°N	LAT. =	32.079324	°N
LONG. =	103.824879	°W	LONG. =	103.825042	°W
FTP (NAD 83 NME)					
Y =	400,825.8	N			
X =	698,776.0	E			
LAT. =	32.100929	°N			
LONG. =	103.824893	°W			
SHL (NAD 27 NME)			LTP (NAD 27 NME)		
Y =	401,095.8	N	Y =	392,998.6	N
X =	657,695.0	E	X =	657,581.2	E
LAT. =	32.101705	°N	LAT. =	32.079447	°N
LONG. =	103.824071	°W	LONG. =	103.824562	°W
KOP (NAD 27 NME)			BHL (NAD 27 NME)		
Y =	401,484.1	N	Y =	392,908.6	N
X =	657,591.4	E	X =	657,581.2	E
LAT. =	32.102774	°N	LAT. =	32.079200	°N
LONG. =	103.824400	°W	LONG. =	103.824563	°W
FTP (NAD 27 NME)					
Y =	400,767.9	N			
X =	657,590.5	E			
LAT. =	32.100805	°N			
LONG. =	103.824414	°W			

CORNER COORDINATES (NAD83 NME)				
A - Y =	400,922.9	N	A - X =	698,427.0 E
B - Y =	398,269.0	N	B - X =	698,399.2 E
C - Y =	395,615.4	N	C - X =	698,415.7 E
D - Y =	392,953.5	N	D - X =	698,417.0 E
E - Y =	400,933.8	N	E - X =	699,752.5 E
F - Y =	398,278.5	N	F - X =	699,727.5 E
G - Y =	395,624.6	N	G - X =	699,742.6 E
H - Y =	392,964.1	N	H - X =	699,750.1 E
CORNER COORDINATES (NAD27 NME)				
A - Y =	400,865.0	N	A - X =	657,241.5 E
B - Y =	398,211.1	N	B - X =	657,213.6 E
C - Y =	395,557.6	N	C - X =	657,230.0 E
D - Y =	392,895.8	N	D - X =	657,231.2 E
E - Y =	400,875.9	N	E - X =	658,567.0 E
F - Y =	398,220.6	N	F - X =	658,541.9 E
G - Y =	395,566.8	N	G - X =	658,556.9 E
H - Y =	392,906.4	N	H - X =	658,564.3 E

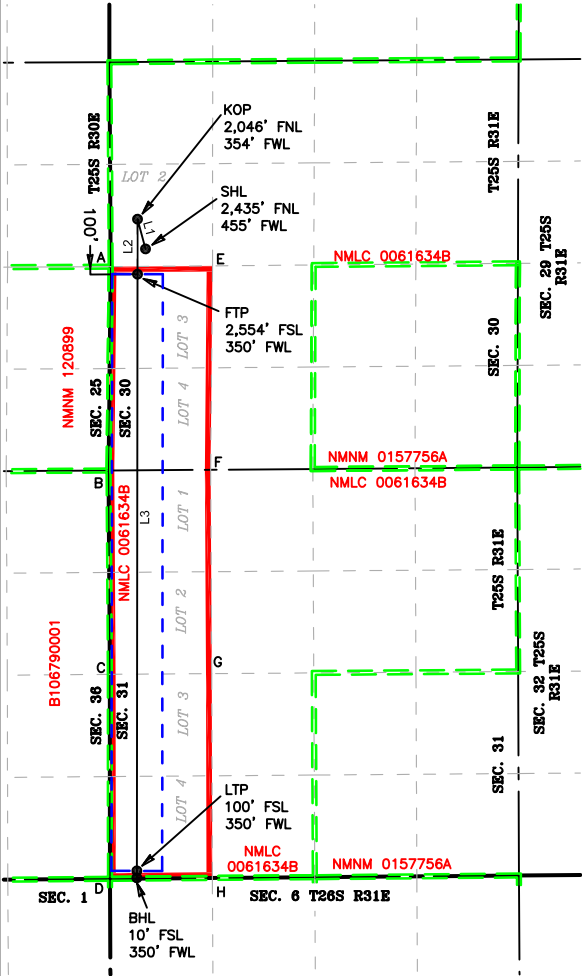

DRILLING PLAN: BLM COMPLIANCE
(Supplement to BLM 3160-3)

XTO Energy Inc.
PLU 30 B5 108H
Projected TD: 16992' MD / 8709' TVD
SHL: 2435' FNL & 455' FWL , Section 30, T25S, R31E
BHL: 10' FSL & 350' FWL , Section 31, T25S, R31E
Eddy County, NM

1. Geologic Name of Surface Formation

A. Quaternary

2. Estimated Tops of Geological Markers & Depths of Anticipated Fresh Water, Oil or Gas

Formation	Well Depth	Water/Oil/Gas
Rustler	1097'	Water
Salado	1605'	Water
Base of Salt	3896'	Water
Delaware	4114'	Water/Oil/Gas
Cherry Canyon	5057'	Water/Oil/Gas
Brushy Canyon	6723'	Water/Oil/Gas
Basal Brushy Canyon	7795'	Water/Oil/Gas
Bone Spring Lm.	8015'	Water/Oil/Gas
Avalon	8158'	Water/Oil/Gas
Lower Avalon	8495'	Water/Oil/Gas
Avalon Landing	8709'	Water/Oil/Gas
1st Bone Spring Lime	8778'	Water/Oil/Gas

Section 2 Summary:

*** Deepest Expected Groundwater Depth: 40' (per NM State Engineers Office).

No other formations are expected to give up oil, gas or fresh water in measurable quantities.
Surface fresh water sands will be protected by setting 9-5/8" inch casing at 1580' and circulating cement back to surface.

3. Casing Design

Primary Design:

Hole Size	MD	Casing TVD	OD Csg	Weight	Grade	Collar	New/Used	SF Burst	SF Collapse	SF Tension
12.25	0' – 1580'	1579'	9-5/8"	40	J55	BTC	New	8.15	3.75	4.47
8.75	0' – 7808'	7793'	7-5/8"	29.7	L80-IC	Tenaris Wedge 511	New	3.49	1.74	2.64
6.75	0' – 16992'	8709'	5-1/2"	20	P110-CY	Tenaris Wedge 461	New	1.18	2.94	2.11

Section 3 Summary:

The planned kick off point is located at: 8008' MD / 7993' TVD.

Wellhead:

A multi-bowl wellhead system will be utilized. The well design chosen is: 3-String Slim Non-Potash

Wellhead will be installed by manufacturer's representatives.

Manufacturer will monitor welding process to ensure appropriate temperature of seal.

4. Cement Program

Primary Cementing								
Casing	Slurry Type	No. Sacks	Density (ppg)	Yield (ft3/sack)	TOC (ft)	Casing Setting Depth	Excess (%)	Slurry Description
Surface 1	Lead	380	12.4	2.11	0	1580	100%	Surface Class C Lead Cement
Surface 1	Tail	141	14.8	1.33	1280	1580	100%	Surface Class C Tail Cement
Intermediate 1	Lead				0			
Intermediate 1	Tail	1	14.8	1.45	7795	7808	35%	Intermediate Class C Tail Cement
Production 1	Lead							
Production 1	Tail	730	13.2	1.44	7308	16992	30%	Production Class C Tail Cement
Remedial Cementing								
Casing	Slurry Type	No. Sacks	Density (ppg)	Yield (ft3/sack)	Cemented Interval	Excess (%)	Slurry Description	
Intermediate 1	Bradenhead Squeeze	810	14.8	1.45	0 - 7795'	50%	Intermediate Class C Bradenhead Squeeze Cement	

Section 4 Summary:

*Bradenhead Squeeze 2nd Stage Offline

5. Pressure Control Equipment**Section 5 Summary:**

Once the permanent WH is installed on the casing, the blow out preventer equipment (BOP) will consist of a 5M Hydril Annular and a 10M Triple Ram BOP.

All BOP testing will be done by an independent service company. Operator will Test as per BLM 43CFR-3172

Requested Variances**4A) Offline Cementing Variance**

XOM requests the option to offline cement and remediate (if needed) surface and intermediate casing strings where batch drilling is approved and if unplanned remediation is needed. XOM will ensure well is static with no pressure on the csg annulus, as with all other casing strings where batch drilling operations occur before moving off the rig. Offline cement operations will then be conducted after the rig is moved off the current well to the next well in the batch sequence. The TA cap will also be installed when applicable per wellhead manufacturer's procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.

5A) Break Test Variance

A break testing variance is requested to ONLY test broken pressure seals on the BOP equipment when moving from wellhead to wellhead for the intermediate hole sections which is in compliance with API Standard 53. The maximum anticipated Surface hole pressure at the deepest intermediate casing point is less than 4800psi.

5B) Flex Hose Variance

A variance is requested to allow use of a flex hose as the choke line from the BOP to the Choke Manifold. If this hose is used, a copy of the manufacturer's certification and pressure test chart will be kept on the rig. Attached is an example of a certification and pressure test chart. The manufacturer does not require anchors.

5C) 5M Annular Variance

XOM requests a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack. The component and compatibility tables attached along with the general well control plans demonstrate how the 5000 psi annular BOP will be protected from pressures that exceed its rated working pressure (RWP). The pressure at which the control of the wellbore is transferred from the annular preventer to another available preventer will not exceed 3500 psi (70% of the RWP of the 5000 psi annular BOP).

8A) Open Hole Logging Variance

Open hole logging will not be done on this well.

10A) Spudder Rig Variance

XOM requests the option to utilize a spudder rig (Atlas Copco RD20 or Equivalent) to set and cement surface casing.

10B) Batch Drilling Variance

XOM requests a variance to be able to batch drill this well. In doing so, XOM will set casing and ensure that the well is cemented properly (unless approval is given for offline cementing) and the well is static. XOM will contact the BLM to skid the rig to drill the remaining wells on the pad. Once surface and both intermediate strings are all completed, XOM will begin drilling the production hole on each of the wells.

6. Proposed Mud Circulation System

INTERVAL	Hole Size	Mud Type	MW (ppg)	Viscosity (sec/qt)	Fluid Loss (cc)	Comments
0' – 1580'	12.25"	FW/Native	8.3 - 8.7	35-40	NC	Fresh Water or Native Water
1580' – 7808'	8.75"	BDE/OBM or FW/Brine	9.5 - 10	30-32	NC	Fluid type will be based upon on well conditions. A fully saturated system will be used across the salt interval.
7808' – 16992'	6.75"	OBM	9 - 9.5	50-60	NC - 20	

Section 6 Summary:

The necessary mud products for weight addition and fluid loss control will be on location at all times.

Spud with fresh water/native mud. Drill out from under surface casing with a fully saturated brine while drilling through the salt formation. Use fibrous materials as needed to control seepage and lost circulation. Pump viscous sweeps as needed for hole cleaning. Pump speed will be recorded on a daily drilling report after mudding up. An EDR (Electronic Drilling Recorder) will be used to detect changes in loss or gain of mud volume. A mud test will be performed every 24 hours to determine: density, viscosity, strength, filtration and pH as necessary. Use available solids controls equipment to help keep mud weight down after mud up. Rig up solids control equipment to operate as a closed loop system.

7. Auxiliary Well Control and Monitoring Equipment**Section 7 Summary:**

A Kelly cock will be in the drill string at all times.

A full opening drill pipe stabbing valve having appropriate connections will be on the rig floor at all times.

H2S monitors will be on location when drilling below the 9-5/8" casing.

8. Logging, Coring and Testing Program**Section 8 Summary:**

Open hole logging will not be done on this well.

9. Abnormal Pressures and Temperatures / Potential Hazards**Section 9 Summary:**

The estimated bottom hole temperature of 153F to 173F. No H2S is expected but monitors will be in place to detect any H2S occurrences. Should these circumstances be encountered the operator and drilling contractor are prepared to take all necessary steps to ensure safety of all personnel and environment. Lost circulation is possible throughout the well.

10. Anticipated Starting Date and Duration of Operations**Section 10 Summary:**

Anticipated spud date will be after BLM approval. Move in operations and drilling is expected to take 40 days.

Well Plan Report - Poker Lake Unit 30BS 108H

Measured Depth: 16991.88 ft

TVD RKB: 8709.00 ft

Location

Cartographic Reference System: New Mexico East - NAD 27

Northing: 401095.80 ft

Easting: 657695.00 ft

RKB: 3403.00 ft

Ground Level: 3371.00 ft

North Reference: Grid

Convergence Angle: 0.27 Deg

Site: A

Slot: Poker Lake Unit 30BS
108H

Plan Sections

Poker Lake Unit 30BS 108H

Measured				TVD			Build	Turn	Dogleg
Depth	Inclination	Azimuth	RKB	Y Offset	X Offset	Rate	Rate	Rate	Target
(ft)	(Deg)	(Deg)	(ft)	(ft)	(ft)	(Deg/100ft)	(Deg/100ft)	(Deg/100ft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1100.00	0.00	0.00	1100.00	0.00	0.00	0.00	0.00	0.00	
1311.15	4.27	345.06	1310.95	7.59	-2.03	2.02	0.00	2.02	
6503.62	4.27	345.06	6489.05	380.71	-101.62	0.00	0.00	0.00	
6714.77	0.00	0.00	6700.00	388.30	-103.64	-2.02	0.00	2.02	
8007.57	0.00	0.00	7992.80	388.30	-103.64	0.00	0.00	0.00	
9132.57	90.00	180.07	8709.00	-327.90	-104.50	8.00	0.00	8.00	FTP 1
16901.88	90.00	180.07	8709.00	-8097.20	-113.80	0.00	0.00	0.00	LTP 1
16991.88	90.00	180.07	8709.00	-8187.20	-113.91	0.00	0.00	0.00	BHL 1

Position Uncertainty

Poker Lake Unit 30BS 108H

Measured	TVD	Highside	Lateral	Vertical	Magnitude	Semi-major	Semi-minor	Semi-minor	Tool
----------	-----	----------	---------	----------	-----------	------------	------------	------------	------

Depth	Inclination	Azimuth	RKB	Error	Bias	Error	Bias	Error	Bias	of Bias	Error	Error	Azimuth	Used
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(°)	
0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	MWD+IFR1+MS
100.000	0.000	0.000	100.000	0.700	0.000	0.350	0.000	2.300	0.000	0.000	0.751	0.220	112.264	MWD+IFR1+MS
200.000	0.000	0.000	200.000	1.112	0.000	0.861	0.000	2.310	0.000	0.000	1.259	0.627	122.711	MWD+IFR1+MS
300.000	0.000	0.000	300.000	1.497	0.000	1.271	0.000	2.325	0.000	0.000	1.698	0.986	125.469	MWD+IFR1+MS
400.000	0.000	0.000	400.000	1.871	0.000	1.658	0.000	2.347	0.000	0.000	2.108	1.344	126.713	MWD+IFR1+MS
500.000	0.000	0.000	500.000	2.240	0.000	2.034	0.000	2.374	0.000	0.000	2.503	1.701	127.419	MWD+IFR1+MS
600.000	0.000	0.000	600.000	2.607	0.000	2.405	0.000	2.407	0.000	0.000	2.888	2.059	127.873	MWD+IFR1+MS
700.000	0.000	0.000	700.000	2.971	0.000	2.773	0.000	2.444	0.000	0.000	3.267	2.417	128.190	MWD+IFR1+MS
800.000	0.000	0.000	800.000	3.334	0.000	3.138	0.000	2.486	0.000	0.000	3.642	2.775	128.423	MWD+IFR1+MS
900.000	0.000	0.000	900.000	3.696	0.000	3.502	0.000	2.531	0.000	0.000	4.014	3.133	128.602	MWD+IFR1+MS
1000.000	0.000	0.000	1000.000	4.058	0.000	3.865	0.000	2.581	0.000	0.000	4.384	3.491	128.744	MWD+IFR1+MS
1100.000	0.000	0.000	1100.000	4.419	0.000	4.228	0.000	2.635	0.000	0.000	4.752	3.849	128.859	MWD+IFR1+MS
1200.000	2.020	345.055	1199.979	4.731	0.000	4.811	0.000	2.691	0.000	0.000	5.240	4.254	122.338	MWD+IFR1+MS
1300.000	4.040	345.055	1299.834	5.572	0.000	5.155	0.000	2.751	0.000	0.000	5.948	4.725	109.812	MWD+IFR1+MS
1311.148	4.265	345.055	1310.953	5.606	0.000	5.189	0.000	2.756	0.000	0.000	5.982	4.764	109.725	MWD+IFR1+MS
1400.000	4.265	345.055	1399.559	5.885	0.000	5.473	0.000	2.812	0.000	0.000	6.249	5.065	109.573	MWD+IFR1+MS
1500.000	4.265	345.055	1499.282	6.218	0.000	5.818	0.000	2.878	0.000	0.000	6.586	5.409	109.843	MWD+IFR1+MS
1600.000	4.265	345.055	1599.005	6.557	0.000	6.168	0.000	2.946	0.000	0.000	6.931	5.754	110.134	MWD+IFR1+MS
1700.000	4.265	345.055	1698.728	6.899	0.000	6.518	0.000	3.017	0.000	0.000	7.277	6.102	110.391	MWD+IFR1+MS
1800.000	4.265	345.055	1798.451	7.243	0.000	6.870	0.000	3.090	0.000	0.000	7.625	6.450	110.618	MWD+IFR1+MS
1900.000	4.265	345.055	1898.174	7.588	0.000	7.222	0.000	3.165	0.000	0.000	7.974	6.800	110.820	MWD+IFR1+MS
2000.000	4.265	345.055	1997.897	7.935	0.000	7.575	0.000	3.242	0.000	0.000	8.324	7.151	111.000	MWD+IFR1+MS
2100.000	4.265	345.055	2097.620	8.283	0.000	7.929	0.000	3.321	0.000	0.000	8.675	7.502	111.160	MWD+IFR1+MS
2200.000	4.265	345.055	2197.343	8.632	0.000	8.283	0.000	3.402	0.000	0.000	9.026	7.854	111.304	MWD+IFR1+MS
2300.000	4.265	345.055	2297.066	8.983	0.000	8.637	0.000	3.484	0.000	0.000	9.379	8.207	111.433	MWD+IFR1+MS
2400.000	4.265	345.055	2396.789	9.334	0.000	8.992	0.000	3.568	0.000	0.000	9.732	8.560	111.548	MWD+IFR1+MS
2500.000	4.265	345.055	2496.513	9.686	0.000	9.348	0.000	3.653	0.000	0.000	10.086	8.914	111.652	MWD+IFR1+MS
2600.000	4.265	345.055	2596.236	10.039	0.000	9.703	0.000	3.740	0.000	0.000	10.440	9.269	111.744	MWD+IFR1+MS
2700.000	4.265	345.055	2695.959	10.393	0.000	10.059	0.000	3.828	0.000	0.000	10.795	9.623	111.828	MWD+IFR1+MS
2800.000	4.265	345.055	2795.682	10.747	0.000	10.415	0.000	3.918	0.000	0.000	11.150	9.978	111.902	MWD+IFR1+MS
2900.000	4.265	345.055	2895.405	11.101	0.000	10.771	0.000	4.008	0.000	0.000	11.505	10.334	111.969	MWD+IFR1+MS

3000.000	4.265	345.055	2995.128	11.456	0.000	11.128	0.000	4.101	0.000	0.000	11.861	10.689	112.029	MWD+IFR1+MS
3100.000	4.265	345.055	3094.851	11.812	0.000	11.484	0.000	4.194	0.000	0.000	12.217	11.045	112.082	MWD+IFR1+MS
3200.000	4.265	345.055	3194.574	12.168	0.000	11.841	0.000	4.289	0.000	0.000	12.574	11.401	112.130	MWD+IFR1+MS
3300.000	4.265	345.055	3294.297	12.524	0.000	12.198	0.000	4.386	0.000	0.000	12.930	11.758	112.172	MWD+IFR1+MS
3400.000	4.265	345.055	3394.020	12.881	0.000	12.555	0.000	4.484	0.000	0.000	13.287	12.114	112.209	MWD+IFR1+MS
3500.000	4.265	345.055	3493.743	13.238	0.000	12.912	0.000	4.583	0.000	0.000	13.644	12.471	112.242	MWD+IFR1+MS
3600.000	4.265	345.055	3593.466	13.595	0.000	13.269	0.000	4.683	0.000	0.000	14.002	12.828	112.270	MWD+IFR1+MS
3700.000	4.265	345.055	3693.189	13.953	0.000	13.627	0.000	4.785	0.000	0.000	14.359	13.185	112.295	MWD+IFR1+MS
3800.000	4.265	345.055	3792.912	14.310	0.000	13.984	0.000	4.888	0.000	0.000	14.717	13.542	112.315	MWD+IFR1+MS
3900.000	4.265	345.055	3892.635	14.668	0.000	14.342	0.000	4.993	0.000	0.000	15.075	13.900	112.333	MWD+IFR1+MS
4000.000	4.265	345.055	3992.358	15.027	0.000	14.700	0.000	5.099	0.000	0.000	15.433	14.257	112.348	MWD+IFR1+MS
4100.000	4.265	345.055	4092.081	15.385	0.000	15.057	0.000	5.207	0.000	0.000	15.791	14.614	112.359	MWD+IFR1+MS
4200.000	4.265	345.055	4191.804	15.743	0.000	15.415	0.000	5.316	0.000	0.000	16.149	14.972	112.368	MWD+IFR1+MS
4300.000	4.265	345.055	4291.527	16.102	0.000	15.773	0.000	5.427	0.000	0.000	16.508	15.330	112.375	MWD+IFR1+MS
4400.000	4.265	345.055	4391.250	16.461	0.000	16.131	0.000	5.540	0.000	0.000	16.866	15.688	112.379	MWD+IFR1+MS
4500.000	4.265	345.055	4490.973	16.820	0.000	16.489	0.000	5.654	0.000	0.000	17.225	16.046	112.381	MWD+IFR1+MS
4600.000	4.265	345.055	4590.697	17.179	0.000	16.847	0.000	5.769	0.000	0.000	17.584	16.404	112.381	MWD+IFR1+MS
4700.000	4.265	345.055	4690.420	17.539	0.000	17.205	0.000	5.887	0.000	0.000	17.942	16.762	112.379	MWD+IFR1+MS
4800.000	4.265	345.055	4790.143	17.898	0.000	17.563	0.000	6.006	0.000	0.000	18.301	17.120	112.375	MWD+IFR1+MS
4900.000	4.265	345.055	4889.866	18.258	0.000	17.922	0.000	6.127	0.000	0.000	18.660	17.478	112.370	MWD+IFR1+MS
5000.000	4.265	345.055	4989.589	18.617	0.000	18.280	0.000	6.250	0.000	0.000	19.019	17.836	112.362	MWD+IFR1+MS
5100.000	4.265	345.055	5089.312	18.977	0.000	18.638	0.000	6.374	0.000	0.000	19.379	18.195	112.354	MWD+IFR1+MS
5200.000	4.265	345.055	5189.035	19.337	0.000	18.996	0.000	6.501	0.000	0.000	19.738	18.553	112.344	MWD+IFR1+MS
5300.000	4.265	345.055	5288.758	19.697	0.000	19.355	0.000	6.629	0.000	0.000	20.097	18.911	112.332	MWD+IFR1+MS
5400.000	4.265	345.055	5388.481	20.057	0.000	19.713	0.000	6.760	0.000	0.000	20.457	19.270	112.320	MWD+IFR1+MS
5500.000	4.265	345.055	5488.204	20.417	0.000	20.072	0.000	6.892	0.000	0.000	20.816	19.628	112.306	MWD+IFR1+MS
5600.000	4.265	345.055	5587.927	20.777	0.000	20.430	0.000	7.026	0.000	0.000	21.176	19.987	112.291	MWD+IFR1+MS
5700.000	4.265	345.055	5687.650	21.137	0.000	20.789	0.000	7.163	0.000	0.000	21.535	20.345	112.274	MWD+IFR1+MS
5800.000	4.265	345.055	5787.373	21.498	0.000	21.147	0.000	7.301	0.000	0.000	21.895	20.704	112.257	MWD+IFR1+MS
5900.000	4.265	345.055	5887.096	21.858	0.000	21.506	0.000	7.442	0.000	0.000	22.254	21.063	112.239	MWD+IFR1+MS
6000.000	4.265	345.055	5986.819	22.219	0.000	21.864	0.000	7.585	0.000	0.000	22.614	21.422	112.220	MWD+IFR1+MS
6100.000	4.265	345.055	6086.542	22.579	0.000	22.223	0.000	7.730	0.000	0.000	22.974	21.780	112.200	MWD+IFR1+MS
6200.000	4.265	345.055	6186.265	22.940	0.000	22.581	0.000	7.877	0.000	0.000	23.334	22.139	112.179	MWD+IFR1+MS

6300.000	4.265	345.055	6285.988	23.300	0.000	22.940	0.000	8.026	0.000	0.000	23.693	22.498	112.157	MWD+IFR1+MS
6400.000	4.265	345.055	6385.711	23.661	0.000	23.299	0.000	8.178	0.000	0.000	24.053	22.857	112.134	MWD+IFR1+MS
6503.622	4.265	345.055	6489.047	24.035	0.000	23.671	0.000	8.338	0.000	0.000	24.427	23.229	112.118	MWD+IFR1+MS
6600.000	2.318	345.055	6585.261	24.412	0.000	24.016	0.000	8.489	0.000	0.000	24.802	23.576	111.480	MWD+IFR1+MS
6700.000	0.298	345.055	6685.230	24.840	0.000	24.371	0.000	8.645	0.000	0.000	25.242	23.947	109.606	MWD+IFR1+MS
6714.771	0.000	0.000	6700.000	25.151	0.000	24.148	0.000	8.669	0.000	0.000	25.293	23.999	109.584	MWD+IFR1+MS
6800.000	0.000	0.000	6785.229	25.445	0.000	24.448	0.000	8.803	0.000	0.000	25.586	24.301	109.575	MWD+IFR1+MS
6900.000	0.000	0.000	6885.229	25.793	0.000	24.805	0.000	8.962	0.000	0.000	25.935	24.656	109.725	MWD+IFR1+MS
7000.000	0.000	0.000	6985.229	26.142	0.000	25.163	0.000	9.124	0.000	0.000	26.287	25.012	109.907	MWD+IFR1+MS
7100.000	0.000	0.000	7085.229	26.491	0.000	25.521	0.000	9.289	0.000	0.000	26.638	25.368	110.085	MWD+IFR1+MS
7200.000	0.000	0.000	7185.229	26.841	0.000	25.879	0.000	9.456	0.000	0.000	26.990	25.724	110.260	MWD+IFR1+MS
7300.000	0.000	0.000	7285.229	27.191	0.000	26.237	0.000	9.626	0.000	0.000	27.341	26.081	110.431	MWD+IFR1+MS
7400.000	0.000	0.000	7385.229	27.541	0.000	26.596	0.000	9.799	0.000	0.000	27.693	26.437	110.599	MWD+IFR1+MS
7500.000	0.000	0.000	7485.229	27.891	0.000	26.954	0.000	9.974	0.000	0.000	28.046	26.793	110.764	MWD+IFR1+MS
7600.000	0.000	0.000	7585.229	28.242	0.000	27.312	0.000	10.152	0.000	0.000	28.398	27.149	110.925	MWD+IFR1+MS
7700.000	0.000	0.000	7685.229	28.593	0.000	27.670	0.000	10.333	0.000	0.000	28.751	27.506	111.084	MWD+IFR1+MS
7800.000	0.000	0.000	7785.229	28.943	0.000	28.028	0.000	10.516	0.000	0.000	29.103	27.862	111.239	MWD+IFR1+MS
7900.000	0.000	0.000	7885.229	29.295	0.000	28.386	0.000	10.702	0.000	0.000	29.456	28.218	111.391	MWD+IFR1+MS
8007.573	0.000	0.000	7992.803	29.673	0.000	28.772	0.000	10.905	0.000	0.000	29.838	28.602	111.588	MWD+IFR1+MS
8100.000	7.394	180.069	8084.973	29.823	-0.000	29.076	0.000	11.089	0.000	0.000	30.326	28.937	108.330	MWD+IFR1+MS
8200.000	15.394	180.069	8182.923	30.561	-0.000	29.381	0.000	11.405	0.000	0.000	31.807	29.280	101.342	MWD+IFR1+MS
8300.000	23.394	180.069	8277.172	30.891	-0.000	29.667	0.000	11.966	0.000	0.000	33.228	29.575	98.921	MWD+IFR1+MS
8400.000	31.394	180.069	8365.886	30.757	-0.000	29.933	0.000	12.837	0.000	0.000	34.445	29.841	97.880	MWD+IFR1+MS
8500.000	39.394	180.069	8447.338	30.225	-0.000	30.177	0.000	14.032	0.000	0.000	35.442	30.083	97.387	MWD+IFR1+MS
8600.000	47.394	180.069	8519.944	29.388	-0.000	30.401	0.000	15.516	0.000	0.000	36.220	30.302	97.178	MWD+IFR1+MS
8700.000	55.394	180.069	8582.289	28.360	-0.000	30.605	0.000	17.228	0.000	0.000	36.789	30.500	97.139	MWD+IFR1+MS
8800.000	63.394	180.069	8633.161	27.284	-0.000	30.790	0.000	19.094	0.000	0.000	37.169	30.679	97.210	MWD+IFR1+MS
8900.000	71.394	180.069	8671.569	26.327	-0.000	30.956	0.000	21.042	0.000	0.000	37.391	30.840	97.346	MWD+IFR1+MS
9000.000	79.394	180.069	8696.765	25.668	-0.000	31.104	0.000	23.005	0.000	0.000	37.492	30.984	97.502	MWD+IFR1+MS
9100.000	87.394	180.069	8708.259	25.470	-0.000	31.232	0.000	24.921	0.000	0.000	37.519	31.110	97.623	MWD+IFR1+MS
9132.573	90.000	180.069	8709.000	25.048	0.000	31.266	0.000	25.048	0.000	0.000	37.521	31.145	97.636	MWD+IFR1+MS
9200.000	90.000	180.069	8709.000	25.179	0.000	31.342	0.000	25.179	0.000	0.000	37.523	31.221	97.667	MWD+IFR1+MS
9300.000	90.000	180.069	8709.000	25.357	0.000	31.480	0.000	25.357	0.000	0.000	37.527	31.360	97.745	MWD+IFR1+MS

9400.000	90.000	180.069	8709.000	25.559	0.000	31.644	0.000	25.559	0.000	0.000	37.531	31.524	97.855	MWD+IFR1+MS
9500.000	90.000	180.069	8709.000	25.785	0.000	31.832	0.000	25.785	0.000	0.000	37.536	31.711	98.000	MWD+IFR1+MS
9600.000	90.000	180.069	8709.000	26.032	0.000	32.042	0.000	26.032	0.000	0.000	37.542	31.921	98.185	MWD+IFR1+MS
9700.000	90.000	180.069	8709.000	26.300	0.000	32.276	0.000	26.300	0.000	0.000	37.550	32.153	98.415	MWD+IFR1+MS
9800.000	90.000	180.069	8709.000	26.588	0.000	32.531	0.000	26.588	0.000	0.000	37.558	32.406	98.698	MWD+IFR1+MS
9900.000	90.000	180.069	8709.000	26.897	0.000	32.808	0.000	26.897	0.000	0.000	37.568	32.681	99.047	MWD+IFR1+MS
10000.000	90.000	180.069	8709.000	27.224	0.000	33.107	0.000	27.224	0.000	0.000	37.579	32.976	99.475	MWD+IFR1+MS
10100.000	90.000	180.069	8709.000	27.570	0.000	33.426	0.000	27.570	0.000	0.000	37.591	33.290	100.002	MWD+IFR1+MS
10200.000	90.000	180.069	8709.000	27.934	0.000	33.765	0.000	27.934	0.000	0.000	37.606	33.622	100.658	MWD+IFR1+MS
10300.000	90.000	180.069	8709.000	28.315	0.000	34.123	0.000	28.315	0.000	0.000	37.623	33.972	101.483	MWD+IFR1+MS
10400.000	90.000	180.069	8709.000	28.712	0.000	34.500	0.000	28.712	0.000	0.000	37.644	34.339	102.538	MWD+IFR1+MS
10500.000	90.000	180.069	8709.000	29.125	0.000	34.895	0.000	29.125	0.000	0.000	37.668	34.719	103.916	MWD+IFR1+MS
10600.000	90.000	180.069	8709.000	29.553	0.000	35.308	0.000	29.553	0.000	0.000	37.699	35.112	105.764	MWD+IFR1+MS
10700.000	90.000	180.069	8709.000	29.995	0.000	35.737	0.000	29.995	0.000	0.000	37.738	35.513	108.324	MWD+IFR1+MS
10800.000	90.000	180.069	8709.000	30.451	0.000	36.183	0.000	30.451	0.000	0.000	37.793	35.916	112.001	MWD+IFR1+MS
10900.000	90.000	180.069	8709.000	30.921	0.000	36.645	0.000	30.921	0.000	0.000	37.874	36.309	117.442	MWD+IFR1+MS
11000.000	90.000	180.069	8709.000	31.403	0.000	37.122	0.000	31.403	0.000	0.000	38.000	36.672	125.445	MWD+IFR1+MS
11100.000	90.000	180.069	8709.000	31.897	0.000	37.614	0.000	31.897	0.000	0.000	38.204	36.972	-43.975	MWD+IFR1+MS
11200.000	90.000	180.069	8709.000	32.403	0.000	38.119	0.000	32.403	0.000	0.000	38.508	37.187	-33.014	MWD+IFR1+MS
11300.000	90.000	180.069	8709.000	32.919	0.000	38.638	0.000	32.919	0.000	0.000	38.902	37.326	-24.308	MWD+IFR1+MS
11400.000	90.000	180.069	8709.000	33.446	0.000	39.170	0.000	33.446	0.000	0.000	39.359	37.416	-18.300	MWD+IFR1+MS
11500.000	90.000	180.069	8709.000	33.983	0.000	39.715	0.000	33.983	0.000	0.000	39.856	37.478	-14.249	MWD+IFR1+MS
11600.000	90.000	180.069	8709.000	34.529	0.000	40.271	0.000	34.529	0.000	0.000	40.381	37.525	-11.444	MWD+IFR1+MS
11700.000	90.000	180.069	8709.000	35.085	0.000	40.839	0.000	35.085	0.000	0.000	40.927	37.563	-9.428	MWD+IFR1+MS
11800.000	90.000	180.069	8709.000	35.649	0.000	41.418	0.000	35.649	0.000	0.000	41.490	37.595	-7.925	MWD+IFR1+MS
11900.000	90.000	180.069	8709.000	36.221	0.000	42.007	0.000	36.221	0.000	0.000	42.067	37.624	-6.771	MWD+IFR1+MS
12000.000	90.000	180.069	8709.000	36.801	0.000	42.606	0.000	36.801	0.000	0.000	42.657	37.651	-5.861	MWD+IFR1+MS
12100.000	90.000	180.069	8709.000	37.389	0.000	43.215	0.000	37.389	0.000	0.000	43.258	37.676	-5.129	MWD+IFR1+MS
12200.000	90.000	180.069	8709.000	37.983	0.000	43.833	0.000	37.983	0.000	0.000	43.870	37.700	-4.528	MWD+IFR1+MS
12300.000	90.000	180.069	8709.000	38.585	0.000	44.460	0.000	38.585	0.000	0.000	44.492	37.724	-4.028	MWD+IFR1+MS
12400.000	90.000	180.069	8709.000	39.193	0.000	45.096	0.000	39.193	0.000	0.000	45.124	37.747	-3.606	MWD+IFR1+MS
12500.000	90.000	180.069	8709.000	39.807	0.000	45.740	0.000	39.807	0.000	0.000	45.764	37.771	-3.246	MWD+IFR1+MS
12600.000	90.000	180.069	8709.000	40.427	0.000	46.391	0.000	40.427	0.000	0.000	46.413	37.794	-2.936	MWD+IFR1+MS

12700.000	90.000	180.069	8709.000	41.053	0.000	47.050	0.000	41.053	0.000	0.000	47.069	37.817	-2.667	MWD+IFR1+MS
12800.000	90.000	180.069	8709.000	41.684	0.000	47.716	0.000	41.684	0.000	0.000	47.733	37.840	-2.431	MWD+IFR1+MS
12900.000	90.000	180.069	8709.000	42.320	0.000	48.389	0.000	42.320	0.000	0.000	48.404	37.864	-2.223	MWD+IFR1+MS
13000.000	90.000	180.069	8709.000	42.961	0.000	49.069	0.000	42.961	0.000	0.000	49.082	37.888	-2.039	MWD+IFR1+MS
13100.000	90.000	180.069	8709.000	43.607	0.000	49.755	0.000	43.607	0.000	0.000	49.767	37.912	-1.875	MWD+IFR1+MS
13200.000	90.000	180.069	8709.000	44.257	0.000	50.447	0.000	44.257	0.000	0.000	50.457	37.936	-1.728	MWD+IFR1+MS
13300.000	90.000	180.069	8709.000	44.912	0.000	51.144	0.000	44.912	0.000	0.000	51.154	37.961	-1.595	MWD+IFR1+MS
13400.000	90.000	180.069	8709.000	45.571	0.000	51.848	0.000	45.571	0.000	0.000	51.856	37.986	-1.476	MWD+IFR1+MS
13500.000	90.000	180.069	8709.000	46.233	0.000	52.556	0.000	46.233	0.000	0.000	52.564	38.011	-1.367	MWD+IFR1+MS
13600.000	90.000	180.069	8709.000	46.900	0.000	53.270	0.000	46.900	0.000	0.000	53.277	38.037	-1.268	MWD+IFR1+MS
13700.000	90.000	180.069	8709.000	47.570	0.000	53.989	0.000	47.570	0.000	0.000	53.995	38.063	-1.178	MWD+IFR1+MS
13800.000	90.000	180.069	8709.000	48.243	0.000	54.712	0.000	48.243	0.000	0.000	54.718	38.090	-1.096	MWD+IFR1+MS
13900.000	90.000	180.069	8709.000	48.920	0.000	55.441	0.000	48.920	0.000	0.000	55.446	38.117	-1.020	MWD+IFR1+MS
14000.000	90.000	180.069	8709.000	49.600	0.000	56.173	0.000	49.600	0.000	0.000	56.178	38.144	-0.951	MWD+IFR1+MS
14100.000	90.000	180.069	8709.000	50.283	0.000	56.910	0.000	50.283	0.000	0.000	56.914	38.172	-0.886	MWD+IFR1+MS
14200.000	90.000	180.069	8709.000	50.969	0.000	57.650	0.000	50.969	0.000	0.000	57.654	38.200	-0.827	MWD+IFR1+MS
14300.000	90.000	180.069	8709.000	51.658	0.000	58.395	0.000	51.658	0.000	0.000	58.399	38.229	-0.772	MWD+IFR1+MS
14400.000	90.000	180.069	8709.000	52.350	0.000	59.143	0.000	52.350	0.000	0.000	59.147	38.258	-0.721	MWD+IFR1+MS
14500.000	90.000	180.069	8709.000	53.044	0.000	59.895	0.000	53.044	0.000	0.000	59.898	38.288	-0.674	MWD+IFR1+MS
14600.000	90.000	180.069	8709.000	53.740	0.000	60.651	0.000	53.740	0.000	0.000	60.653	38.318	-0.630	MWD+IFR1+MS
14700.000	90.000	180.069	8709.000	54.439	0.000	61.409	0.000	54.439	0.000	0.000	61.412	38.348	-0.588	MWD+IFR1+MS
14800.000	90.000	180.069	8709.000	55.141	0.000	62.171	0.000	55.141	0.000	0.000	62.174	38.379	-0.550	MWD+IFR1+MS
14900.000	90.000	180.069	8709.000	55.844	0.000	62.937	0.000	55.844	0.000	0.000	62.939	38.411	-0.514	MWD+IFR1+MS
15000.000	90.000	180.069	8709.000	56.550	0.000	63.705	0.000	56.550	0.000	0.000	63.707	38.443	-0.480	MWD+IFR1+MS
15100.000	90.000	180.069	8709.000	57.258	0.000	64.476	0.000	57.258	0.000	0.000	64.477	38.475	-0.449	MWD+IFR1+MS
15200.000	90.000	180.069	8709.000	57.967	0.000	65.249	0.000	57.967	0.000	0.000	65.251	38.508	-0.419	MWD+IFR1+MS
15300.000	90.000	180.069	8709.000	58.679	0.000	66.026	0.000	58.679	0.000	0.000	66.027	38.541	-0.391	MWD+IFR1+MS
15400.000	90.000	180.069	8709.000	59.392	0.000	66.805	0.000	59.392	0.000	0.000	66.806	38.574	-0.365	MWD+IFR1+MS
15500.000	90.000	180.069	8709.000	60.108	0.000	67.587	0.000	60.108	0.000	0.000	67.588	38.609	-0.340	MWD+IFR1+MS
15600.000	90.000	180.069	8709.000	60.825	0.000	68.371	0.000	60.825	0.000	0.000	68.372	38.643	-0.317	MWD+IFR1+MS
15700.000	90.000	180.069	8709.000	61.543	0.000	69.157	0.000	61.543	0.000	0.000	69.158	38.678	-0.295	MWD+IFR1+MS
15800.000	90.000	180.069	8709.000	62.263	0.000	69.945	0.000	62.263	0.000	0.000	69.946	38.713	-0.274	MWD+IFR1+MS
15900.000	90.000	180.069	8709.000	62.985	0.000	70.736	0.000	62.985	0.000	0.000	70.737	38.749	-0.255	MWD+IFR1+MS


16000.000	90.000	180.069	8709.000	63.708	0.000	71.529	0.000	63.708	0.000	0.000	71.530	38.786	-0.236	MWD+IFR1+MS
16100.000	90.000	180.069	8709.000	64.433	0.000	72.324	0.000	64.433	0.000	0.000	72.325	38.823	-0.218	MWD+IFR1+MS
16200.000	90.000	180.069	8709.000	65.159	0.000	73.121	0.000	65.159	0.000	0.000	73.121	38.860	-0.202	MWD+IFR1+MS
16300.000	90.000	180.069	8709.000	65.887	0.000	73.920	0.000	65.887	0.000	0.000	73.920	38.897	-0.186	MWD+IFR1+MS
16400.000	90.000	180.069	8709.000	66.615	0.000	74.720	0.000	66.615	0.000	0.000	74.721	38.936	-0.171	MWD+IFR1+MS
16500.000	90.000	180.069	8709.000	67.345	0.000	75.523	0.000	67.345	0.000	0.000	75.523	38.974	-0.156	MWD+IFR1+MS
16600.000	90.000	180.069	8709.000	68.076	0.000	76.327	0.000	68.076	0.000	0.000	76.327	39.013	-0.143	MWD+IFR1+MS
16700.000	90.000	180.069	8709.000	68.809	0.000	77.133	0.000	68.809	0.000	0.000	77.133	39.053	-0.130	MWD+IFR1+MS
16800.000	90.000	180.069	8709.000	69.542	0.000	77.940	0.000	69.542	0.000	0.000	77.940	39.093	-0.118	MWD+IFR1+MS
16901.879	90.000	180.069	8709.000	70.291	0.000	78.764	0.000	70.291	0.000	0.000	78.765	39.134	-0.106	MWD+IFR1+MS
16991.877	90.000	180.069	8709.000	70.953	0.000	79.493	0.000	70.953	0.000	0.000	79.493	39.170	-0.096	MWD+IFR1+MS

Plan Targets


Poker Lake Unit 30BS 108H

Target Name	Measured Depth (ft)	Grid Northing (ft)	Grid Easting (ft)	TVD MSL (ft)	Target Shape
FTP 1	9132.57	400767.90	657590.50	5306.00	CIRCLE
LTP 1	16901.88	392998.60	657581.20	5306.00	CIRCLE
BHL 1	16991.99	392908.60	657581.20	5306.00	CIRCLE

Bleed line will discharge 100' from wellhead for non-H2S situations and 150' from wellhead for H2S situations.

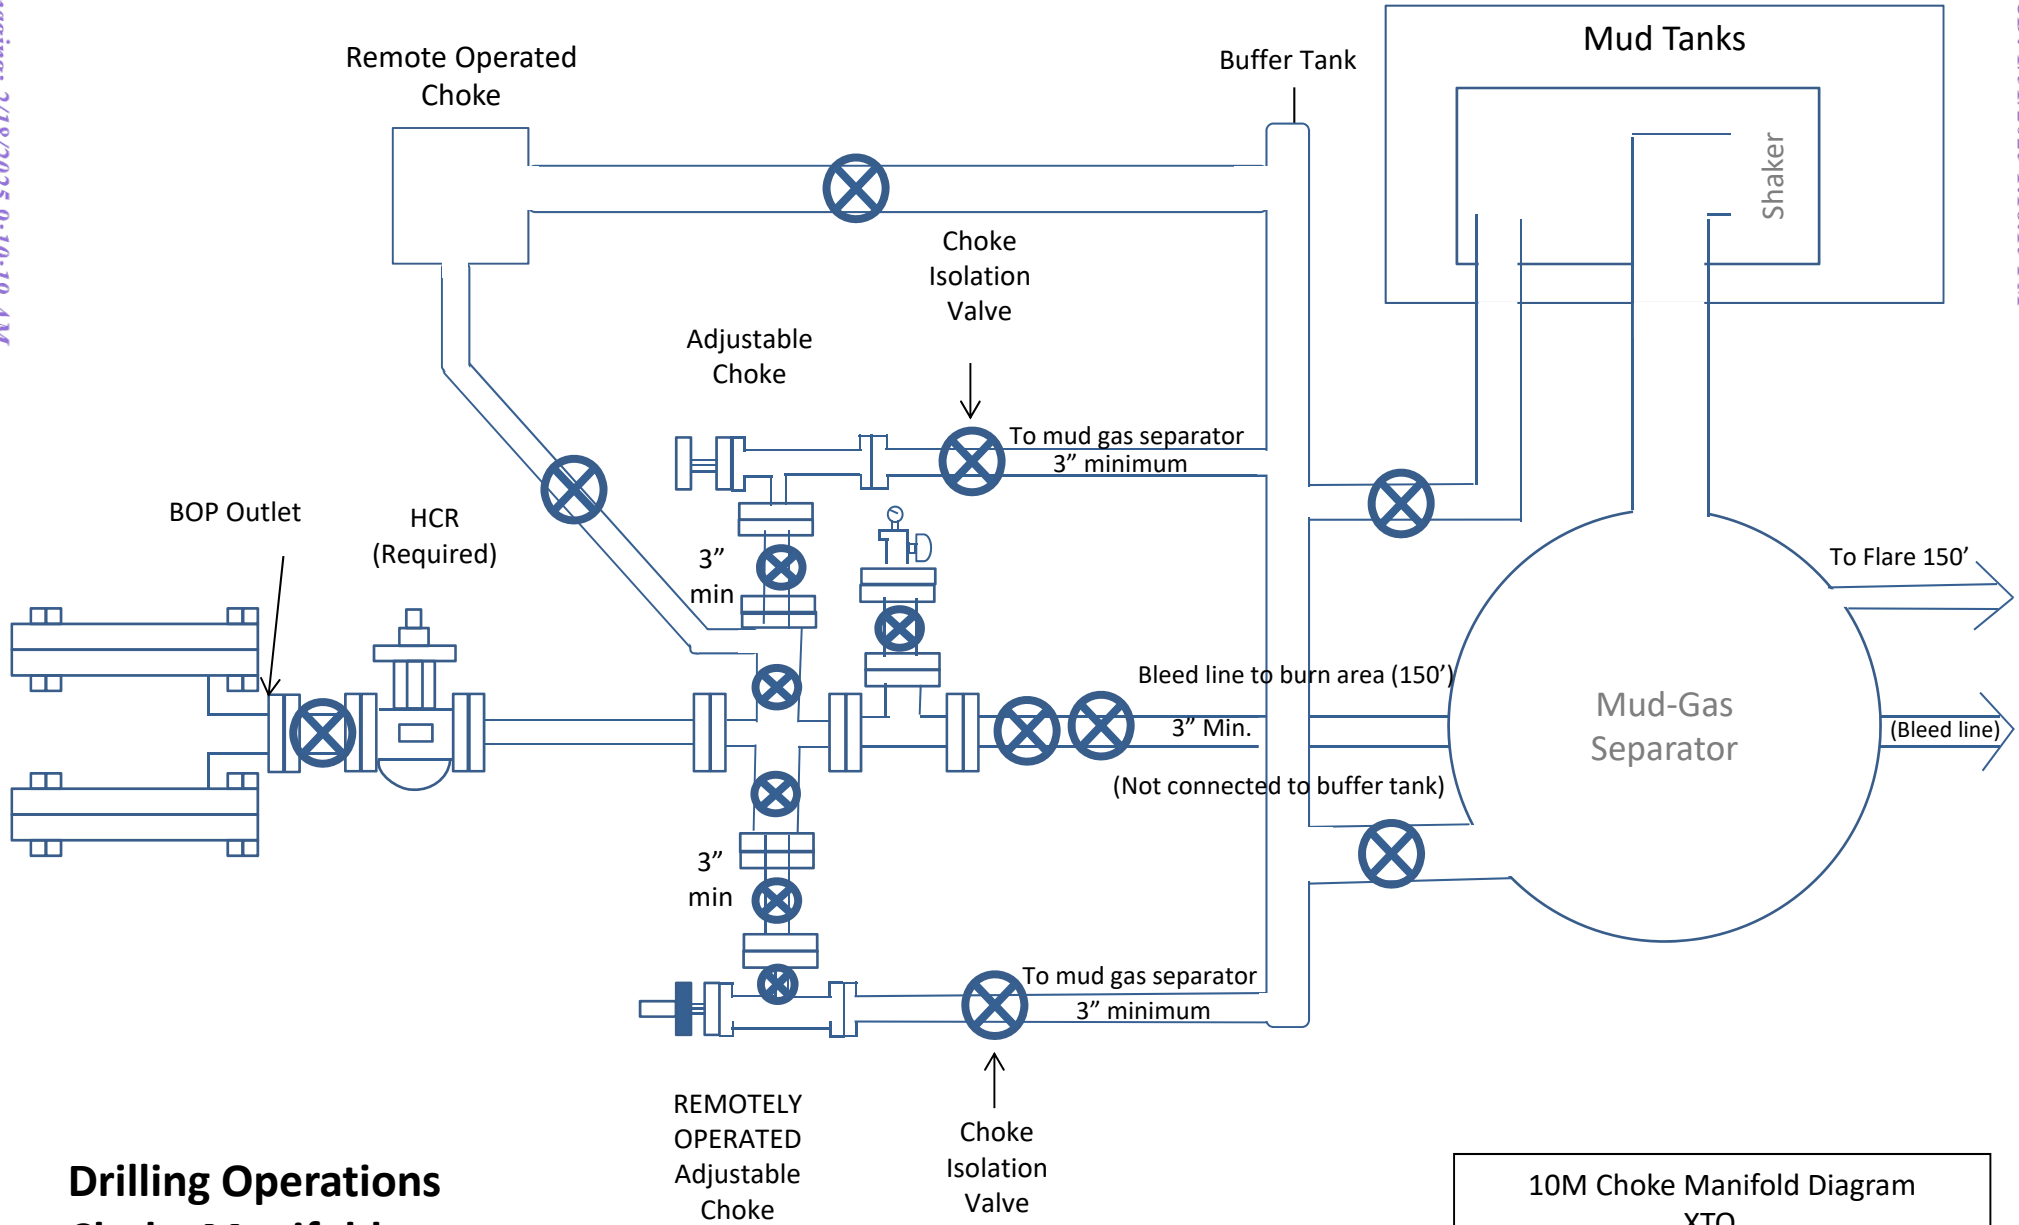

Drilling Operations
Choke Manifold
10M Service

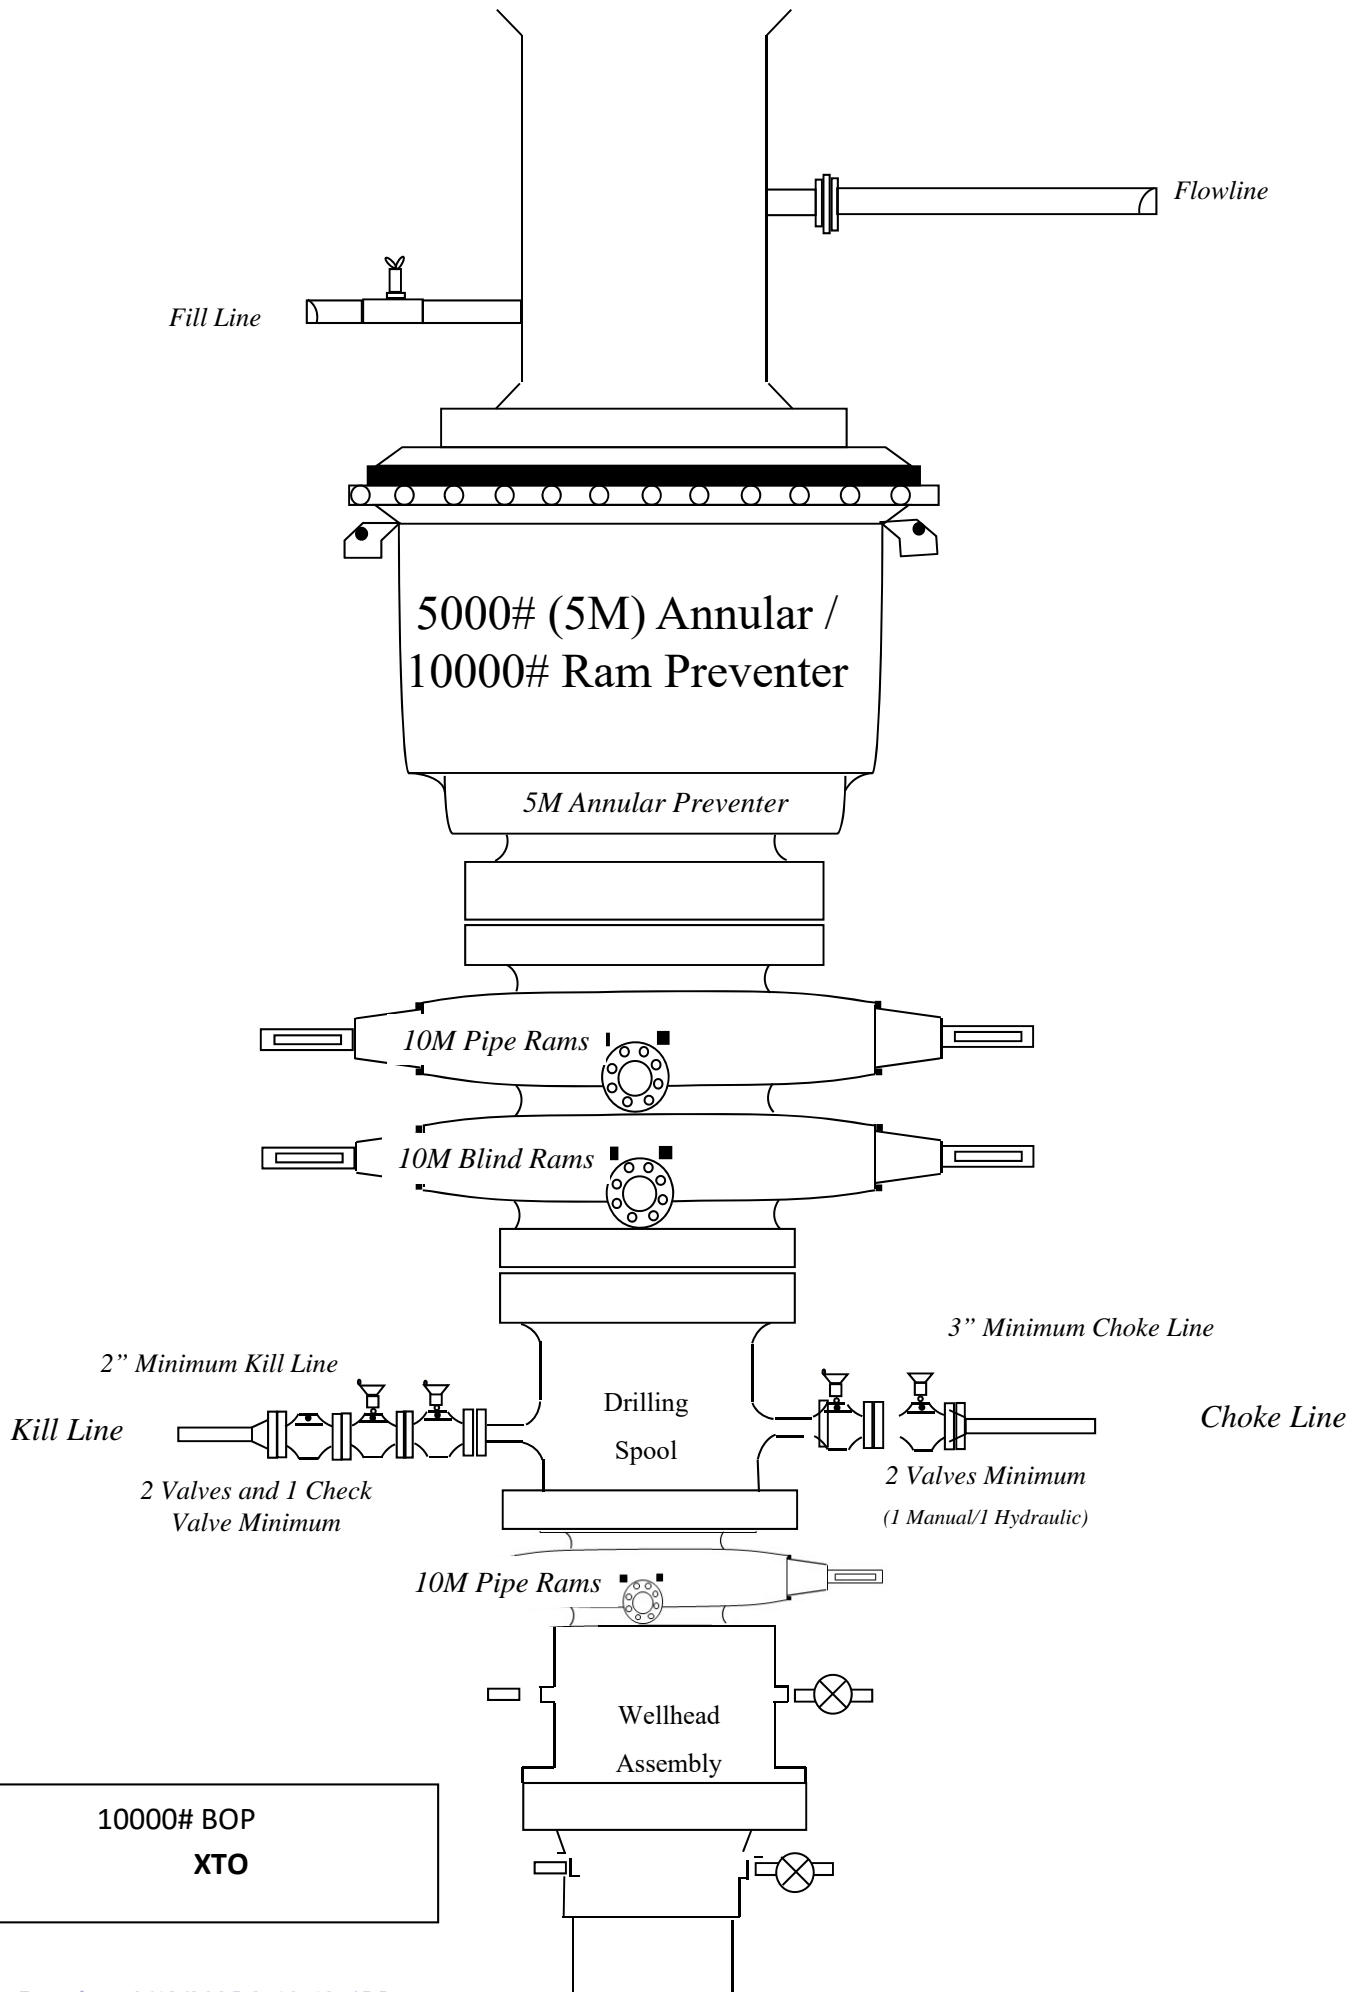



TenarisHydril Wedge 461®



Coupling	Pipe Body
Grade: P110-CY	Grade: P110-CY
Body: White	1st Band: White
1st Band: Grey	2nd Band: Grey
2nd Band: -	3rd Band: -
3rd Band: -	4th Band: -
	5th Band: -
	6th Band: -

Outside Diameter	5.500 in.	Wall Thickness	0.361 in.	Grade	P110-CY
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	REGULAR				

Pipe Body Data

Geometry				Performance	
Nominal OD	5.500 in.	Wall Thickness	0.361 in.	Body Yield Strength	641 x1000 lb
Nominal Weight	20.00 lb/ft	Plain End Weight	19.83 lb/ft	Min. Internal Yield Pressure	12,640 psi
Drift	4.653 in.	OD Tolerance	API	SMYS	110,000 psi
Nominal ID	4.778 in.			Collapse Pressure	11,100 psi

Connection Data

Geometry		Performance		Make-Up Torques	
Connection OD	6.300 in.	Tension Efficiency	100 %	Minimum	17,000 ft-lb
Coupling Length	7.714 in.	Joint Yield Strength	641 x1000 lb	Optimum	18,000 ft-lb
Connection ID	4.778 in.	Internal Pressure Capacity	12,640 psi	Maximum	21,600 ft-lb
Make-up Loss	3.775 in.	Compression Efficiency	100 %	Operation Limit Torques	
Threads per inch	3.40	Compression Strength	641 x1000 lb	Operating Torque	39,000 ft-lb
Connection OD Option	Regular	Max. Allowable Bending	92 °/100 ft	Yield Torque	46,000 ft-lb
		External Pressure Capacity	11,100 psi	Buck-On	
		Coupling Face Load	290,000 lb	Minimum	21,600 ft-lb
				Maximum	23,100 ft-lb

Notes

This connection is fully interchangeable with:
Wedge 441® - 5.5 in. - 0.304 (17.00) / 0.361 (20.00) in. (lb/ft)
Wedge 461® - 5.5 in. - 0.304 (17.00) / 0.415 (23.00) / 0.476 (26.00) in. (lb/ft)
Connections with Dopeless® Technology are fully compatible with the same connection in its doped version
In October 2019, TenarisHydril Wedge XP® 2.0 was renamed TenarisHydril Wedge 461™. Product dimensions and properties remain identical and both connections are fully interchangeable

For the latest performance data, always visit our website: www.tenaris.com
For further information on concepts indicated in this datasheet, download the Datasheet Manual from www.tenaris.com

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com . ©Tenaris 2024. All rights reserved.



TenarisHydril Wedge 511



Coupling	Pipe Body
Grade: L80-IC	Grade: L80-IC
Body: Red	1st Band: Red
1st Band: Brown	2nd Band: Brown
2nd Band: -	3rd Band: Pale Green
3rd Band: -	4th Band: -
	5th Band: -
	6th Band: -

Outside Diameter	7.625 in.	Wall Thickness	0.375 in.	Grade	L80-IC
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	REGULAR				

Pipe Body Data

Geometry				Performance	
Nominal OD	7.625 in.	Wall Thickness	0.375 in.	Body Yield Strength	683 x1000 lb
Nominal Weight	29.70 lb/ft	Plain End Weight	29.06 lb/ft	Min. Internal Yield Pressure	6890 psi
Drift	6.750 in.	OD Tolerance	API	SMYS	80,000 psi
Nominal ID	6.875 in.			Collapse Pressure	5900 psi

Connection Data

Geometry		Performance		Make-Up Torques	
Connection OD	7.625 in.	Tension Efficiency	61.10 %	Minimum	5900 ft-lb
Connection ID	6.787 in.	Joint Yield Strength	417 x1000 lb	Optimum	7100 ft-lb
Make-up Loss	3.704 in.	Internal Pressure Capacity	6890 psi	Maximum	10,300 ft-lb
Threads per inch	3.28	Compression Efficiency	73.80 %	Operation Limit Torques	
Connection OD Option	Regular	Compression Strength	504 x1000 lb	Operating Torque	35,000 ft-lb
		Max. Allowable Bending	29.33 °/100 ft	Yield Torque	52,000 ft-lb
		External Pressure Capacity	5900 psi		

Notes

For the latest performance data, always visit our website: www.tenaris.com
For further information on concepts indicated in this datasheet, download the Datasheet Manual from www.tenaris.com

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com . ©Tenaris 2024. All rights reserved.

**BLACK GOLD®**

GATES ENGINEERING & SERVICES NORTH AMERICA
7603 Prairie Oak Dr.
Houston, TX. 77086

PHONE: +1 (281) 602-4100**FAX: +1 (281) 602-4147****EMAIL: gesna.quality@gates.com****WEB: www.gates.com/oilandgas**

*NEW CHOKE HOSE
INSTALLED 02-10-2024*

CERTIFICATE OF CONFORMANCE

This is to verify that the items detailed below meet the requirements of the Customer's Purchase Order referenced herein, and are in Conformance with applicable specifications, and that Records of Required Tests are on file and subject to examination. The following items were inspected and hydrostatically tested at **Gates Engineering & Services North America** facilities in Houston, TX, USA.

CUSTOMER: NABORS DRILLING TECHNOLOGIES USA DBA NABORS DRILLING USA
CUSTOMER P.O.#: 15582803 (TAG NABORS PO #15582803 SN 74621 ASSET 66-1531)
CUSTOMER P/N: IMR RETEST SN 74621 ASSET #66-1531

PART DESCRIPTION: RETEST OF CUSTOMER 3" X 45 FT 16C CHOKE & KILL HOSE ASSEMBLY C/W 4 1/16" 10K FLANGES

SALES ORDER #: 529480
QUANTITY: 1
SERIAL #: 74621 H3-012524-1

SIGNATURE:*F. Cismos***TITLE:****QUALITY ASSURANCE****DATE:****1/25/2024**



H3-15/16

1/25/2024 11:48:06 AM

TEST REPORT

CUSTOMER

Company: Nabors Industries Inc.

Production description: 74621/66-1531

Sales order #: 529480

Customer reference: FG1213

TEST OBJECT

Serial number: H3-012524-1

Lot number:

Description: 74621/66-1531

Hose ID: 3" 16C CK

Part number:

TEST INFORMATION

Test procedure: GTS-04-053

Test pressure: 15000.00 psi

Test pressure hold: 3600.00 sec

Work pressure: 10000.00 psi

Work pressure hold: 900.00 sec

Length difference: 0.00 %

Length difference: 0.00 inch

Fitting 1: 3.0 x 4-1/16 10K

Part number:

Description:

Fitting 2: 3.0 x 4-1/16 10K

Part number:

Description:


Visual check:

Pressure test result: PASS

Length measurement result:

Length: 45 feet

Test operator: Travis

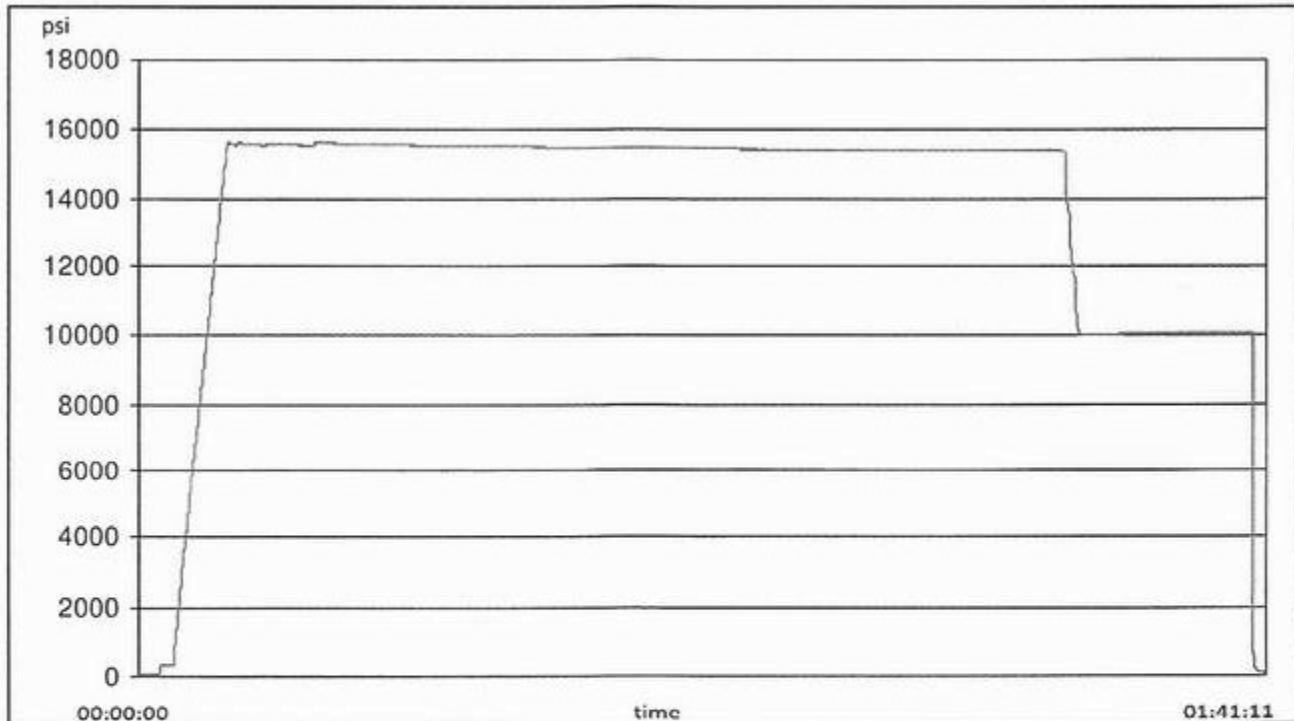



H3-15/16


1/25/2024 11:48:06 AM

TEST REPORT

Description	Serial number	Calibration date	Calibration due date
S-25-A-W	110D3PHO	2023-06-06	2024-06-06
S-25-A-W	110IQWDG	2023-05-16	2024-05-16

Comment

--

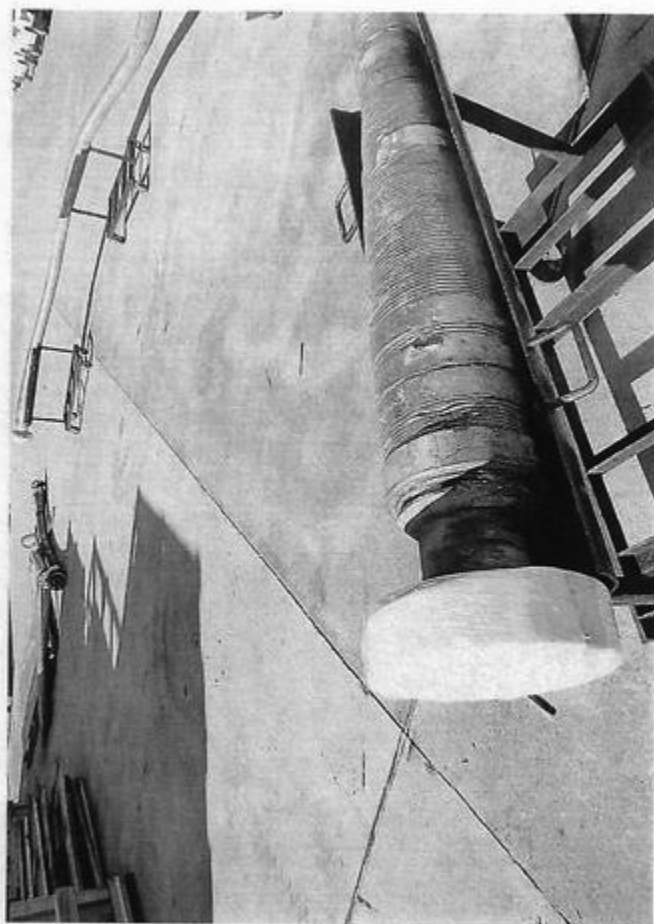



XTO respectfully requests approval to utilize a spudder rig to pre-set surface casing.

Description of Operations:

1. Spudder rig will move in to drill the surface hole and pre-set surface casing on the well.
 - a. After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
 - b. The spudder rig will utilize fresh water-based mud to drill the surface hole to TD. Solids control will be handled entirely on a closed loop basis. No earth pits will be used.
2. The wellhead will be installed and tested as soon as the surface casing is cut off and WOC time has been reached.
3. A blind flange at the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on two wing valves.
 - a. A means for intervention will be maintained while the drilling rig is not over the well.
4. Spudder rig operations are expected to take 2-3 days per well on the pad.
5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
6. Drilling Operations will begin with a larger rig and a BOP stack equal to or greater than the pressure rating that was permitted will be nipped up and tested on the wellhead before drilling operations resume on each well.
 - a. The larger rig will move back onto the location within 90 days from the point at which the wells are secured and the spudder rig is moved off location.
 - b. The BLM will be notified 24 hours before the larger rig moves back on the pre-set locations
7. XTO will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
8. Once the rig is removed, XTO will secure the wellhead area by placing a guard rail around the cellar area.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 427167

CONDITIONS

Operator: XTO PERMIAN OPERATING LLC. 6401 HOLIDAY HILL ROAD MIDLAND, TX 79707	OGRID: 373075
	Action Number: 427167
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Any previous COA's not addressed within the updated COA's still apply.	2/18/2025