

Well Name: SIXTEEN G`S	Well Location: T24N / R9W / SEC 7 / NESW / 36.326584 / -107.831512	County or Parish/State: SAN JUAN / NM
Well Number: 4	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM25433	Unit or CA Name:	Unit or CA Number:
US Well Number: 300452944000S2	Operator: DUGAN PRODUCTION CORPORATION	

Notice of Intent

Sundry ID: 2854795

Type of Submission: Notice of Intent	Type of Action: Plug and Abandonment
Date Sundry Submitted: 05/27/2025	Time Sundry Submitted: 02:56
Date proposed operation will begin: 06/16/2025	

Procedure Description: Dugan Production Corp. plans to plug and abandon the well per the attached procedure.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

- Sixteen\_Gs\_4\_Rec\_Plan\_4\_1\_25\_20250527145127.pdf
- Sixteen\_Gs\_4\_proposed\_PA\_formation\_tops\_20250527145042.pdf
- Sixteen\_Gs\_4\_proposed\_PA\_planned\_wellbore\_schematic\_20250527144935.pdf
- Sixteen\_Gs\_4\_proposed\_PA\_current\_wellbore\_schematic\_20250527144921.pdf
- Sixteen\_Gs\_4\_proposed\_PA\_planned\_work\_20250527144832.pdf

Well Name: SIXTEEN G S	Well Location: T24N / R9W / SEC 7 / NESW / 36.326584 / -107.831512	County or Parish/State: SAN JUAN / NM
Well Number: 4	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM25433	Unit or CA Name:	Unit or CA Number:
US Well Number: 300452944000S2	Operator: DUGAN PRODUCTION CORPORATION	

Conditions of Approval

Additional

General\_Requirement\_PxA\_20250613090540.pdf  
2854795\_NOI\_PnA\_Sixteen\_Gs\_4\_3004529440\_MHK\_06.13.2025\_20250613090532.pdf  
Sixteen\_G\_s\_No\_4\_Geo\_Rpt\_20250611150203.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: TYRA FEIL	Signed on: MAY 27, 2025 02:52 PM
Name: DUGAN PRODUCTION CORPORATION	
Title: Authorized Representative	
Street Address: PO BOX 420	
City: FARMINGTON	State: NM
Phone: (505) 325-1821	
Email address: TYRAFEIL@DUGANPRODUCTION.COM	

Field

Representative Name: Aliph Reena		
Street Address: PO Box 420		
City: Farmington	State: NM	Zip: 87499-0420
Phone: (505)360-9192		
Email address: Aliph.Reena@duganproduction.com		

BLM Point of Contact


BLM POC Name: JEFFREY J TAFOYA	BLM POC Title: Assistant Field Manager
BLM POC Phone: 5055647672	BLM POC Email Address: JTAFOYA@BLM.GOV
Disposition: Approved	Disposition Date: 06/16/2025
Signature: s/ Jeff Tafoya	

Dugan Production plans to plug and abandon the well per the following procedure:

- POOH & LD rods & 2-3/8" production tubing.
- PU & tally 2-3/8" workstring. Run 4½" casing scraper to 6330' to PBTD and tag. Dakota perforations at 6433'-6451'. Dakota PBTD'd w/CIBP at 6380' w/50' cement on top during original completion in 1997.
- **Plug I:** Spot Plug I inside 4½" casing from 6330' (on top of the /CIBP + 50' cement at PBTD) to 6124' w/20 sks, 23 cu ft Class G neat cement to cover the Dakota & Graneros top. **Plug I, Inside 4½" casing, 20 sks, 23 cu ft, Graneros-Dakota, 6124'-6330'.**
- RIH & set 4½" CIBP @ 5356'. Gallup perforations @ 5406'-5444'.
- Load and circulate hole and Run CBL from 5356' to surface. All plugs are designed assuming cement behind casing to surface. Will make necessary changes to the plugs after reviewing the CBL.
- Pressure test casing to 650 psi for 30 minutes.
- **Plug II:** Spot Plug II inside 4½" casing from 5356' on top of the CIBP to cover till 5030' w/26 sks (29.9 cu ft) Class G cement to cover the Gallup top & Gallup perforations. **Plug II, Inside 4" casing, 26 sks, 29.1 cu ft, Gallup top-Gallup perforations, 5030'-5356'.**
- **Plug III:** Spot Plug III inside 4½" casing from 4483' to 4306' w/15 sks, 17.25 cu ft Class G neat cement to cover the Mancos top & DV tool. **Plug III, Inside 4½" casing, 15 sks, 17.25 cu ft, Mancos-DV tool, 4306'-4483'.**
- **Plug IV:** Spot Plug IV inside 4½" casing from 2620' to 2030' w/46 sks, 52.9 cu ft Class G cement to cover the Mesaverde- Lower Chacra-Upper Chacra tops. **Plug IV, Inside 4½" casing, 46 sks, 52.9 cu ft, Mesaverde-Lower Chacra-Upper Chacra, 2030'-2620'.**
- **Plug V:** Spot Plug V inside 4½" casing from 1842' to 1311' w/42 sks, 48.3 cu ft Class G cement to cover the Fruitland-Pictured Cliffs tops. **Plug V, Inside 4½" casing, 42 sks, 48.3 cu ft, Fruitland-Pictured Cliffs, 1311'-1842'.**
- **Plug VI:** Spot Plug VI inside 4½" casing from 1034' to 786' w/20 sks, 23 cu ft Class G cement to cover the Kirtland & Ojo Alamo tops. **Plug VI, Inside 4½" casing, 20 sks, 23 cu ft, Kirtland-Ojo Alamo, 786'-1034'.**
- **Plug VII:** Spot Plug VII inside 4½" casing from 384' to surface w/30 sks, 34.5 cu ft Class G neat cement to cover the surface casing shoe to surface. **Plug VII, Inside 4½" casing, 30 sks, 34.5 cu ft, Surface, 0'-384'.**
- Cut wellhead. Tag TOC at surface. Fill cement in case needed.
- Install dry hole marker. Clean location.

**Current Wellbore Schematic**

Sixteen G's #004  
API: 30-045-29440  
Sec 7 T24N R09W  
1980' FSL & 2100' FWL  
San Juan County, NM  
Lat: 36.326776, Long: -107.832140

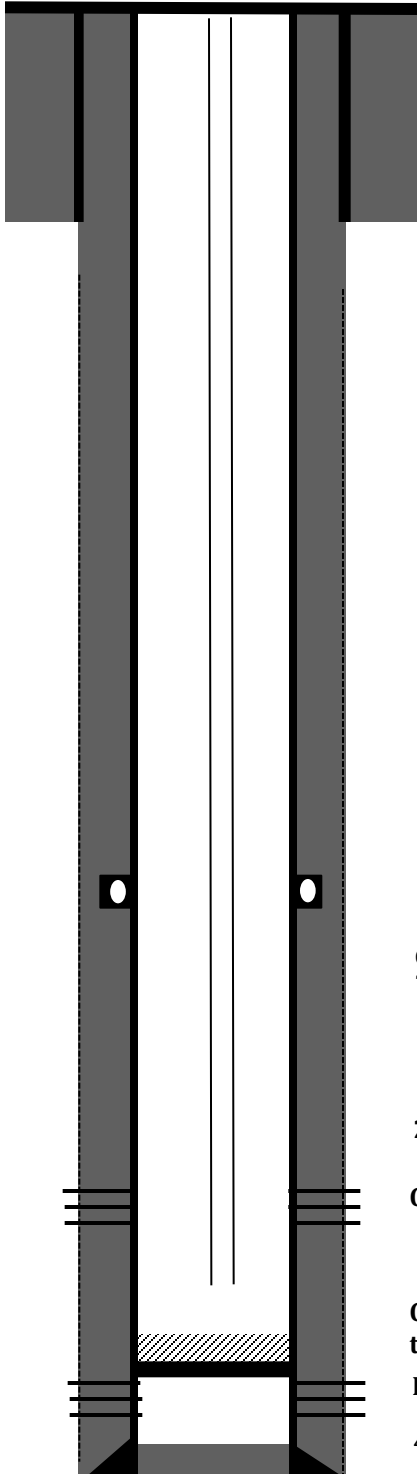

8-5/8" 24# casing @ 334'. Cemented with 225 sks, 260 Cu.ft.  
Circulated 5 bbls cement to surface

Cemented Stage I w/ 550 sks 50/50 Class B cement, 698 Cu.ft. **DV tool @ 4433'**. Stage II w/  
750 sks 65-35-12 and 150 sks 50-50 sks cement, 1848 Cu.ft. Total 2546 Cu.ft cement.

**2-3/8" J-55 tubing ran to 5503'**


**Gallup Perforated @ 5406'-5444'**

**CIBP at 6380' & 50' cement on top and PBTD'ed  
to 6330 part of the initial completion**

**Dakota Perforated @ 6433'-6451'**

**4 1/2" 10.5 # casing @ 6575', Hole size 7-7/8"**

Sixteen G's #004  
 API: 30-045-29440  
 Sec 7 T24N R09W  
 1980' FSL & 2100' FWL  
 San Juan County, NM  
 Lat: 36.326776, Long: -107.832140

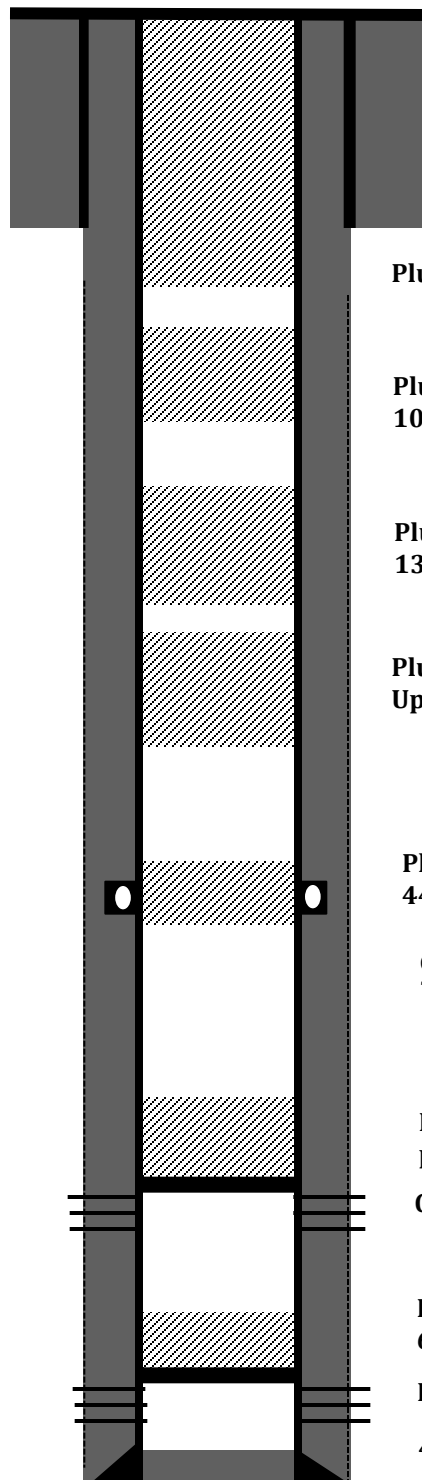

8-5/8" 24# casing @ 334'. Cemented with 225 sks, 260 Cu.ft.  
 Circulated 5 bbls cement to surface

**Plug VII, Inside 4 ½" casing, 30 sks, 34.5 Cu.ft, Surface, 0'-384'**

**Plug VI, Inside 4 ½" casing, 20 sks, 23 Cu.ft, Kirtland-Ojo Alamo, 786'-1034'**

**Plug V, Inside 4 ½" casing, 42 sks, 48.3 Cu.ft, Fruitland-Pictured Cliffs, 1311'-1842'**

**Plug IV, Inside 4 ½" casing, 46 sks, 52.9 Cu.ft, Mesaverde-Lower Chacra-Upper Chacra, 2030'-2620'**

**Plug III, Inside 4 ½" casing, 15 sks, 17.25 Cu.ft, Mancos-DV tool, 4306'-4483'**

Cemented Stage I w/ 550 sks 50/50 Class B cement, 698 Cu.ft. **DV tool @ 4433'**. Stage II w/ 750 sks 65-35-12 and 150 sks 50-50 sks cement, 1848 Cu.ft. Total 2546 Cu.ft cement.

**Plug II, Inside 4 ½" casing, 26 sks, 29.1 Cu.ft, Gallup top-Gallup perforations, 5030'-5356'**

**Gallup Perforated @ 5406'-5444'**

**Plug I, Inside 4 ½" casing, 20 sks, 23 Cu.ft, Graneros-Dakota, 6124'-6330'**

**Dakota Perforated @ 6433'-6451'**

**4 ½" 10.5 # casing @ 6575', Hole size 7-7/8"**

**Sixteen G's #004**  
API: 30-045-29440  
Sec 7 T24N R09W  
1980' FSL & 2100' FWL  
San Juan County, NM  
Lat: 36.326776, Long: -107.832140

**Elevation ASL : 6850' GL**

**Formation Tops (Operator Submitted)**

- ***Surface Casing - 334'***
- ***Ojo Alamo - 886'***
- ***Kirtland - 984'***
- ***Fruitland - 1411'***
- ***Pictured Cliffs - 1792'***
- ***Lewis - 1867'***
- ***Upper Chacra - 2130'***
- ***Lower Chacra - 2360'***
- ***Mesaverde - 2570'***
- ***Mancos - 4406'***
- ***DV tool - 4433'***
- ***Gallup - 5130'***
- ***Gallup Perfs - 5406'-5444'***
- ***Greenhorn - 6160'***
- ***Graneros - 6224'***
- ***Dakota - 6261'***
- ***PBTD - 6330'***



# United States Department of the Interior

BUREAU OF LAND MANAGEMENT  
Farmington District Office  
6251 College Boulevard, Suite A  
Farmington, New Mexico 87402  
<http://www.blm.gov/nm>



## CONDITIONS OF APPROVAL

June 13, 2025

### Notice of Intent - Plug and Abandonment

---

**Operator:** Dugan Production Corporation  
**Lease:** NMNM25433  
**Well(s):** Sixteen G'S 4, API # 30-045-29440  
**Location:** NESW Sec 7 T24N R9W (San Juan County, NM)  
**Sundry Notice ID#:** 2854795

The Notice of Intent to Plug and Abandon is accepted with the following Conditions of Approval (COA):

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. **The following modifications to your plugging program are made:**
  - a. Adjust Plug 4 (Mesaverde/Chacra) BOC to 3275' to cover BLM Geologist's Cliffhouse formation top pick @ 3225' and TOC to 2026' to cover BLM Geologist's Upper Chacra formation top pick @ 2126'. Plug 4 should at a minimum cover 3275' up to 2076'.
  - b. Adjust Plug 5 (Fruitland/Picture Cliffs) TOC to 1246' to cover BLM Geologist's Fruitland formation top pick @ 1346'. Plug 5 should at a minimum cover 1746' up to 1296'.
  - c. Adjust Plug 6 (Kirtland/Ojo Alamo) TOC to 402' to account for BLM Geologist's Ojo Alamo formation top pick @ 452'. Plug 6 should at a minimum cover 791' up to 402'. Plug 6 (Kirtland/Ojo Alamo) may be combined with Plug 7 (Surface) and go from 791' to surface.
3. **Notification:** Farmington Field Office is to be notified at least 24 hours before the plugging operations commence at (505) 564-7750.
4. **Deadline of Completion of Operations:** Complete the plugging operation before June 13, 2026. If unable to meet the deadline, notify the Bureau of Land Management's Farmington Field Office prior to the deadline via Sundry Notice (Form 3160-5) Notice of Intent detailing the reason for the delay and the date the well is to be plugged.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements. Any estimated minimum sacks provided in procedure modification include necessary excesses.

Office Hours: 7:45 a.m. to 4:30 p.m.

Matthew Kade ([mkade@blm.gov](mailto:mkade@blm.gov)/505-564-7736) / Kenny Rennick ([krennick@blm.gov](mailto:krennick@blm.gov)/505-564-7742)



**GENERAL REQUIREMENTS FOR  
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES  
FARMINGTON FIELD OFFICE**

1.0 The approved plugging plans may contain variances from the following minimum general requirements.

1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.

1.2 Requirements may be added to address specific well conditions.

2.0 Materials used must be accurately measured. (densometer/scales)

3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.

3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.

4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.

4.1 The cement shall be as specified in the approved plugging plan.

4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.3 Surface plugs may be no less than 50' in length.

4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.

4.6 **A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H<sub>2</sub>S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), through the Automated Fluid Minerals Support System (AFMSS) with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d) and 43 CFR 3172.12(a)(10). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

**BLM - FFO - Geologic Report****Date Completed** 6/11/2025

Well No.	Sixteen G's No 4	Surf. Loc.	1980	FSL	2100	FWL
Lease No.	NMNM25433	Sec	7	T24N	R9W	
US Well No.	3004529440					
Operator	Dugan Production Company	County	San Juan	State	New Mexico	
TVD	6570	PBTD	6330	Formation	Bisti Lower Gallup	
Elevation	GL		6850	Elevation	Est. KB	6862

<b>Geologic Formations</b>	<b>Est. tops</b>	<b>Subsea Elev.</b>	<b>Remarks</b>
Nacimientto Fm.	Surface		Surface /fresh water sands
Ojo Alamo Ss	452	6410	Fresh water aquifer
Kirtland Fm.	741	6121	
Fruitland Fm.	1346	5516	Coal/gas/possible water
Pictured Cliffs	1696	5166	Possible gas/water
Lewis Shale (Main)	1808	5054	Source rock
Huerfanito Bentonite	2008	4854	Reference bed
Chacra (upper)	2126	4736	Possible gas/water
Chacra (Lower)	2565	4297	Possible gas/water
La Ventana Member	2768	4094	Possible gas/water
Lewis Shale Stringer	3135	3727	
Cliff House Ss	3225	3637	Possible gas/water
Menefee Fm.	3265	3597	Coal/water/possible gas
Point Lookout Fm.	4205	2657	Possible gas/water
Mancos Shale	4406	2456	Source rock
DV Tool	4433	2429	
Gallup	5130	1732	Oil & gas
Juana Lopez	5420	1442	
Mancos Stringer	5570	1292	
Bridge Creek/Greenhorn	6160	702	
Graneros Shale	6224	638	
Dakota Ss	6215	647	Possible gas/water
Morrison Fm.	6370	492	Possible water

Remarks:Reference Wells:

-Vertical wellbore, all formation depths are TVD from KB at the wellhead.

-Modify Plug 4: Move the BOC to 3275' and the TOC to 2026' to account for the BLM geologist's picks for the Upper and Lower Chacra, the LaVentana tongue of the Cliff House and the Cliff House main.

-Modify Plug 5: Move the TOC to 1246' to account for the BLM geologist's pick for the Fruitland.

-Modify Plug 6: Move the TOC to 402' to account for the BLM geologist's pick for the Ojo Alamo.

Surface - Upper Chacra  
Dugan Production Company  
Sixteen G's No 2  
3004522002  
1650' FSL, 1190' FWL  
7L-T27N-R9W  
GL= 6874, KB= 6886'

Lower Chacra -Morrison  
Dugan Production Company  
Sixteen G's No 4

Prepared by: Walter Gage

**State of New Mexico**  
**Energy, Minerals and Natural Resources Department**  
**Oil Conservation Division**  
**Standard Plugging Conditions**



This document provides OCD's general plugging conditions of approval. It should be noted that the list below may not cover special plugging programs in unique and unusual cases, and OCD expressly reserves the right to impose additional requirements to the extent dictated by project conditions. The OCD also reserves the right to approve deviations from the below conditions if field conditions warrant a change. A C-103F NOI to P&A must be approved prior to plugging operations. Failure to comply with the conditions attached to a plugging approval may result in a violation of 19.15.5.11 NMAC, which may result in enforcement actions, including but not limited to penalties and a requirement that the well be re-plugged as necessary.

1. Notify OCD office at least 24 hours before beginning work and seek prior approval to implementing any changes to the C-103 NOI to PA.
  - North Contact, Monica Kuehling, 505-320-0243, [monica.kuehling@emnrd.nm.gov](mailto:monica.kuehling@emnrd.nm.gov)
  - South Contact, Gilbert Cordero, 575-626-0830, [gilbert.cordero@emnrd.nm.gov](mailto:gilbert.cordero@emnrd.nm.gov)
2. A Cement Bond Log is required to ensure strata isolation of producing formations, protection of water and correlative rights. A CBL must be run or be on file that can be used to properly evaluate the cement behind the casing.

Note: Logs must be submitted to OCD via OCD permitting. A copy of the log may be emailed to OCD inspector for faster review times, but emailing does not relieve the operators obligation to submit through OCD permitting.

3. Once Plugging operations have commenced, the rig must not rig down until the well is fully plugged without OCD approval. If gap in plugging operations exceeds 30 days, the Operator must file a subsequent sundry of work performed and revised NOI for approval on work remaining. At no time shall the rig be removed from location if it will result in waste or contamination of fresh water.
4. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
5. Fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
  - North, water or mud laden fluids
  - South, mud laden fluids
6. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to an OCD permitted disposal facility.
7. Class of cement shall be used in accordance with the below table for depth allowed.

Class	TVD Lower Limit (feet)
Class A/B	6,000
Class I/II	6,000
Class C or III	6,000
Class G and H	8,000
Class D	10,000

Class E	14,000
Class F	16,000

8. After cutting the well head any "top off cement jobs" must remain static for 30 minutes. Any gas bubbles or flow during this 30 minutes shall be reported to the OCD for approval of next steps.
9. Trucking companies being used to haul oilfield waste fluids (Commercial or Private) to a disposal facility shall have an approved OCD C-133 permit.
  - A copy of this permit shall be available in each truck used to haul waste products.
  - It is the responsibility of the Operator and Contractor to verify that this permit is in place prior to performing work.
  - Drivers shall be able to produce a copy upon request of an OCD Compliance Officer.
10. Filing a [C-103] Sub. Plugging (C-103P) will serve as notification that the well has been plugged.
11. A [C-103] Sub. Release After P&A (C-103Q) shall be filed no later than a year after plugging and a site inspection by OCD Compliance officer to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to meet OCD standards before bonding can be released.
12. Produced water or brine-based fluids **may not** be used during any part of plugging operations without **prior OCD approval**.
13. Cementing;
  - All cement plugs will be neat cement and a minimum of 100' in length. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
  - If cement does not exist between or behind the casing strings at recommended formation depths, the casing perforations will be shot at 50' below the formation top and the cement retainer shall be set no more than 50' from the perforations.
  - WOC (Wait on Cement) time will be:
    - 4 hours for accelerated (calcium chloride) cement.
    - 6 hours on regular cement.
  - Operator must tag all cement plugs unless it meets the below condition.
    - The operator has a passing pressure test for the casing annulus and the plug is only an inside plug.
  - If perforations are made operator must tag all plugs using the work string to tag unless given approval to tag with wireline by the correct contact from COA #1 of this document.
    - This includes plugs pumped underneath a cement retainer to ensure retainer seats properly after cement is pumped.
  - Cement can only be bull-headed with specific prior approval.
  - Squeeze pressures are not to exceed the exposed formations frac gradient or the burst pressure of the casing.
14. A cement plug is required to be set from 50' below to 50' above (straddling) formation tops, casing shoes, casing stubs, any attempted casing cut offs, anywhere the casing is perforated, DV tools.
  - Perforation/Formation top plug. (When there is less than 100ft between the top perforation to the formation top.) These plugs are required to be started no greater than

50ft from the top perforation. However, the plug should be set below the formation top or as close to the formation top as possible for the maximum isolation between the formations. The plug is required to be a 100ft cement plug plus excess.

- Perforation Plug when a formation top is not included. These plugs are required to be started within 50ft of the top perforation. The plug is required to be a 100ft cement plug plus excess.
- Cement caps on top of bridge plugs or cement retainers for perforation plugs, that are not straddling a formation top, may be set using a bailer with a minimum of 35' of cement in lieu of the 100' plug. The bridge plug or retainer must be set within 50ft of the perforations.
- Perforations are required below the surface casing shoe if cement does not exist behind the casing, a 30-minute minimum wait time will be required immediately after perforating to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. If gas is detected contact the OCD office for directions.

15. No more than 3000 feet is allowed between cement plugs in cased hole and no more than 2000 feet is allowed in open hole.

16. Formation Tops to be isolated with cement plugs, but not limited to are:

- Northwest See Figure A
- South (Artesia) See Figure B
- Potash See Figure C
  - In the R-111-P (Or as subsequently revised) Area a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, woe 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
- South (Hobbs) See Figure D1 and D2
- Areas not provided above will need to be reviewed with the OCD on a case by case basis.

17. Markers

- Dry hole marker requirements 19.15.25.10.  
The operator shall mark the exact location of plugged and abandoned wells with a steel marker not less than four inches in diameter set in cement and extending at least four feet above mean ground level. The marker must include the below information:
  1. Operator name
  2. Lease name and well number
  3. API number
  4. Unit letter
  5. Section, Township and Range
- AGRICULTURE (Below grade markers)  
In Agricultural areas a request can be made for a below ground marker. For a below ground marker the operator must file their request on a C-103 notice of intent, and it must include the following;
  - A) Aerial photo showing the agricultural area
  - B) Request from the landowner for the below ground marker.

C) Subsequent plugging report for a well using a below ground marker must have an updated C-102 signed by a certified surveyor for SHL.

Note: A below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to OCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to OCD. OCD requires a current survey to verify the location of the below ground marker, however OCD will accept a GPS coordinate that were taken with a GPS that has an accuracy of within 15 feet.

18. If work has not commenced within 1 year of the approval of this procedure, the approval is automatically expired. After 1 year a new [C-103] NOI Plugging (C-103F) must be submitted and approved prior to work.

Figure A

North Formations to be isolated with cement plugs are:

- San Jose
- Nacimiento
- Ojo Alamo
- Kirtland
- Fruitland
- Picture Cliffs
- Chacra (if below the Chacra Line)
- Mesa Verde Group
- Mancos
- Gallup
- Basin Dakota (plugged at the top of the Graneros)
- Deeper formations will be reviewed on a case-by-case basis



Figure B

South (Artesia) Formations to be isolated with cement plugs are:

- Fusselman
- Montoya
- Devonian
- Morrow
- Strawn
- Atoka
- Permo-Penn
- Wolfcamp
- Bone Springs
- Delaware , in certain areas where the Delaware is subdivided into;
  - 1. Bell Canyon
  - 2. Cherry Canyon
  - 3. Brushy Canyon
- Any salt sections
- Abo
- Yeso
- Glorieta
- San Andres
- Greyburg
- Queen
- Yates

## Figure C

## Potash Area R-111-P

## T 18S – R 30E

Sec 10 Unit P. Sec 11 Unit M,N. Sec 13 Unit L,M,N. Sec 14 Unit C -P. Sec 15 Unit A G,H,I,J,K,N,O,P. Sec 22 Unit All  
except for M. Sec 23, Sec 24 Unit C,D,E,L, Sec 26 Unit A-G, Sec 27 Unit A,B,C

## T 19S – R 29E

Sec 11 Unit P. Sec 12 Unit H-P. Sec 13. Sec 14 Unit A,B,F-P. Sec 15 Unit P. Sec 22 Unit A,B,C,F,G,H,I,J K,N,O,P. Sec 23.  
Sec 24. Sec 25 Unit D. Sec 26 Unit A- F. Sec 27 Unit A,B,C,F,G,H.

## T 19S – R 30E

Sec 2 Unit K,L,M,N. Sec 3 Unit I,L,M,N,O,P. Sec 4 Unit C,D,E,F,G,I-P. Sec 5 Unit A,B,C,E-P. Sec 6 Unit I,O,P. Sec 7 – Sec  
10. Sec 11 Unit D, G—P. Sec 12 Unit A,B,E-P. Sec 13 Unit A-O. Sec 14-Sec 18. Sec 19 Unit A-L, P. Sec 20 – Sec 23. Sec  
24 Unit C,D,E,F,L,M,N. Sec 25 Unit D. Sec 26 Unit A-G, I-P. Sec 27, Sec 28, Sec 29 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 32  
Unit A,B,G,H,I,J,N,O,P. Sec 33. Sec 34. Sec 35. Sec 36 Unit D,E,F,I-P.

## T 19S – R 31E

Sec 7 Unit C,D,E,F,L. Sec 18 Unit C,D,E,F,G,K,L. Sec 31 Unit M. Sec 34 Unit P. Sec 35 Unit M,N,O. Sec 36 Unit O,P.

## T 20S – R 29E

Sec 1 Unit H,I,P. Sec 13 Unit E,L,M,N. Sec 14 Unit B-P. Sec 15 Unit A,H,I,J,N,O,P. Sec 22 Unit A,B,C,F,G,H,I,J,O,P. Sec  
23. Sec 24 Unit C,D,E,F,G,J-P. Sec 25 Unit A-O. Sec 26. Sec 27 Unit A,B,G,H,I,J,O,P. Sec 34 Unit A,B,G,H. Sec 35 Unit  
A-H. Sec 36 Unit B-G.

## T 20S – R 30E

Sec 1 – Sec 4. Sec 5 Unit A,B,C,E-P. Sec 6 Unit E,G-P. Sec 7 Unit A-H,I,J,O,P. Sec 8 – 17. Sec 18 Unit A,B,G,H,I,J,O,P.  
Sec 19 Unit A,B,G,H,I,J,O,P. Sec 20 – 29. Sec 30 Unit A-L,N,O,P. Sec 31 Unit A,B,G,H,I,P. Sec 32 – Sec 36.

## T 20S – R 31E

Sec 1 Unit A,B,C,E-P. Sec 2. Sec 3 Unit A,B,G,H,I,J,O,P. Sec 6 Unit D,E,F,J-P. Sec 7. Sec 8 Unit E-P. Sec 9 Unit E,F,J-P.  
Sec 10 Unit A,B,G-P. Sec 11 – Sec 36.

## T 21S – R 29E

Sec 1 – Sec 3. Sec 4 Unit L1 – L16,I,J,K,O,P. Sec 5 Unit L1. Sec 10 Unit A,B,H,P. Sec 11 – Sec 14. Sec 15 Unit A,H,I. Sec  
23 Unit A,B. Sec 24 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 25 Unit A,O,P. Sec 35 Unit G,H,I,J,K,N,O,P. Sec 36 A,B,C,F – P.

## T 21S – R 30E

Sec 1 – Sec 36

## T 21S – R 31E

Sec 1 – Sec 36

T 22S – R 28E

Sec 36 Unit A,H,I,P.

T 22S – R 29E

Sec 1. Sec2. Sec 3 Unit I,J,N,O,P. Sec 9 Unit G – P. Sec 10 – Sec 16. Sec 19 Unit H,I,J. Sec 20 – Sec 28. Sec 29 Unit

A,B,C,D,G,H,I,J,O,P. Sec 30 Unit A. Section 31 Unit C – P. Sec 32 – Sec 36

T 22S – R 30E

Sec 1 – Sec 36

T 22S – R 31E

Sec 1 – Sec 11. Sec 12 Unit B,C,D,E,F,L. Sec 13 Unit E,F,K,L,M,N. Sec 14 – Sec 23. Sec 24 Unit C,D,E,F,K,L,M,N. Sec 25

Unit A,B,C,D. Sec 26 Unit A,BC,D,G,H. Sec 27 – Sec 34.

T 23S – R 28E

Sec 1 Unit A

T 23S – R 29E

Sec 1 – Sec 5. Sec 6 Unit A – I, N,O,P. Sec 7 Unit A,B,C,G,H,I,P. Sec 8 Unit A – L, N,O,P. Sec 9 – Sec 16. Sec 17 Unit

A,B,G,H,I,P. Sec 21 – Sec 23. Sec 24 Unit A – N. Sec 25 Unit D,E,L. Sec 26. Sec 27. Sec 28 Unit A – J, N,O,P. Sec 33

Unit A,B,C. Sec 34 Unit A,B,C,D,F,G,H. Sec 35. Sec 36 Unit B,C,D,E,F,G,K,L.

T 23S – R 30E

Sec 1 – Sec 18. Sec 19 Unit A – I,N,O,P. Sec 20, Sec 21. Sec 22 Unit A – N, P. Sec 23, Sec 24, Sec 25. Sec 26 Unit

A,B,F-P. Sec 27 Unit C,D,E,I,N,O,P. Sec 28 Unit A – H, K,L,M,N. Sec 29 Unit A – J, O,P. Sec 30 Unit A,B. Sec 32 A,B. Sec

33 Unit C,D,H,I,O,P. Sec 34, Sec 35, Sec 36.

T 23S – R 31E

Sec 2 Unit D,E,J,O. Sec 3 – Sec 7. Sec 8 Unit A – G, K – N. Sec 9 Unit A,B,C,D. Sec 10 Unit D,P. Sec 11 Unit G,H,I,J,M,N,O,P. Sec 12 Unit E,L,K,M,N. Sec 13 Unit C,D,E,F,G,J,K,L,M,N,O. Sec 14. Sec 15 Unit A,B,E – P.

Sec 16 Unit

I, K – P. Sec 17 Unit B,C,D,E, I – P. Sec 18 – Sec 23. Sec 24 Unit B – G, K,L,M,N. Sec 25 Unit B – G, J,K,L. Sec 26 – Sec

34. Sec 35 Unit C,D,E.

T 24S – R 29E

Sec 2 Unit A, B, C, D. Sec 3 Unit A

T 24S – R 30E

Sec 1 Unit A – H, J – N. Sec 2, Sec 3. Sec 4 Unit A,B,F – K, M,N,O,P. Sec 9 Unit A – L. Sec 10 Unit A – L, O,P. Sec 11.

Sec 12 Unit D,E,L. Sec 14 Unit B – G. Sec 15 Unit A,B,G,H.

T 24S – R 31E

Sec 3 Unit B – G, J – O. Sec 4. Sec 5 Unit A – L, P. Sec 6 Unit A – L. Sec 9 Unit A – J, O, P. Sec 10 Unit B – G, K – N. Sec

35 Unit E – P. Sec 36 Unit E, K, L, M, N.

T 25S – R 31E

Sec 1 Unit C, D, E, F. Sec 2 Unit A – H.

Figure D1 and D2

South (Hobbs) Formations to be isolated with cement plugs are:

The plugging requirements in the Hobbs Area are based on the well location within specific areas of the Area (See Figure D1). The Formations in the Hobbs Area to be isolated with cement plugs are (see Figure D2)

Figure D1 Map

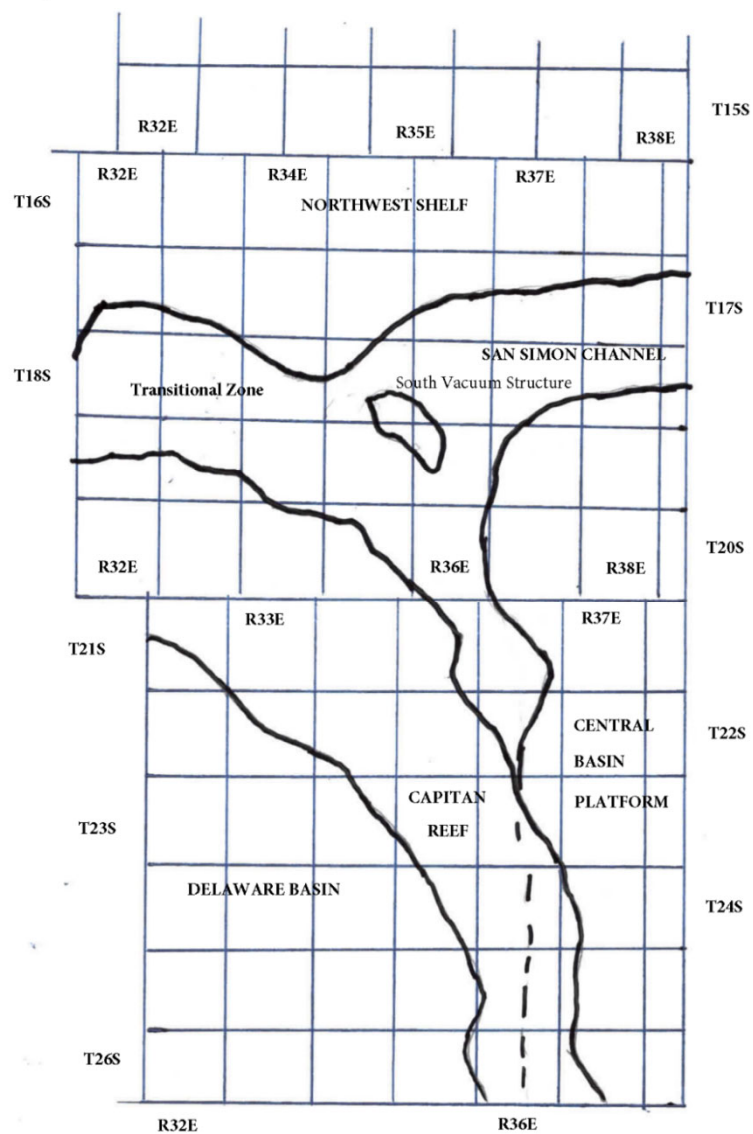


Figure D2 Formation Table

100' Plug to isolate upper and lower fresh water zones (typically 250' to 350')						
Northwest Shelf	Captan Reef Area	Transition Zone	San Simon Channel	South Vacuum Structure	Delaware Basin	Central Basin Platform
Granit Wash (Detrital basement material and fractured pre-Cambrian basement rock)	Siluro-Devonian	Morrow	Siluro-Devonian	Ellenburger	Siluro-Devonian	Granit Wash (Detrital basement material, fractured pre-Cambrian basement rock and fracture Mafic Volcanic intrusives).
Montoya	Mississippian	Atoka	Morrow	McKee	Morrow	Ellenburger
Fusselman	Morrow	Strawn	Wolfcamp	Siluro-Devonian	Atoka	Connell
Woodford	Atoka	Cisco	Abo Reef	Woodford	Strawn	Waddell
Siluro-Devonian	Strawn	Pennsylvanian	Bone Spring	Mississippian	Pennsylvanian	McKee
Chester	Pennsylvanian	Wolfcamp	Delaware	Barnett Shale	Lower Wolfcamp	Simpson Group
Austin	Wolfcamp	Bone Spring	San Andres	Morrow	Upper Wolfcamp	Montoya
Mississippian	Abo Reef, if present	Delaware	Queen	Atoka	Wolfcamp	Fusselman
Morrow	Abo, if present	San Andres	Yates	Strawn	Third Bone Spring Sand (Top of Wolfbone)	Silurian
Atoka	Queen, if present	Grayburg-San Andres	Base of Salt	Canyon	First Bone Spring Sand (Top of Lower Bone Spring)	Devonian
Lower Pennsylvanian	Bone Spring	Queen	Rustler	Pennsylvanian	Bone Spring	Strawn
Cisco-Canyon	Delaware	Seven Rivers		Blinbry	Brushy Canyon	Pennsylvanian
Pennsylvanian	Base Capitan Reef	Yates		Bone Spring	Delaware (Base of Salt)	Wolfcamp
Bough	Seven Rivers	Base of Salt		San Andres	Rustler	Abo
Wolfcamp	Yates	Rustler		Queen		Abo Reef
Abo	Top Capitan Reef			Base of Salt		Drinkard
Abo Reef, if present	Base of Salt			Rustler		Tubb
Yeso (Township 15 South to Township 17 South)	Rustler					Blinbry
Drinkard or Lower Yeso (Township 15 South to Township 17 South)						Paddock
Tubb (Township 15 South to Township 17 South)						Glorieta
Blinbry (Township 15 South to Township 17 South)						San Andres
Paddock (Township 15 South to Township 17 South)						Grayburg
Glorieta						Grayburg-San Andres
San Andres						Queen
Queen (Township 15 South to Township 17 South)						Seven Rivers
Seven Rivers (Township 15 South to Township 17 South)						Yates
Yates (Township 15 South to Township 17 South)						Base of Salt
Base of Salt						Rustler
Rustler						

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS

Action 475278

CONDITIONS

Operator: DUGAN PRODUCTION CORP PO Box 420 Farmington, NM 87499	OGRID: 6515
	Action Number: 475278
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
loren.diede	Notify the OCD inspection supervisor via email 24 hours prior to beginning Plug & Abandon (P&A) operations.	6/18/2025
loren.diede	Submit CBL tif file to the NMOCD Well Log File. Email CBL copy to L Diede after log is run. loren.diede@emnrd.nm.gov	6/18/2025
loren.diede	Submit photo and GPS coordinates of the P&A marker with the subsequent P&A report submission.	6/18/2025
loren.diede	NMOCD requests that Plug 5 be extended to 1196' to satisfy NMOCD Geo Fruitland top pick of 1246'.	6/18/2025
loren.diede	NMOCD concurs with all other BLM conditions and modifications.	6/18/2025