

Well Name: PENNZOIL FED	Well Location: T19S / R33E / SEC 12 / SENE / 32.67648 / -103.610169	County or Parish/State: LEA / NM
Well Number: 02	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMNM4312	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002526499	Operator: EARTHSTONE OPERATING LLC	

Notice of Intent

Sundry ID: 2863600

Type of Submission: Notice of Intent Type of Action: Plug and Abandonment

Date Sundry Submitted: 07/17/2025 Time Sundry Submitted: 06:55

Date proposed operation will begin: 10/12/2025

Procedure Description: Earthstone Operating, LLC respectfully requests approval of the attached plug and abandon procedure for the Pennzoil Fed #2. Attachments: P&A Procedure Current WBD Proposed WBD

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Pennzoil_Fed__2_PA_NOI_Attachments_20250716110010.pdf

Well Name: PENNZOIL FED	Well Location: T19S / R33E / SEC 12 / SENE / 32.67648 / -103.610169	County or Parish/State: LEA / NM
Well Number: 02	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMNM4312	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002526499	Operator: EARTHSTONE OPERATING LLC	

Conditions of Approval

Specialist Review

Pennzoil_Fed_2_Sundry_ID_2863600_P_A_20250805055916.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JESSICA DOOLING	Signed on: JUL 16, 2025 11:00 AM
Name: EARTHSTONE OPERATING LLC	
Title: Regulatory Specialist	
Street Address: 300 N MARIENFELD ST STE 1000	
City: MIDLAND	State: TX
Phone: (432) 999-3072	
Email address: JESSICA.DOOLING@PERMIANRES.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: LONG VO	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5759885402	BLM POC Email Address: LVO@BLM.GOV
Disposition: Approved	Disposition Date: 08/05/2025
Signature: Long Vo	

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

1. Type of Well ☐ Oil Well ☐ Gas Well ☐ Other		5. Lease Serial No.
2. Name of Operator		6. If Indian, Allottee or Tribe Name
3a. Address	3b. Phone No. (include area code)	7. If Unit of CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)		8. Well Name and No.
		9. API Well No.
		10. Field and Pool or Exploratory Area
		11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
☐ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity	
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other	
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon		
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)		
	Title	
Signature	Date	

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: SENE / 1980 FNL / 660 FEL / TWSP: 19S / RANGE: 33E / SECTION: 12 / LAT: 32.67648 / LONG: -103.610169 (TVD: 0 feet, MD: 0 feet)


BHL: SENE / 1980 FNL / 660 FEL / TWSP: 19S / SECTION: / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

Proposed P&A NOI
Earthstone Operating, LLC
Pennzoil Operating, LLC
30-025-26499

1. Hold Pre job meeting, comply with all NMOCD, BLM and environmental regulations.
2. **Tag existing 5 ½" CIBP @ 12,846' w/ 20' cmt on top.**
3. MIRU logging truck. Run CBL from CIBP to log TOC to surface. Log with zero psi. **NOTE: Results of CBL may change the following plugs. Electronic copy of CBL to be sent to BLM & NMOCD representatives.**
4. Circulate hole & pressure test casing to 500 psi.
5. **Plug #1: (Atoka & Strawn):** Spot 40 sxs class H cmt @ 12,335-11,978'.
6. **Plug #2: (Wolfcamp):** Spot 25 sxs class H cmt @ 10,800-10,598'.
7. **Plug #3: (Bone Springs):** Perf & Sqz 49 sxs class H cmt (34 sxs outside, 15 sxs inside) @ 7568-7468'.
8. **Plug #4: (8 5/8" Shoe & San Andres):** Perf & Sqz 104 sxs class C cmt w/ 2% CaCl (72 sxs outside, 32 sxs inside) @ 5,255-4,990'. WOC & Tag
9. **Plug #5: (Yates & B/Salt):** Perf & Sqz 201 sxs class C cmt w/ 2% CaCl (143 sxs outside, 58 sxs inside) @ 3,310-2,780'. WOC & Tag.
10. **Plug #6 (Rustler & T/Salt):** Perf & Sqz 53 sxs class C cmt w/ 2% CaCl (35 sxs outside, 18 sxs inside) @ 1,620-1,495'. WOC & Tag.
11. **Plug #7: (13 3/8" Shoe & Surface plug):** Perf & Sqz 153 sxs class C cmt (108 sxs outside, 45 sxs inside) @ 400' & circulate to surface.
12. Cut off wellhead, fill any exposed annulus with cement, as necessary. Install DHM.
13. Record GPS coordinates for P&A marker and the Final P&A Report. Photograph the P&A marker and attach to the report. RDMO all rig and cement equipment. Assure that location is free of trash before moving off.
14. Send all reports and attachments will be uploaded to NMOCD website within 30 days of completion.

Permian Resources (Earthstone Operating, LLC)		PROPOSED	
Author:	Abby @ JMR	Well No.	#2
Well Name	Pennzoil Federal	API #:	30-025-26499
Field/Pool	Quail Ridge; Morrow, Nth (Gas)	Location:	1980 FNL & 660 FEL
County	Lea		Sec 12, T19S, R33E
State	NM	GL:	3776
Spud Date	11/4/1979		

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface	13 3/8	H40	48#	350	17 1/2	400	0
Intermediate	8 5/8	H40	24/32#	5,205	11	2,800	0
Production	5 1/2	N80	17#	13,400	7 7/8	850	9510'

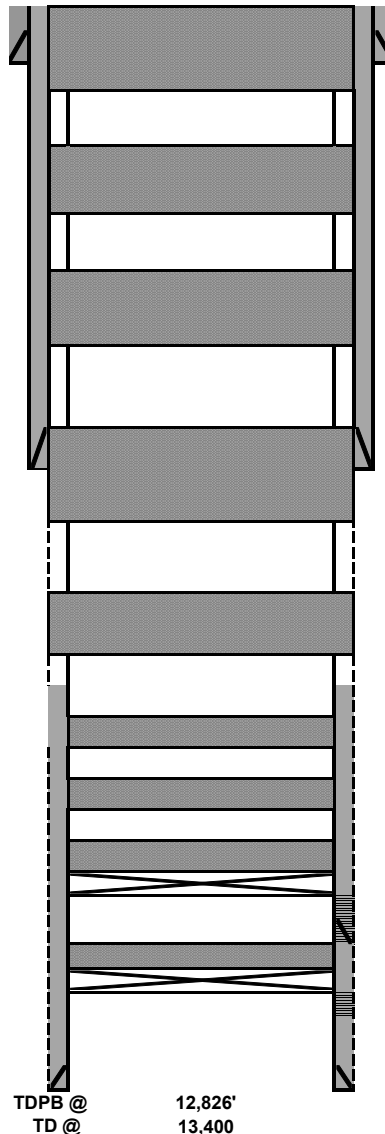

13 3/8 48# CSG @ 350

8. Plug #7: Perf & Sqz 153 sxs class C cmt (108 sxs outside, 45 sxs inside) @ 400' & circulate to surface. (13 3/8" Shoe)

7. Plug #6: Perf & Sqz 53 sxs class C cmt w/ 2% CaCl (35 sxs outside, 18 sxs inside) @ 1,620-1,495'. WOC & Tag (Rustler & T/Salt)

6. Plug #5: Perf & Sqz 201 sxs class C cmt w/ 2% CaCl (143 sxs outside, 58 sxs inside) @ 3,310-2,780'. WOC & Tag (Yates & B/Salt)

8 5/8 24/32# CSG @ 5,205

5. Plug #4: Perf & Sqz 104 sxs class C cmt w/ 2% CaCl (72 sxs outside, 32 sxs inside) @ 5,255-4,990'. WOC & Tag (8 5/8" Shoe & San Andres)

4. Plug #3: Perf & Sqz 49 sxs class H cmt (34 sxs outside, 15 sxs inside) @ 7568-7468'. (Bone Springs)

3. Plug #2: Spot 25 sxs class H cmt @ 10,800-10,598'. (Wolfcamp)

2. Plug #1: Spot 40 sxs class H cmt @ 12,335-11,978'. (Atoka & Strawn)

1. Tag existing CIBP @ 12,846' w/ 38' cmt on top.

CIBP @ 12,846' Dump bailed cmt to 12,808'.

Morrow Perfs @ 12,946-12,952'. (07/25/2002)

Morrow Perfs @ 13,179-13,213'; Sqz'd on 09/09/1980

CIBP @ 13,083'. Dumped bail 30' cmt. Tagged TOC @ 13,052' (09/12/1981)

Perfs @ 13,317-13,327'. (01/06/1980)

5 1/2 17# CSG @ 13,400

TDPB @ 12,826'
TD @ 13,400

Formation Tops

T/Salt	1545'
Rustler	1570
B/Salt	2830
Yates	3240
Queen	4426
San Andres	5040
Bn Springs	7518
Wolfcamp	10750
Strawn	12028
Atoka	12284
Morrow	12800
Barnett	13338

32.6764679

-103.6102371



Last Updated: 2/4/2021 10:04 AM

Field Name		Lease Name		Well No.	
Pennzoil Federal 2		Pennzoil		2	
County		State		API No.	
LEA		NM		30025264990000	
Version		Version Tag			
0					
GL (ft)	KB (ft)	Section	Township/Block	Range/Survey	
3,776.0		12	19S	33E	
Operator		Well Status	Latitude	Longitude	
Chisholm Energy		TA Pending			
Dist. N/S (ft)	Dir. N/S	Dist. E/W (ft)	Dir. E/W	Footage From	
1980	FNL	660	FEL		
Prop Num		Spud Date		Comp. Date	
		11/1/1979		1/6/1980	
Additional Information					
Other 1		Other 2		Other 3	
Prepared By		Updated By		Last Updated	
sbrodbeck		sbrodbeck		2/4/2021 10:04 AM	
Hole Summary					
Date	Diam. (in)	Top (MD ft)	Bottom (MD ft)	Memo	
	17.500	0	350		
	11.000	350	5,205		
	7.875	5,205	13,400		
Tubular Summary					
Date	Description	O.D. (in)	Wt (lb/ft)	Grade	Top (MD ft)
	Surface Casing	13.375	48.00	H-40	0
	Intermediate Casing	8.625	32.00	S80	0
	Production Casing	5.500	17.00	N-80	0
					Bottom (MD ft)
					13,400
Casing Cement Summary					
C	Date	No. Sx	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)
		375	13.375	0	350
		2,800	8.625	0	5,205
		850	5.500	9,510	13,400
Tools/Problems Summary					
Date	Tool Type	O.D. (in)	I.D. (in)	Top (MD ft)	Bottom (MD ft)
1/1/1753	Cmt Tag	5.500	0.000	12,808	0
5/1/2021	CIBP	5.500	0.000	12,846	0
9/12/1981	Cmt Tag	5.500	0.000	13,052	0
9/12/1981	CIBP	5.500	0.000	13,083	0
Perforation Summary					
C	Date	Perf. Status	Formation	OA Top (MD ft)	OA Bottom (MD ft)
	7/25/2002	Open	Morrow	12,946	12,952
	9/9/1980	Squeezed	Morrow	13,179	13,213
	1/6/1980	Isolated	Morrow "B" & "C"	13,317	13,327

MD
(TVD)

1,000

2,000

3,000

4,000

5,000

6,000

7,000

8,000

9,000


10,000

11,000

12,000

13,000

14,000

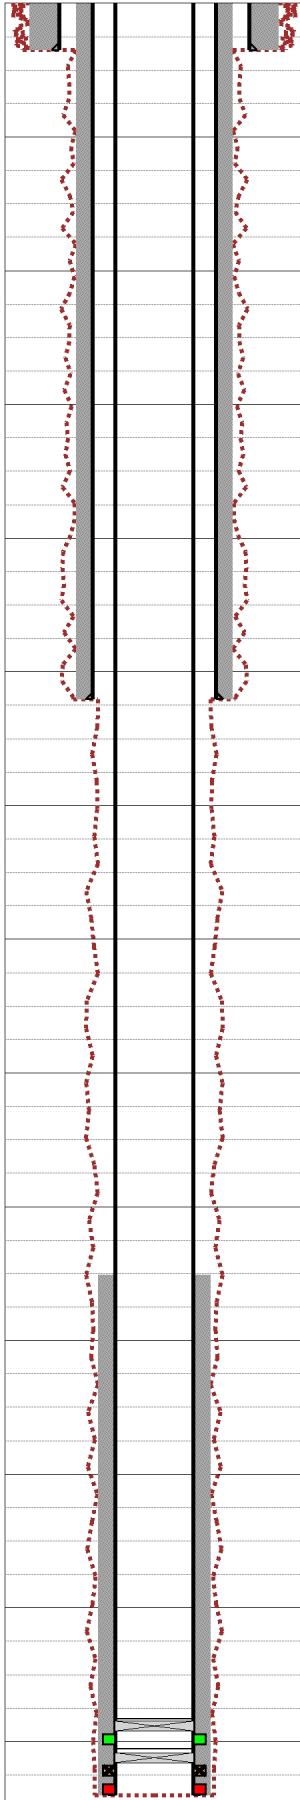



Last Updated: 2/4/2021 10:04 AM

Field Name		Lease Name		Well No.		County		State		API No.	
Pennzoil Federal 2		Pennzoil		2		LEA		NM		30025264990000	
Version	Version Tag					Spud Date		Comp. Date		GL (ft)	KB (ft)
0						11/1/1979		1/6/1980		3,776.0	
Section	Township/Block		Range/Survey		Dist. N/S (ft)	Dir. N/S	Dist. E/W (ft)		Dir. E/W	Footage From	
12	19S		33E		1,980	FNL	660		FEL		
Operator			Well Status			Latitude		Longitude		Prop Num	
Chisholm Energy			TA Pending								
Other 1		Other 2		Other 3		Other 4					
Last Updated		Prepared By				Updated By					
02/04/2021 10:04 AM		sbrodbeck				sbrodbeck					
Additional Information											
Hole Summary											
Date	Diam. (in)	Top (MD ft)	Bottom (MD ft)	Memo							
	17.500	0	350								
	11.000	350	5,205								
	7.875	5,205	13,400								
Tubular Summary											
Date	Description	No. Jts	O.D. (in)	Wt (lb/ft)	Grade	Coupling	Top (MD ft)	Bottom (MD ft)	Memo		
	Surface Casing		13.375	48.00	H-40		0	350			
	Intermediate Casing	124	8.625	32.00	S80		0	5,205			
	Production Casing	346	5.500	17.00	N-80	LT&C	0	13,400			
Casing Cement Summary											
C	Date	No. Sx	Yield (ft3/sk)	Vol. (ft3)	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)	Description	Memo		
		375	1.00	375	13.375	0	350				
		2,800	1.00	2,800	8.625	0	5,205				
		850	1.00	850	5.500	9,510	13,400				
Tools/Problems Summary											
Date	Tool Type		O.D. (in)	I.D. (in)	Top (MD ft)	Bottom (MD ft)	Description	Memo			
1/1/1753	Cement Tag		5.500	0.000	12,826	0					
5/1/2021	Cast Iron Bridge Plug		5.500	0.000	12,846	0					
9/12/1981	Cement Tag		5.500	0.000	13,052	0					
9/12/1981	Cast Iron Bridge Plug		5.500	0.000	13,083	0					
Perforation Summary											
C	Date	Stage	Perf. Status	Formation		Closed Date	Memo				
	1/6/1980	1	Isolated	Morrow "B" & "C"							
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Memo				
13,317		13,327			6						
9/9/1980		1	Squeezed	Morrow							
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Memo				
13,179		13,213			20						
7/25/2002		1	Open	Morrow							
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Memo				
12,946		12,952									

Well Name: PENNZOIL FED	Well Location: T19S / R33E / SEC 12 / SENE / 32.67648 / -103.610169	County or Parish/State: LEA / NM
Well Number: 02	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMNM4312	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002526499	Operator: EARTHSTONE OPERATING LLC	

Notice of Intent

Sundry ID: 2863600

Type of Submission: Notice of Intent Type of Action: Plug and Abandonment

Date Sundry Submitted: 07/17/2025 Time Sundry Submitted: 06:55

Date proposed operation will begin: 10/12/2025

Procedure Description: Earthstone Operating, LLC respectfully requests approval of the attached plug and abandon procedure for the Pennzoil Fed #2. Attachments: P&A Procedure Current WBD Proposed WBD

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Pennzoil_Fed__2_PA_NOI_Attachments_20250716110010.pdf

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

Well Name: PENNZOIL FED	Well Location: T19S / R33E / SEC 12 / SENE / 32.67648 / -103.610169	County or Parish/State: LEA / NM
Well Number: 02	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMNM4312	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002526499	Operator: EARTHSTONE OPERATING LLC	

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JESSICA DOOLING

Signed on: JUL 16, 2025 11:00 AM

Name: EARTHSTONE OPERATING LLC

Title: Regulatory Specialist

Street Address: 300 N MARIENFELD ST STE 1000

City: MIDLANDState: TX

Phone: (432) 999-3072

Email address: JESSICA.DOOLING@PERMIANRES.COM

Field

Representative Name:

Street Address:

City:State:Zip:

Phone:

Email address:

APPROVED by Long Vo
Petroleum Engineer
Carlsbad Field Office
575-988-50402
LVO@BLM.GOV

Lea County Notification: 575-689-5981

Eddy County Notification: [BLM NM CFO PluggingNotifications@BLM.GOV](#)

Secondary Contact: 575-361-2822

Form 3160-5 (June 2019)	UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT	FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021
SUNDRY NOTICES AND REPORTS ON WELLS <i>Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.</i>		5. Lease Serial No.
		6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2		7. If Unit of CA/Agreement, Name and/or No.
1. Type of Well ☐ Oil Well ☐ Gas Well ☐ Other		8. Well Name and No.
2. Name of Operator		9. API Well No.
3a. Address	3b. Phone No. (include area code)	10. Field and Pool or Exploratory Area
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)		11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA				
TYPE OF SUBMISSION	TYPE OF ACTION			
☐ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)	Title
Signature	Date

THE SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by Long Vo 	Title Petroleum Engineer	Date 8-4-2025
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office Carlsbad Field Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: SENE / 1980 FNL / 660 FEL / TWSP: 19S / RANGE: 33E / SECTION: 12 / LAT: 32.67648 / LONG: -103.610169 (TVD: 0 feet, MD: 0 feet)

BHL: SENE / 1980 FNL / 660 FEL / TWSP: 19S / SECTION: / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

Proposed P&A NOI
Earthstone Operating, LLC
Pennzoil Operating, LLC
30-025-26499


1. Hold Pre job meeting, comply with all NMOCD, BLM and environmental regulations.
2. **Tag existing 5 ½" CIBP @ 12,846' w/ 20' cmt on top.**
3. MIRU logging truck. Run CBL from CIBP to log TOC to surface. Log with zero psi. **NOTE: Results of CBL may change the following plugs. Electronic copy of CBL to be sent to BLM & NMOCD representatives.**
4. Circulate hole & pressure test casing to 500 psi. **Spot 28 sxs on top of CIBP. WOC and Tag.**
5. **Plug #1: (Atoka & Strawn):** Spot **59** sxs class H cmt @ 12,335-11,857'.
6. **Plug #2: (Wolfcamp):** Spot **29** sxs class H cmt @ 10,800-10,567'. **WOC and Tag.**
7. **Plug #3: (Bone Springs):** Perf & Sqz **56** sxs class H cmt (34 sxs outside, **22** sxs inside) @ 7568-7392'.
8. **Plug #4: (8 5/8" Shoe & San Andres):** Perf & Sqz **240** sxs class C cmt w/ 2% CaCl (**138** sxs outside, **102** sxs inside) @ **5,350-4,327'**. WOC & Tag
9. **Plug #5: (Yates & B/Salt):** Perf & Sqz 201 sxs class C cmt w/ 2% CaCl (143 sxs outside, 58 sxs inside) @ 3,310-2,780'. WOC & Tag.
10. **Plug #6 (Rustler & T/Salt):** Perf & Sqz **91** sxs class C cmt w/ 2% CaCl (**52** sxs outside, **39** sxs inside) @ 1,881-1,495'. WOC & Tag.
11. **Plug #7: (13 3/8" Shoe & Surface plug):** Perf & Sqz 153 sxs class C cmt (108 sxs outside, 45 sxs inside) @ 400' & circulate to surface.
12. Cut off wellhead, fill any exposed annulus with cement, as necessary. Install DHM.
13. Record GPS coordinates for P&A marker and the Final P&A Report. Photograph the P&A marker and attach to the report. RDMO all rig and cement equipment. Assure that location is free of trash before moving off.
14. Send all reports and attachments will be uploaded to NMOCD website within 30 days of completion.

REVISED

2:38 pm, Aug 04, 2025

Permian Resources (Earthstone Operating, LLC)				PROPOSED	
Author:	Abby @ JMR			Well No.	#2
Well Name	Pennzoil Federal			API #:	30-025-26499
Field/Pool	Quail Ridge; Morrow, Nth (Gas)			Location:	1980 FNL & 660 FEL
County	Lea				Sec 12, T19S, R33E
State	NM			GL:	3776
Spud Date	11/4/1979				

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface	13 3/8	H40	48#	350	17 1/2	400	0
Intermediate	8 5/8	H40	24/32#	5,205	11	2,800	0
Production	5 1/2	N80	17#	13,400	7 7/8	850	9510'

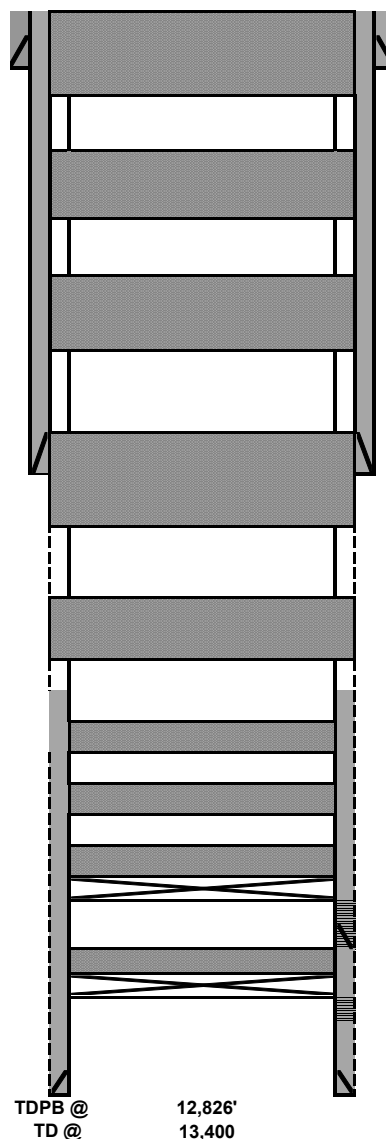

13 3/8 48# CSG @ 350

8. Plug #7: Perf & Sqz 153 sxs class C cmt (108 sxs outside, 45 sxs inside) @ 400' & circulate to surface. (13 3/8" Shoe)

7. Plug #6: Perf & Sqz 91 sxs class C cmt w/ 2% CaCl (52 sxs outside, 39 sxs inside) @ 1,881-1,495'. WOC & Tag (Rustler & T/ Salt)

6. Plug #5: Perf & Sqz 201 sxs class C cmt w/ 2% CaCl (143 sxs outside, 58 sxs inside) @ 3,310-2,780'. WOC & Tag (Yates & B/Salt)

8 5/8 24/32# CSG @ 5,205

5. Plug #4: Perf & Sqz 240 sxs class C cmt w/ 2% CaCl (138 sxs outside, 102 sxs inside) @ 5,350-4,327'. WOC & Tag (8 5/8" Shoe & San Andres)

4. Plug #3: Perf & Sqz 56 sxs class H cmt (34 sxs outside, 22 sxs inside) @ 7568-7392'. (Bone Springs)

3. Plug #2: Spot 29 sxs class H cmt @ 10,800-10,567'. WOC and Tag.

2. Plug #1: Spot 59 sxs class H cmt @ 12,335-11,11857'. WOC and Tag.

1. Tag existing CIBP @ 12,846' w/ 38' cmt on top.

CIBP @ 12,846' Dump bailed cmt to 12,808'.

Morrow Perfs @ 12,946-12,952'. (07/25/2002)

Morrow Perfs @ 13,179-13,213'; Sqz'd on 09/09/1980

CIBP @ 13,083'. Dumped bail 30' cmt. Tagged TOC @ 13,052' (09/12/1981)

Perfs @ 13,317-13,327'. (01/06/1980)

5 1/2 17# CSG @ 13,400

TDPB @ 12,826'
TD @ 13,400

Formation Tops

T/Salt	1545'
Rustler	1570
B/Salt	2830
Yates	3240
Queen	4426
San Andres	5040
Bn Springs	7518
Wolfcamp	10750
Strawn	12028
Atoka	12284
Morrow	12800
Barnett	13338

Spot 28 sxs on top. WOC and
Tag. Leak test CIBP.

32.6764679
-103.6102371

REVISED

2:38 pm, Aug 04, 2025



Last Updated: 2/4/2021 10:04 AM

Field Name		Lease Name		Well No.		
Pennzoil Federal 2		Pennzoil		2		
County		State		API No.		
LEA		NM		30025264990000		
Version		Version Tag				
0						
GL (ft)	KB (ft)	Section	Township/Block	Range/Survey		
3,776.0		12	19S	33E		
Operator		Well Status		Latitude	Longitude	
Chisholm Energy		TA Pending				
Dist. N/S (ft)	Dir. N/S	Dist. E/W (ft)	Dir. E/W	Footage From		
1980	FNL	660	FEL			
Prop Num		Spud Date		Comp. Date		
		11/1/1979		1/6/1980		
Additional Information						
Other 1		Other 2		Other 3	Other 4	
Prepared By		Updated By		Last Updated		
sbrodbeck		sbrodbeck		2/4/2021 10:04 AM		
Hole Summary						
Date	Diam. (in)	Top (MD ft)	Bottom (MD ft)	Memo		
	17.500	0	350			
	11.000	350	5,205			
	7.875	5,205	13,400			
Tubular Summary						
Date	Description	O.D. (in)	Wt (lb/ft)	Grade	Top (MD ft)	Bottom (MD ft)
	Surface Casing	13.375	48.00	H-40	0	350
	Intermediate Casing	8.625	32.00	S80	0	5,205
	Production Casing	5.500	17.00	N-80	0	13,400
Casing Cement Summary						
C	Date	No. Sx	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)	Memo
		375	13.375	0	350	
		2,800	8.625	0	5,205	
		850	5.500	9,510	13,400	
Tools/Problems Summary						
Date	Tool Type	O.D. (in)	I.D. (in)	Top (MD ft)	Bottom (MD ft)	
1/1/1753	Cmt Tag	5.500	0.000	12,808	0	
5/1/2021	CIBP	5.500	0.000	12,846	0	
9/12/1981	Cmt Tag	5.500	0.000	13,052	0	
9/12/1981	CIBP	5.500	0.000	13,083	0	
Perforation Summary						
C	Date	Perf. Status	Formation	OA Top (MD ft)	OA Bottom (MD ft)	
	7/25/2002	Open	Morrow	12,946	12,952	
	9/9/1980	Squeezed	Morrow	13,179	13,213	
	1/6/1980	Isolated	Morrow "B" & "C"	13,317	13,327	

MD
(TVD)

1,000

2,000

3,000

4,000

5,000

6,000

7,000

8,000

9,000


10,000

11,000

12,000

13,000

14,000

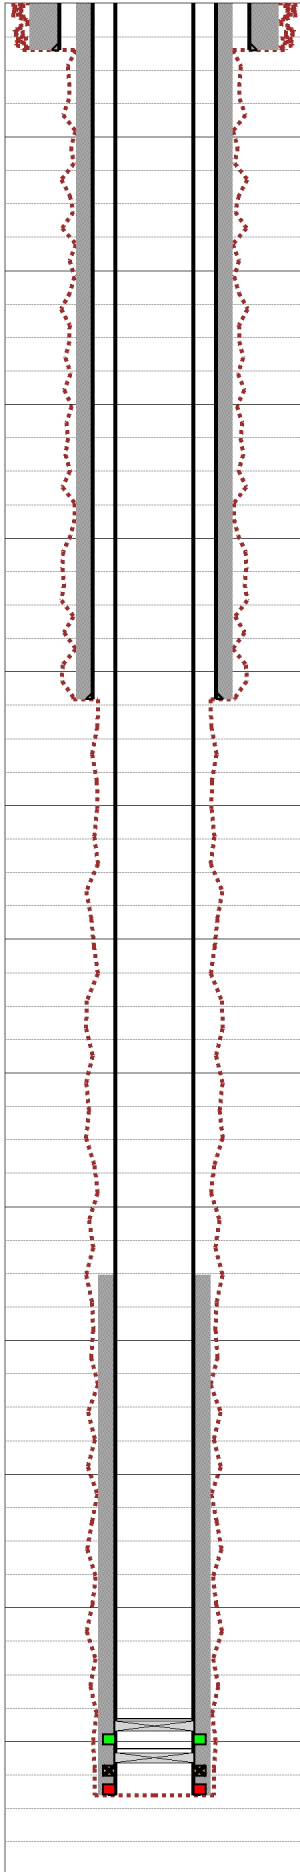



Last Updated: 2/4/2021 10:04 AM

Field Name		Lease Name		Well No.		County		State		API No.	
Pennzoil Federal 2		Pennzoil		2		LEA		NM		30025264990000	
Version	Version Tag					Spud Date		Comp. Date		GL (ft)	KB (ft)
0						11/1/1979		1/6/1980		3,776.0	
Section	Township/Block		Range/Survey		Dist. N/S (ft)	Dir. N/S	Dist. E/W (ft)		Dir. E/W	Footage From	
12	19S		33E		1,980	FNL	660		FEL		
Operator			Well Status			Latitude		Longitude		Prop Num	
Chisholm Energy			TA Pending								
Other 1		Other 2		Other 3		Other 4					
Last Updated		Prepared By				Updated By					
02/04/2021 10:04 AM		sbrodbeck				sbrodbeck					
Additional Information											
Hole Summary											
Date	Diam. (in)	Top (MD ft)	Bottom (MD ft)	Memo							
	17.500	0	350								
	11.000	350	5,205								
	7.875	5,205	13,400								
Tubular Summary											
Date	Description	No. Jts	O.D. (in)	Wt (lb/ft)	Grade	Coupling	Top (MD ft)	Bottom (MD ft)	Memo		
	Surface Casing		13.375	48.00	H-40		0	350			
	Intermediate Casing	124	8.625	32.00	S80		0	5,205			
	Production Casing	346	5.500	17.00	N-80	LT&C	0	13,400			
Casing Cement Summary											
C	Date	No. Sx	Yield (ft3/sk)	Vol. (ft3)	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)	Description	Memo		
		375	1.00	375	13.375	0	350				
		2,800	1.00	2,800	8.625	0	5,205				
		850	1.00	850	5.500	9,510	13,400				
Tools/Problems Summary											
Date	Tool Type		O.D. (in)	I.D. (in)	Top (MD ft)	Bottom (MD ft)	Description	Memo			
1/1/1753	Cement Tag		5.500	0.000	12,826	0					
5/1/2021	Cast Iron Bridge Plug		5.500	0.000	12,846	0					
9/12/1981	Cement Tag		5.500	0.000	13,052	0					
9/12/1981	Cast Iron Bridge Plug		5.500	0.000	13,083	0					
Perforation Summary											
C	Date	Stage	Perf. Status	Formation		Closed Date	Memo				
	1/6/1980	1	Isolated	Morrow "B" & "C"							
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Memo				
13,317		13,327			6						
9/9/1980		1		Squeezed	Morrow						
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Memo				
13,179		13,213			20						
7/25/2002		1		Open	Morrow						
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Memo				
12,946		12,952									

Lesser Prairie Chicken Area

**BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972**

**Permanent Abandonment of Federal Wells
Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Lea County, call 575-689-5981. Eddy County, please email notifications to: [BLM NM CFO PluggingNotifications@BLM.GOV](mailto:BLM_NM_CFO_PluggingNotifications@BLM.GOV). The Eddy County inspector on call phone, 575-361-2822, will remain active as a secondary contact.

Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

Mud Requirement: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.

Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours for Class C or accelerated cement (calcium chloride) and 6 hours for Class H. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

Fluid used to mix the cement in R111Q shall be saturated with the salts common to the section penetrated, and in suitable proportions but not less than 1% and not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Above Ground Level Marker: If outside of Lesser Prairie-Chicken Habitat an above ground level marker shall be utilized. All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified *BY PHONE* (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within fourteen (14) calendar days of the well being plugged. If the cut off cannot be done by the 14th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.**

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds). A weep hole shall be left if a metal plate is welded in place.

Below Ground Level Marker: If within Lesser Prairie-Chicken Habitat a below ground level marker shall be utilized. All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified *BY PHONE* (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within fourteen (14) calendar days of the well being plugged. If the cut off cannot be done by the 14th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.**

Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing. The following information shall be permanently inscribed on the plate: well name and number, name of operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

Operator to verify the ground marker type with the BLM before setting dry hole Marker.

Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file via the AFMSS 2 WISx Module a Subsequent Report of Plugging and Abandonment to BLM. Please include the following information:

- The report should give in detail the manner in which the plugging work was carried out, the Extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left In the well.
- The final copy of CBL.
- Any email correspondence regarding changes to originally approved procedure.
- Show date well was plugged.

Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:

From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office
620 E. Greene St.
Carlsbad, New Mexico 88220-6292
www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo “interim” reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo “final” reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines **(Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure)**. Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. **This will apply to well pads, facilities, and access roads.** Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.

For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.

The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.

Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and

access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.

It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.

At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos
Supervisory Petroleum Engineering Tech/Environmental Protection Specialist
575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias
Environmental Protection Specialist
575-234-6230

Crisha Morgan
Environmental Protection Specialist
575-234-5987

Jose Martinez-Colon
Environmental Protection Specialist
575-234-5951

Angela Mohle
Environmental Protection Specialist
575-234-9226

Robert Duenas
Environmental Protection Specialist
575-234-2229

Terry Gregston
Environmental Protection/HAZMAT Specialist
575-234-5958

Sundry ID		2863600					
Plug Type	Top	Bottom	Length	Tag	Sacks	Cement Class	Notes
Surface Plug	0.00	100.00	100.00	Tag/Verify			
13.375 inch- Shoe Plug	296.50	400.00	103.50	Tag/Verify	94.00	C	Perf and circulate from 400' to surface. (In 40 sxs/Out 54 sxs)
Top of Salt @ 1831	1762.69	1881.00	118.31	Tag/Verify	91.00	C	Perf and squeeze from 1881' to 1495'. WOC and Tag. (In 39 sxs/Out 52 sxs)
Base of Salt @ 3130	2780.00	3180.00	400.00	Tag/Verify			
				If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations			Perf and squeeze from 3310' to 2780'. WOC and Tag. (In 53 sxs/Out 72 sxs)
Yates @ 3220	3137.80	3310.00	172.20	ns	125.00	C	
Queen @ 4422	4327.78	4472.00	144.22	If solid			
Capitan Reef @ 4948	4848.52	4998.00	149.48	If solid			
San Andres @ 5040	4939.60	5090.00	150.40	If solid			
8.625 inch- Shoe Plug	5102.95	5255.00	152.05	Tag/Verify			
				If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations			Perf and squeeze from 5350' to 4327'. WOC and Tag. (In 102 sxs/Out 138 sxs)
Delaware @ 5300	5197.00	5350.00	153.00	ns	240.00	C	

				If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio ns			
Bonesprings @ 7518	7392.82	7568.00	175.18		56.00	H	Perf and squeeze from 7568' to 7392'. WOC and Tag. (In 22 sxs/Out 34 sxs)
Wolfcamp @ 10750	10567.00	10800.00	233.00	base no need to Tag	29.00	H	Spot cement from 10800' to 10567'. WOC and Tag.
Strawn @ 12028	11857.72	12078.00	220.28	If solid			
				If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio ns			
Atoka @ 12284	12111.16	12334.00	222.84		59.00	H	Spot cement from 12335' to 11857'. WOC and Tag.
Morrow @ 12800	12622.00	12850.00	228.00	If solid			
Perforations Plug (If No CIBP)	12772.48	13002.00	229.52	Tag/Verify			
				If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio ns			
CIBP Plug	12811.00	12846.00	35.00		28.00	H	Tag CIBP at 12846'. Spot 28 sxs on top. WOC and Tag. Leak test CIBP.
5.5 inch- Shoe Plug	13216.00	13450.00	234.00	Tag/Verify			

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole.

Class H >7500'

Class C <7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater

R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft³/sx

Class H: 1.06 ft³/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

Cave Karst/Potash Cement Requirement:

Wild Life

13.375 inch- Shoe Plug @

8.625 inch- Shoe Plug @

5.5 inch- Shoe Plug @

Low

Within Lesser Prairie Chicken Area

350.00

5205.00

13400.00

TOC @ 9510.00

Perforatons Top @

12946.00

Perforations 12952.00

CIBP @ 12846.00

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 491964

CONDITIONS

Operator: Earthstone Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 331165
	Action Number: 491964
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	A Cement Bond Log (CBL) is required to be submitted to electronic permitting.	8/8/2025
gcordero	Submit Cement Bond Logs (CBL) prior to submittal of C-103P.	8/8/2025