

Well Name: GEORGE WASHINGTON	Well Location: T26N / R12W / SEC 35 / NESE / 36.443731 / -108.074269	County or Parish/State: SAN JUAN / NM
Well Number: 90S	Type of Well: OTHER	Allottee or Tribe Name:
Lease Number: NMNM61	Unit or CA Name:	Unit or CA Number:
US Well Number: 300453375200S1	Operator: DUGAN PRODUCTION CORPORATION	

Subsequent Report

Sundry ID: 2869922

Type of Submission: Subsequent Report	Type of Action: Plug and Abandonment
Date Sundry Submitted: 08/26/2025	Time Sundry Submitted: 01:29
Date Operation Actually Began: 07/14/2025	

Actual Procedure: Dugan Production P&A'd the well on 7/14/2025 - 7/15/2025 per the attached procedure.

SR Attachments

Actual Procedure

- George\_Washington\_90S\_SR\_PA\_work\_completed\_20250826132809.pdf
- George\_Washington\_90S\_dry\_hole\_marker\_and\_gps\_photos\_20250826132751.pdf
- George\_Washington\_90S\_SR\_PA\_formation\_tops\_20250826125015.pdf
- George\_Washington\_90S\_SR\_PA\_completed\_wellbore\_schematic\_20250826125001.pdf

<b>Well Name:</b> GEORGE WASHINGTON	<b>Well Location:</b> T26N / R12W / SEC 35 / NESE / 36.443731 / -108.074269	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 90S	<b>Type of Well:</b> OTHER	<b>Allottee or Tribe Name:</b>
<b>Lease Number:</b> NMNM61	<b>Unit or CA Name:</b>	<b>Unit or CA Number:</b>
<b>US Well Number:</b> 300453375200S1	<b>Operator:</b> DUGAN PRODUCTION CORPORATION	

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

<b>Operator Electronic Signature:</b> TYRA FEIL	<b>Signed on:</b> AUG 26, 2025 01:28 PM
<b>Name:</b> DUGAN PRODUCTION CORPORATION	
<b>Title:</b> Authorized Representative	
<b>Street Address:</b> PO BOX 420	
<b>City:</b> FARMINGTON	<b>State:</b> NM
<b>Phone:</b> (505) 325-1821	
<b>Email address:</b> TYRAFEIL@DUGANPRODUCTION.COM	

Field

<b>Representative Name:</b> Aliph Reena		
<b>Street Address:</b> PO Box 420		
<b>City:</b> Farmington	<b>State:</b> NM	<b>Zip:</b> 87499-0420
<b>Phone:</b> (505)360-9192		
<b>Email address:</b> Aliph.Reena@duganproduction.com		

BLM Point of Contact

<b>BLM POC Name:</b> MATTHEW H KADE	<b>BLM POC Title:</b> Petroleum Engineer
<b>BLM POC Phone:</b> 5055647736	<b>BLM POC Email Address:</b> MKADE@BLM.GOV
<b>Disposition:</b> Accepted	<b>Disposition Date:</b> 08/27/2025
<b>Signature:</b> Matthew Kade	

Dugan Production P&A'd the well on **07/14/2025-07/15/2025** per the following procedure:

- MI & RU Aztec Rig 450 and cement equipment. Spot & RU.
- Check pressures: Tubing 20 psi, Casing 20 psi, BH 0 psi.
- Pull and LD all rods & production tubing.
- Run 5½" string mill to 1171'. TOOH & SB.
- RIH & set 4½" cement retainer to 1108'. Fruitland Coal perforations @ 1156'-1242'.
- Load and circulate hole w/ 25 bbls water.
- **Attempt to pressure test casing to 600 psi for 30 mins. Casing tested good. Test passed.**
- RU WL and run CBL from 1108' to surface. Sent copy of CBL to BLM & NMOCD.
- Plug I: Sting in the cement retainer. Attempt to get a rate below the retainer to cover Pictured Cliffs top below the retainer. Cannot get a rate through. Locked up to 1000 psi. Sting out. Spot Plug I inside 5½" casing above cement retainer @ 1108' w/133 sks (153 cu ft) Class G neat cement to cover the Pictured Cliffs, Fruitland, Kirtland, Ojo Alamo tops & surface casing shoe to surface (5 gal/sk, 15.8 #/gal, 1.15 cu ft/sk). No displacement. WOC 4 hrs. RU welder. Tagged TOC at 40' inside casing and 8' outside annulus. Good tag. **Plug I, Inside 5½" casing, cement retainer at 1108', 133 sks, 153 cu ft, Pictured Cliffs-Fruitland-Kirtland-Ojo Alamo-Surface Casing shoe, 0'-1108'.**
- Fill up casing, and cellar w/34 sks, 39.1 cu ft Class G neat cement and install dry hole marker.
- Verified GPS coordinates. Took pictures with GPS coordinates on the DHM. Photographs are attached.
- Clean location. Rig down Aztec 450 and cement equipment.
- Clay Yazzie w/BLM witnessed job.
- **Well P&A'd 07/15/2025.**

**Completed P & A Wellbore Schematic**

George Washington #90S


30-045-33752

Basin Fruitland Coal (Gas)

2300' FSL &amp; 660' FEL

I-S35-T26N-R12W

San Juan County, NM

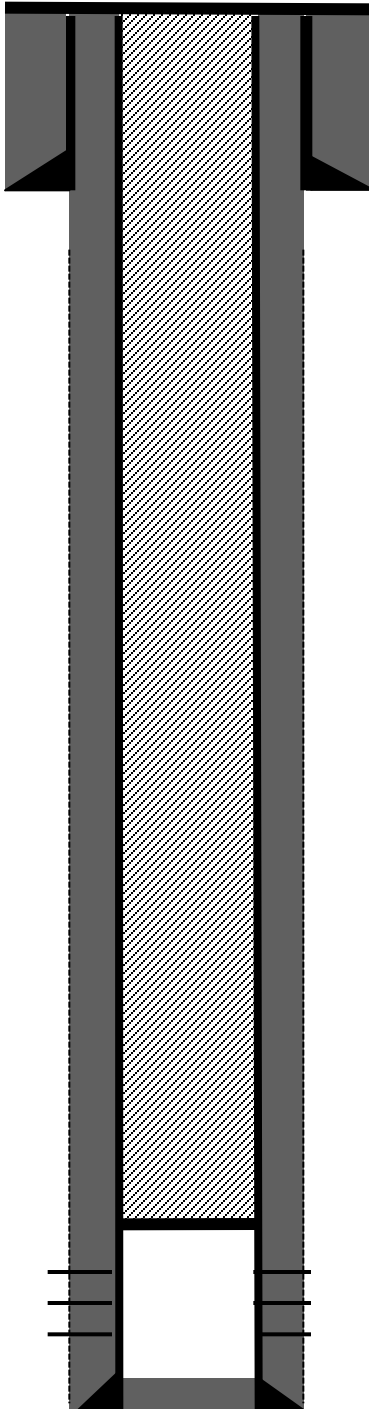

Spud 12-1/4" hole @130'.

Casing 8-5/8" 24# J-55 @ 126', float collar @ 84'. Cement w/90 sx Type 5 cement w/2% CaCl<sub>2</sub> & 1/4# celloflake/sx (106 cu ft total slurry) Displace w/5.5 bbls water. Circulate 4 bbls cement.

5-1/2" 15.5# J-55 csg in 7" hole.@ 1455', + float collar @ 1415'.

Cement w/85 sx Type 5 cement w/2% Lodense, 2# PhenoSeal & 1/4# celloflake/sx. Tail w/50sx Type 5 cement w/2# PhenoSeal & 1/4# celloflake/sx (240 cu ft total slurry). Circ 10 bbls cement to surface

**Plug I, Inside 5 1/2" casing, Cement Retainer at 1108', 133 sks, 153 Cu.ft, Pictured Cliffs-Fruitland-Kirtland-Ojo Alamo-Surface Casing shoe, 0'-1108'.**

Fruitland Coal Perfs:

1156'-1160' &amp; 1225'-1242' w/ 4spf (total 20', 80 holes)

TD @ 1470' PBD @ 1314'

**George Washington #90S**

30-045-33752

Basin Fruitland Coal (Gas)

2300' FSL & 660' FEL

I-S35-T26N-R12W

San Juan County , NM

Lat: 36.4437218 Long: -108.0742569

**Formation Tops**

- Surface Casing – 126'
- Ojo Alamo – 232'
- Kirtland – 318'
- Fruitland – 900'
- Perforations – 1156'-1242'
- Pictured Cliffs – 1248'

















Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS

Action 499747

CONDITIONS

Operator: DUGAN PRODUCTION CORP PO Box 420 Farmington, NM 87499	OGRID: 6515
	Action Number: 499747
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
loren.diede	None	8/29/2025