

Form 3160-3
(June 2015)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

1a. Type of work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NMNM101608
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☒ Single Zone ☐ Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator CIVITAS PERMIAN OPERATING LLC		8. Lease Name and Well No. FIRST TEE FED COM 122H
3a. Address 555 17TH STREET SUITE 3700, DENVER, CO 80202	3b. Phone No. (include area code) (303) 293-1000	9. API Well No. 30-025-55132
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SENE / 2342 FNL / 935 FEL / LAT 32.1602888 / LONG -103.349869 At proposed prod. zone SESE / 10 FSL / 1000 FEL / LAT 32.1376479 / LONG -103.3500903		10. Field and Pool, or Exploratory WC-025 G-09 S243532M WOLF BONE WC-025 G-09 S253502B LWR BONE SPRING
11. Sec., T. R. M. or Blk. and Survey or Area SEC 3/T25S/R35E/NMP		
14. Distance in miles and direction from nearest town or post office* 9 miles		12. County or Parish LEA
13. State NM		
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 935 feet	16. No of acres in lease	17. Spacing Unit dedicated to this well 480.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 20 feet	19. Proposed Depth 11144 feet / 19209 feet	20. BLM/BIA Bond No. in file FED: NMB106332702
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3247 feet	22. Approximate date work will start* 02/01/2026	23. Estimated duration 60 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed) BRIAN WOOD / Ph: (303) 293-1000	Date 05/18/2025
Title Permitting Agent		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959	Date 07/28/2025
Title Assistant Field Manager Lands & Minerals Carlsbad Field Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
		☐ As Drilled	

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025- 55132	Pool Code 98185 98098	Pool Name WC-025 G-09 S243532M-WOLFBONE WC-025 G-09 S253502B;LWR BONE SPRING
Property Code 337726	Property Name FIRST TEE FED COM	Well Number 122H
OGRID No. 332195	Operator Name CIVITAS PERMIAN OPERATING, LLC	Ground Level Elevation 3247'
Surface Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☐ State ☒ Fee ☐ Tribal ☒ Federal

Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
H	3	25-S	35-E	-	2342' N	935' E	N 32.1602888	W 103.3498690	LEA

Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
P	10	25-S	35-E	-	10' S	1000' E	N 32.1376479	W 103.3500903	LEA

Dedicated Acres 480	Infill or Defining Well Infill	Defining Well API 112H (API pending)	Overlapping Spacing Unit (Y/N) N	Consolidated Code C
Order Numbers -			Well Setbacks are under Common Ownership: ☐ Yes ☐ No	

Kick Off Point (KOP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
H	3	25-S	35-E	-	2377' N	1000' E	N 32.1601922	W 103.3500783	LEA

First Take Point (FTP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
I	3	25-S	35-E	-	2535' S	1000' E	N 32.1590927	W 103.3500786	LEA

Last Take Point (LTP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
P	10	25-S	35-E	-	100' S	1000' E	N 32.1378952	W 103.3500916	LEA

Unitized Area or Area of Uniform Intrest -	Spacing Unity Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation -
---	--	-----------------------------

OPERATOR CERTIFICATION <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief; and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i> <i>If this well is a horizontal well, I further certify that this organization has received The consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i> Cory Walk Signature Date 05/14/25		SURVEYORS CERTIFICATION <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i>  5/12/2025 9:38:27 AM Signature and Seal of Professional Surveyor Date	
Print Name cory@permitswest.com		Certificate Number Date of Survey 05/09/2025	
E-mail Address			

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION		Revised July 9, 2024	
			Submittal Type: ☒ Initial Submittal ☐ Amended Report ☐ As Drilled	
	Property Name and Well Number FIRST TEE FED COM 122H			

SURFACE LOCATION (SHL)

NEW MEXICO EAST
 NAD 1983
 X=845675 Y=423439
 LAT.: N 32.1602888
 LONG.: W 103.3498690
 NAD 1927
 X=804488 Y=423380
 LAT.: N 32.1601625
 LONG.: W 103.3494030
 2342' FNL 935' FEL

KICK OFF POINT (KOP)

NEW MEXICO EAST
 NAD 1983
 X=845610 Y=423403
 LAT.: N 32.1601922
 LONG.: W 103.3500783
 NAD 1927
 X=804424 Y=423344
 LAT.: N 32.1600658
 LONG.: W 103.3496124
 2377' FNL 1000' FEL

FIRST TAKE POINT (FTP)


NEW MEXICO EAST
 NAD 1983
 X=845614 Y=423003
 LAT.: N 32.1590927
 LONG.: W 103.3500786
 NAD 1927
 X=804427 Y=422944
 LAT.: N 32.1589664
 LONG.: W 103.3496128
 2535' FSL 1000' FEL

LAST TAKE POINT (LTP)

NEW MEXICO EAST
 NAD 1983
 X=845680 Y=415291
 LAT.: N 32.1378952
 LONG.: W 103.3500916
 NAD 1927
 X=804493 Y=415233
 LAT.: N 32.1377688
 LONG.: W 103.3496269
 100' FSL 1000' FEL


BOTTOM HOLE LOCATION (BHL)

NEW MEXICO EAST
 NAD 1983
 X=845681 Y=415201
 LAT.: N 32.1376479
 LONG.: W 103.3500903
 NAD 1927
 X=804495 Y=415143
 LAT.: N 32.1375214
 LONG.: W 103.3496256
 10' FSL 1000' FEL

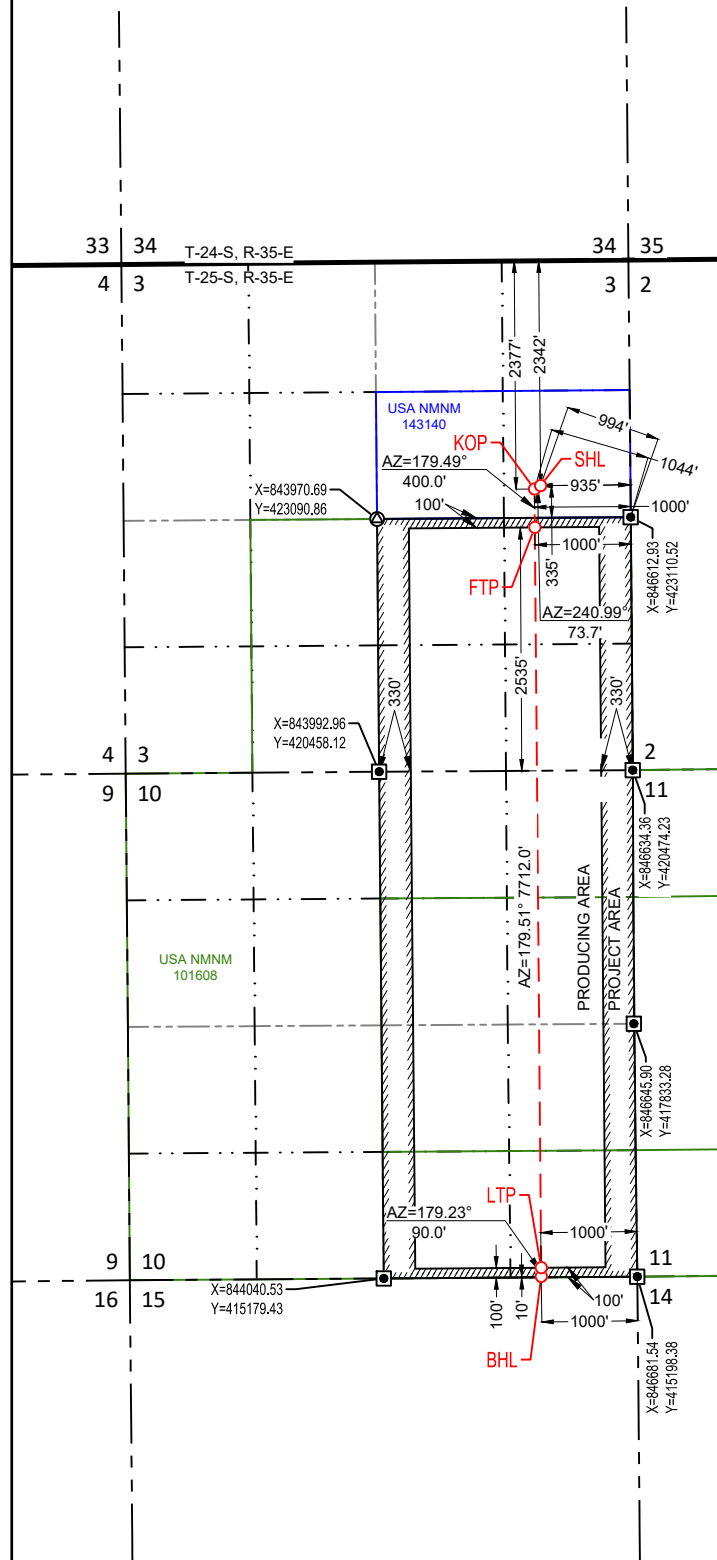**SURVEYORS CERTIFICATION**

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.
 05/09/2025

Date of Survey
 Signature and Seal of Professional Surveyor:



State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: CIVITAS PERMIAN OPERATING, LLC **OGRID:** 332195 **Date:** 05/14/2025

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
<u>SEE ATTACHED</u>						

IV. Central Delivery Point Name: FIRST TEE CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
<u>SEE ATTACHED</u>						

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan**EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 
Printed Name: Cory Walk
Title: Consultant
E-mail Address: cory@permitswest.com
Date: 05/14/2025
Phone: (505) 466-8120
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

III. Wells: First Tee Pad

Well Name	API	ULSTR	Footages	Anticipated Oil (BBL/D)	Anticipated Gas (MCF/D)	Anticipated Produced Water (BBL/D)
First Tee Fed Com 111H	TBD	H-3-25S-35E	2302' FNL/935' FEL	667	1609	2172
First Tee Fed Com 112H	TBD	H-3-25S-35E	2322' FNL/935' FEL	667	1609	2172
First Tee Fed Com 113H	TBD	H-3-25S-35E	2362' FNL/935' FEL	667	1609	2172
First Tee Fed Com 121H	TBD	H-3-25S-35E	2282' FNL/935' FEL	667	1609	2172
First Tee Fed Com 122H	TBD	H-3-25S-35E	2342' FNL/935' FEL	667	1609	2172

V. Anticipated Schedule: First Tee Pad

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
First Tee Fed Com 111H	TBD	3/8/2026	6/6/2026	9/4/2026	9/24/2026	10/14/2026
First Tee Fed Com 112H	TBD	3/10/2026	6/8/2026	9/6/2026	9/26/2026	10/16/2026
First Tee Fed Com 113H	TBD	3/12/2026	6/10/2026	9/8/2026	9/28/2026	10/18/2026
First Tee Fed Com 121H	TBD	3/15/2026	6/13/2026	9/11/2026	10/1/2026	10/21/2026
First Tee Fed Com 122H	TBD	3/17/2026	6/15/2026	9/13/2026	10/3/2026	10/23/2026



Civitas Permian Operating Natural Gas Management Plan

VI. Separation Equipment:

Each surface facility design includes the following process equipment: Multiphase test measurement per upstream pad, 3-phase separators, a sales gas scrubber, heater treaters, a VRU compressor, multiple water and oil tanks, as well as flare knockouts (HP & LP), and flares (HP & LP - combined). All process vessels will be sized to separate oil, water, gas based upon typical/historical & predicted well performance. Each process vessel will be fitted with an appropriately sized PSV as per ASME code requirements to mitigate vessel rupture and loss of containment. Additionally, the process vessels will be fitted with pressure transmitters tied to the facility control system which will allow operations to monitor pressures and when necessary, shut in the facility to avoid vessel over-pressure and the potential vent of natural gas. Natural gas will preferentially be sold to pipeline, and only during upset/emergency conditions will gas be directed to the flare system. Aboveground steel oil tanks & water tanks will be fitted with 32 oz thief hatches as well as PRVs to protect the tanks from rupture/collapse. Additionally, the tank vapor outlets will preferentially be directed to the VRU and the sales gas pipeline. Only during process upsets/emergency conditions will tank vapors be directed to the LP flare system.

VII. Operational Practices:

- During drilling operations, gas meters will be installed at the shakers and Volume Totalizers will be installed on the pits. In the event that elevated gas levels, or a pit gain are observed, returns will be diverted to a gas buster. Gas coming off the gas buster will be combusted at the flare stack. A 10' or taller flare will be located at least 100' from the SHL.
- During completions operations, including stimulation and frac plug drill out operations, hydrocarbon production to surface is minimized. When gas production does occur, gas will be combusted at a flare stack. A 10' or taller flare will be located at least 100' from the SHL.
- During production operations, all process vessels (separators, heater treaters, tanks) will recompress (where necessary) and route gas outlets into the natural gas gathering pipeline. Gas will preferentially be routed to natural gas gathering pipeline and the flare system will be used only during emergencies, malfunction, or if the gas does not meet pipeline specifications. In the event of flaring off-specification gas, operations will pull gas samples twice a week and will also route gas back to pipeline as soon as the gas meets specification. Exceptions to this will include only those qualified emergencies as mentioned in the BLM Waste Prevention Rule.



- To comply with state performance standards, separation and storage equipment will be designed to handle the maximum anticipated throughput and pressure to minimize waste and reduce the likelihood of venting gas to atmosphere. Additionally, each storage tank (Oil & Water) will be fitted with a level transmitter to facilitate gauging of the tank without opening of the thief hatch. Any gas collected through the tank vent system is expected to be recompressed and routed to sales. However, in the event of an emergency, the tank vapor system will be designed to combust the gas using a flare stack fitted with a continuous or automatic ignitor. The flare stack will be properly anchored and will be located a minimum of 100 feet from the well and storage tanks. Operators will conduct weekly AVO inspections. These AVO inspection records will be stored for the required 5-year period and will be made available upon Division request.

VIII. Best Management Practices:

When performing routine or preventive maintenance on a vessel or tank, initially all inlet valves are closed, and the vessel or tank is allowed to depressurize through the normal outlet connections to gas sales and/or liquid tanks. Once the vessel or tank is depressurized to lowest acceptable sales outlet pressure, usually around 20 psig, a temporary low-pressure flowline is connected from the vessel or tank to the Vapor Recovery Unit (VRU) for further pressure reduction. Once depressurized to less than 1-2 psig, the remaining natural gas in the vessel or tank is vented to atmosphere through a controlled pressure relief valve. Once the vessel or tank is depressurized to atmospheric pressure, the vessel or tank can be safely opened, and maintenance performed.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

07/28/2025

APD ID: 10400105020

Submission Date: 05/18/2025

Highlighted data
reflects the most
recent changes

Operator Name: CIVITAS PERMIAN OPERATING LLC

Well Name: FIRST TEE FED COM

Well Number: 122H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
16105978	QUATERNARY	3247	0	0	OTHER : None	NONE	N
16105979	RUSTLER	2390	857	857	ANHYDRITE, DOLOMITE	OTHER : Salt	N
16105980	SALADO	2024	1223	1223	HALITE	OTHER : Salt	N
16105973	BELL CANYON	-1910	5157	5166	SANDSTONE	OTHER : Salt	N
16105974	CHERRY CANYON	-2800	6047	6057	SANDSTONE	NONE	N
16105975	BRUSHY CANYON	-4303	7550	7559	SANDSTONE	NATURAL GAS, OIL	N
16105976	BRUSHY CANYON LOWER	-5393	8640	8649	SANDSTONE	NATURAL GAS, OIL	N
16105977	AVALON SAND	-5629	8876	8885	LIMESTONE, OTHER, SHALE : Upper	NATURAL GAS, OIL	N
16105982	AVALON SAND	-5909	9156	9165	LIMESTONE, OTHER : Middle	NATURAL GAS, OIL	N
16105983	AVALON SAND	-6483	9730	9740	LIMESTONE, OTHER, SHALE : Lower	NATURAL GAS, OIL	N
16105981	BONE SPRING 1ST	-6865	10112	10122	SANDSTONE	NATURAL GAS, OIL	N
16105971	BONE SPRING 2ND	-7017	10264	10275	OTHER : Carbonate	NATURAL GAS, OIL	N
16105972	BONE SPRING 2ND	-7683	10930	10993	SANDSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: CIVITAS PERMIAN OPERATING LLC**Well Name:** FIRST TEE FED COM**Well Number:** 122H**Pressure Rating (PSI):** 5M**Rating Depth:** 20000

Equipment: At 19,209', a 5M pressure control system is required. The BOP stack consisting of 3 rams with 2 pipe rams, 1 blind ram, and 1 annular preventer will be used below surface casing to TD. See attachments for BOP and choke manifold diagrams. Also present will be an accumulator that meets the requirements of 43 CFR 3172 for the pressure rating of the BOP stack. A rotating head will also be installed as needed. BOP will be inspected and operated as recommended in 43 CFR 3172. A top drive check valve and sub equipped with a full opening valve sized to fit the drill pipe and collars will be available on the rig floor in the open position. The wellhead will be a multi-bowl speed head.

Requesting Variance? YES

Variance request: • Multi-bowl speed head: Civitas requests a variance to run a multi-bowl speed head for setting the Intermediate and Production Strings. • CoFlex line for Choke/BOP: Civitas requests a variance to drill this well using a co-flex line between the BOP and choke manifold. Certification for proposed co-flex hose is attached. The hose is not required by the manufacturer to be anchored. In the event the specific hose is not available, one of equal or higher rating will be used. • Batch Drilling: Civitas requests a variance to have the option of batch drilling this well with other wells on the same pad. If this well is batch drilled, after cementing a casing string, a 5M dry hole cap with bleed off valve will be installed. The rig will then walk to another well on the pad. Civitas Operating requests to only test BOP connection breaks after rig walks per the procedures and stipulations set forth in the "BOP Shell Test Procedure" attached. • Offline Cementing: Civitas requests a variance for the option to offline cement intermediate casing strings set higher than Wolfcamp A (which applies to all First Tee wells during the drilling campaign). To execute offline cement jobs safely, the following precautions and equipment are detailed below: o During the drilling of the 11" hole section (all intermediate strings will be TD'd above the WCA top), hole conditions will be monitored and addressed to ensure for a successful casing run. In the event hole conditions change after running casing and/or the well is not in a static state, Civitas Resources can elect to pump the cement job online. o Equipment for the offline cement job will include a tested/charted 5M working pressure dual manifold cement head system will be used with a standard offline cement tool that is packed off and tested through a port between the upper valve and packoff assembly (diagram below). Returns from the manifold will be taken to an auxiliary mud-gas separator during cement job. The operational scope is described in the following steps: the casing will be landed on the mandrel, pull tested, packoff installed and tested to 80% of collapse of casing on the top and bottom seals, nipple down BOP and install offline cement tool/manifold. The offline cement tool screws into the top of the packoff assembly. During the cement job, all returns will be taken through the A-Section valve (flanged).

Testing Procedure: After surface casing is set and the BOP is nipped up, the BOP pressure tests will be made with a third party tester to 250 psi low, 5000 psi high, and the annular preventer will be tested to 250 psi low, 2500 psi high.

Choke Diagram Attachment:

5M_Choke_Diagram_20250516092017.pdf

BOP Diagram Attachment:

5M_BOP_Diagram_20250516092025.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
-----------	-------------	-----------	----------	-----------	----------	----------------	------------	---------------	-------------	----------------	-------------	----------------	-----------------------------	-------	--------	------------	-------------	----------	---------------	----------	--------------	---------

Operator Name: CIVITAS PERMIAN OPERATING LLC

Well Name: FIRST TEE FED COM

Well Number: 122H

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	11.75	NEW	API	N	0	1198	0	1198	3247	2049	1198	J-55	42	BUTT	1.13	1.15	DRY	1.8	DRY	1.8
2	INTERMEDIATE	11	8.625	NEW	API	N	0	5016	0	5007	3248	-1760	5016	HCL-80	32	BUTT	1.13	1.15	DRY	1.8	DRY	1.8
3	PRODUCTION	7.875	5.5	NEW	NON API	N	0	19209	0	11144	3248	-7897	19209	OTHER - P110RY	20	OTHER - GBCD	1.13	1.15	DRY	1.8	DRY	1.8

Casing Attachments

Casing ID: 1StringSURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Casing_Design_Assumptions_20250516093844.pdf

Casing ID: 2StringINTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Casing_Design_Assumptions_20250516093906.pdf

Operator Name: CIVITAS PERMIAN OPERATING LLC

Well Name: FIRST TEE FED COM

Well Number: 122H

Casing Attachments

Casing ID: 3StringPRODUCTION

Inspection Document:

Spec Document:
Casing_Spec_5.5_GBCD_20250516093932.pdf

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):
Casing_Design_Assumptions_20250516093947.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	898	453	1.72	13.5	779	100	Class C	Additives + LCM
SURFACE	Tail		898	1198	196	1.33	14.8	260	100	Class C	Additives + LCM
INTERMEDIATE	Lead		0	4016	478	3.66	10.5	1750	200	Class C	Additives + LCM
INTERMEDIATE	Tail		4016	5016	219	1.16	13.2	254	100	Class C	Additives + LCM
PRODUCTION	Lead		4516	11076	343	3.93	10.5	1349	20	Class C	Additives + LCM
PRODUCTION	Tail		11076	19209	1174	1.44	13.2	1691	20	Class H	Fluid Loss + Dispersant + Retarder + LCM

Operator Name: CIVITAS PERMIAN OPERATING LLC**Well Name:** FIRST TEE FED COM**Well Number:** 122H

Section 5 - Circulating Medium

Mud System Type: Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with 43 CFR 3172:****Diagram of the equipment for the circulating system in accordance with 43 CFR 3172:****Describe what will be on location to control well or mitigate other conditions:** All necessary mud products (i.e., barite, pac) for weight addition and fluid loss control will always be on site. Mud program is subject to change due to hole conditions.**Describe the mud monitoring system utilized:** Electronic Totco mud monitor system complying with 43 CFR 3172 will be used.

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1198	OTHER : Fresh Water Spud Mud	8.4	8.4							
1198	5016	OTHER : Brine Water	10	10							
5016	1920 9	OIL-BASED MUD	9	9.5							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Electric Logging Program: No open-hole logs are planned at this time. GR will be collected while drilling through the MWD tools from KOP to TD. CBL w/ CCL from as far as gravity will let it fall to TOC.

List of open and cased hole logs run in the well:

GAMMA RAY LOG, CEMENT BOND LOG,

Coring operation description for the well:

No DSTs or cores are planned at this time.

Operator Name: CIVITAS PERMIAN OPERATING LLC**Well Name:** FIRST TEE FED COM**Well Number:** 122H

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 3836**Anticipated Surface Pressure:** 1384**Anticipated Bottom Hole Temperature(F):** 150**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations**

FT_H2S_Plan_20250516094218.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

FT_122H_Directional_Plan_20250516094236.pdf

Other proposed operations facets description:**Other proposed operations facets attachment:**

FT_122H_Drill_Plan_20250516094245.pdf

FT_122H_Anticollision_Report_20250516094254.pdf

CoFlex_Hose_Certs_20250516094306.pdf

BOP_Shell_Test_Procedure_20250516094318.pdf

Wellhead_Diagram_20250516094329.pdf

FT_WMP_20250516094330.pdf

Other Variance request(s)?: N**Other Variance attachment:**



Company: Civitas Permian Operating, LLC
Well: First Tee Fed Com 122H
County: Lea County, New Mexico (NAD 83)
Rig: 26.5' RKB
Wellbore: Wellbore #1
Design: Design #1
Date: 11:06, April 01 2025

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level
To convert a Magnetic Direction to a Grid Direction, Add 5.526°
To convert a Magnetic Direction to a True Direction, Add 6.050° East
To convert a True Direction to a Grid Direction, Subtract 0.524°

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
FTP - First Tee Fed Com 122H	11076.29	-435.73	-60.92	423002.87	845613.78	32.159093	-103.350079
KOP - First Tee Fed Com 122H	0.00	-35.75	-64.47	423402.85	845610.22	32.160192	-103.350078
LTP - First Tee Fed Com 122H	11143.59	-8147.41	5.50	415291.20	845680.19	32.137895	-103.350092
PBHL - First Tee Fed Com 122H	11144.38	-8237.40	6.72	415201.20	845681.41	32.137648	-103.350090

WELL DETAILS: First Tee Fed Com 122H

+N/-S	+E/-W	GL @ 3246.00	Well @ 3272.50usft (26.5' RKB)
0.00	0.00	Northing 423438.60	Easting 845674.69
		Latitude 32.160289	Longitude -103.349869




SURVEY PROGRAM






Depth From	Depth To	Survey/Plan	Tool
0.00	19209.20	Design #1 (Wellbore #1)	MWD+IFR1+SAG+FDIR

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Annotation
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.00	
1500.00	0.00	0.00	1500.00	0.00	0.00	0.00	0.000	0.00	KOP, 1.50°/100' Build
2033.33	8.00	333.53	2031.60	33.27	-16.57	1.50	333.526	-33.42	Hold 8.00° Inc, 333.53° Azm
2560.34	8.00	333.53	2553.48	98.93	-49.27	0.00	0.000	-99.35	Begin 1.50°/100' Drop
3093.67	0.00	0.00	3085.08	132.20	-65.84	1.50	180.000	-132.77	Begin Vertical Hold
10511.95	0.00	0.00	10503.35	132.20	-65.84	0.00	0.000	-132.77	Begin 10.00°/100' Build
11406.95	89.50	179.50	11076.29	-435.73	-60.92	10.00	179.503	435.18	Hold 89.50° Inc, 179.50° Azm
19209.20	89.50	179.50	11144.38	-8237.40	6.72	0.00	0.000	8237.14	PBHL

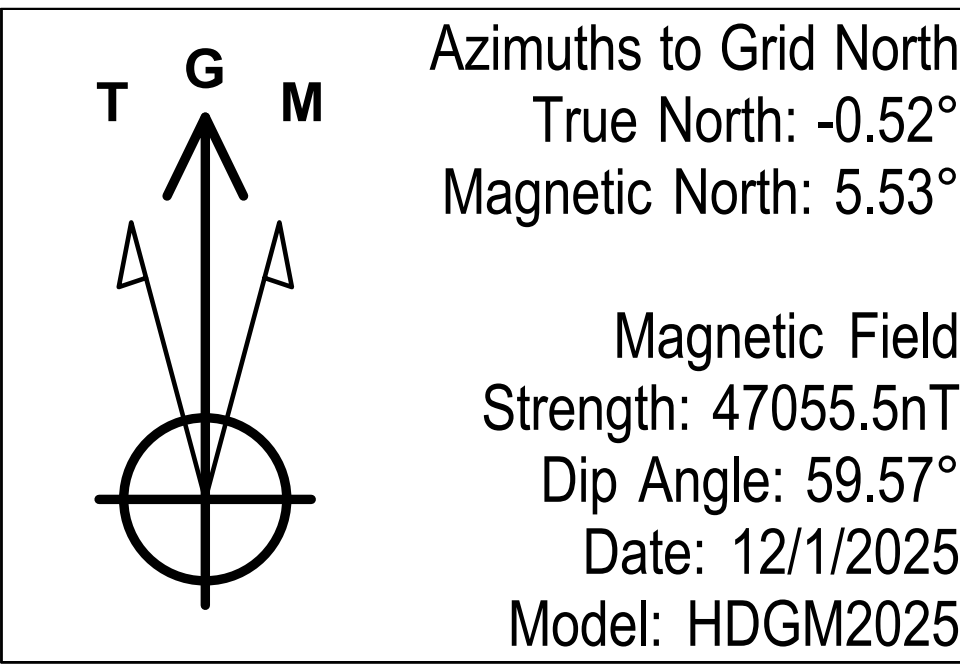

Vertical Section at 179.50° (500 usft/in)

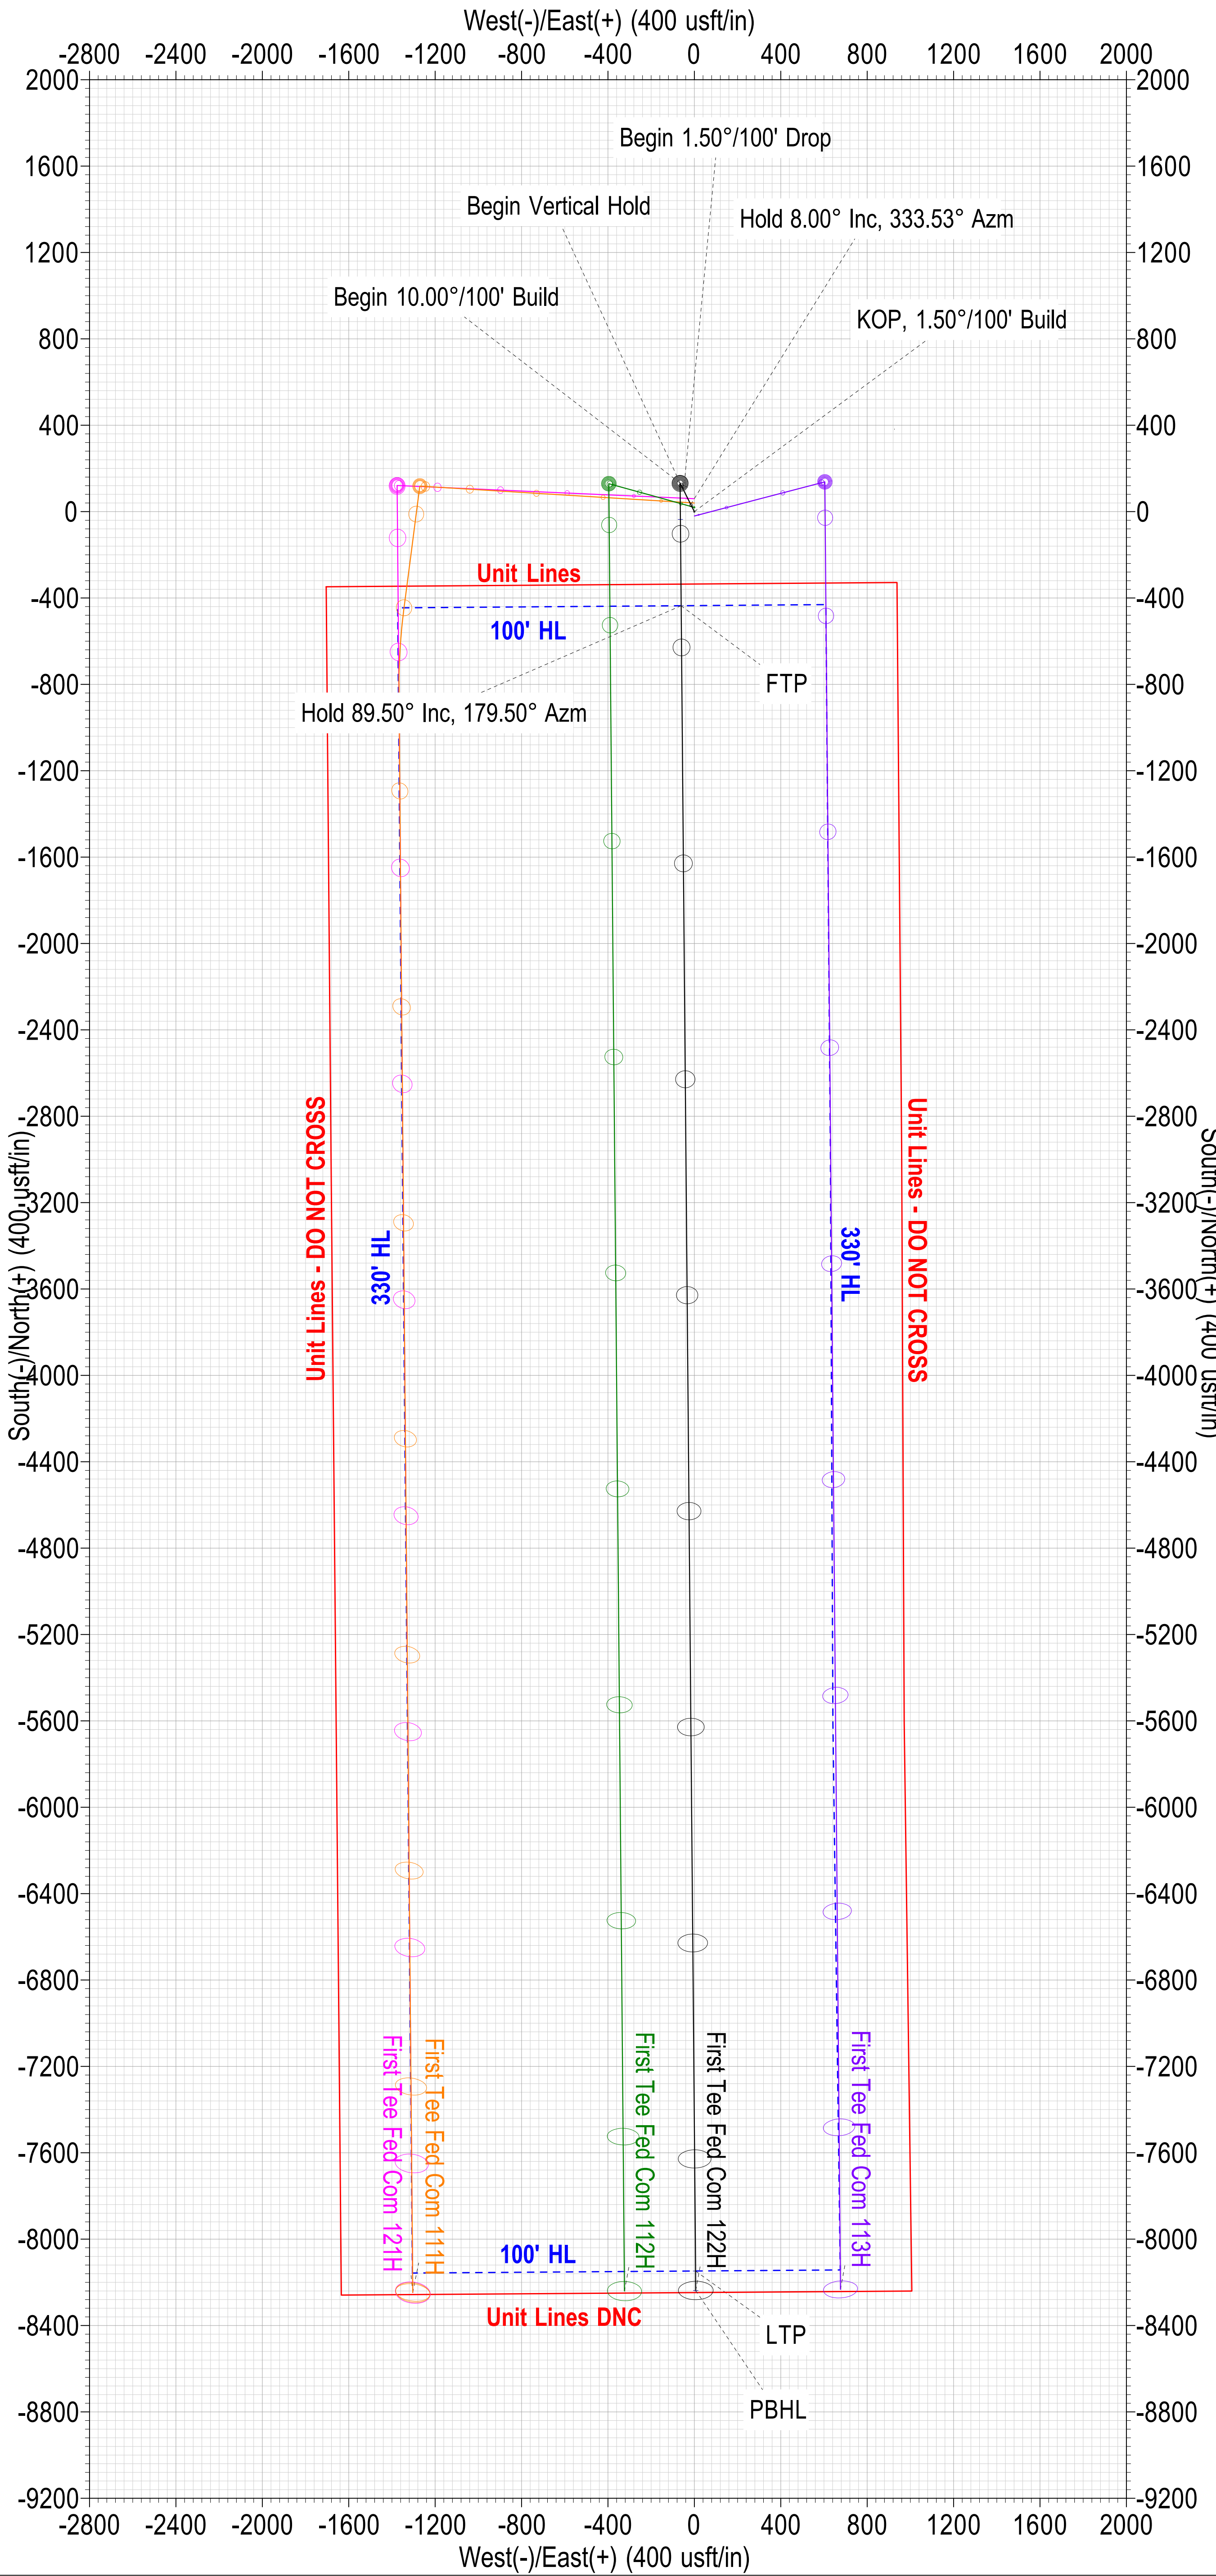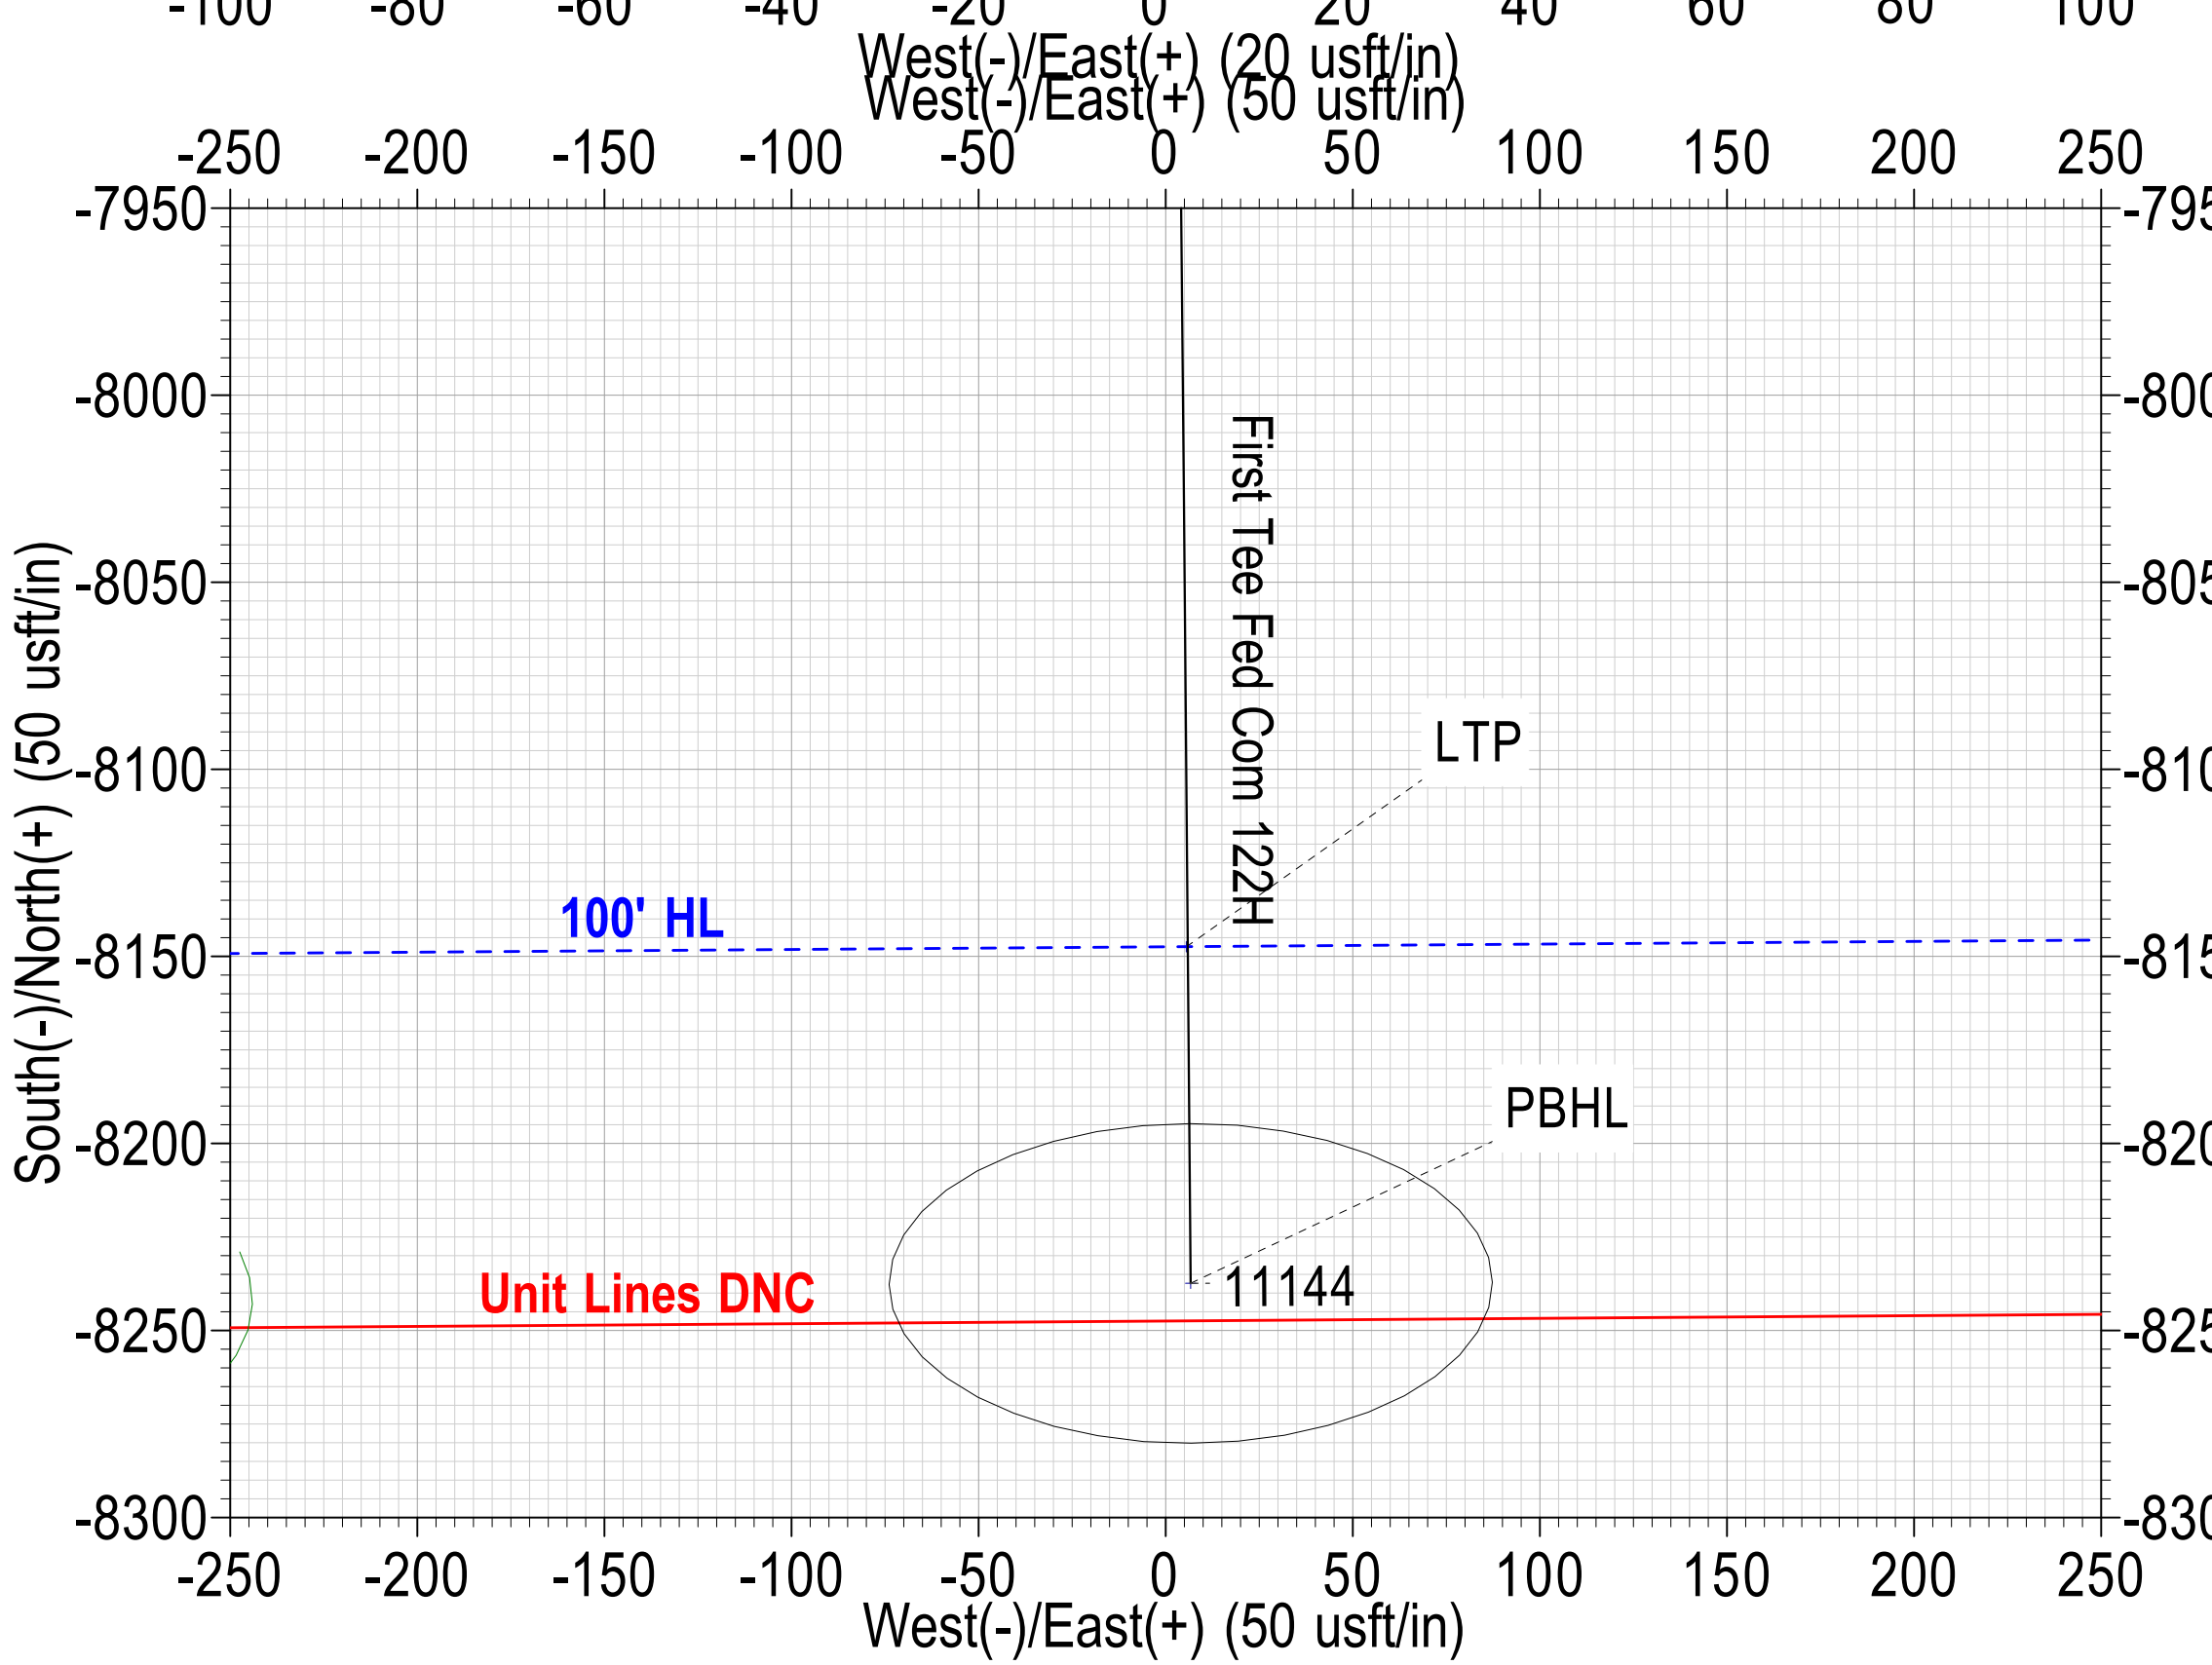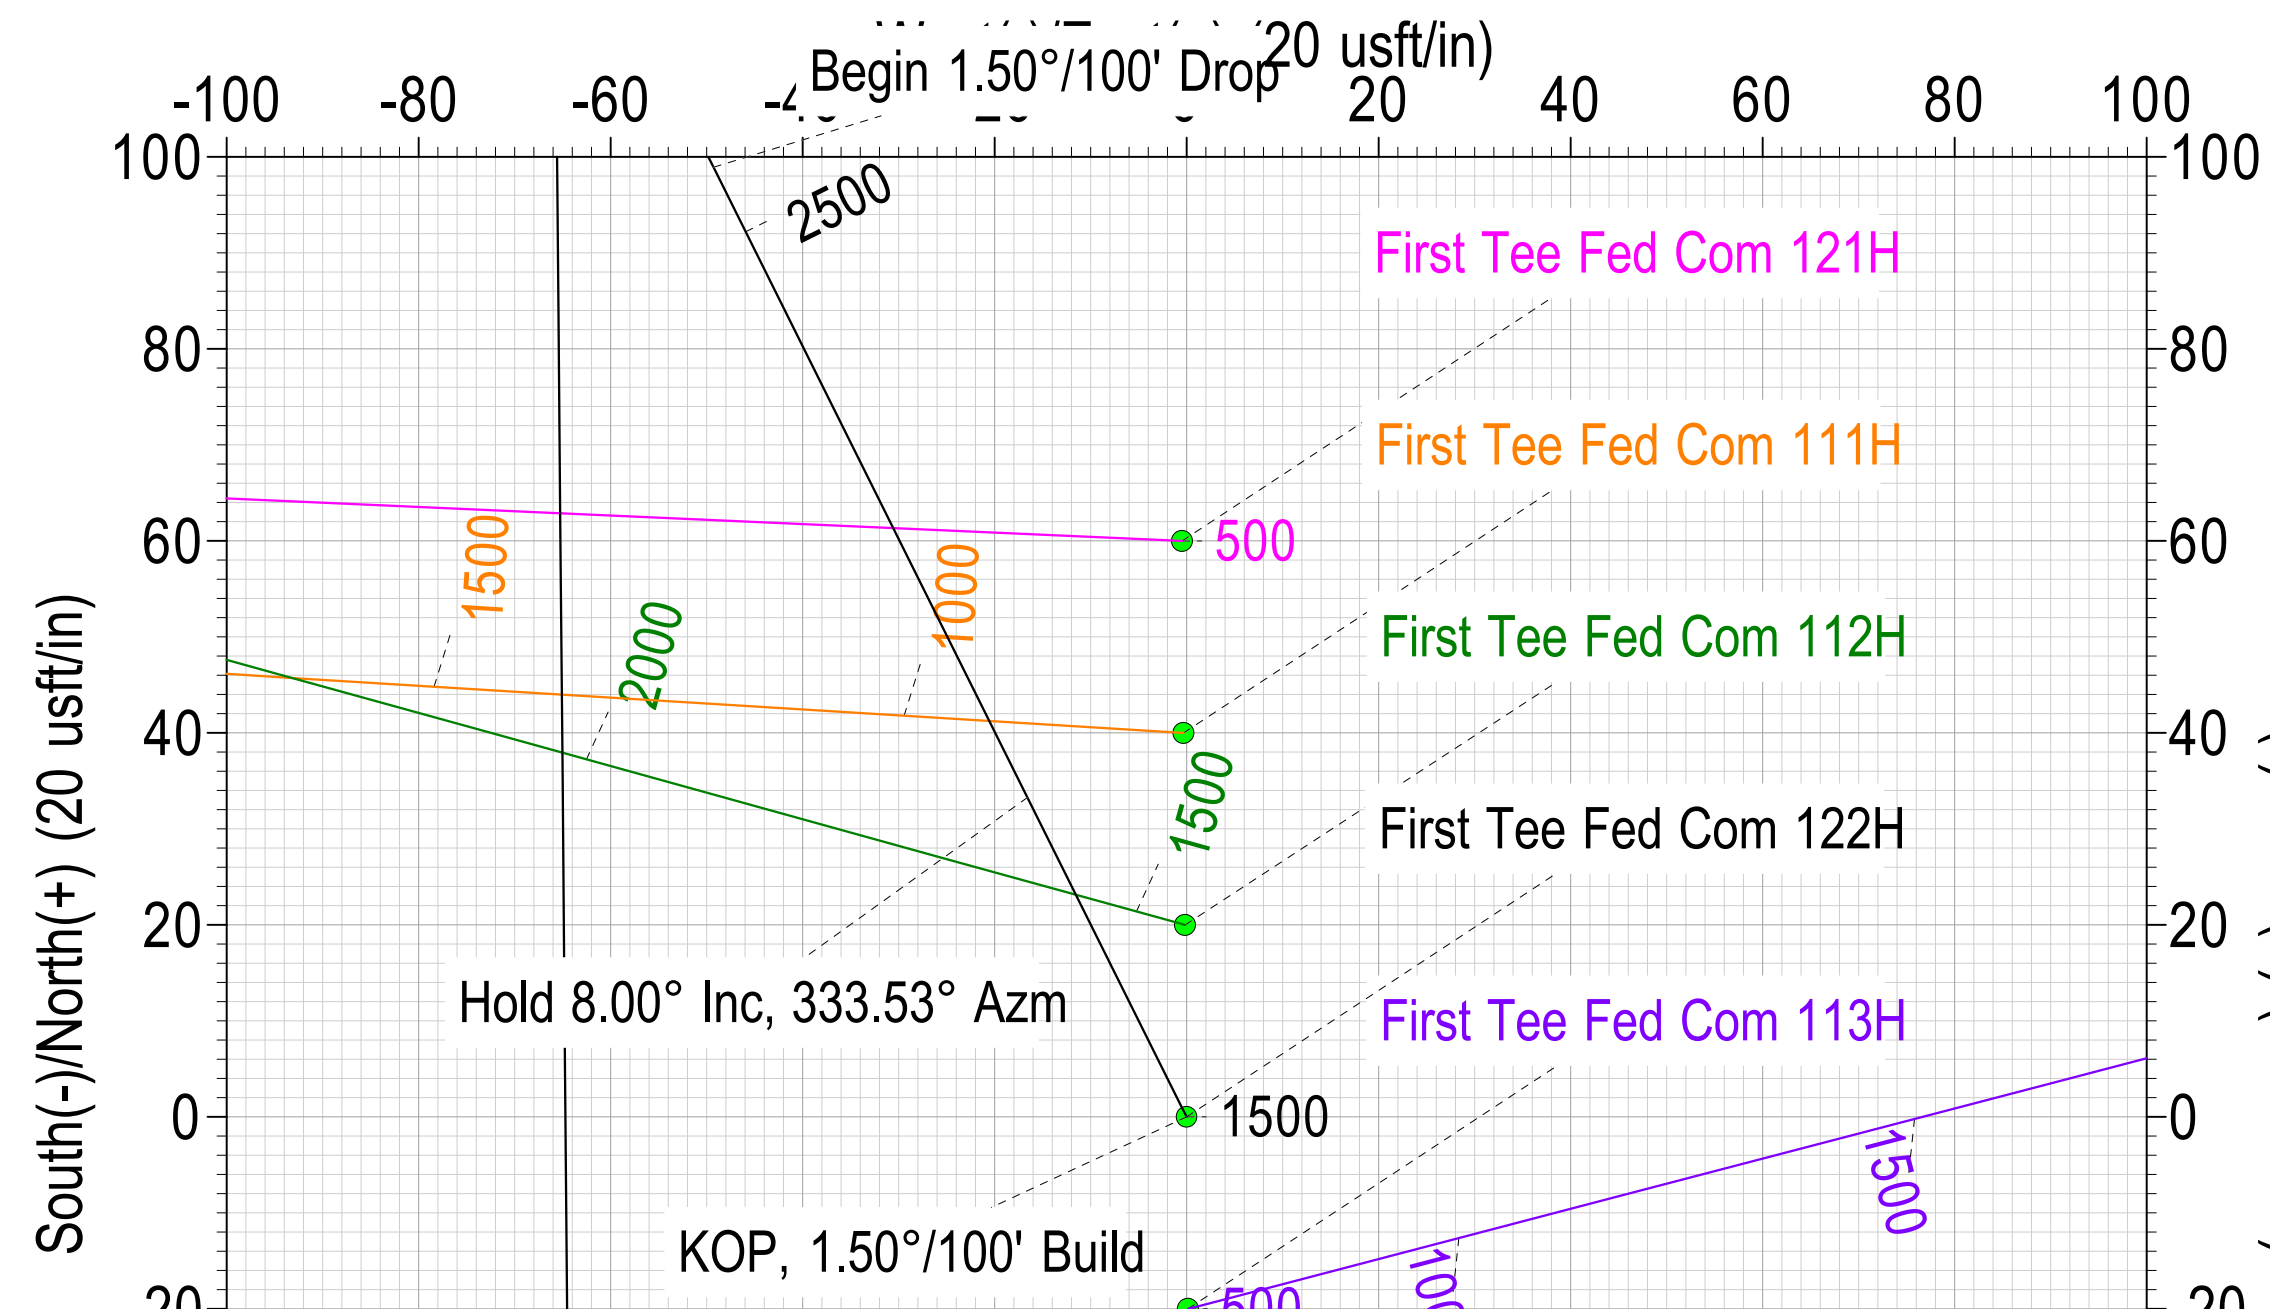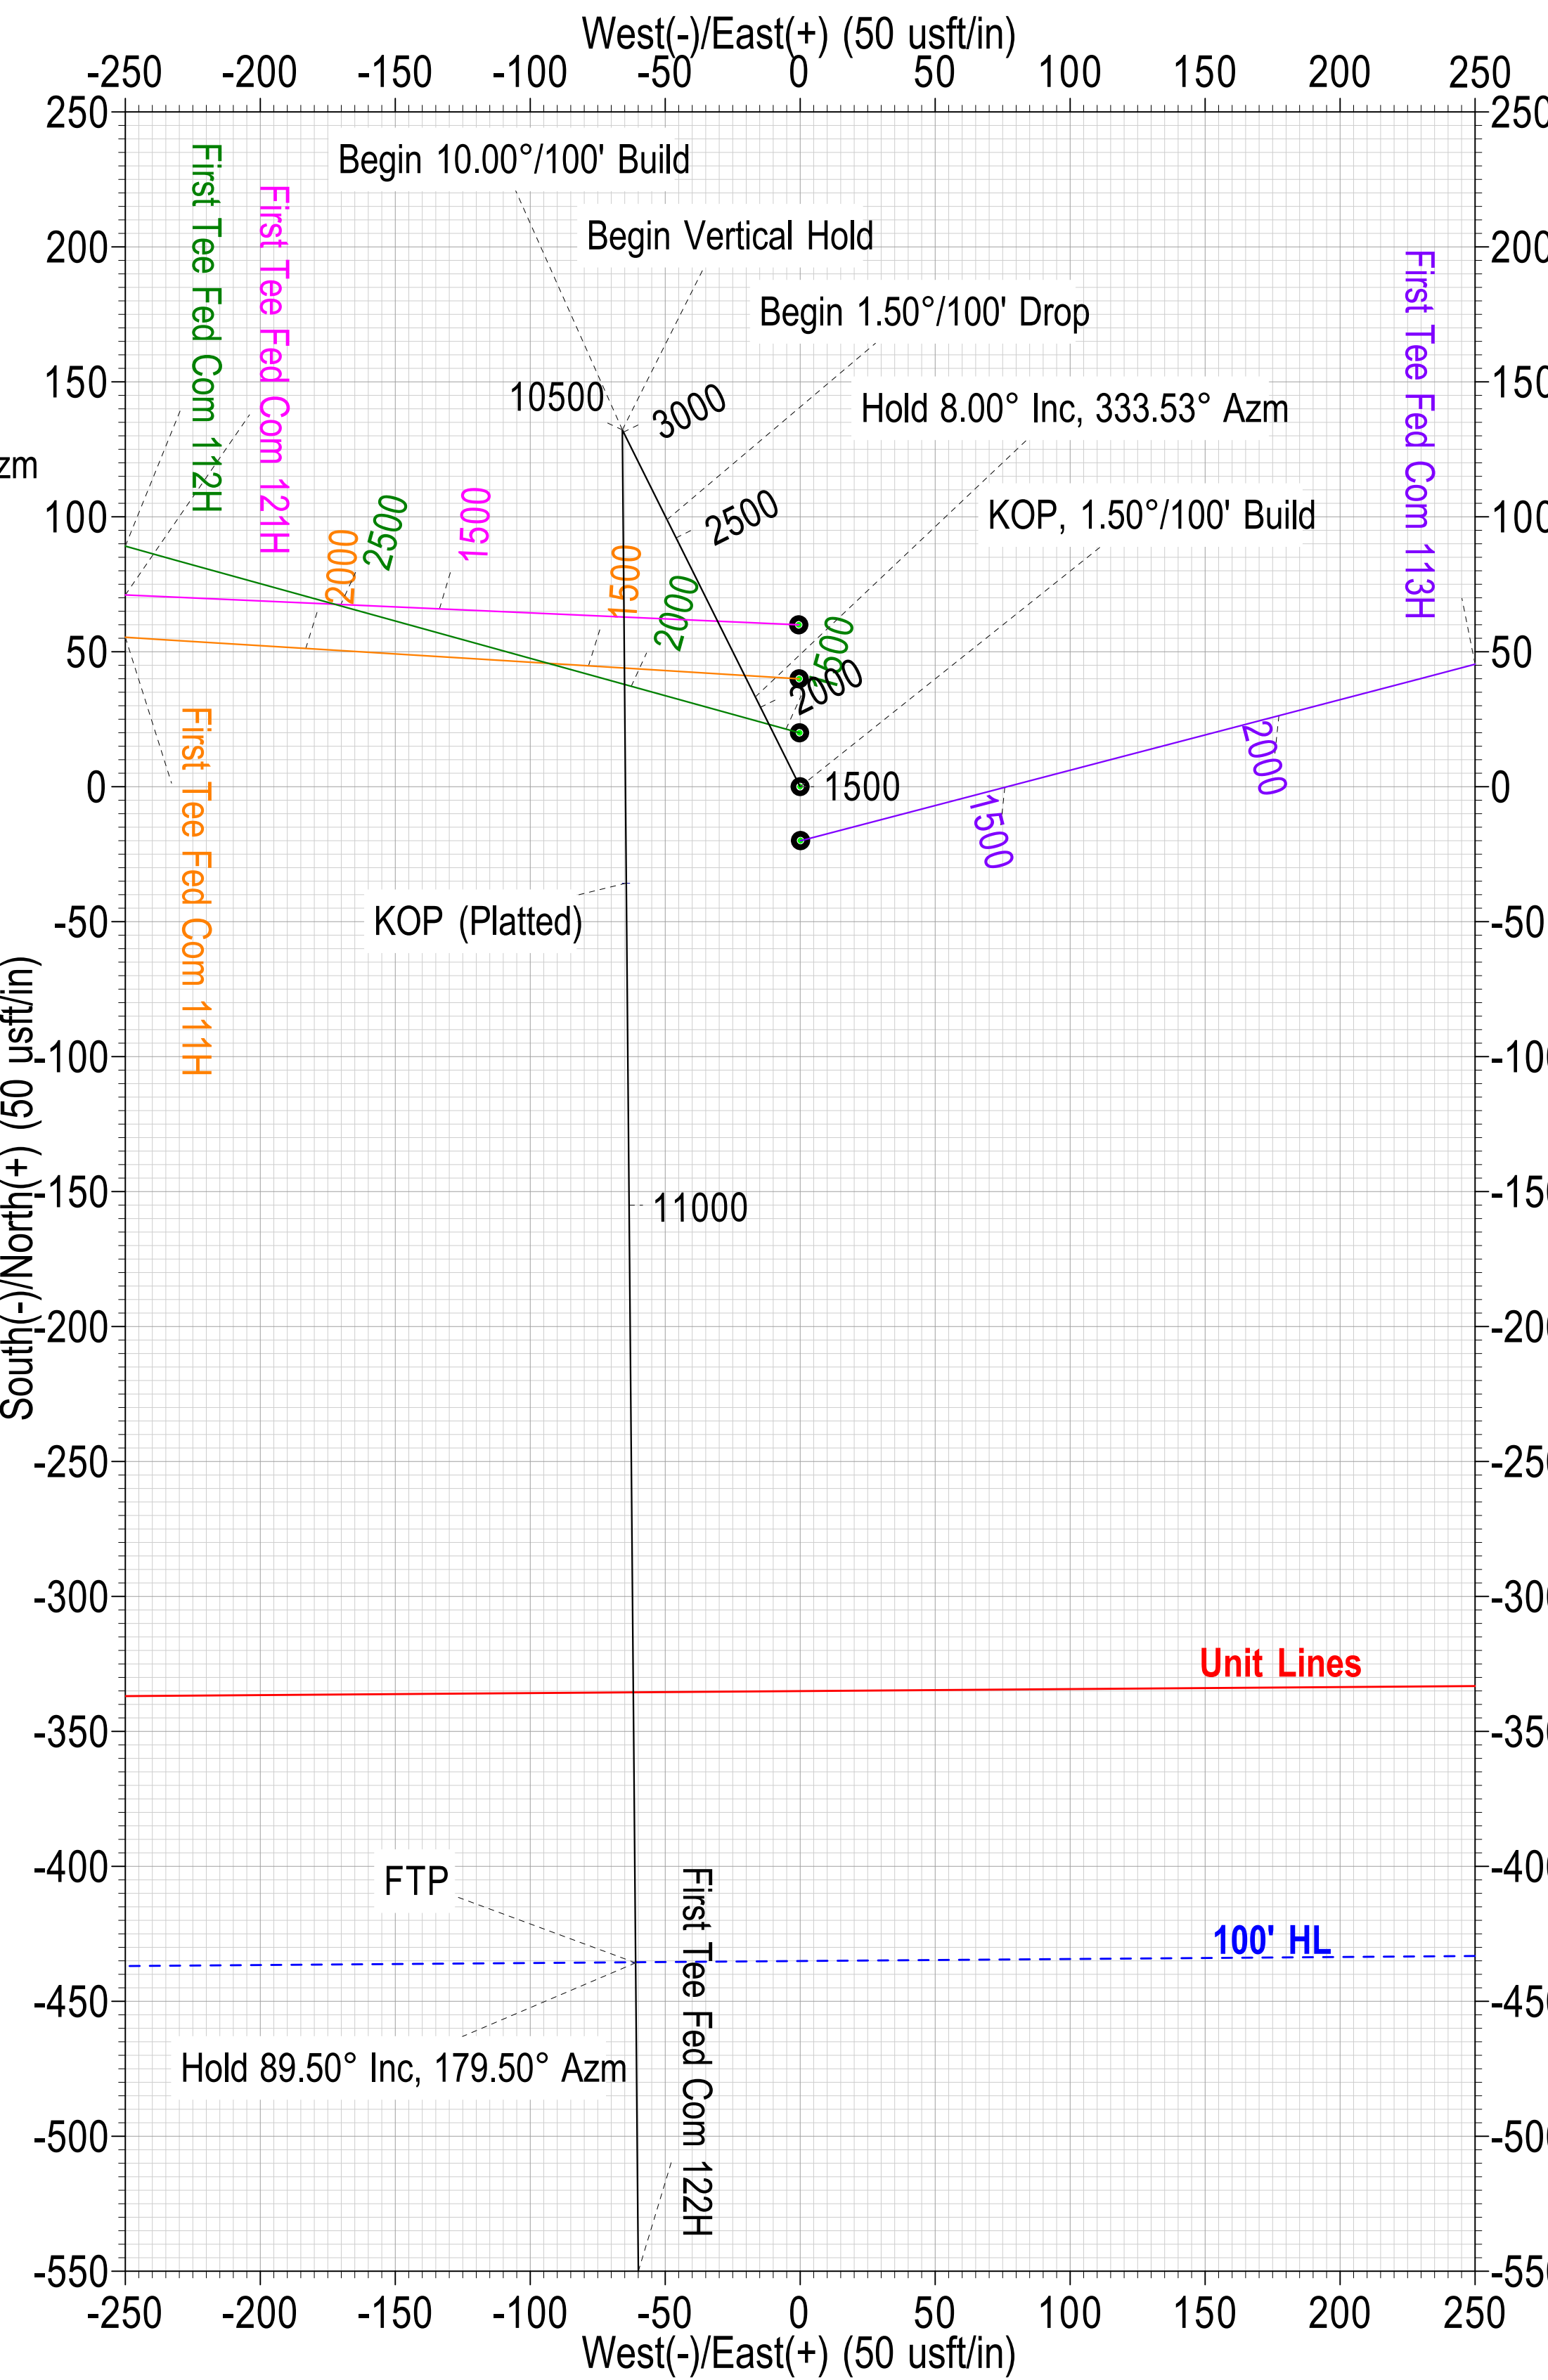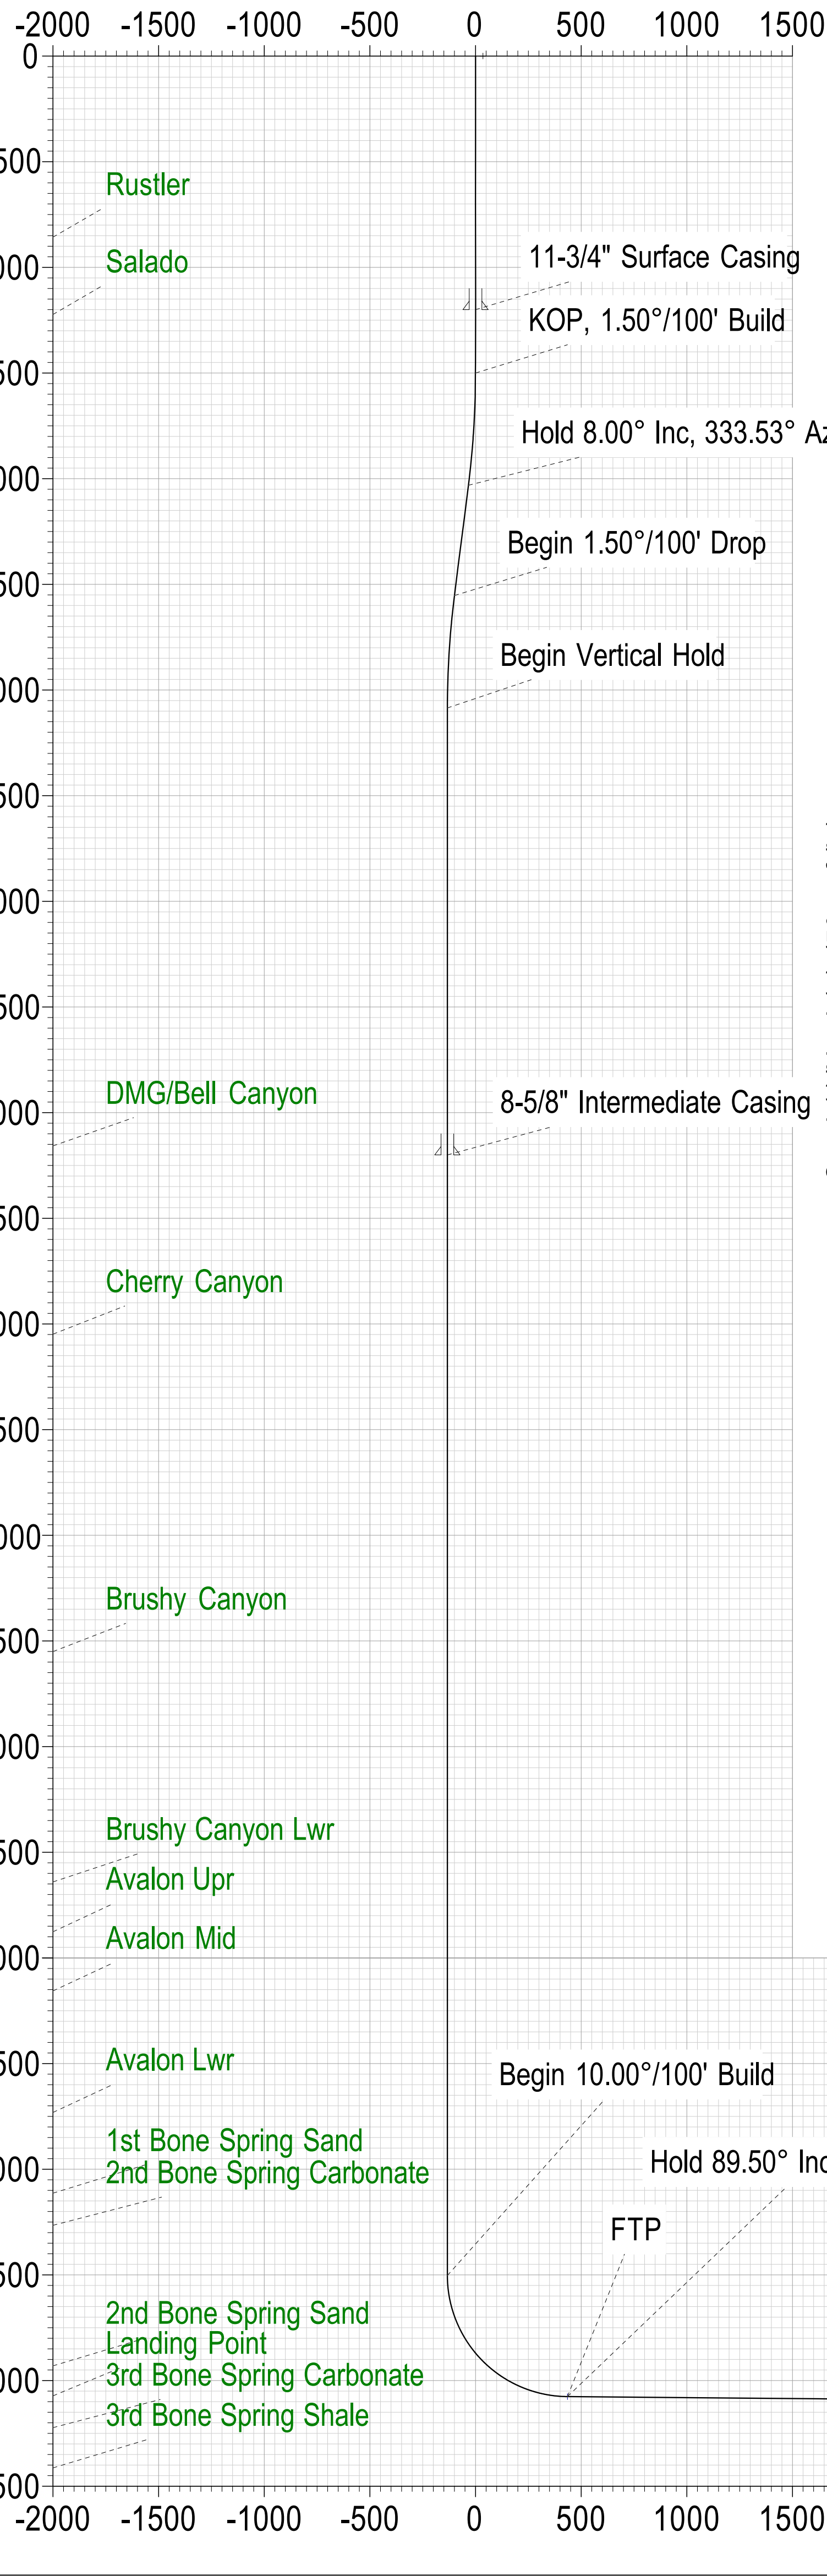



Civitas Permian Operating, LLC

**Lea County, New Mexico (NAD 83)
First Tee (111H,112H,113H,121H,122H)
First Tee Fed Com 122H**

Wellbore #1

Plan: Design #1

Standard Planning Report

31 March, 2025





MS Directional Planning Report



Database:	TRG_EDMConroe	Local Co-ordinate Reference:	Well First Tee Fed Com 122H
Company:	Civitas Permian Operating, LLC	TVD Reference:	Well @ 3272.50usft (26.5' RKB)
Project:	Lea County, New Mexico (NAD 83)	MD Reference:	Well @ 3272.50usft (26.5' RKB)
Site:	First Tee (111H,112H,113H,121H,122H)	North Reference:	Grid
Well:	First Tee Fed Com 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	Lea County, New Mexico (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	First Tee (111H,112H,113H,121H,122H)		
Site Position:		Northing:	423,478.60 usft
From:	Map	Easting:	845,674.38 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32.160399
		Longitude:	-103.349869

Well	First Tee Fed Com 122H		
Well Position	+N/-S	0.00 usft	Northing: 423,438.60 usft
	+E/-W	0.00 usft	Easting: 845,674.69 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft
Grid Convergence:	0.524 °	Ground Level:	3,246.00 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM2025	12/1/2025	6.050	59.567	47,055.500

Design	Design #1				
Audit Notes:					
Version:	Phase:	PLAN	Tie On Depth:	0.00	
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	179.50	

Plan Survey Tool Program	Date	3/31/2025			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	19,209.20	Design #1 (Wellbore #1)	MWD+IFR1+SAG+FDIR	
				OWSG MWD + IFR1 + Sag	

Plan Sections											
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000		
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.000		
2,033.33	8.00	333.53	2,031.60	33.27	-16.57	1.50	1.50	0.00	333.526		
2,560.34	8.00	333.53	2,553.48	98.93	-49.27	0.00	0.00	0.00	0.000		
3,093.67	0.00	0.00	3,085.08	132.20	-65.84	1.50	-1.50	0.00	180.000		
10,511.95	0.00	0.00	10,503.35	132.20	-65.84	0.00	0.00	0.00	0.000		
11,406.95	89.50	179.50	11,076.29	-435.73	-60.92	10.00	10.00	0.00	179.503	FTP - First Tee Fed	
19,209.20	89.50	179.50	11,144.38	-8,237.40	6.72	0.00	0.00	0.00	0.000	PBHL - First Tee Fe	



MS Directional Planning Report



Database:	TRG_EDMConroe	Local Co-ordinate Reference:	Well First Tee Fed Com 122H
Company:	Civitas Permian Operating, LLC	TVD Reference:	Well @ 3272.50usft (26.5' RKB)
Project:	Lea County, New Mexico (NAD 83)	MD Reference:	Well @ 3272.50usft (26.5' RKB)
Site:	First Tee (111H,112H,113H,121H,122H)	North Reference:	Grid
Well:	First Tee Fed Com 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
857.50	0.00	0.00	857.50	0.00	0.00	0.00	0.00	0.00	0.00
Rustler									
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
11-3/4" Surface Casing									
1,223.50	0.00	0.00	1,223.50	0.00	0.00	0.00	0.00	0.00	0.00
Salado									
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP, 1.50°/100' Build									
1,600.00	1.50	333.53	1,599.99	1.17	-0.58	-1.18	1.50	1.50	0.00
1,700.00	3.00	333.53	1,699.91	4.69	-2.33	-4.71	1.50	1.50	0.00
1,800.00	4.50	333.53	1,799.69	10.54	-5.25	-10.59	1.50	1.50	0.00
1,900.00	6.00	333.53	1,899.27	18.73	-9.33	-18.81	1.50	1.50	0.00
2,000.00	7.50	333.53	1,998.57	29.25	-14.57	-29.38	1.50	1.50	0.00
2,033.33	8.00	333.53	2,031.60	33.27	-16.57	-33.42	1.50	1.50	0.00
Hold 8.00° Inc, 333.53° Azm									
2,100.00	8.00	333.53	2,097.62	41.58	-20.71	-41.76	0.00	0.00	0.00
2,200.00	8.00	333.53	2,196.65	54.04	-26.91	-54.27	0.00	0.00	0.00
2,300.00	8.00	333.53	2,295.67	66.50	-33.12	-66.78	0.00	0.00	0.00
2,400.00	8.00	333.53	2,394.70	78.95	-39.32	-79.29	0.00	0.00	0.00
2,500.00	8.00	333.53	2,493.73	91.41	-45.52	-91.81	0.00	0.00	0.00
2,560.34	8.00	333.53	2,553.48	98.93	-49.27	-99.35	0.00	0.00	0.00
Begin 1.50°/100' Drop									
2,600.00	7.41	333.53	2,592.78	103.69	-51.64	-104.13	1.50	-1.50	0.00
2,700.00	5.91	333.53	2,692.11	114.06	-56.80	-114.55	1.50	-1.50	0.00
2,800.00	4.41	333.53	2,791.70	122.10	-60.81	-122.63	1.50	-1.50	0.00
2,900.00	2.91	333.53	2,891.49	127.81	-63.65	-128.36	1.50	-1.50	0.00
3,000.00	1.41	333.53	2,991.42	131.18	-65.33	-131.74	1.50	-1.50	0.00
3,093.67	0.00	0.00	3,085.08	132.20	-65.84	-132.77	1.50	-1.50	0.00
Begin Vertical Hold									
3,100.00	0.00	0.00	3,091.41	132.20	-65.84	-132.77	0.00	0.00	0.00
3,200.00	0.00	0.00	3,191.41	132.20	-65.84	-132.77	0.00	0.00	0.00
3,300.00	0.00	0.00	3,291.41	132.20	-65.84	-132.77	0.00	0.00	0.00
3,400.00	0.00	0.00	3,391.41	132.20	-65.84	-132.77	0.00	0.00	0.00
3,500.00	0.00	0.00	3,491.41	132.20	-65.84	-132.77	0.00	0.00	0.00
3,600.00	0.00	0.00	3,591.41	132.20	-65.84	-132.77	0.00	0.00	0.00
3,700.00	0.00	0.00	3,691.41	132.20	-65.84	-132.77	0.00	0.00	0.00
3,800.00	0.00	0.00	3,791.41	132.20	-65.84	-132.77	0.00	0.00	0.00
3,900.00	0.00	0.00	3,891.41	132.20	-65.84	-132.77	0.00	0.00	0.00
4,000.00	0.00	0.00	3,991.41	132.20	-65.84	-132.77	0.00	0.00	0.00



MS Directional Planning Report



Database:	TRG_EDMConroe	Local Co-ordinate Reference:	Well First Tee Fed Com 122H
Company:	Civitas Permian Operating, LLC	TVD Reference:	Well @ 3272.50usft (26.5' RKB)
Project:	Lea County, New Mexico (NAD 83)	MD Reference:	Well @ 3272.50usft (26.5' RKB)
Site:	First Tee (111H,112H,113H,121H,122H)	North Reference:	Grid
Well:	First Tee Fed Com 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,100.00	0.00	0.00	4,091.41	132.20	-65.84	-132.77	0.00	0.00	0.00
4,200.00	0.00	0.00	4,191.41	132.20	-65.84	-132.77	0.00	0.00	0.00
4,300.00	0.00	0.00	4,291.41	132.20	-65.84	-132.77	0.00	0.00	0.00
4,400.00	0.00	0.00	4,391.41	132.20	-65.84	-132.77	0.00	0.00	0.00
4,500.00	0.00	0.00	4,491.41	132.20	-65.84	-132.77	0.00	0.00	0.00
4,600.00	0.00	0.00	4,591.41	132.20	-65.84	-132.77	0.00	0.00	0.00
4,700.00	0.00	0.00	4,691.41	132.20	-65.84	-132.77	0.00	0.00	0.00
4,800.00	0.00	0.00	4,791.41	132.20	-65.84	-132.77	0.00	0.00	0.00
4,900.00	0.00	0.00	4,891.41	132.20	-65.84	-132.77	0.00	0.00	0.00
5,000.00	0.00	0.00	4,991.41	132.20	-65.84	-132.77	0.00	0.00	0.00
5,100.00	0.00	0.00	5,091.41	132.20	-65.84	-132.77	0.00	0.00	0.00
5,166.09	0.00	0.00	5,157.50	132.20	-65.84	-132.77	0.00	0.00	0.00
DMG/Bell Canyon									
5,200.00	0.00	0.00	5,191.41	132.20	-65.84	-132.77	0.00	0.00	0.00
5,208.59	0.00	0.00	5,200.00	132.20	-65.84	-132.77	0.00	0.00	0.00
8-5/8" Intermediate Casing									
5,300.00	0.00	0.00	5,291.41	132.20	-65.84	-132.77	0.00	0.00	0.00
5,400.00	0.00	0.00	5,391.41	132.20	-65.84	-132.77	0.00	0.00	0.00
5,500.00	0.00	0.00	5,491.41	132.20	-65.84	-132.77	0.00	0.00	0.00
5,600.00	0.00	0.00	5,591.41	132.20	-65.84	-132.77	0.00	0.00	0.00
5,700.00	0.00	0.00	5,691.41	132.20	-65.84	-132.77	0.00	0.00	0.00
5,800.00	0.00	0.00	5,791.41	132.20	-65.84	-132.77	0.00	0.00	0.00
5,900.00	0.00	0.00	5,891.41	132.20	-65.84	-132.77	0.00	0.00	0.00
6,000.00	0.00	0.00	5,991.41	132.20	-65.84	-132.77	0.00	0.00	0.00
6,057.09	0.00	0.00	6,048.50	132.20	-65.84	-132.77	0.00	0.00	0.00
Cherry Canyon									
6,100.00	0.00	0.00	6,091.41	132.20	-65.84	-132.77	0.00	0.00	0.00
6,200.00	0.00	0.00	6,191.41	132.20	-65.84	-132.77	0.00	0.00	0.00
6,300.00	0.00	0.00	6,291.41	132.20	-65.84	-132.77	0.00	0.00	0.00
6,400.00	0.00	0.00	6,391.41	132.20	-65.84	-132.77	0.00	0.00	0.00
6,500.00	0.00	0.00	6,491.41	132.20	-65.84	-132.77	0.00	0.00	0.00
6,600.00	0.00	0.00	6,591.41	132.20	-65.84	-132.77	0.00	0.00	0.00
6,700.00	0.00	0.00	6,691.41	132.20	-65.84	-132.77	0.00	0.00	0.00
6,800.00	0.00	0.00	6,791.41	132.20	-65.84	-132.77	0.00	0.00	0.00
6,900.00	0.00	0.00	6,891.41	132.20	-65.84	-132.77	0.00	0.00	0.00
7,000.00	0.00	0.00	6,991.41	132.20	-65.84	-132.77	0.00	0.00	0.00
7,100.00	0.00	0.00	7,091.41	132.20	-65.84	-132.77	0.00	0.00	0.00
7,200.00	0.00	0.00	7,191.41	132.20	-65.84	-132.77	0.00	0.00	0.00
7,300.00	0.00	0.00	7,291.41	132.20	-65.84	-132.77	0.00	0.00	0.00
7,400.00	0.00	0.00	7,391.41	132.20	-65.84	-132.77	0.00	0.00	0.00
7,500.00	0.00	0.00	7,491.41	132.20	-65.84	-132.77	0.00	0.00	0.00
7,559.09	0.00	0.00	7,550.50	132.20	-65.84	-132.77	0.00	0.00	0.00
Brushy Canyon									
7,600.00	0.00	0.00	7,591.41	132.20	-65.84	-132.77	0.00	0.00	0.00
7,700.00	0.00	0.00	7,691.41	132.20	-65.84	-132.77	0.00	0.00	0.00
7,800.00	0.00	0.00	7,791.41	132.20	-65.84	-132.77	0.00	0.00	0.00
7,900.00	0.00	0.00	7,891.41	132.20	-65.84	-132.77	0.00	0.00	0.00
8,000.00	0.00	0.00	7,991.41	132.20	-65.84	-132.77	0.00	0.00	0.00
8,100.00	0.00	0.00	8,091.41	132.20	-65.84	-132.77	0.00	0.00	0.00
8,200.00	0.00	0.00	8,191.41	132.20	-65.84	-132.77	0.00	0.00	0.00
8,300.00	0.00	0.00	8,291.41	132.20	-65.84	-132.77	0.00	0.00	0.00
8,400.00	0.00	0.00	8,391.41	132.20	-65.84	-132.77	0.00	0.00	0.00
8,500.00	0.00	0.00	8,491.41	132.20	-65.84	-132.77	0.00	0.00	0.00



MS Directional Planning Report



Database:	TRG_EDMConroe	Local Co-ordinate Reference:	Well First Tee Fed Com 122H
Company:	Civitas Permian Operating, LLC	TVD Reference:	Well @ 3272.50usft (26.5' RKB)
Project:	Lea County, New Mexico (NAD 83)	MD Reference:	Well @ 3272.50usft (26.5' RKB)
Site:	First Tee (111H,112H,113H,121H,122H)	North Reference:	Grid
Well:	First Tee Fed Com 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,600.00	0.00	0.00	8,591.41	132.20	-65.84	-132.77	0.00	0.00	0.00
8,649.09	0.00	0.00	8,640.50	132.20	-65.84	-132.77	0.00	0.00	0.00
Brushy Canyon Lwr									
8,700.00	0.00	0.00	8,691.41	132.20	-65.84	-132.77	0.00	0.00	0.00
8,800.00	0.00	0.00	8,791.41	132.20	-65.84	-132.77	0.00	0.00	0.00
8,885.09	0.00	0.00	8,876.50	132.20	-65.84	-132.77	0.00	0.00	0.00
Avalon Upr									
8,900.00	0.00	0.00	8,891.41	132.20	-65.84	-132.77	0.00	0.00	0.00
9,000.00	0.00	0.00	8,991.41	132.20	-65.84	-132.77	0.00	0.00	0.00
9,100.00	0.00	0.00	9,091.41	132.20	-65.84	-132.77	0.00	0.00	0.00
9,165.09	0.00	0.00	9,156.50	132.20	-65.84	-132.77	0.00	0.00	0.00
Avalon Mid									
9,200.00	0.00	0.00	9,191.41	132.20	-65.84	-132.77	0.00	0.00	0.00
9,300.00	0.00	0.00	9,291.41	132.20	-65.84	-132.77	0.00	0.00	0.00
9,400.00	0.00	0.00	9,391.41	132.20	-65.84	-132.77	0.00	0.00	0.00
9,500.00	0.00	0.00	9,491.41	132.20	-65.84	-132.77	0.00	0.00	0.00
9,600.00	0.00	0.00	9,591.41	132.20	-65.84	-132.77	0.00	0.00	0.00
9,700.00	0.00	0.00	9,691.41	132.20	-65.84	-132.77	0.00	0.00	0.00
9,740.09	0.00	0.00	9,731.50	132.20	-65.84	-132.77	0.00	0.00	0.00
Avalon Lwr									
9,800.00	0.00	0.00	9,791.41	132.20	-65.84	-132.77	0.00	0.00	0.00
9,900.00	0.00	0.00	9,891.41	132.20	-65.84	-132.77	0.00	0.00	0.00
10,000.00	0.00	0.00	9,991.41	132.20	-65.84	-132.77	0.00	0.00	0.00
10,100.00	0.00	0.00	10,091.41	132.20	-65.84	-132.77	0.00	0.00	0.00
10,122.09	0.00	0.00	10,113.50	132.20	-65.84	-132.77	0.00	0.00	0.00
1st Bone Spring Sand									
10,200.00	0.00	0.00	10,191.41	132.20	-65.84	-132.77	0.00	0.00	0.00
10,274.09	0.00	0.00	10,265.50	132.20	-65.84	-132.77	0.00	0.00	0.00
2nd Bone Spring Carbonate									
10,300.00	0.00	0.00	10,291.41	132.20	-65.84	-132.77	0.00	0.00	0.00
10,400.00	0.00	0.00	10,391.41	132.20	-65.84	-132.77	0.00	0.00	0.00
10,500.00	0.00	0.00	10,491.41	132.20	-65.84	-132.77	0.00	0.00	0.00
10,511.95	0.00	0.00	10,503.35	132.20	-65.84	-132.77	0.00	0.00	0.00
Begin 10.00°/100' Build									
10,550.00	3.81	179.50	10,541.38	130.94	-65.83	-131.51	10.00	10.00	0.00
10,600.00	8.81	179.50	10,591.06	125.45	-65.78	-126.02	10.00	10.00	0.00
10,650.00	13.81	179.50	10,640.08	115.65	-65.70	-116.22	10.00	10.00	0.00
10,700.00	18.81	179.50	10,688.05	101.62	-65.57	-102.19	10.00	10.00	0.00
10,750.00	23.81	179.50	10,734.62	83.46	-65.42	-84.03	10.00	10.00	0.00
10,800.00	28.81	179.50	10,779.43	61.31	-65.22	-61.88	10.00	10.00	0.00
10,850.00	33.81	179.50	10,822.13	35.34	-65.00	-35.90	10.00	10.00	0.00
10,900.00	38.81	179.50	10,862.41	5.74	-64.74	-6.31	10.00	10.00	0.00
10,950.00	43.81	179.50	10,899.96	-27.25	-64.46	26.68	10.00	10.00	0.00
10,993.98	48.20	179.50	10,930.50	-58.87	-64.18	58.31	10.00	10.00	0.00
2nd Bone Spring Sand									
11,000.00	48.81	179.50	10,934.49	-63.39	-64.14	62.82	10.00	10.00	0.00
11,050.00	53.81	179.50	10,965.74	-102.40	-63.81	101.84	10.00	10.00	0.00
11,100.00	58.81	179.50	10,993.47	-143.98	-63.45	143.42	10.00	10.00	0.00
11,150.00	63.81	179.50	11,017.47	-187.83	-63.06	187.27	10.00	10.00	0.00
11,200.00	68.81	179.50	11,037.56	-233.60	-62.67	233.04	10.00	10.00	0.00
11,250.00	73.81	179.50	11,053.58	-280.94	-62.26	280.39	10.00	10.00	0.00
11,300.00	78.81	179.50	11,065.41	-329.50	-61.84	328.95	10.00	10.00	0.00
11,345.82	83.39	179.50	11,072.50	-374.75	-61.44	374.20	10.00	10.00	0.00



MS Directional Planning Report



Database:	TRG_EDMConroe	Local Co-ordinate Reference:	Well First Tee Fed Com 122H
Company:	Civitas Permian Operating, LLC	TVD Reference:	Well @ 3272.50usft (26.5' RKB)
Project:	Lea County, New Mexico (NAD 83)	MD Reference:	Well @ 3272.50usft (26.5' RKB)
Site:	First Tee (111H,112H,113H,121H,122H)	North Reference:	Grid
Well:	First Tee Fed Com 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
Landing Point									
11,350.00	83.81	179.50	11,072.97	-378.91	-61.41	378.36	10.00	10.00	0.00
11,400.00	88.81	179.50	11,076.19	-428.79	-60.98	428.24	10.00	10.00	0.00
11,406.95	89.50	179.50	11,076.29	-435.73	-60.92	435.18	10.00	10.00	0.00
Hold 89.50° Inc, 179.50° Azm									
11,500.00	89.50	179.50	11,077.10	-528.78	-60.11	528.24	0.00	0.00	0.00
11,600.00	89.50	179.50	11,077.98	-628.77	-59.24	628.23	0.00	0.00	0.00
11,700.00	89.50	179.50	11,078.85	-728.77	-58.38	728.23	0.00	0.00	0.00
11,800.00	89.50	179.50	11,079.72	-828.76	-57.51	828.22	0.00	0.00	0.00
11,900.00	89.50	179.50	11,080.59	-928.75	-56.64	928.22	0.00	0.00	0.00
12,000.00	89.50	179.50	11,081.47	-1,028.74	-55.77	1,028.22	0.00	0.00	0.00
12,100.00	89.50	179.50	11,082.34	-1,128.74	-54.91	1,128.21	0.00	0.00	0.00
12,200.00	89.50	179.50	11,083.21	-1,228.73	-54.04	1,228.21	0.00	0.00	0.00
12,300.00	89.50	179.50	11,084.08	-1,328.72	-53.17	1,328.21	0.00	0.00	0.00
12,400.00	89.50	179.50	11,084.96	-1,428.71	-52.31	1,428.20	0.00	0.00	0.00
12,500.00	89.50	179.50	11,085.83	-1,528.71	-51.44	1,528.20	0.00	0.00	0.00
12,600.00	89.50	179.50	11,086.70	-1,628.70	-50.57	1,628.19	0.00	0.00	0.00
12,700.00	89.50	179.50	11,087.57	-1,728.69	-49.71	1,728.19	0.00	0.00	0.00
12,800.00	89.50	179.50	11,088.45	-1,828.68	-48.84	1,828.19	0.00	0.00	0.00
12,900.00	89.50	179.50	11,089.32	-1,928.67	-47.97	1,928.18	0.00	0.00	0.00
13,000.00	89.50	179.50	11,090.19	-2,028.67	-47.11	2,028.18	0.00	0.00	0.00
13,100.00	89.50	179.50	11,091.07	-2,128.66	-46.24	2,128.18	0.00	0.00	0.00
13,200.00	89.50	179.50	11,091.94	-2,228.65	-45.37	2,228.17	0.00	0.00	0.00
13,300.00	89.50	179.50	11,092.81	-2,328.64	-44.51	2,328.17	0.00	0.00	0.00
13,400.00	89.50	179.50	11,093.68	-2,428.64	-43.64	2,428.16	0.00	0.00	0.00
13,500.00	89.50	179.50	11,094.56	-2,528.63	-42.77	2,528.16	0.00	0.00	0.00
13,600.00	89.50	179.50	11,095.43	-2,628.62	-41.91	2,628.16	0.00	0.00	0.00
13,700.00	89.50	179.50	11,096.30	-2,728.61	-41.04	2,728.15	0.00	0.00	0.00
13,800.00	89.50	179.50	11,097.17	-2,828.61	-40.17	2,828.15	0.00	0.00	0.00
13,900.00	89.50	179.50	11,098.05	-2,928.60	-39.30	2,928.14	0.00	0.00	0.00
14,000.00	89.50	179.50	11,098.92	-3,028.59	-38.44	3,028.14	0.00	0.00	0.00
14,100.00	89.50	179.50	11,099.79	-3,128.58	-37.57	3,128.14	0.00	0.00	0.00
14,200.00	89.50	179.50	11,100.67	-3,228.58	-36.70	3,228.13	0.00	0.00	0.00
14,300.00	89.50	179.50	11,101.54	-3,328.57	-35.84	3,328.13	0.00	0.00	0.00
14,400.00	89.50	179.50	11,102.41	-3,428.56	-34.97	3,428.13	0.00	0.00	0.00
14,500.00	89.50	179.50	11,103.28	-3,528.55	-34.10	3,528.12	0.00	0.00	0.00
14,600.00	89.50	179.50	11,104.16	-3,628.55	-33.24	3,628.12	0.00	0.00	0.00
14,700.00	89.50	179.50	11,105.03	-3,728.54	-32.37	3,728.11	0.00	0.00	0.00
14,800.00	89.50	179.50	11,105.90	-3,828.53	-31.50	3,828.11	0.00	0.00	0.00
14,900.00	89.50	179.50	11,106.77	-3,928.52	-30.64	3,928.11	0.00	0.00	0.00
15,000.00	89.50	179.50	11,107.65	-4,028.52	-29.77	4,028.10	0.00	0.00	0.00
15,100.00	89.50	179.50	11,108.52	-4,128.51	-28.90	4,128.10	0.00	0.00	0.00
15,200.00	89.50	179.50	11,109.39	-4,228.50	-28.04	4,228.10	0.00	0.00	0.00
15,300.00	89.50	179.50	11,110.26	-4,328.49	-27.17	4,328.09	0.00	0.00	0.00
15,400.00	89.50	179.50	11,111.14	-4,428.49	-26.30	4,428.09	0.00	0.00	0.00
15,500.00	89.50	179.50	11,112.01	-4,528.48	-25.43	4,528.08	0.00	0.00	0.00
15,600.00	89.50	179.50	11,112.88	-4,628.47	-24.57	4,628.08	0.00	0.00	0.00
15,700.00	89.50	179.50	11,113.76	-4,728.46	-23.70	4,728.08	0.00	0.00	0.00
15,800.00	89.50	179.50	11,114.63	-4,828.46	-22.83	4,828.07	0.00	0.00	0.00
15,900.00	89.50	179.50	11,115.50	-4,928.45	-21.97	4,928.07	0.00	0.00	0.00
16,000.00	89.50	179.50	11,116.37	-5,028.44	-21.10	5,028.06	0.00	0.00	0.00
16,100.00	89.50	179.50	11,117.25	-5,128.43	-20.23	5,128.06	0.00	0.00	0.00
16,200.00	89.50	179.50	11,118.12	-5,228.43	-19.37	5,228.06	0.00	0.00	0.00



MS Directional Planning Report



Database:	TRG_EDMConroe	Local Co-ordinate Reference:	Well First Tee Fed Com 122H
Company:	Civitas Permian Operating, LLC	TVD Reference:	Well @ 3272.50usft (26.5' RKB)
Project:	Lea County, New Mexico (NAD 83)	MD Reference:	Well @ 3272.50usft (26.5' RKB)
Site:	First Tee (111H,112H,113H,121H,122H)	North Reference:	Grid
Well:	First Tee Fed Com 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
16,300.00	89.50	179.50	11,118.99	-5,328.42	-18.50	5,328.05	0.00	0.00	0.00	
16,400.00	89.50	179.50	11,119.86	-5,428.41	-17.63	5,428.05	0.00	0.00	0.00	
16,500.00	89.50	179.50	11,120.74	-5,528.40	-16.77	5,528.05	0.00	0.00	0.00	
16,600.00	89.50	179.50	11,121.61	-5,628.39	-15.90	5,628.04	0.00	0.00	0.00	
16,700.00	89.50	179.50	11,122.48	-5,728.39	-15.03	5,728.04	0.00	0.00	0.00	
16,800.00	89.50	179.50	11,123.36	-5,828.38	-14.17	5,828.03	0.00	0.00	0.00	
16,900.00	89.50	179.50	11,124.23	-5,928.37	-13.30	5,928.03	0.00	0.00	0.00	
17,000.00	89.50	179.50	11,125.10	-6,028.36	-12.43	6,028.03	0.00	0.00	0.00	
17,100.00	89.50	179.50	11,125.97	-6,128.36	-11.57	6,128.02	0.00	0.00	0.00	
17,200.00	89.50	179.50	11,126.85	-6,228.35	-10.70	6,228.02	0.00	0.00	0.00	
17,300.00	89.50	179.50	11,127.72	-6,328.34	-9.83	6,328.02	0.00	0.00	0.00	
17,400.00	89.50	179.50	11,128.59	-6,428.33	-8.96	6,428.01	0.00	0.00	0.00	
17,500.00	89.50	179.50	11,129.46	-6,528.33	-8.10	6,528.01	0.00	0.00	0.00	
17,600.00	89.50	179.50	11,130.34	-6,628.32	-7.23	6,628.00	0.00	0.00	0.00	
17,700.00	89.50	179.50	11,131.21	-6,728.31	-6.36	6,728.00	0.00	0.00	0.00	
17,800.00	89.50	179.50	11,132.08	-6,828.30	-5.50	6,828.00	0.00	0.00	0.00	
17,900.00	89.50	179.50	11,132.95	-6,928.30	-4.63	6,927.99	0.00	0.00	0.00	
18,000.00	89.50	179.50	11,133.83	-7,028.29	-3.76	7,027.99	0.00	0.00	0.00	
18,100.00	89.50	179.50	11,134.70	-7,128.28	-2.90	7,127.98	0.00	0.00	0.00	
18,200.00	89.50	179.50	11,135.57	-7,228.27	-2.03	7,227.98	0.00	0.00	0.00	
18,300.00	89.50	179.50	11,136.45	-7,328.27	-1.16	7,327.98	0.00	0.00	0.00	
18,400.00	89.50	179.50	11,137.32	-7,428.26	-0.30	7,427.97	0.00	0.00	0.00	
18,500.00	89.50	179.50	11,138.19	-7,528.25	0.57	7,527.97	0.00	0.00	0.00	
18,600.00	89.50	179.50	11,139.06	-7,628.24	1.44	7,627.97	0.00	0.00	0.00	
18,700.00	89.50	179.50	11,139.94	-7,728.24	2.30	7,727.96	0.00	0.00	0.00	
18,800.00	89.50	179.50	11,140.81	-7,828.23	3.17	7,827.96	0.00	0.00	0.00	
18,900.00	89.50	179.50	11,141.68	-7,928.22	4.04	7,927.95	0.00	0.00	0.00	
19,000.00	89.50	179.50	11,142.55	-8,028.21	4.91	8,027.95	0.00	0.00	0.00	
19,100.00	89.50	179.50	11,143.43	-8,128.21	5.77	8,127.95	0.00	0.00	0.00	
19,209.20	89.50	179.50	11,144.38	-8,237.40	6.72	8,237.15	0.00	0.00	0.00	
PBHL										

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
KOP - First Tee Fed C - hit/miss target - Shape	0.00	0.00	0.00	-35.75	-64.47	423,402.85	845,610.22	32.160192	-103.350079	
- plan misses target center by 73.72usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)										
- Point										
FTP - First Tee Fed C - plan hits target center - Point	0.00	0.00	11,076.29	-435.73	-60.92	423,002.87	845,613.77	32.159093	-103.350079	
LTP - First Tee Fed C - plan misses target center by 19.20usft at 19100.00usft MD (11143.43 TVD, -8128.21 N, 5.77 E) - Point	0.00	0.00	11,143.59	-8,147.41	5.50	415,291.20	845,680.19	32.137895	-103.350092	
PBHL - First Tee Fed C - plan hits target center - Point	0.00	0.00	11,144.38	-8,237.40	6.72	415,201.20	845,681.41	32.137648	-103.350091	


MS Directional
 Planning Report


Database:	TRG_EDMConroe	Local Co-ordinate Reference:	Well First Tee Fed Com 122H
Company:	Civitas Permian Operating, LLC	TVD Reference:	Well @ 3272.50usft (26.5' RKB)
Project:	Lea County, New Mexico (NAD 83)	MD Reference:	Well @ 3272.50usft (26.5' RKB)
Site:	First Tee (111H,112H,113H,121H,122H)	North Reference:	Grid
Well:	First Tee Fed Com 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Casing Points				
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
1,200.00	1,200.00	11-3/4" Surface Casing	11-3/4	14-3/4
5,208.59	5,200.00	8-5/8" Intermediate Casing	8-5/8	11

Formations					
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
857.50	857.50	Rustler			
1,223.50	1,223.50	Salado			
5,166.09	5,157.50	DMG/Bell Canyon			
6,057.09	6,048.50	Cherry Canyon			
7,559.09	7,550.50	Brushy Canyon			
8,649.09	8,640.50	Brushy Canyon Lwr			
8,885.09	8,876.50	Avalon Upr			
9,165.09	9,156.50	Avalon Mid			
9,740.09	9,731.50	Avalon Lwr			
10,122.09	10,113.50	1st Bone Spring Sand			
10,274.09	10,265.50	2nd Bone Spring Carbonate			
10,993.98	10,930.50	2nd Bone Spring Sand			
11,345.82	11,072.50	Landing Point			

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,500.00	1,500.00	0.00	0.00	KOP, 1.50°/100' Build
2,033.33	2,031.60	33.27	-16.57	Hold 8.00° Inc, 333.53° Azm
2,560.34	2,553.48	98.93	-49.27	Begin 1.50°/100' Drop
3,093.67	3,085.08	132.20	-65.84	Begin Vertical Hold
10,511.95	10,503.35	132.20	-65.84	Begin 10.00°/100' Build
11,406.95	11,076.29	-435.73	-60.92	Hold 89.50° Inc, 179.50° Azm
19,209.20	11,144.38	-8,237.40	6.72	PBHL

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Civitas Permian Operating LLC
WELL NAME & NO.:	First Tee Fed Com 122H
LOCATION:	Sec 03-25S-35E-NMP
COUNTY:	Lea County, New Mexico

Create COAs

H₂S	Cave / Karst	Waste Prevention Rule
Present	Low	Waste Minimization Plan
Potash	R-111-Q Design	
None		
Wellhead	Casing	
Multibowl	3-String Well	
☒ Flex Hose ☒ Break Testing	☐ Liner ☐ Fluid Filled ☐ Casing Clearance	
	Cementing	
	☐ DV Tool ☐ Bradenhead ☐ Echometer ☒ Offline Cement ☐ Open Annulus ☐ Pilot Hole	
Special Requirements		
☐ Capitan Reef	☐ Water Disposal	☒ COM ☐ Unit

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated **at surface**. As a result, the Hydrogen Sulfide area must meet all requirements from 43 CFR 3176, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **11-3/4** inch surface casing shall be set at approximately **1198** feet (a minimum of **70'** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the

- cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 pounds compressive strength**, whichever is greater (including lead cement.)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **8-5/8** inch intermediate casing (**set at 5089' per BLM Geologist**) is **cement to surface**. If cement does not circulate, see B.1.a, c-d above.
 3. The minimum required fill of cement behind the **5-1/2** inch production casing is at least **200 feet** into previous casing string. Operator shall provide method of verification.
 - If cement does not circulate to surface on the previous casing, this string must come to surface.

C. PRESSURE CONTROL

1. Operator has proposed a multi-bowl wellhead assembly. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.
2. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
3. Break testing has been approved for this well ONLY on those intervals utilizing a 5M BOPE or less. (**Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP.**) If in the event break testing is not utilized, then a full BOPE test would be conducted.
 - a. Variance only pertains to the intermediate hole-sections and no deeper than the

Bone Springs formation. **BOPE Break Testing is NOT permitted to drilling the production hole section.**

- b. While in transfer between wells, BOPE shall be secured by the hydraulic carrier or cradle.
- c. A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- d. As a minimum, a full BOPE test shall be performed at 21-day intervals.
- e. In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per **43 CFR 3172**. Any well control event while drilling require notification to the BLM Petroleum Engineer (**575-706-2779**) prior to the commencement of any BOPE Break Testing operations.

D. SPECIAL REQUIREMENT(S)

Communitization Agreement:

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in 43 CFR 3171 and 3172.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Offline Cementing

Offline cementing has been approved for **all hole sections, excluding production**. Contact the BLM prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Lea County Petroleum Engineering Inspection Staff:

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification

- matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii. Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
 - iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the

pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).

- iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- v. The results of the test shall be reported to the appropriate BLM office.
- vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.



1. H₂S safety instructions to the following:
 - a. Characteristics of H₂S
 - b. Physical effects and hazards
 - c. Principal and operation of H₂S detectors, warning system and briefing areas
 - d. Evacuation procedures, routes and first aid
 - e. Proper use of safety equipment & life support systems
 - f. Essential personnel meeting medical evaluation criteria will receive additional training on the proper use of 30 min pressure demand air packs
2. H₂S Detection and Alarm Systems:
 - a. H₂S sensor/detectors to be located on the drilling rig floor, in the base of the sub structure / cellar area, on the mud pits in the shale shaker area.
Additional H₂S detectors may be placed as deemed necessary
 - b. An audio alarm system will be installed on the derrick floor and in the doghouse
3. Windssocks and / Wind Streamers:
 - a. Windssocks at mud pit area should be high enough to be visible
 - b. Windssock on the rig floor and / top of doghouse should be high enough to be visible
4. Condition Flags and Signs:
 - a. Warning sign on access road to location
 - b. Flags to be displayed on sign at entrance to location
 - i. Green Flag – Normal Safe Operation Condition
 - ii. Yellow Flag – Potential Pressure and Danger
 - iii. Red Flag – Danger (H₂S present in dangerous concentrations) Only
H₂S trained personnel admitted on location
5. Well Control Equipment:
 - a. See Drilling Operations Plan Schematics
6. Communication:
 - a. While working under masks chalkboards will be used for communications
 - b. Hand signals will be used where chalk board is inappropriate
 - c. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.



7. Drilling Stem Testing:
 - a. No DST cores are planned at this time
8. Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubulars, goods and other mechanical equipment
9. If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary
10. Emergency Contacts


Emergency Contacts		
Carlsbad Police Department	575.887.7551	911
Carlsbad Medical Center	575.887.4100	911
Eddy County Fire Service	575.628.5450	911
Eddy County Sherriff	575.887.7551	911
Lea County Fire Service	575.391.2983	911
Lea County Sherriff	575.396.3611	911
Jal Police Department	575.395.2121	911
Jal Fire Department	575.395.2221	911
Civitas Resources	720.601.8437	

Civitas Permian Operating, LLC

First Tee East Pad
H₂S Contingency Plan:
Radius Map

Section 3, Township 25S, Range 35E
Lea County, New Mexico


 Well Pad Location





NAD 1983 New Mexico State Plane East
FIPS 3001 Feet




Prepared by Permits West, Inc., May 15, 2025
for Civitas Permian Operating, LLC

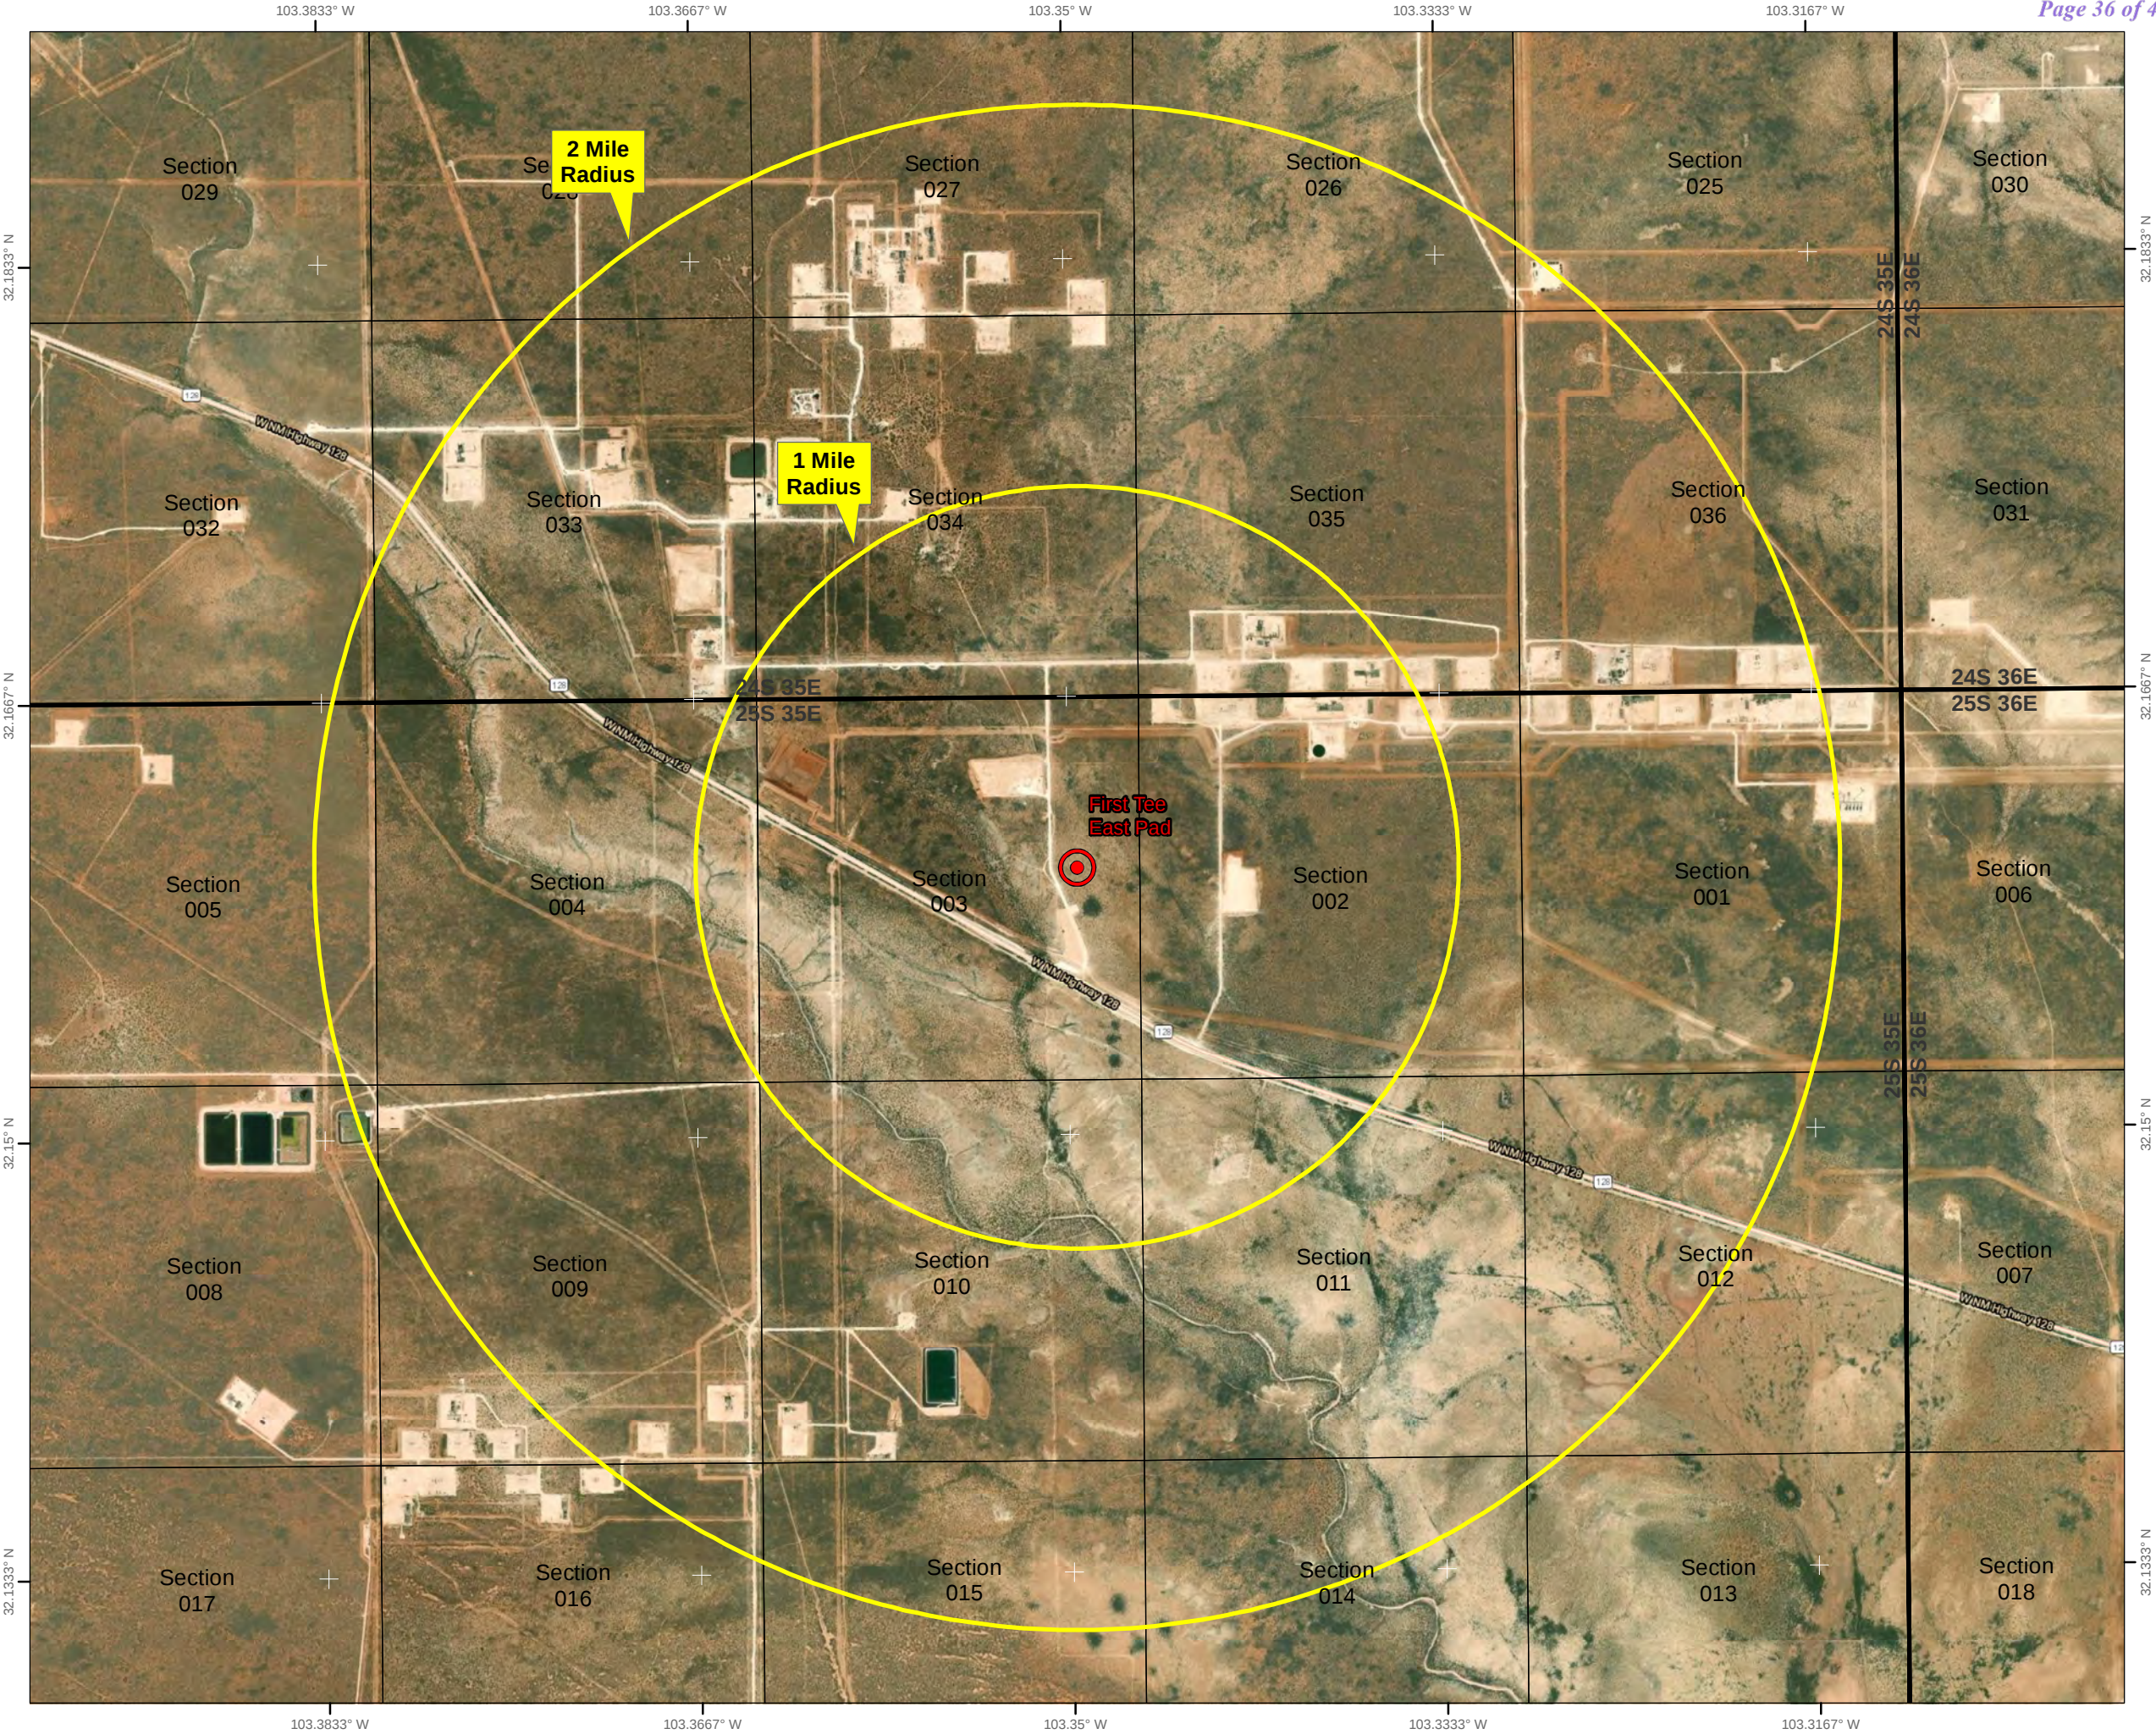

Rig Diagram
First Tee Fed Com
Well Pad
Civitas Permian Operating, LLC
3-25S-35E
Lea County, NM

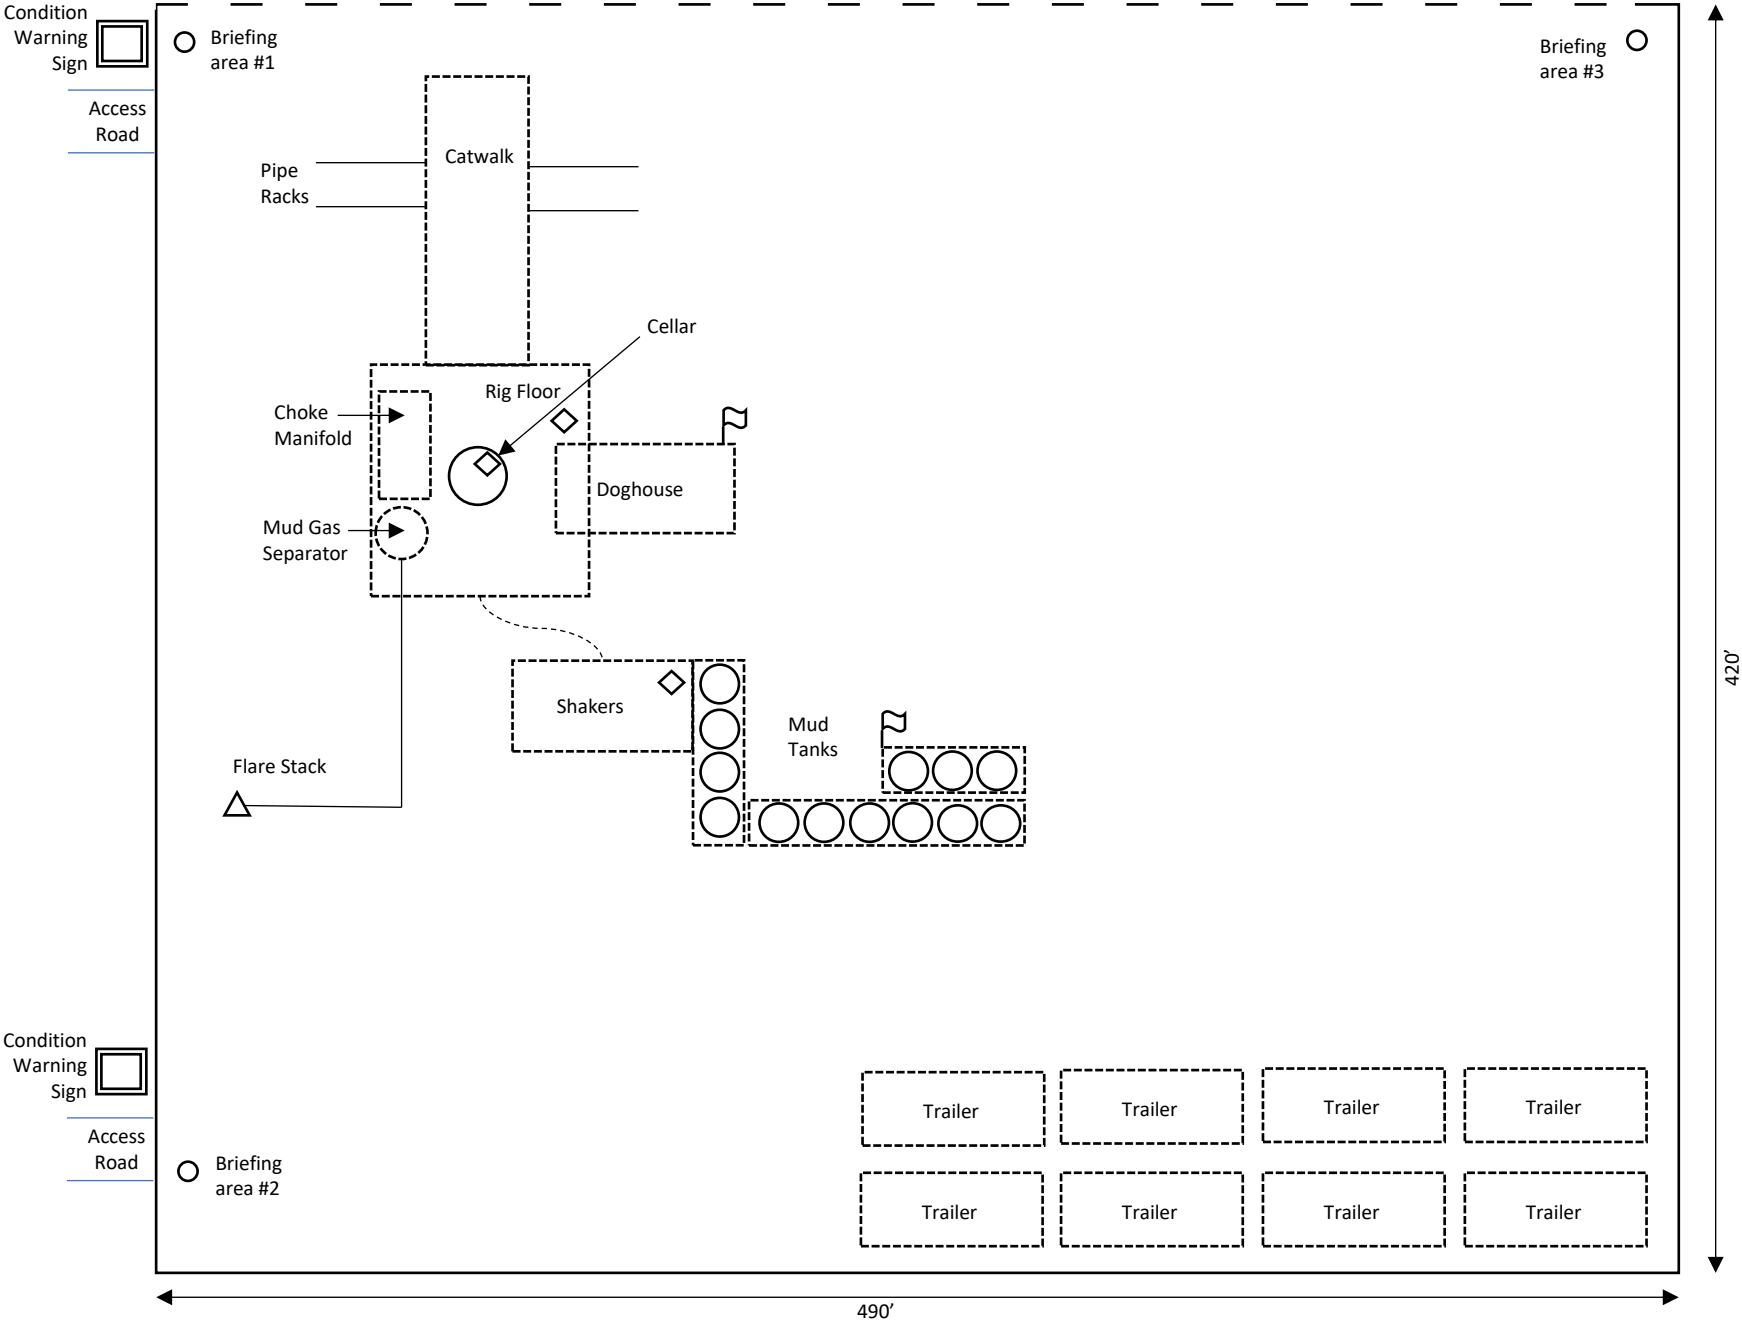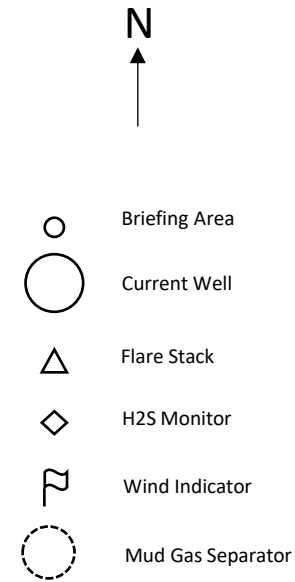

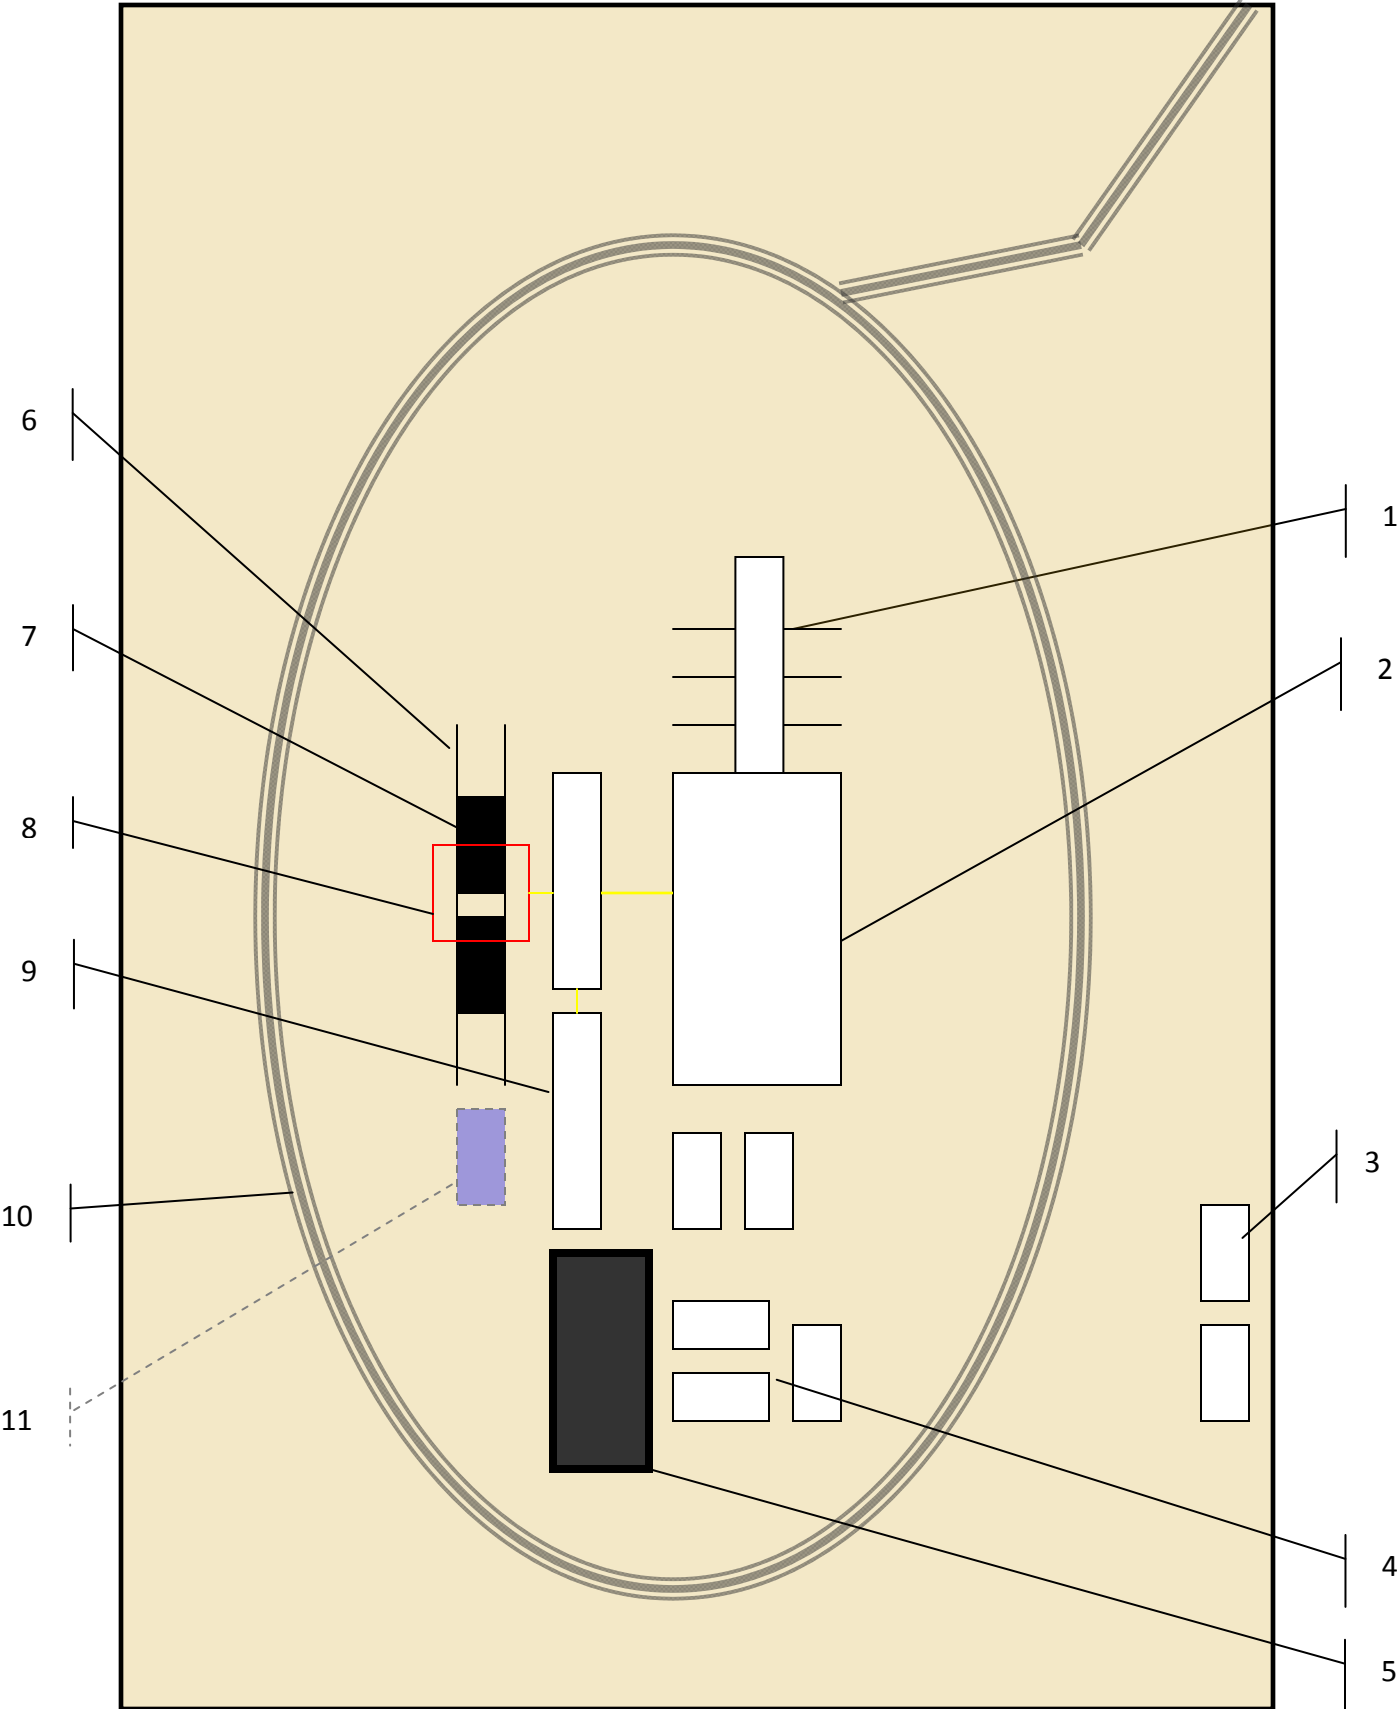

Schematic Closed Loop Drilling Rig*

- 1. Pipe Rack
- 2. Drill Rig
- 3. House Trailers/ Offices
- 4. Generator/Fuel/Storage
- 5. Overflow-Frac Tank
- 6. Skids
- 7. Roll Offs
- 8. Hopper or Centrifuge
- 9. Mud Tanks
- 10. Loop Drive
- 11. Generator (only for use with centrifuge)

*Not drawn to scale: Closed loop system requires at least 30 feet beyond mud tanks. Ideally 60 feet would be available




Above: Centrifugal Closed Loop System



Closed Loop Drilling System: Mud tanks to right (1)
Hopper in air to settle out solids (2)
Water return pipe (3)
Shaker between hopper and mud tanks (4)
Roll offs on skids (5)

Flow Chart for Drilling Fluids and Solids

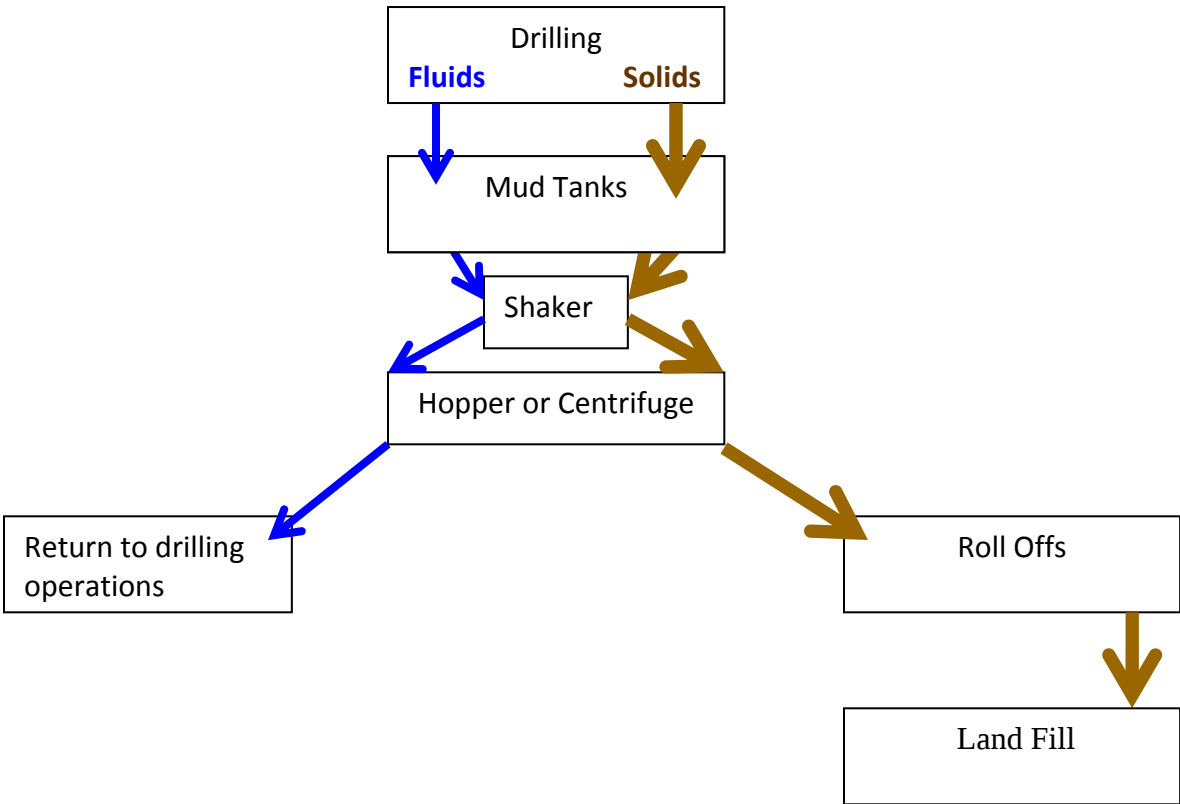

Photos Courtesy of Gandy Corporation Oil
Field Service

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 489595

ACKNOWLEDGMENTS

Operator: Civitas Permian Operating, LLC 555 17th Street Denver, CO 80202	OGRID: 332195
	Action Number: 489595
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

ACKNOWLEDGMENTS

☐	I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.
--------------------------	--

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 489595

CONDITIONS

Operator: Civitas Permian Operating, LLC 555 17th Street Denver, CO 80202	OGRID: 332195
	Action Number: 489595
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
bwood	Cement is required to circulate on both surface and intermediate1 strings of casing.	7/29/2025
bwood	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.	7/29/2025
jeffrey.harrison	For future submissions, please fill out forms with blue or black text.	9/2/2025
jeffrey.harrison	Administrative order required for non-standard spacing unit prior to production.	9/2/2025
jeffrey.harrison	Notify the OCD 24 hours prior to casing & cement.	9/2/2025
jeffrey.harrison	File As Drilled C-102 and a directional Survey with C-104 completion packet.	9/2/2025
jeffrey.harrison	A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.	9/2/2025
jeffrey.harrison	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	9/2/2025
jeffrey.harrison	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	9/2/2025