Form 3160-3 FORM APPROVED OMB No. 1004-0137 (October 2024) Expires: October 31, 2027 **UNITED STATES** DEPARTMENT OF THE INTERIOR 5. Lease Serial No. NMNM028097 **BUREAU OF LAND MANAGEMENT** APPLICATION FOR PERMIT TO DRILL OR REENTER 6. If Indian, Allotee or Tribe Name 7. If Unit or CA Agreement, Name and No. **✓** DRILL REENTER 1a. Type of work: Oil Well 1b. Type of Well: Gas Well Other 8. Lease Name and Well No. 1c. Type of Completion: Hydraulic Fracturing ✓ Single Zone Multiple Zone IOU 24/19 FED COM 2. Name of Operator 9. API Well No. MEWBOURNE OIL COMPANY 30-015-57364 3a. Address 3b. Phone No. (include area code) 10. Field and Pool, or Exploratory SAND TANK/BONE SPRING P O BOX 5270, HOBBS, NM 88241 (575) 393-5905 4. Location of Well (Report location clearly and in accordance with any State requirements.*) 11. Sec., T. R. M. or Blk. and Survey or Area SEC 20/T18S/R30E/NMP At surface NWNW / 430 FNL / 475 FWL / LAT 32.7390732 / LONG -104.0011739 At proposed prod. zone SWNW / 1900 FNL / 100 FWL / LAT 32.7350192 / LONG -104.0536741 14. Distance in miles and direction from nearest town or post office* 12. County or Parish 13. State **EDDY** NM 10 miles 15. Distance from proposed* 16. No of acres in lease 17. Spacing Unit dedicated to this well 210 feet location to nearest property or lease line, ft. 0.088 (Also to nearest drig. unit line, if any) 18. Distance from proposed location* 19. Proposed Depth 20. BLM/BIA Bond No. in file to nearest well, drilling, completed, 20 feet 7859 feet / 24210 feet FED: NM1693 applied for, on this lease, ft. 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 22. Approximate date work will start* 23. Estimated duration 3495 feet 11/18/2024 60 days 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable) 1. Well plat certified by a registered surveyor. 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the 5. Operator certification. SUPO must be filed with the appropriate Forest Service Office). 6. Such other site specific information and/or plans as may be requested by the Name (Printed/Typed) Date 25. Signature BRADLEY BISHOP / Ph: (575) 393-5905 09/20/2024 (Electronic Submission) Title Regulatory Approved by (Signature) Date Name (Printed/Typed) (Electronic Submission) CODY LAYTON / Ph: (575) 234-5959 10/07/2025 Title Office Assistant Field Manager Lands & Minerals Carlsbad Field Office Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency

APPROVED WITH CONDITIONS

APPROVED WITH CONDITIONS

Approval Date: 10/07/2025

of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)


<u>C-102</u>	_		Ene		erals & Na	tura	v Mexico l Resources Dep		nt			Revised J	uly 9, 2024
	t Electronica CD Permittir			OIL (CONSERV	/AT	ION DIVISION	Ī				✓ Initial Submit	tal
Via OC	D I CHIIICH	1g								Subm		☐ Amended Rep	
										Type:		☐ As Drilled	
					WELLIO	CAT	ION INTODA A TIC	NT.					
API Nu			Pool Code		WELL LO		ION INFORMATIO	JN					
	30-015	-57364	96832- 5				AND TANK; BO	ONE-S	PRING	San		•	oring
Property	33782	4	Property Na		IOU	24	/19 FED CO	OM_				Number	523H
OGRID 14744	No.		Operator Na	ame	MEWBOU	URI	NE OIL COM	PANY	T		Grou	and Level Elevation	3495
Surface	Owner:	State □ Fee □	 ∃Tribal ☑ F∈	ederal			Mineral Owner:	☐ State	e □Fee □	Tribal	☑ Fee	deral	
						Surfa	ce Location						
UL	Section	Township	Range	Lot	Ft. from N/S	S	Ft. from E/W	Latitu	ıde		Long	 itude	County
D	20	18S	30E		430 F	NL	475 FWL	32.	739073	32°N	_	.0011739°W	EDDY
							Hole Location	ļ					
UL	Section	Township	Range	Lot	Ft. from N/S		Ft. from E/W	Latitu	de		Long	itude	County
E	23	18S	29E		1900 F				735019	2°N	_	.0536741°W	
			LAGE		1		100 1 112	10.0.	. 55516		101		
	ed Acres	Infill or Defin	_	Defining	Well API		Overlapping Spa	icing Ui		Consoli	dation	Code	
880	<u> </u>	DEFININ	10				Y			<u>C</u>		137 (7 13)	
Order N	lumbers. N /	<u>A</u>					Well setbacks ar	e under	Common	Owners.	nıp: L	Yes MINO	
					Kio	ck Of	ff Point (KOP)						
UL	Section	Township	Range	Lot	Ft. from N/S	S	Ft. from E/W	Latitu	de		Long	itude	County
E	20	18S	30E		1900 F	NL	473 FWL	32.	735033	6°N	104	.0011793°W	EDDY
					Firs	st Tal	L ke Point (FTP)						
UL	Section	Township	Range	Lot	Ft. from N/S		Ft. from E/W	Latitu	de		Long	itude	County
Н	19	185	30E		1900 F	NL	100 FEL	1	735037	'8°N	_	.0030423°W	EDDY
							ke Point (LTP)	1					
UL	Section	Township	Range	Lot	Ft. from N/S		Ft. from E/W	Latitu	ıde		Long	 ritude	County
E	23	18S	29E	200	1900 F		100 FWL		735019	2°N		.0536741°W	EDDY
		100			1000 1		100 1 112	٠٠٠.		~~ 11	101		LDD I
Unitized N/A	d Area or A	rea of Uniform	Interest	Spacing U	Unit Type 🔽	Hori	zontal 🗆 Vertical		Ground 3495'	d Floor	Elevati	ion:	
				1									
OPER.	ATOR CER	TIFICATIONS	3				SURVEYOR CER	RTIFIC	ATIONS				
		e information conte				of						s plotted from field no	
		ef, and , if the well ns a working inter					surveys made by me u my belief.	ınder my	supervictori		Thesan	ne is true and correct i	to the best of
		' bottom hole locat contract with an o				. _{al}			\ <u>\</u> \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	ME	6		
interest,		ary pooling agreen								19680	/o /		
					7 . 7 . 7			1		19000	"	<u> </u>	
consent o	of at least one i	tal well, I further o lessee or owner of	f a working inter	est or unlease	ed mineral intere	est		\	9			<i>E.</i> /	
		get pool or format or obtained a con				d			Tigg.		all P		
_	ett Mi		06/16/	-					PROFITS SIC	WAL	9		
Signature	7, 10		Date			_	Signature and Seal of Pro	fessional S	Surveyor	١			
Brett	Miller						Robert M	l. 6	bwet				
Printed Na	ime						Certificate Number		Date of Survey	/			
brett.	miller@	mewbour	ne.com				19680			0	5 /n	9/2025	
Email Add						_	10000				. 5 / 5	J/ 2020	

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is a directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

IOU 24/19 FED COM #523H

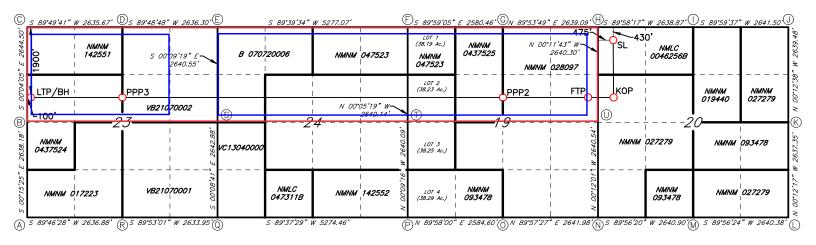

<u>GEODETIC DATA</u> NAD 83 GRID — NM EAST

SURFACE LOCATION (SL) 430' FNL & 475' FWL (SEC.20) N: 632766.6 - E: 643468.7

> LAT: 32.7390732° N LONG: 104.0011739° W

<u>KICK OFF POINT (KOP)</u> 1900' FNL & 473' FWL (SEC.20) N: 631297.0 - E: 643471.7

> LAT: 32.7350336° N LONG: 104.0011793° W

FIRST TAKE POINT (FTP) 1900' FNL & 100' FEL (SEC.19) N: 631296.7 - E: 642898.8

> LAT: 32.7350378° N LONG: 104.0030423° W

PROPOSED PENETRATION POINT 2 (PPP2)

1904' FNL & 2640' FEL (SEC.19)

N: 631288.3 - E: 640359.4

LAT: 32.7350362° N LONG: 104.0113007° W

PROPOSED PENETRATION POINT 3 (PPP3)

1899' FNL & 2636' FEL (SEC.23)

N: 631253.5 - E: 629868.6

LAT: 32.7350237° N LONG: 104.0454183° W

LAST TAKE POINT/BOTTOM HOLE (LTP/BH) 1900' FNL & 100' FWL (SEC.23) N: 631245.1 - E: 627330.0

> LAT: 32.7350192° N LONG: 104.0536741° W

CORNER DATA NAD 83 GRID — NM EAST

A: FOUND BRASS CAP "1916" N: 627863.0 - E: 627242.7

B: FOUND BRASS CAP "1916" N: 630500.5 - E: 627230.9

C: FOUND BRASS CAP "1916" N: 633144.3 - E: 627227.7

D: FOUND BRASS CAP "1916' N: 633152.3 - E: 629862.7

E: FOUND BRASS CAP "1916" N: 633160.8 - E: 632498.4

F: FOUND BRASS CAP "1914' N: 633192.2 - E: 637774.1

G: FOUND BRASS CAP "1916" N: 633191.5 - E: 640353.9

H: FOUND BRASS CAP "1916" N: 633196.2 - E: 642992.3

I: FOUND BRASS CAP "1916" N: 633197.6 - E: 645630.6

J: FOUND BRASS CAP "1916" N: 633197.9 - E: 648271.4

K: FOUND BRASS CAP "1916" N: 630559.0 - E: 648281.1 L: FOUND BRASS CAP "1916" N: 627922.3 - E: 648290.5

M: FOUND BRASS CAP "1916" N: 627919.6 - E: 645650.8

N: FOUND BRASS CAP "1916" N: 627916.7 - E: 643010.5

0: FOUND BRASS CAP "1916" N: 627914.8 - E: 640369.2

P: FOUND BRASS CAP "1914" N: 627913.3 - E: 637785.2

Q: FOUND BRASS CAP "1916" N: 627878.7 - E: 632512.2

R: FOUND IRON PIPE N: 627873.4 - E: 629878.9

S: FOUND BRASS CAP "1916" N: 630521.0 - E: 632505.5

T: FOUND BRASS CAP "1914" N: 630552.7 - E: 637778.1

U: FOUND BRASS CAP "1916" N: 630556.6 - E: 643001.3

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

	N	ATURAL GA	AS MANA(GEMENT PI	LAN	
This Natural Gas Manag	gement Plan m	ust be submitted wi	th each Applicat	ion for Permit to D	Orill (APD) for a	new or recompleted well.
			1 – Plan De fective May 25,			
I. Operator: Mev	vbourne (Oil Co.	OGRID:	14744	Date: _	9/18/2024
II. Type: X Original	☐ Amendment	due to □ 19.15.27.	9.D(6)(a) NMA(C □ 19.15.27.9.D(6)(b) NMAC □ (Other.
If Other, please describe	»:					
III. Well(s): Provide the be recompleted from a s					vells proposed to	be drilled or proposed to
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
IOU 24/19 FED COM 523H		M 13 18S 29E	290' FSL x 450' FW	,,,,,	2500	2500
				Y1-400 Y2-300 Y3-200	Y1-700 Y2-500 Y3-300	Y1-700 Y2-500 Y3-300
IV. Central Delivery P	oint Name:	IOU 24	4/19 FED COM 5	23H	[See 1	9.15.27.9(D)(1) NMAC]
V. Anticipated Schedu proposed to be recomple					ell or set of wells	proposed to be drilled or
Well Name	API	Spud Date	TD Reached Date	Completion Commencement		
OU 24/19 FED COM 523H		1/18/25	2/18/25	3/18/25	04/2/2	25 4/7/25
VII. Operational Prac Subsection A through F	tices: 🛛 Attac of 19.15.27.8	h a complete descr NMAC. ☑ Attach a complet	ription of the act	ions Operator will	take to comply	t to optimize gas capture. with the requirements of ices to minimize venting

Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

X Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. \Box Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system \square will \square will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator \square does \square does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: □ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Released to Imaging: 10/14/2025 8:43:51 AM

Section 3 - Certifications Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: 🖾 Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan.

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: power generation on lease; (a) (b) power generation for grid; compression on lease; (c) liquids removal on lease; (d)

- reinjection for underground storage; (e)
- reinjection for temporary storage; **(f)**
- reinjection for enhanced oil recovery; **(g)**
- fuel cell production; and (h)
- other alternative beneficial uses approved by the division.

Section 4 - Notices

- 1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
- Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	Bradley Bishop
Printed Name:	BRADLEY BISHOP
Title:	REGULATORY MANAGER
E-mail Address:	BBISHOP@MEWBOURNE.COM
Date:	9/18/2024
Phone:	575-393-5905
	OIL CONSERVATION DIVISION
	(Only applicable when submitted as a standalone form)
Approved By:	
Title:	
Approval Date:	
Conditions of Ap	pproval:


Mewbourne Oil Company


Natural Gas Management Plan – Attachment

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Mewbourne Oil Company (MOC) will take following actions to comply with the regulations listed in 19.15.27.8:
 - A. MOC will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. MOC will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, well(s) will be shut in until the natural gas gathering system is available.
 - B. All drilling operations will be equipped with a rig flare located at least 100 ft from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
 - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flow will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, MOC will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. MOC will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
 - D. Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(1) through (4). If there is no adequate takeaway for the separator gas, well(s) will be shut in until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be estimated and reported appropriately.
 - E. MOC will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(1) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs in order to minimize the waste. Production storage tanks constructed after May 25, 2021 will be equipped with automatic gauging system. Flares constructed after May 25, 2021 will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. MOC will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
 - F. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared or beneficially used during production operations, will be measured or estimated. MOC will install equipment to measure

the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an APD issued after May 25, 2021 that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, MOC will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

VIII. For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.

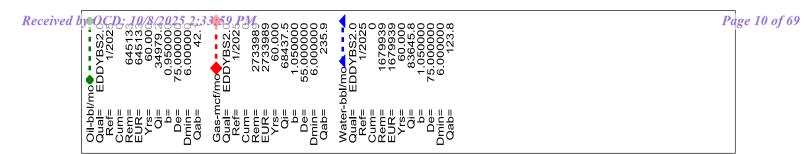

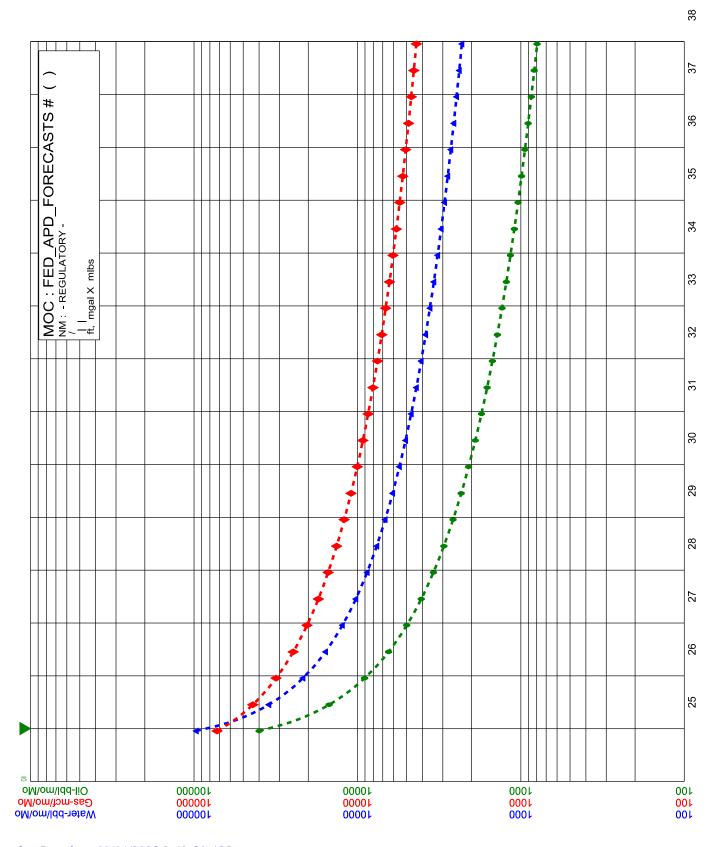

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

APD ID: 10400101098

Well Type: OIL WELL

Submission Date: 09/20/2024

Highlighted data reflects the most recent changes

Operator Name: MEWBOURNE OIL COMPANY

Well Number: 523H

Well Name: IOU 24/19 FED COM

Well Work Type: Drill

Show Final Text

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
16548505	UNKNOWN	3511	28	28	OTHER : Topsoil	NONE	N
16548520	RUSTLER	3278	233	233	ANHYDRITE, DOLOMITE	USEABLE WATER	N
16548516	TOP SALT	3024	487	487	SALT	NONE	N
16548517	BASE OF SALT	2346	1165	1165	SALT	NONE	N
16548509	YATES	2126	1385	1385	SANDSTONE	NATURAL GAS, OIL	N
16548518	SEVEN RIVERS	1713	1798	1798	DOLOMITE	NATURAL GAS, OIL	N
16548510	QUEEN	1068	2443	2443	DOLOMITE, SANDSTONE	NATURAL GAS, OIL	N
16548511	GRAYBURG	883	2628	2628	DOLOMITE	NATURAL GAS, OIL	N
16548519	SAN ANDRES	458	3053	3053	DOLOMITE	NATURAL GAS, OIL	N
16548521	DELAWARE	-86	3597	3597	LIMESTONE	NATURAL GAS, OIL	N
16548513	BONE SPRING	-952	4463	4463	LIMESTONE	NATURAL GAS, OIL	N
16548522	BONE SPRING 1ST	-3225	6736	6736	LIMESTONE	NATURAL GAS, OIL	N
16548514	BONE SPRING 1ST	-3593	7104	7104	SANDSTONE	NATURAL GAS, OIL	N
16548523	BONE SPRING 2ND	-3892	7403	7403	LIMESTONE	NATURAL GAS, OIL	N
16548515	BONE SPRING 2ND	-4233	7744	7744	SANDSTONE	NATURAL GAS, OIL	Y
16548524	BONE SPRING 3RD	-4769	8280	8280	LIMESTONE	NATURAL GAS, OIL	N
16548525	WOLFCAMP	-5575	9086	9086	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N

Well Name: IOU 24/19 FED COM Well Number: 523H

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M Rating Depth: 24210

Equipment: Annular, Pipe Rams, Blind Rams, Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics

Requesting Variance? YES

Variance request: A variance is requested for the use of a variable choke line from the BOP to the choke manifold. See attached for hydrostatic test chart. Anchors are not required by manufacturer. Variance is requested to use a multi bowl wellhead. Variance is requested to perform break testing according to attached procedure. If a breaktesting variance is approved & incorporated, API Standard 53 will be incorporated and testing annular BOP to 70% of RWP or 100% of MASP, whichever is greater, will be performed.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR Part 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets

Choke Diagram Attachment:

5M_BOPE_Choke_Diagram_20240918110126.pdf

Flex_Line_Specs_API_16C_20250103090930.pdf

Multi_Bowl_WH_20250103090930.pdf

BOP Diagram Attachment:

5M_BOPE_Schematic_20240918110148.pdf

MOC_Break_Testing_Variance_20240918110237.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	310	0	310	3495	3185	310	H-40	48	ST&C	5.55	12 . 4 8	DRY	21 . 6 4	DRY	36 . 3
2	INTERMED IATE	12 . 2 5	9.625	NEW	API	N	0	3385	0	3385		110	3385	J-55	36	LT&C	1.13	1.96	DRY	3.56	DRY	4.43
3	INTERMED IATE	12 . 2 5	9.625	NEW	API	N	3385	3520	3385	3520	110	-25	135	J-55	40	LT&C	1.38	2.12	DRY	96.3	DRY	99.9
4	PRODUCTI ON	8.75	7.625	NEW	API	N	0	7738	0	7583		-4088	7738	P- 110	29.7	LT&C	1.4	2.48	DRY	3.35	DRY	4.09
5	LINER	6.75	5.5	NEW	API	N	7538	24210	7438	7859	-3943	-4364	16672	P- 110		OTHER - TALON	2.27	2,59	DRY	1.64	DRY	1,92

Well Name: IOU 24/19 FED COM Well Number: 523H

Casing	Attachments
--------	--------------------

Casing ID: 1

String

SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

 $13.375 in_48__H40_STC_Csg_20250103091309.pdf$

Casing ID: 2

String

INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

9.625in_36__J55_LTC_Csg_20250103091419.pdf

Casing ID: 3

٦

String

INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

9.625in_40__J55_LTC_Csg_20250616103416.pdf

Well Name: IOU 24/19 FED COM Well Number: 523H

Casing Attachments

Casing ID: 4

String

PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

7.625in_29.7__P110_LTC_Csg_20250616103013.pdf

Casing ID: 5

String

LINER

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

5.5in_20__HPP110_Talon_Csg_20250616103211.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	120	80	2.12	12.5	170	100	Class C	Salt, Gel, Extender, LCM
SURFACE	Tail		120	310	200	1.34	14.8	268	100	Class C	Retarder
INTERMEDIATE	Lead		0	2845	530	2.12	12.5	1130	25	Class C	Salt, Gel, Extender, LCM
INTERMEDIATE	Tail		2845	3520	200	1.34	14.8	268	25	Class C	Retarder
PRODUCTION	Lead		3320	5657	250	2.12	12.5	530	25	Class C	Salt, Gel, Extender, LCM, Defoamer

Well Name: IOU 24/19 FED COM Well Number: 523H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Tail		5657	7738	400	1.18	15.6	472	25	Class H	Retarder, Fluid loss, defoamer
LINER	Lead		7538	2421	940	1.85	13.5	1740	25	Class H	Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-settling Agent

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with 43 CFR 3172:

Diagram of the equipment for the circulating system in accordance with 43 CFR 3172:

Describe what will be on location to control well or mitigate other conditions: Formation integrity test will be performed per 43 CFR Part 3172. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR Part 3172.

Describe the mud monitoring system utilized: Pason/PVT/visual monitoring

Circulating Medium Table

O Top Depth	Bottom Depth	Mud Type	% Min Weight (lbs/gal)	ο Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	Н	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
310	3520	SALT SATURATED	10	10.2							
3520	7738	WATER-BASED MUD	8.6	9.7							
7738	2421 0	OIL-BASED MUD	10	11.5							

Well Name: IOU 24/19 FED COM Well Number: 523H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will run GR/CNL from KOP (7738') to surface (horizontal well vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.

List of open and cased hole logs run in the well:

DIRECTIONAL SURVEY,MEASUREMENT WHILE DRILLING,MUD LOG/GEOLOGIC LITHOLOGY LOG,COMPENSATED NEUTRON LOG.GAMMA RAY LOG.

Coring operation description for the well:

None

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4877 Anticipated Surface Pressure: 3082

Anticipated Bottom Hole Temperature(F): 140

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations

H2S_Plan_20240918112241.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

IOU_24_19_FED_COM_523H_Dir_Plot_20250616104122.pdf IOU_24_19_FED_COM_523H_Dir_Plan_20250616104123.pdf

Other proposed operations facets description:

Other proposed operations facets attachment:

IOU_24_19_FED_COM_523H_NGMP_20240919134905.pdf IOU_24_19_Fed_Com_523H_Tapered_String_20250616104206.pdf IOU_24_19_Fed_Com_523H_CsgAssumptions_20250616104206.pdf IOU_24_19_Fed_Com_523H_Drlg_Program_20250616104206.pdf


Other Variance request(s)?:

Other Variance attachment:

MOC Break Testing Variance 20240919134716.pdf

Well Name: IOU 24/19 FED COM Well Number: 523H

MOC_Offline_Cementing_Variance_20240919134720.pdf

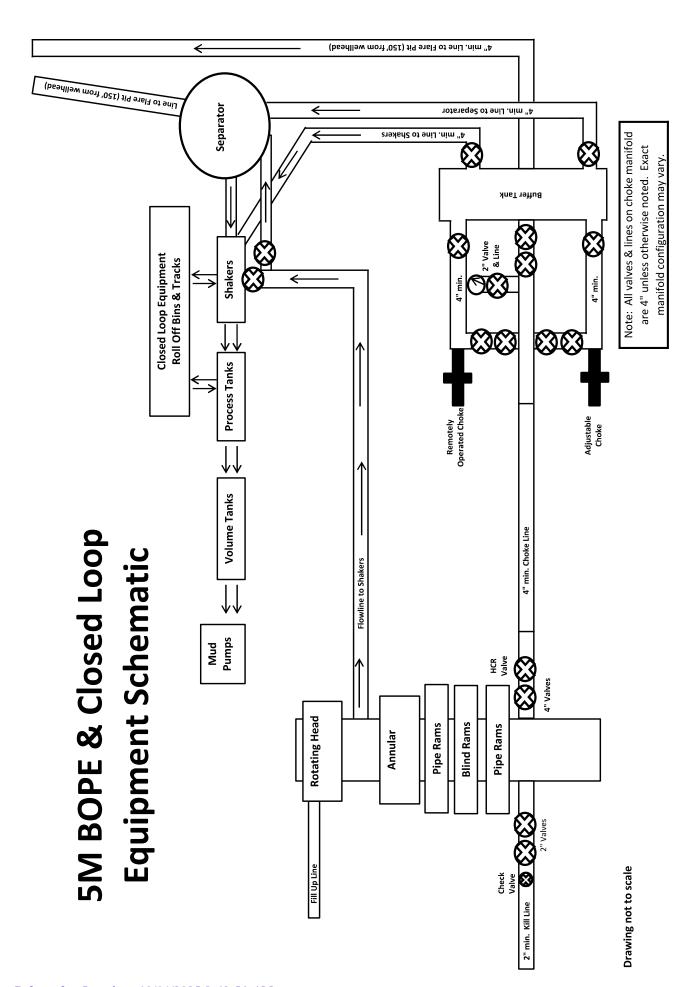



LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD

HYDROSTATIC TESTING REPORT

LTYY/QR-5.7.1-28

№: 230826015

Product Name					· · · · · · · · · · · · · · · · · · ·	
	Cho	ke And Kill Hose		Standard		API Spec 16C 3 rd edition
Product Specification	3″×1000	0psi×60ft (18.29m))	Serial Num	ber	7660144
Inspection Equipment	MTU	J-BS-1600-3200-E		Test mediu	ım	Water
Inspection Department	Ç	.C. Department		Inspection I	Date	2023.08.26
		Rate of len	ngth change	*	•	
Standard requirements	At working pro	essure, the rate of len	ngth change	should not m	ore than	±2%
Testing result	10000psi (69.0	MPa) ,Rate of length	h change 0	.7%		
///		Hydrostat	tic testing			
Standard requirements		orking pressure, the ssure-holding period				ot less than three minutes
Testing result	15000psi (103	.5MPa), 3 min for the	e first time	, 60 min for th	e second t	ime, no leakage
Graph of pressure testin	g:					About 51
110			110			
100			110 100 90 83 70 66 17 84 15 10			
100 - 90 - 90 - 90 - 90 - 90 - 90 - 90 -	महंद्य महंद्य महंद्य महंद्य सह	N.21 22:00:21 22:00:21 22:00:21 22:00:21 22:00	50 - 50 - 50 - 50 - 50 - 50 - 50 - 50 -	SI 23:09:58 23:59:	- 2015 (2005)	001454 002454 003654 00:
100 90 90 90 90 90 90 90	महंद्य महंद्य महंद्य महंद्य सह		50 - 50 - 50 - 50 - 50 - 50 - 50 - 50 -	SI 23:09:58 23:59:	S\$ 00:09:S\$	355000HC (100



LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD

CERTIFICATE OF QUALITY

LTYY/QR-5.7.1-19B

№: LT2023-126-002

Customer Name	Austin Hose			
Product Name	Choke And Kill Hose			
Product Specification	3"×10000psi×60ft (18.29m)	Quantity	2PCS	
Serial Number	7660143~7660144	FSL	FSL3	
Temperature Range	-29℃~+121℃	Standard	API Spec 16C 3 rd edition	
Inspection Department	Q.C. Department	Inspection date	2023.08.26	

Inspection Items				Inspection result	ds		
Appearance Checking			In accordance with API Spec 16C 3 rd edition				
	Size and L	engths			In accordance with API Spec 16C 3 rd edition		
Γ	Dimensions and	d Tolerar	nces		In accordar	nce with API Spec	16C 3 rd edition
End Connections: 4-1/16"×10000psi Integral flange for sour gas service			vice	In accordance with API Spec 6A 21st edition			
End Connections: 4-1/16"×10000psi Integral flange for sour gas service			vice	In accordance with API Spec 17D 3 rd edition			
Hydrostatic Testing				In accordance with API Spec 16C 3 rd edition			
product Marking				In accordance with API Spec 16C 3 rd edition			
Inspection conclusion The inspected items n			ms m	eet standard requirer	ments of API Spec	16C 3 rd edition	
Remarks							
Approver	Jian long (Chen	Auditor	1/1	nging Dong	Inspector	Zhansheng Wang



LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD

CERTIFICATE OF CONFORMANCE

№:LT230826016

Product Name: Choke And Kill Hose

Product Specification: 3"×10000psi×60ft (18.29m)

Serial Number: 7660143~7660144

End Connections: 4-1/16"×10000psi Integral flange for sour gas service

The Choke And Kill Hose assembly was produced by LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD. in Aug 2023, and inspected by LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD. according to API Spec 16C 3rd edition on Aug 26, 2023. The overall condition is good. This is to certify that the Choke And Kill Hose complies with all current standards and specifications for API Spec 16C 3rd edition.


Jiaulong Chen


QC Manager:

Date: Aug 26, 2023



13-5/8" MN-DS Wellhead System

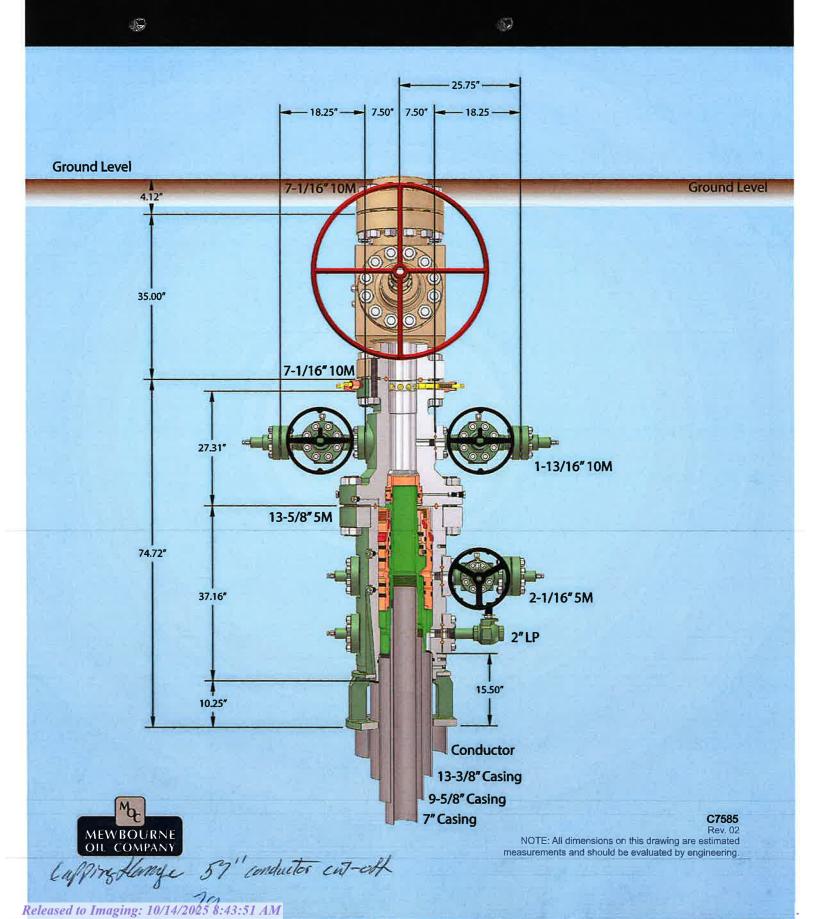

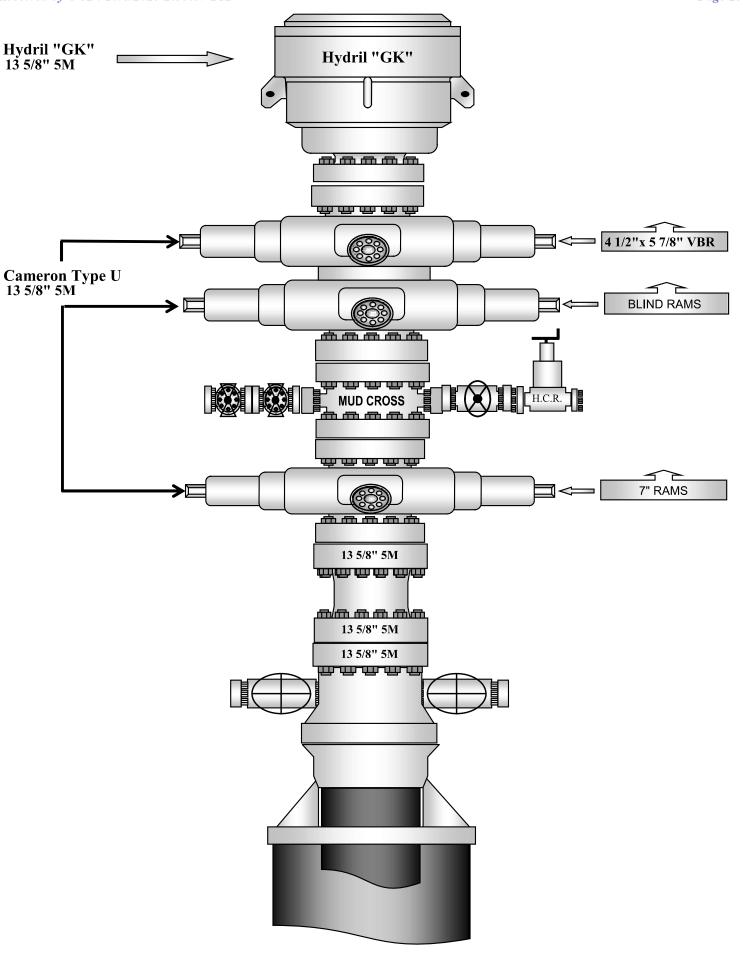



Mewbourne Oil Co.

BOP Break Testing Variance

Mewbourne Oil Company requests a variance from the minimum standards for well control equipment testing of 43 CFR 3172 to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with batch drilling & offline cementing operations. Modern rig upgrades which facilitate pad drilling allow the BOP stack to be moved between wells on a multi-well pad without breaking any BOP stack components apart. Widespread use of these technologies has led to break testing BOPE being endorsed as safe and reliable. American Petroleum Institute (API) best practices are frequently used by regulators to develop their regulations. API Standard 53, *Well Control Equipment Systems for Drilling Wells* (5th Ed., Dec. 2018) Section 5.3.7.1 states "A pressure test of the pressure containing component shall be performed following the disconnection or repair, limited to the affected component."

Procedures

- 1. Full BOPE test at first installation on the pad.
 - Full BOPE test at least every 21 days.
 - Function test BOP elements per 43 CFR 3172.
 - Contact the BLM if a well control event occurs.
- 2. After the well section is secured and the well is confirmed to be static, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad. Two breaks on the BOPE will be made (Fig. 1).
 - Connection between the flex line and the HCR valve
 - Connection between the wellhead and the BOP quick connect (Fig. 5 & 6).
- 3. A capping flange will be installed after cementing per wellhead vendor procedure & casing pressure will be monitored via wellhead valve.
- 4. The BOP will be removed and carried by a hydraulic carrier (Fig. 3 & 4).
- 5. The rig will then walk to the next well.
- 6. Confirm that the well is static and remove the capping flange.
- 7. The connection between the flex line and HCR valve and the connection between the wellhead and the BOP guick connect will be reconnected.
- 8. Install a test plug into the wellhead.
- 9. A test will then be conducted against the upper pipe rams and choke, testing both breaks (Fig. 1 & 2).
- 10. The test will be held at 250 psi low and to the high value submitted in the APD, not to exceed 5000 psi.
- 11. The annular, blind rams and lower pipe rams will then be function tested.
- 12. If a pad consists of three or more wells, steps 4 through 11 will be repeated.



13. A break test will only be conducted if the intermediate section can be drilled and cased within 21 days of the last full BOPE test.

Barriers

Before Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff

After Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff
- Offline cementing tool and/or cement head
- Capping flange after cementing

Summary

A variance is requested to only test broken pressure seals on the BOPE when moving between wells on a multi-well pad if the following conditions are met:

- A full BOPE test is conducted on the first well on the pad. API Standard 53 requires testing annular BOP to 70% of RWP or 100% of MASP, whichever is greater.
- If the first well on the pad is not the well with the deepest intermediate section, a full BOPE test will also be performed when moving to a deeper well.
- The hole section being drilled has a MASP under 5000 psi.
- If a well control event occurs, Mewbourne will contact BLM for permission to continue break testing.
- If significant (>50%) losses occur, full BOPE testing will be required going forward.
- Full BOPE test will be required prior to drilling the production hole.

While walking the rig, the BOP stack will be secured via hydraulic winch or hydraulic carrier. A full BOPE test will be performed at least every 21 days.



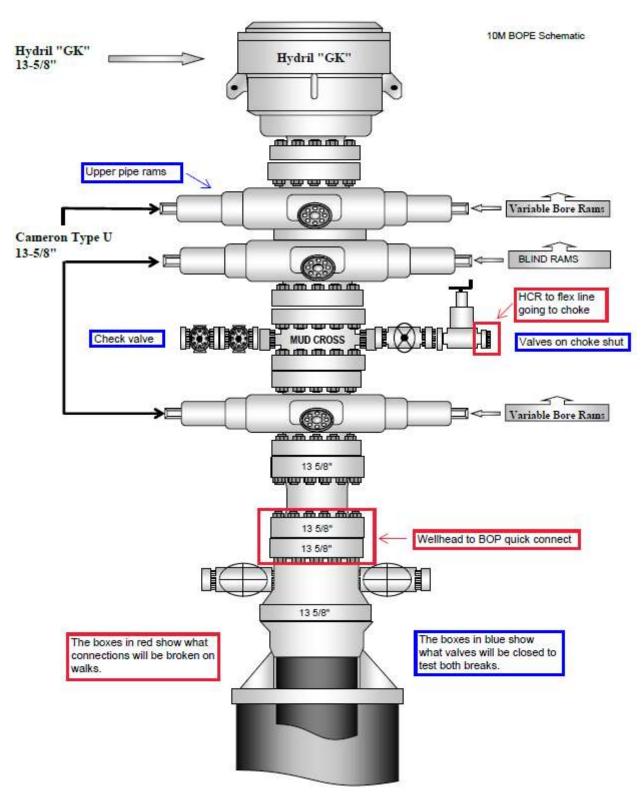


Figure 1. BOP diagram



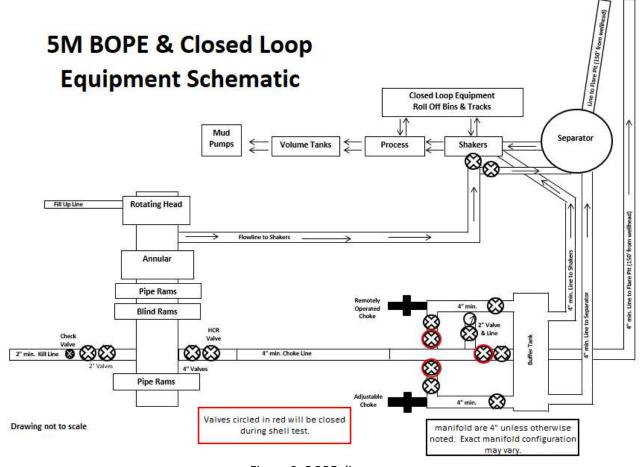


Figure 2. BOPE diagram





Figure 3. BOP handling system





Figure 4. BOP handling system



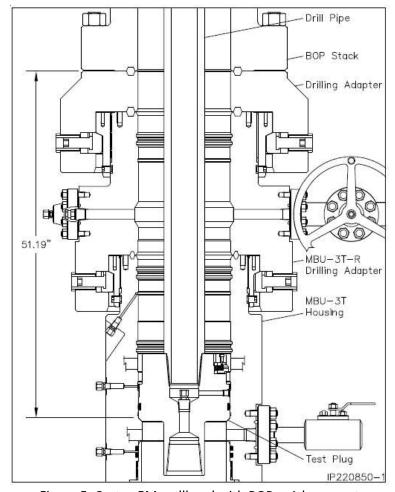


Figure 5. Cactus 5M wellhead with BOP quick connect

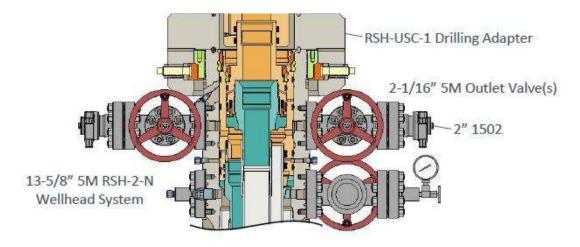


Figure 6. Vault 5M wellhead with BOP quick connect

■ Tenaris

API LTC

 Coupling
 Pipe Body

 Grade: J55 (Casing)
 Grade: J55 (Casing)

 Body: Bright Green
 1st Band: Bright Green

 1st Band: White
 2nd Band:

 2nd Band: 3rd Band:

 3rd Band: 4th Band:

Outside Diameter	9.625 in.	Wall Thickness	0.395 in.	Grade	J55 (Casing)
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Туре	Casing
Connection OD Option	Regular				

Pipe Body Data

Geometry			
Nominal OD	9.625 in.	Drift	8.679 in.
Wall Thickness	0.395 in.	Plain End Weight	38.97 lb/ft
Nominal Weight	40 lb/ft	OD Tolerance	API
Nominal ID	8.835 in.		

Performance	
SMYS	55,000 psi
Min UTS	75,000 psi
Body Yield Strength	630 x1000 lb
Min. Internal Yield Pressure	3950 psi
Collapse Pressure	2570 psi
Max. Allowed Bending	26 °/100 ft

Connection Data

A.L. (
Hand Tight Stand Off	3.500 in.	Internal Pressure Capacity	3950 psi	Maximum Torque	6500 ft-lb
Connection OD	10.625 in.	Coupling Face Load	433 x1000 lb	Optimum Torque	5200 ft-lb
Thread per In	8	Joint Strength	520 x1000 lb	Minimum Torque	3900 ft-lb
Geometry		Performance		Make-Up Torques	

Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.

For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.

Couplings OD are shown according to current API 5CT 10th Edition.

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information —if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. ©Tenaris 2024. All rights reserved.



API STC

Coupling	Pipe Body
Grade: H40	Grade: H40
Body: -	1st Band: Black
1st Band: Black	2nd Band: -
2nd Band: -	3rd Band: -
3rd Band: -	4th Band: -

Outside Diameter	13.375 in.	Wall Thickness	0.330 in.	Grade	H40
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Туре	Casing
Connection OD Option	Regular				

Pipe Body Data

Geometry			
Nominal OD	13,375 in.	Drift	12,559 in.
Wall Thickness	0.330 in.	Plain End Weight	46.02 lb/ft
Nominal Weight	48 lb/ft	OD Tolerance	API
Nominal ID	12.715 in.		

Performance	
SMYS	40,000 psi
Min UTS	60,000 psi
Body Yield Strength	541 x1000 lb
Min. Internal Yield Pressure	1730 psi
Collapse Pressure	740 psi
Max. Allowed Bending	14 °/100 ft

Connection Data

A.L. (
Hand Tight Stand Off	3.500 in.	Internal Pressure Capacity	1730 psi	Maximum Torque	4030 ft-lb
Connection OD	14.375 in.	Coupling Face Load	377 x1000 lb	Optimum Torque	3220 ft-lb
Thread per In	8	Joint Strength	322 x1000 lb	Minimum Torque	2420 ft-lb
Geometry		Performance		Make-Up Torques	

Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.

For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.

Couplings OD are shown according to current API 5CT 10th Edition,

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information in famy-provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com . ©Tenaris 2024. All rights reserved.



Coupling	Pipe Body
Grade: P110	Grade: P110
Body: White	1st Band: White
1st Band: -	2nd Band: -
2nd Band: -	3rd Band: -
3rd Band: -	4th Band: -

Outside Diameter	7.625 in.	Wall Thickness	0.375 in.	Grade	P110
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Туре	Casing
Connection OD Option	Regular				

Pipe Body Data

Geometry			
Nominal OD	7.625 in.	Drift	6.750 in.
Wall Thickness	0.375 in.	Plain End Weight	29.06 lb/ft
Nominal Weight	29.700 lb/ft	OD Tolerance	API
Nominal ID	6.875 in.		

Performance	
SMYS	110,000 psi
Min UTS	125,000 psi
Body Yield Strength	940 x1000 lb
Min. Internal Yield Pressure	9470 psi
Collapse Pressure	5350 psi
Max. Allowed Bending	66 °/100 ft

Connection Data

Geometry		Performance		Make-Up Torques	
Thread per In	8	Joint Strength	769 x1000 lb	Minimum Torque	5770 ft-lb
Connection OD	8.500 in.	Coupling Face Load	604 x1000 lb	Optimum Torque	7690 ft-lb
Hand Tight Stand Off	3.500 in.	Internal Pressure Capacity	9470 psi	Maximum Torque	9610 ft-lb

Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.

For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.

Couplings OD are shown according to current API 5CT 10th Edition,

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information —if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. ©Tenaris 2024. All rights reserved.

Tenaris

API LTC

 Coupling
 Pipe Body

 Grade: J55 (Casing)
 Grade: J55 (Casing)

 Body: Bright Green
 1st Band: Bright Green

 1st Band: White
 2nd Band:

 2nd Band: 3rd Band:

 3rd Band: 4th Band:

Outside Diameter	9.625 in.	Wall Thickness	0.352 in.	Grade	J55 (Casing)
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Туре	Casing
Connection OD Option	Regular				

Pipe Body Data

Geometry			
Nominal OD	9.625 in.	Drift	8.765 in.
Wall Thickness	0.352 in.	Plain End Weight	34.89 lb/ft
Nominal Weight	36 lb/ft	OD Tolerance	API
Nominal ID	8.921 in.		

Performance	
SMYS	55,000 psi
Min UTS	75,000 psi
Body Yield Strength	564 x1000 lb
Min. Internal Yield Pressure	3520 psi
Collapse Pressure	2020 psi
Max. Allowed Bending	26 °/100 ft

Connection Data

Hand Tight Stand Off	3.500 in.	Internal Pressure Capacity	3520 psi	Maximum Torque	5660 ft-lb
Connection OD	10.625 in.	Coupling Face Load	433 x1000 lb	Optimum Torque	4530 ft-lb
Thread per In	8	Joint Strength	453 x1000 lb	Minimum Torque	3400 ft-lb
Geometry		Performance		Make-Up Torques	

Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.
For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.

Couplings OD are shown according to current API 5CT 10th Edition.

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information —if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. ©Tenaris 2024. All rights reserved.

U. S. Steel Tubular Products 5.500" 20.00lb/ft (0.361" Wall) P110 HP USS-TALON HTQ™ RD

8/10/2024 7:28:17 PM

MECHANICAL PROPERTIES	Pipe	USS-TALON HTQ™ RD		[6]
Minimum Yield Strength	125,000		psi	
Maximum Yield Strength	140,000		psi	
Minimum Tensile Strength	130,000		psi	
DIMENSIONS	Pipe	USS-TALON HTQ™ RD		
Outside Diameter	5.500	5.900	in.	
Wall Thickness	0.361		in.	
Inside Diameter	4.778	4.778	in.	
Standard Drift	4.653	4.653	in.	
Alternate Drift			in.	
Nominal Linear Weight, T&C	20.00		lb/ft	
Plain End Weight	19.83		lb/ft	
SECTION AREA	Pipe	USS-TALON HTQ™ RD		
Critical Area	5.828	5.828	sq. in.	
Joint Efficiency		100.0	%	[2]
PERFORMANCE	Pipe	USS-TALON HTQ™ RD		
Minimum Collapse Pressure	13,150	13,150	psi	
Minimum Internal Yield Pressure	14,360	14,360	psi	
Minimum Pipe Body Yield Strength	729,000		lb	
Joint Strength		729,000	lb	
Compression Rating		729,000	lb	
Reference Length		24,300	ft	[5]
Maximum Uniaxial Bend Rating		104.2	deg/100 ft	[3]
MAKE-UP DATA	Pipe	USS-TALON HTQ™ RD		
Make-Up Loss		5.58	in.	
Minimum Make-Up Torque		18,400	ft-lb	[4]
Maximum Make-Up Torque		21,400	ft-lb	[4]
Maximum Operating Torque		44,400	ft-lb	[4]

Notes

- 1. Other than proprietary collapse and connection values, performance properties have been calculated using standard equations defined by API 5C3 and do not incorporate any additional design or safety factors. Calculations assume nominal pipe OD, nominal wall thickness, and Specified Minimum Yield Strength (SMYS).
- 2. Joint efficiencies are calculated by dividing the connection critical area by the pipe body area.
- 3. Uniaxial bend rating shown is structural only.
- 4. Torques have been calculated assuming a thread compound friction factor of 1.0 and are recommended only. Field make-up torques may require adjustment based on actual field conditions (e.g. make-up speed, temperature, thread compound, etc.).
- 5. Reference length is calculated by Joint Strength divided by Nominal Linear Weight, T&C with a 1.5 Safety factor.
- 6. Coupling must meet minimum mechanical properties of the pipe.

Legal Notice

All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.

> U. S. Steel Tubular Products 460 Wildwood Forest Drive, Suite 300S Spring, Texas 77380


1-877-893-9461 connections@uss.com www.usstubular.com

Mewbourne Oil Company, IOU 24/19 Fed Com 523H

Sec 20, T18S, R30E SHL: 430' FNL & 475' FWL (Sec 20) BHL: 1900' FNL & 100' FWL (Sec 23)

Casing Design B

Hole Size	From	То	Csg. Size	#/ft	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
8.75	0'	8638'	7" 26# P110 LTC			1.51	2.42	3.09	3.7	
8.5	8638'	24210'	4.	4.5" 13.5# P110 LTC			2.19	2.54	1.61	2.01

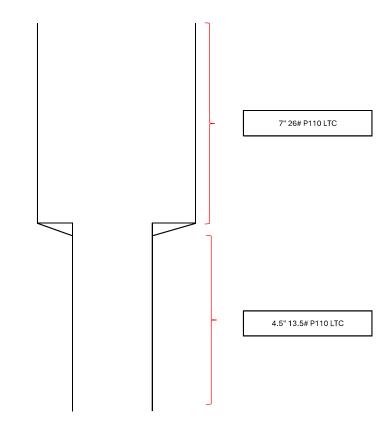

Mewbourne Oil Company, IOU 24/19 Fed Com 523H Sec 20, T18S, R30E SHL: 430' FNL 475' FWL (Sec 20)

BHL: 1900' FNL 100' FWL (Sec 23)

		Casing Progra	ım Design A		BLM Minimum Safety Factors	1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet	
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	310'	310'	13.375" 48# H40 STC	5.55	12.48	21.64	36.36
Intermediate	12.25"	0'	0'	3385'	3385'	9.625" 36# J55 LTC	1.13	1.96	3.56	4.43
Intermediate	12.25"	3385'	3385'	3520'	3520'	9.625" 40# J55 LTC	1.38	2.12	96.30	116.67
Production	8.75"	0'	0'	7738'	7583'	7 5/8" 29.7# P110 LTC	1.40	2.48	3.35	4.09
Liner	6.75"	7538'	7438'	24210'	7859'	5.5" 20# HPP110 Talon	2.27	2.59	1.64	1.92

Cement Program

Casing		# Sacks	Wt. (PPG)	Yield (ft ³ /sack)	тос/вос	Volume (ft ³)	% Excess	Slurry Description
13,375 in	LEAD	80	12.5	2.12	0' - 120'	170	100%	Class C: Salt, Gel, Extender, LCM
13.375 III	TAIL	200	14.8	1.34	120' - 310'	268	100%	Class C: Retarder
9.625 in	LEAD	530	12.5	2.12	0' - 2845'	1130	25%	Class C: Salt, Gel, Extender, LCM
9.025 III	TAIL	200	14.8	1.34	2845' - 3520'	268	2370	Class C: Retarder
7.625 in	LEAD	250	12.5	2.12	3320' - 5657'	530	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
7.025 III	TAIL	400	15.6	1.18	5657' - 7738'	472	4370	Class H: Retarder, Fluid Loss, Defoamer
5.5 in	LEAD	940	13.5	1.85	7538' - 24210'	1740	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant,

Design A - Mud Program

Depth	Mud Wt	Mud Type
0' - 310'	8.4 - 8.6	Fresh Water
310' - 3520'	10.0 - 10.2	Brine
3520' - 7738'	8.6 - 9.7	Cut-Brine
7738' - 24210'	10.0 - 11.5	OBM

Geology

Formation	Est. Top (TVD)	Mineral Resources	Formation	Est. Top (TVD)	Mineral Resources
Rustler	233'	Usable Water	Delaware (Lamar)	3597'	Oil/Natural Gas
Castile			Bell Canyon		
Salt Top	487'	None	Cherry Canyon		
Marker Bed 126			Manzanita Marker		
Salt Base	1165'	None	Basal Brushy Canyon		
Yates	1385'	Oil/Natural Gas	Bone Spring	4463'	Oil/Natural Gas
Seven Rivers	1798'	Oil/Natural Gas	1st Bone Spring Carbonate	6736'	Oil/Natural Gas
Queen	2443'	Oil/Natural Gas	1st Bone Spring Sand	7104'	Oil/Natural Gas
Capitan			2nd Bone Spring Carbonate	7403'	Oil/Natural Gas
Grayburg	2628'	None	2nd Bone Spring Sand	7744'	Oil/Natural Gas
San Andres	3053'	Oil/Natural Gas	3rd Bone Spring Carbonate	8280'	Oil/Natural Gas
Glorietta			3rd Bone Spring Sand	8752'	Oil/Natural Gas
Yeso			Wolfcamp	9086'	Oil/Natural Gas

All casing strings will be tested in accordance with 43 CFR Part 3170 Subpart 3172. Must have table for contingency casing.

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50° above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, IOU 24/19 Fed Com 523H Sec 20, T18S, R30E SHL: 430' FNL 475' FWL (Sec 20)

BHL: 1900' FNL 100' FWL (Sec 23)

Casing Program Design B						BLM Minimum Safety Factors	1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	310'	310'	13.375" 48# H40 STC	5.55	12.48	21.64	36.36
Intermediate	12.25"	0'	0'	3385'	3385'	9.625" 36# J55 LTC	1.13	1.96	3.56	4.43
Intermediate	12.25"	3385'	3385'	3520'	3520'	9.625" 40# J55 LTC	1.38	2.12	96.30	116.67
Production	8.75"	0'	0'	8638'	8156'	7" 26# P110 LTC	1.51	2.42	3.09	3.70
Production	8.5"	8638'	8156'	24210'	7859'	4.5" 13.5# P110 LTC	2.19	2.54	1.61	2.01

Design B - Cement Program

Design D - Centent Frogram								
Casing	Cement Stage	# sx	Density (ppg)	Yield (ft ³ /sack)	Depth (MD)	Volume (ft ³)	% Excess	Slurry Description
13,375 in	LEAD	80	12.5	2.12	0' - 120'	170	100%	Class C: Salt, Gel, Extender, LCM
13.375 III	TAIL	200	14.8	1.34	120' - 310'	268	100%	Class C: Retarder
9.625 in	LEAD	530	12.5	2.12	0' - 2845'	1130	25%	Class C: Salt, Gel, Extender, LCM
9.625 III	TAIL	200	14.8	1.34	2845' - 3520'	268	2370	Class C: Retarder
7 in - 4.5 in	LEAD	610	12.5	2.12	3320' - 7092'	1300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
/ in - 4.5 in	TAIL	5000	15.6	1.18	7092' - 24210'	5900	25%	Class H: Retarder, Fluid Loss, Defoamer

Design B - Mud Program

Depth	Mud Wt (ppg)	Mud Type
0' - 310'	8.4 - 8.6	Fresh Water
310' - 3520'	10.0 - 10.2	Brine
3520' - 8638'	8.6 - 9.7	Cut-Brine
8638' - 24210'	10.0 - 11.5	OBM

Geology					
Formation	Est. Top (TVD)	Mineral Resources	Formation	Est. Top (TVD)	Mineral Resources
Rustler	233'	Usable Water	Delaware (Lamar)	3597'	Oil/Natural Gas
Castile			Bell Canyon		
Salt Top	487'	None	Cherry Canyon		
Marker Bed 126			Manzanita Marker		
Salt Base	1165'	None	Basal Brushy Canyon		
Yates	1385'	Oil/Natural Gas	Bone Spring	4463'	Oil/Natural Gas
Seven Rivers	1798'	Oil/Natural Gas	1st Bone Spring Carbonate	6736'	Oil/Natural Gas
Queen	2443'	Oil/Natural Gas	1st Bone Spring Sand	7104'	Oil/Natural Gas
Capitan			2nd Bone Spring Carbonate	7403'	Oil/Natural Gas
Grayburg	2628'	None	2nd Bone Spring Sand	7744'	Oil/Natural Gas
San Andres	3053'	Oil/Natural Gas	3rd Bone Spring Carbonate	8280'	Oil/Natural Gas
Glorietta			3rd Bone Spring Sand	8752'	Oil/Natural Gas
Yeso			Wolfcamp	9086'	Oil/Natural Gas

All casing strings will be tested in accordance with 43 CFR Part 3170 Subpart 3172. Must have table for contingency casing.

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	· ·
	· · · · · · · · · · · · · · · · · · ·

Well Location GL: 3495'

Point	Calls	Leases	Aliquot	Section	Township	Range	County	Lat	Long	TVD	MD
SHL	SHL: 430' FNL & 475' FWL (Sec 20)	NMLC0046256B	NWNW	20	18S	30E	Eddy	32.7390732	- 104.0011739	0'	0'
KOP	KOP: 1900' FNL & 473' FWL (Sec 20)	NMNM027279	SWNW	20	18S	30E	Eddy	32.7350336	- 104.0011793	7,583'	7,738'
FTP	FTP/LP: 1900' FNL & 100' FEL (Sec 19)	NMNM028097	SENE	19	18S	30E	Eddy	32.7350378	- 104.0030423	8,156'	8,638'
PPP2	PPP2: 1904' FNL & 2640' FEL (Sec 19)	NMNM0437525	SENW	19	18S	30E	Eddy	32.7350362	- 104.0113007	8,107'	11,178'
PPP3	PPP3: 1899' FNL & 2636' FEL (Sec 23)	NMNM0437524	SENW	23	18S	29E	Eddy	32.7350237	- 104.0454183	7,907'	21,671'
BHL	BHL: 1900' FNL & 100' FWL (Sec 23)	NMNM0437524	SWNW	23	18S	29E	Eddy	32.7350192	- 104.0536741	7,859'	24,210'

GEOLOGY

Formation	Est. Top (TVD)	Lithology	Mineral Resources	Formation	Est. Top (TVD)	Lithology	Mineral Resources
Rustler	233'	Dolomite/Anhydrite	Usable Water	Delaware (Lamar)	3597'	Limestone	Oil/Natural Gas
Castile				Bell Canyon			
Salt Top	487'	Salt	None	Cherry Canyon			
Marker Bed 126				Manzanita Marker			
Salt Base	1165'	Salt	None	Basal Brushy Canyon			
Yates	1385'	Sandstone	Oil/Natural Gas	Bone Spring	4463'	Limestone/Shale	Oil/Natural Gas
Seven Rivers	1798'	Dolomite	Oil/Natural Gas	1st Bone Spring Carbonate	6736'	Limestone	Oil/Natural Gas
Queen	2443'	Sandstone/Dolomite	Oil/Natural Gas	1st Bone Spring Sand	7104'	Sandstone	Oil/Natural Gas
Capitan				2nd Bone Spring Carbonate	7403'	Limestone	Oil/Natural Gas
Grayburg	2628'	0	None	2nd Bone Spring Sand	7744'	Sandstone	Oil/Natural Gas
San Andres	3053'	Dolomite	Oil/Natural Gas	3rd Bone Spring Carbonate	8280'	Limestone	Oil/Natural Gas
Glorietta				3rd Bone Spring Sand	8752'	Sandstone	Oil/Natural Gas
Yeso				Wolfcamp	9086'	Shale/Sandstone/Limestone	Oil/Natural Gas

			BLM Minimum Safety Factors	1.125	1.0	1.6 Dry	1.6 Dry			
		BEW William Salety Factors	1.123	1.0	1.8 Wet	1.8 Wet				
Casing String	Hole Diameter (in)	Top MD	Top TVD	Bottom MD	Bottom TVD	Casing Description	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	310'	310'	13.375" 48# H40 STC	5.55	12.48	21.64	36.36
Intermediate	12.25"	0'	0'	3385'	3385'	9.625" 36# J55 LTC	1.13	1.96	3.56	4.43
Intermediate	12.25"	3385'	3385'	3520'	3520'	9.625" 40# J55 LTC	1.38	2.12	96.30	116.67
Production	8.75"	0'	0'	7738'	7583'	7 5/8" 29.7# P110 LTC	1.40	2.48	3.35	4.09
Liner	6.75"	7538'	7438'	24210'	7859'	5.5" 20# HPP110 Talon	2.27	2.59	1.64	1.92

All casing strings will be tested in accordance with 43 CFR Part 3172. Must have table for contingency casing.

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production easing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Design A - Cement Program

Casing	Cement Stage	# sx	Density (ppg)	Yield (ft ³ /sack)	Depth (MD)	Volume (ft ³)	% Excess	Slurry Description
	LEAD	80	12.5	2.12	0' - 120'	170	1000/	Class C: Salt, Gel, Extender, LCM
13.375 in	TAIL	200	14.8	1.34	120' - 310'	268	100%	Class C: Retarder
9.625 in	LEAD	530	12.5	2.12	0' - 2845'	1130	25%	Class C: Salt, Gel, Extender, LCM
9.025 III	TAIL	200	14.8	1.34	2845' - 3520'	268	2376	Class C: Retarder
7.625 in	LEAD	250	12.5	2.12	3320' - 5657'	530	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
7.025 III	TAIL	400	15.6	1.18	5657' - 7738'	472	25%	Class H: Retarder, Fluid Loss, Defoamer
5.5 in	LEAD	940	13.5	1.85	7538' - 24210'	1740	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-settling Agent

Pressure Control Equipment

BOP installed and tested before drilling hole (in):	Size (in)	System Rated WP	Туре		Tested to:	Rating Depth
		5M	Annular	X	2500#/3500#	24,210'
			Blind Ram	X		
12.25	13.375	5M	Pipe Ram	X	5000#	
	Double Ram		3000#			
			Other*			1

^{*}Specify if additional ram is utilized.

Equipment: Annular, Pipe Rams, Blind Rams, Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached solvematics

Variance Request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for hydrostatic test chart. Anchors are not required by manufacturer. Variance is requested to use a multi bowl wellhead. Variance is requested to perform break testing according to attached procedure. If a breaktesting variance is approved & incorporated, API Standard 53 will be incorporated and testing annular BOP to 70% of RWP or 100% of MASP, whichever is greater, will be performed.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR Part 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Y	Formation integrity test will be performed per 43 CFR Part 3172. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each easing shoe shall be performed. Will be tested in accordance with 43 CFR Part 3172.
N	Mewbourne Oil Company request a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack.

Mud Program

Depth (MD)	Mud Wt (ppg)	Mud Type
0' - 310'	8.4 - 8.6	Fresh Water
310' - 3520'	10.0 - 10.2	Brine
3520' - 7738'	8.6 - 9.7	Cut-Brine
77201 242101	10.0 11.5	ODM

7738' - 24210' 10.0 - 11.5 OBM

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	Pacon/DVT/Vicual Monitoring
what will be used to infolition the loss of gain of fluid:	rasoler v 17 v isual Molitoring

Logging and Testing Procedures

Logg	ing, Coring and Testing.
Y	Will run GR/CNL from KOP (7738') to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
N	No logs are planned based on well control or offset log information. Offset Well:
N	Coring? If yes, explain:

Open & Cased Hole Logs Run In the Well

	Caliper		Cement Bond Log		CNL/FDC
	Compensated Densilog	Ø	Compensated Neutron Log		Computer Generated Log
	Dip Meter Log	Ø	Directional Survey		Dual Induction/Microresistivity
	Dual Lateral Log/Microspherically Focused		Electric Log	Τ□	Formation Density Compensated Log
☑	Gamma Ray Log	T⊠ ¯	Measurement While Drilling		Mud Log/Geological Lithology Log
	Other		Porosity-Resistivity Log		Sidewall Neutron Log
	Sonic Log	To	Spontaneous Potential Log		Temperature Log

Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	4877 psi
BH Temperature	140
Abnormal Temp, Pressure, or Geologic Hazards	No

| Abnormal Temp, Pressure, or Geologic Hazards | Mitigation measure for abnormal conditions. Describe. Lost circulation mate hole. Weighted mud for possible over-pressure in Wolfcamp formation.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

	H2S is present
X	H2S Plan attached

Other facets of operation

Mewbourne Oil Company also requests approval to implement additional designs as described below &/or in other attachments. BLM will be notified of elected design.

Offline Cementing Variance: Variance is requested to perform offline cementing according to the attached procedure. R-111Q: Mewbourne proposes performing Open Hole Cementing per R-111Q Guidelines if well is in Potash.

	Casing Program Design B					BLM Minimum Safety Factors	1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
Casing String	Casing String Hole Diameter (in) Top MD Top TVD Bottom MD Bottom TVI					Casing Description	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	310'	310'	13.375" 48# H40 STC	5.55	12.48	21.64	36.36
Intermediate	12.25"	0'	0'	3385'	3385'	9.625" 36# J55 LTC	1.13	1.96	3.56	4.43
Intermediate	12.25"	3385'	3385'	3520'	3520'	9.625" 40# J55 LTC	1.38	2.12	96.30	116.67
Production	8.75"	0'	0'	8638'	8156'	7" 26# P110 LTC	1.51	2.42	3.09	3.70
Production	8.5"	8638'	8156'	24210'	7859'	4.5" 13.5# P110 LTC	2.19	2.54	1.61	2.01

All casing strings will be tested in accordance with 43 CFR Part 3172. Must have table for contingency casing.

Is casing new? If used, attach certification as required in Onshore Order #1 Is casing API approved? If no, attach casing specification sheet. Is premium or uncommon casing planned? If yes attach casing specification sheet. Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria). Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y or N Y Y N Y Y
Is casing API approved? If no, attach casing specification sheet. Is premium or uncommon casing planned? If yes attach casing specification sheet. Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y N Y Y
Is premium or uncommon casing planned? If yes attach casing specification sheet. Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	N Y Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
	•
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	•
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Design B - Cement Program

Casing	Cement Stage	# sx	Density (ppg)	Yield (ft ³ /sack)	Depth (MD)	Volume (ft ³)	% Excess	Slurry Description
13,375 in	LEAD	80	12.5	2.12	0' - 120'	170	100%	Class C: Salt, Gel, Extender, LCM
13.375 III	TAIL	200	14.8	1.34	120' - 310'	268	100%	Class C: Retarder
9.625 in	LEAD	530	12.5	2.12	0' - 2845'	1130	25%	Class C: Salt, Gel, Extender, LCM
9.025 III	TAIL	200	14.8	1.34	2845' - 3520'	268	2376	Class C: Retarder
7 in - 4.5 in	LEAD	610	12.5	2.12	3320' - 7092'	1300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
/ m = 4.5 m	TAII.	5000	15.6	1.18	7092' - 24210'	5900	2376	Class H: Retarder Fluid Loss Defoamer

Mewbourne Oil Company

Eddy County, New Mexico NAD 83 IOU 19/23 Fed Com #523H Sec 20, T18S, R30E

SHL: 430' FNL & 475' FWL (Sec 20) BHL: 1900' FNL & 100' FWL (Sec 23)

Plan: Design #1

Standard Planning Report

13 June, 2025

Database: Hobbs

Company: Mewbourne Oil Company
Project: Eddy County, New Mexico NAD 83
Site: IOU 19/23 Fed Com #523H

 Well:
 Sec 20, T18S, R30E

 Wellbore:
 BHL: 1900' FNL & 100' FWL (Sec 23)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

Grid

Minimum Curvature

Project Eddy County, New Mexico NAD 83

Map System: US State Plane 1983
Geo Datum: North American Datum 1983
Map Zone: New Mexico Eastern Zone

System Datum:

Ground Level

Site IOU 19/23 Fed Com #523H

 Site Position:
 Northing:
 632,766.60 usft
 Latitude:
 32.7390732

 From:
 Map
 Easting:
 643,468.70 usft
 Longitude:
 -104.0011739

Position Uncertainty: 0.0 usft Slot Radius: 13-3/16 "

Well Sec 20, T18S, R30E

Well Position +N/-S 0.0 usft 632,766.60 usft 32.7390732 Northing: Latitude: +E/-W 0.0 usft Easting: 643,468.70 usft Longitude: -104.0011739 0.0 usft Wellhead Elevation: Ground Level: 3,495.0 usft **Position Uncertainty** 3,523.0 usft

Grid Convergence: 0.18 °

BHL: 1900' FNL & 100' FWL (Sec 23)

 Magnetics
 Model Name
 Sample Date
 Declination
 Dip Angle (°)
 Field Strength (nT)

 IGRF2010
 12/31/2014
 7.39
 60.50
 48,498.69483068

Design #1

Audit Notes:

Wellbore

Version:Phase:PROTOTYPETie On Depth:0.0

 Vertical Section:
 Depth From (TVD) (usft)
 +N/-S (usft)
 +E/-W (usft)
 Direction (°)

 0.0
 0.0
 0.0
 264.61

Plan Survey Tool Program Date 6/13/2025

Depth From Depth To

(usft) (usft) Survey (Wellbore) Tool Name Remarks

1 0.0 0.0 Design #1 (BHL: 1900' FNL & 100

Plan Sections Vertical Measured Build Dogleg Turn +N/-S Depth Inclination Azimuth Depth +E/-W Rate Rate Rate TFO (usft) (°) (°) (usft) (usft) (usft) (°/100usft) (°/100usft) (°/100usft) Target (°) 0.0 0.00 0.00 0.0 0.0 0.0 0.00 0.00 0.00 0.00

Database: Hobbs

Company: Mewbourne Oil Company

Project: Eddy County, New Mexico NAD 83
Site: IOU 19/23 Fed Com #523H
Well: Sec 20, T18S, R30E

Wellbore: BHL: 1900' FNL & 100' FWL (Sec 23)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

Grid

ned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0		0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
	FNL & 475' FWL (S		0.0	0.0	0.0	0.0	0.00	0.00	0.00
50.0	•	0.00	50.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0		0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
150.0		0.00	150.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0		0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
250.0		0.00	250.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0		0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
310.0		0.00	310.0	0.0	0.0	0.0	0.00	0.00	0.00
350.0		179.88	350.0	-0.3	0.0	0.0	2.00	2.00	0.00
400.0	1.80	179.88	400.0	-1.4	0.0	0.1	2.00	2.00	0.00
450.0	2.80	179.88	449.9	-3.4	0.0	0.3	2.00	2.00	0.00
500.0		179.88	499.9	-6.3	0.0	0.6	2.00	2.00	0.00
550.0		179.88	549.7	-10.0	0.0	0.9	2.00	2.00	0.00
600.0	5.80	179.88	599.5	-14.7	0.0	1.3	2.00	2.00	0.00
650.0	6.80	179.88	649.2	-20.2	0.0	1.9	2.00	2.00	0.00
700.0	7.80	179.88	698.8	-26.5	0.1	2.4	2.00	2.00	0.00
750.0 750.0		179.88	748.3	-26.5 -33.7	0.1	3.1	2.00	2.00	0.00
800.0		179.88	746.3 797.6	-33.7 -41.8	0.1	3.1	2.00	2.00	0.00
850.0		179.88	846.8	-41.8 -50.7	0.1	3.6 4.7	2.00	2.00	0.00
900.0		179.88	895.8	-60.5	0.1	5.6	2.00	2.00	0.00
933.3		179.88	928.4	- 67.5	0.1	6.2	2.00	2.00	0.00
950.0		179.88	944.7	- 71.1	0.1	6.5	0.00	0.00	0.00
1,000.0		179.88	993.5	- 81.9	0.2	7.5	0.00	0.00	0.00
1,050.0		179.88	1,042.3	- 92.7	0.2	8.5	0.00	0.00	0.00
1,100.0	12.47	179.88	1,091.2	- 103.5	0.2	9.5	0.00	0.00	0.00
1,150.0	12.47	179.88	1,140.0	-114.3	0.2	10.5	0.00	0.00	0.00
1,200.0		179.88	1,188.8	-125.1	0.3	11.5	0.00	0.00	0.00
1,250.0		179.88	1,237.6	-135.9	0.3	12.5	0.00	0.00	0.00
1,300.0		179.88	1,286.4	-146.7	0.3	13.5	0.00	0.00	0.00
1,350.0		179.88	1,335.3	-157.5	0.3	14.5	0.00	0.00	0.00
4 400 (470.00	4.004.4	400.0	0.0	45.5	0.00	0.00	0.00
1,400.0		179.88	1,384.1	-168.3	0.3	15.5	0.00	0.00	0.00
1,450.0		179.88	1,432.9	-179.1	0.4	16.4	0.00	0.00	0.00
1,500.0		179.88	1,481.7	-189.9 200.7	0.4	17.4	0.00	0.00	0.00
1,550.0 1,600.0		179.88 179.88	1,530.6 1,579.4	-200.7 -211.5	0.4 0.4	18.4 19.4	0.00 0.00	0.00 0.00	0.00 0.00
			,						
1,650.0		179.88	1,628.2	-222.3	0.5	20.4	0.00	0.00	0.00
1,700.0		179.88	1,677.0	-233.0	0.5	21.4	0.00	0.00	0.00
1,750.0		179.88	1,725.8	-243.8	0.5	22.4	0.00	0.00	0.00
1,800.0		179.88	1,774.7	-254.6	0.5	23.4	0.00	0.00	0.00
1,850.0	12.47	179.88	1,823.5	-265.4	0.5	24.4	0.00	0.00	0.00
1,900.0	12.47	179.88	1,872.3	-276.2	0.6	25.4	0.00	0.00	0.00
1,950.0		179.88	1,921.1	-287.0	0.6	26.4	0.00	0.00	0.00
2.000.0		179.88	1,969.9	-297.8	0.6	27.3	0.00	0.00	0.00
2,050.0		179.88	2,018.8	-308.6	0.6	28.3	0.00	0.00	0.00
2,100.0		179.88	2,067.6	-319.4	0.7	29.3	0.00	0.00	0.00
			·						
2,150.0		179.88	2,116.4	-330.2	0.7	30.3	0.00	0.00	0.00
2,200.0		179.88	2,165.2	-341.0	0.7	31.3	0.00	0.00	0.00
2,250.0		179.88	2,214.0	-351.8	0.7	32.3	0.00	0.00	0.00
2,300.0		179.88	2,262.9	-362.6	0.7	33.3	0.00	0.00	0.00
2,350.0	12.47	179.88	2,311.7	-373.4	0.8	34.3	0.00	0.00	0.00
2,400.0	12.47	179.88	2,360.5	-384.2	0.8	35.3	0.00	0.00	0.00
2,450.0		179.88	2,409.3	-395.0	0.8	36.3	0.00	0.00	0.00
2,500.0		179.88	2,458.2	-405.7	0.8	37.3	0.00	0.00	0.00

Database: Hobbs

Company:Mewbourne Oil CompanyProject:Eddy County, New Mexico NAD 83Site:IOU 19/23 Fed Com #523H

 Well:
 Sec 20, T18S, R30E

 Wellbore:
 BHL: 1900' FNL & 100' FWL (Sec 23)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

Grid

esign:	Design #1								
Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
2,550.0	12.47	179.88	2,507.0	-416.5	0.9	38.3	0.00	0.00	0.00
2,600.0	12.47	179.88	2,555.8	-427.3	0.9	39.2	0.00	0.00	0.00
2,650.0	12.47	179.88	2,604.6	-438.1	0.9	40.2	0.00	0.00	0.00
2,700.0	12.47	179.88	2,653.4	-448.9	0.9	41.2	0.00	0.00	0.00
2,750.0	12.47	179.88	2,702.3	-459.7	0.9	42.2	0.00	0.00	0.00
2,800.0 2.850.0	12.47	179.88 179.88	2,751.1 2,799.9	-470.5 -481.3	1.0 1.0	43.2	0.00	0.00 0.00	0.00 0.00
,	12.47		,			44.2	0.00		
2,900.0	12.47	179.88	2,848.7	-492.1	1.0	45.2	0.00	0.00	0.00
2,950.0	12.47	179.88	2,897.5	-502.9	1.0	46.2	0.00	0.00	0.00
3,000.0	12.47	179.88	2,946.4	-513.7 504.5	1.0	47.2	0.00	0.00	0.00
3,050.0	12.47	179.88	2,995.2	-524.5	1.1	48.2	0.00	0.00	0.00
3,100.0	12.47	179.88	3,044.0	-535.3	1,1	49.2	0.00	0.00	0.00
3,150.0	12.47	179.88	3,092.8	-546.1	1.1	50.1	0.00	0.00	0.00
3,200.0	12.47	179.88	3,141.6	-556.9	1.1	51.1	0.00	0.00	0.00
3,250.0	12.47	179.88	3,190.5	-567.7	1.2	52.1	0.00	0.00	0.00
3,300.0	12.47	179.88	3,239.3	-578.4	1.2	53.1	0.00	0.00	0.00
3,350.0	12.47	179.88	3,288.1	-589.2	1.2	54.1	0.00	0.00	0.00
3,400.0	12.47	179.88	3,336.9	-600.0	1.2	55.1	0.00	0.00	0.00
3,450.0	12.47	179.88	3,385.8	-610.8	1.2	56.1	0.00	0.00	0.00
3,500.0	12.47	179.88	3,434.6	-621.6	1.3	57.1	0.00	0.00	0.00
3,550.0	12.47	179.88	3,483.4	-632.4	1.3	58.1	0.00	0.00	0.00
3,600.0	12.47	179.88	3,532.2	-643.2	1.3	59.1	0.00	0.00	0.00
3,650.0	12.47	179.88	3,581.0	-654.0	1.3	60.1	0.00	0.00	0.00
3,700.0	12.47	179.88	3,629.9	-664.8	1.4	61.0	0.00	0.00	0.00
3,750.0	12.47	179.88	3,678.7	-675.6	1.4	62.0	0.00	0.00	0.00
3,800.0	12.47	179.88	3,727.5	-686.4	1.4	63.0	0.00	0.00	0.00
3,850.0	12.47	179.88	3,776.3	-697.2	1.4	64.0	0.00	0.00	0.00
3,900.0	12.47	179.88	3,825.1	-708.0	1.4	65.0	0.00	0.00	0.00
3,950.0	12.47	179.88	3,874.0	-718.8	1.5	66.0	0.00	0.00	0.00
4,000.0	12.47	179.88	3,922.8	-729.6	1.5	67.0	0.00	0.00	0.00
4,050.0	12.47	179.88	3,971.6	-740.4	1.5	68.0	0.00	0.00	0.00
4,100.0	12.47	179.88	4,020.4	-751.1	1.5	69.0	0.00	0.00	0.00
4,150.0	12.47	179.88	4,069.2	-761.9	1.6	70.0	0.00	0.00	0.00
4,200.0	12.47	179.88	4,118.1	-772.7	1.6	71.0	0.00	0.00	0.00
4,250.0	12.47	179.88	4,166.9	-783.5	1.6	71.9	0.00	0.00	0.00
4,300.0	12.47	179.88	4,215.7	-794.3	1.6	72.9	0.00	0.00	0.00
4,350.0	12.47	179.88	4,264.5	-805.1	1.6	73.9	0.00	0.00	0.00
4,400.0	12.47	179.88	4,313.4	-815.9	1.7	74.9	0.00	0.00	0.00
4,450.0	12.47	179.88	4,362.2	-826.7	1.7	75.9	0.00	0.00	0.00
4,500.0	12.47	179.88	4,411.0	-837.5	1.7	76.9	0.00	0.00	0.00
4,550.0	12.47	179.88	4,459.8	-848.3	1.7	77.9	0.00	0.00	0.00
4,600.0	12.47	179.88	4,508.6	-859.1	1.8	78.9	0.00	0.00	0.00
4,650.0	12.47	179.88	4,557.5	-869.9	1.8	79.9	0.00	0.00	0.00
4,700.0	12.47	179.88	4,606.3	-880.7	1.8	80.9	0.00	0.00	0.00
4,750.0	12.47	179.88	4,655.1	-891.5	1.8	81.9	0.00	0.00	0.00
4,800.0	12.47	179.88	4,703.9	-902.3	1.8	82.9	0.00	0.00	0.00
4,850.0	12.47	179.88	4,752.7	-913.0	1.9	83.8	0.00	0.00	0.00
4,900.0	12.47	179.88	4,801.6	-923.8	1.9	84.8	0.00	0.00	0.00
4,950.0	12.47	179.88	4,850.4	-934.6	1.9	85.8	0.00	0.00	0.00
5,000.0	12.47	179.88	4,899.2	-945.4	1.9	86.8	0.00	0.00	0.00
5,050.0	12.47	179.88	4,948.0	-956.2	2.0	87.8	0.00	0.00	0.00
5,100.0	12.47	179.88	4,996.8	-967.0	2.0	88.8	0.00	0.00	0.00
5,150.0	12.47	179.88	5,045.7	-977.8	2.0	89.8	0.00	0.00	0.00
5,200.0	12.47	179.88	5,094.5	-988.6	2.0	90.8	0.00	0.00	0.00

Database: Hobbs

Company: Mewb

Project:

Site:

Mewbourne Oil Company

Eddy County, New Mexico NAD 83 IOU 19/23 Fed Com #523H

 Well:
 Sec 20, T18S, R30E

 Wellbore:
 BHL: 1900' FNL & 100' FWL (Sec 23)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

Grid

lanned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,250.0	12.47	179.88	5,143.3	-999.4	2.0	91.8	0.00	0.00	0.00
5,300.0	12.47	179.88	5,192.1	-1,010.2	2.1	92.8	0.00	0.00	0.00
5,350.0	12.47	179 <u>.</u> 88	5,241.0	-1,021.0	2.1	93.8	0.00	0.00	0.00
5,400.0	12.47	179.88	5,289.8	-1,031.8	2.1	94.7	0.00	0.00	0.00
5,450.0	12.47	179.88	5,338.6	-1,042.6	2.1	95.7	0.00	0.00	0.00
5,500.0	12.47	179.88	5,387.4	-1,053.4	2.2	96.7	0.00	0.00	0.00
5,550.0	12.47	179.88	5,436.2	-1,064.2	2.2	97.7	0.00	0.00	0.00
5,600.0	12.47	179.88	5,485.1	-1,075.0	2.2	98.7	0.00	0.00	0.00
5,650.0	12.47	179.88	5,533.9	-1,085.7	2.2	99.7	0.00	0.00	0.00
5,700.0	12.47	179.88	5,582.7	-1,085.7 -1,096.5	2.2	100.7	0.00	0.00	0.00
5,750.0	12.47	179.88	5,631.5	-1,107.3	2.3	101.7	0.00	0.00	0.00
5,800.0	12.47	179.88	5,680.3	-1,118.1	2.3	101.7	0.00	0.00	0.00
5,850.0	12.47	179.88	5,729.2	-1,118.1 -1,128.9	2.3	102.7	0.00	0.00	0.00
5,900.0	12.47	179.88	5,778.0	-1,139.7	2.3	104.7	0.00	0.00	0.00
5,950.0	12.47	179.88	5,826.8	-1,150.5	2.3	105.6	0.00	0.00	0.00
6,000.0	12.47	179.88	5,875.6	-1,161.3	2.4	106.6	0.00	0.00	0.00
6,050.0	12.47	179.88	5,924.4	-1,172.1	2.4	107.6	0.00	0.00	0.00
6,100.0	12.47	179.88	5,973.3	-1,182.9	2.4	108.6	0.00	0.00	0.00
6,150.0	12.47	179.88	6,022.1	-1,193.7	2.4	109.6	0.00	0.00	0.00
6,200.0	12.47	179.88	6,070.9	-1,204.5	2.5	110.6	0.00	0.00	0.00
6,250.0	12.47	179.88	6,119.7	-1,215.3	2.5	111.6	0.00	0.00	0.00
6,300.0	12.47	179.88	6,168.6	-1,226.1	2.5	112.6	0.00	0.00	0.00
6,350.0	12.47	179.88	6,217.4	-1,236.9	2.5	113.6	0.00	0.00	0.00
6,400.0	12.47	179.88	6,266.2	-1,247.7	2.5	114.6	0.00	0.00	0.00
6,450.0	12.47	179.88	6,315.0	-1,258.4	2.6	115.6	0.00	0.00	0.00
6,500.0	12.47	179.88	6,363.8	-1,269.2	2.6	116.6	0.00	0.00	0.00
6,550.0	12.47	179.88	6,412.7	-1,280.0	2.6	117.5	0.00	0.00	0.00
6,600.0	12.47	179.88	6,461.5	-1,290.8	2.6	118.5	0.00	0.00	0.00
6,650.0 6,700.0	12.47 12.47	179.88 179.88	6,510.3 6,559.1	-1,301.6	2.7 2.7	119.5 120.5	0.00 0.00	0.00 0.00	0.00 0.00
6,750.0		179.88	6,559.1 6,607.9	-1,312.4 -1,323.2	2.7 2.7	120.5	0.00	0.00	
6,800.0	12.47 12.47	179.88	6,656.8	-1,323.2 -1,334.0	2.7	121.5	0.00	0.00	0.00 0.00
6,850.0	12.47	179.88	6,705.6	-1,334.0 -1,344.8	2.7	123.5	0.00	0.00	0.00
6,900.0	12.47	179.88	6,754.4	-1,355.6	2.8	124.5	0.00	0.00	0.00
6,950.0	12.47	179.88	6,803.2	-1,366.4	2.8	125.5	0.00	0.00	0.00
7,000.0	12.47	179.88	6,852.0	-1,377.2	2.8	126.5	0.00	0.00	0.00
7,050.0	12.47	179.88	6,900.9	-1,388.0	2.8	127.5	0.00	0.00	0.00
7,100.0	12.47	179.88	6,949.7	-1,398.8	2.9	128.4	0.00	0.00	0.00
7,115.2	12.47	179.88	6,964.6	-1,402.1	2.9	128.7	0.00	0.00	0.00
7,150.0	11.77	179.88	6,998.6	-1,409.4	2.9	129.4	2.00	-2.00	0.00
7,200.0	10.77	179.88	7,047.6	-1,419.1	2.9	130.3	2.00	-2.00	0.00
7,250.0	9.77	179.88	7,096.8	-1,428.0	2.9	131.1	2.00	-2.00	0.00
7,300.0	8.77	179 <u>.</u> 88	7,146.1	-1,436.1	2.9	131.9	2.00	-2.00	0.00
7,350.0	7.77	179.88	7.195.6	-1,443.3	2.9	132.5	2.00	-2.00	0.00
7,400.0	6.77	179.88	7,245.2	-1,449.6	3.0	133.1	2.00	-2.00	0.00
7,450.0	5.77	179.88	7,294.9	-1,455.1	3.0	133.6	2.00	-2.00	0.00
7,500.0	4.77	179.88	7,344.7	-1,459.7	3.0	134.0	2.00	-2.00	0.00
7,550.0	3.77	179.88	7,394.6	-1,463.4	3.0	134.4	2.00	-2.00	0.00
7,600.0			7,444.5						
7,600.0 7,650.0	2.77	179.88 179.88	7,444.5 7,494.4	-1,466.2 1,468.2	3.0	134.6	2.00 2.00	-2.00 2.00	0.00 0.00
7,650.0 7,700.0	1.77 0.77	179.88	7,494.4 7,544.4	-1,468.2 -1,469.3	3.0 3.0	134.8 134.9	2.00	-2.00 -2.00	0.00
7,700.0	0.00	0.00	7,544.4 7,583.0	-1,469.5 -1,469.6	3.0	135.0	2.00	-2.00 -2.00	0.00
			7,000.0	-1,403.0	3.0	133.0	2.00	-2.00	0.00
	FNL & 473' FWL	•	7.504.4	1 400 0	0.0	405.4	40.00	40.00	0.00
7,750.0	1.14	269.82	7,594.4	-1,469.6	2.9	135.1	10.00	10.00	0.00

Database: Hobbs

Company: Mewbourne Oil Company
Project: Eddy County, New Mexico NAD 83
Site: IOU 19/23 Fed Com #523H

 Well:
 Sec 20, T18S, R30E

 Wellbore:
 BHL: 1900' FNL & 100' FWL (Sec 23)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

Grid

ngii.									
nned Survey									
Measured Depth (usft)	Inclination	Azimuth	Vertical Depth (usft)	+N/-S	+E/-W	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
(usit)	(°)	(°)	(usit)	(usft)	(usft)	(usit)	(/ loousit)	(/ ioousit)	(/ Toousit)
7,800.0	6.14	269.82	7,644.3	-1,469.6	-0.3	138.2	10.00	10.00	0.00
7,850.0	11.14	269.82	7,693.7	-1,469.6	-7.8	145.7	10.00	10.00	0.00
7,900.0	16.14	269.82	7,742.3	-1,469.7	-19.6	157.4	10.00	10.00	0.00
7,950.0	21.14	269.82	7,789.7	-1,469.7	-35.6	173.3	10.00	10.00	0.00
8,000.0	26.14	269.82	7,835.5	-1,469.8	-55.6	193.3	10.00	10.00	0.00
8,050.0	31.13	269.82	7,879.3	-1,469.9	-79.6	217.2	10.00	10.00	0.00
8,100.0	36.13	269.82	7,920.9	-1,470.0	-107.2	244.7	10.00	10.00	0.00
8,150.0	41.13	269.82	7,960.0	-1,470.1	-138.4	275.8	10.00	10.00	0.00
8,200.0	46 13	269.82	7,996.2	-1,470.2	-172.9	310.2	10.00	10.00	0.00
8,250.0	51.13	269.82	8,029.2	-1,470.3	-210.4	347.5	10.00	10.00	0.00
8,300.0	56.13	269.82	8,058.8	-1,470.4	-250.7	387.6	10.00	10.00	0.00
8,350.0	61.13	269.82	8,084.9	-1,470.6	-293.4	430.1	10.00	10.00	0.00
8,400.0	66.13	269.82	8,107.1	-1,470.7	-338.1	474.7	10.00	10.00	0.00
8,450.0	71.12	269.82	8,125.3	-1,470.8	-384.7	521.1	10.00	10.00	0.00
8,500.0	76.12	269.82	8,139.4	-1,471.0	-432.7	568.8	10.00	10.00	0.00
8,550.0	81.12	269.82	8,149.2	-1,471.2	-481.7	617.6	10.00	10.00	0.00
8,600.0	86.12	269.82	8,154.8	-1,471.3	-531.3	667.1	10.00	10.00	0.00
8,638.6	89.98	269.82	8,156.1	-1,471.4	-569.9	705.5	10.00	10.00	0.00
·	0' FNL & 100' FE		-,	.,	222.3				3,33
8,649.7	91.09	269.82	8,156.0	-1,471.5	- 581.0	716.6	10.00	10.00	0.00
8,650.0		269.82				716.8	0.00	0.00	
0.000.0	91.09		8,156.0	-1,471.5	- 581.3	1 10.0		0.00	0.00
8,700.0	91.09	269.82	8,155.0	-1,471.6	-631.3	766.6	0.00	0.00	0.00
8,750.0	91.09	269.82	8,154.1	-1,471.8	-681.3	816.4	0.00	0.00	0.00
8,800.0	91.09	269.82	8,153.1	-1,472.0	-731.3	866.2	0.00	0.00	0.00
		269.82				916.0	0.00	0.00	0.00
8,850.0	91.09		8,152.2	-1,472.1	-781.3				
8,900.0	91.09	269.82	8,151.2	-1,472.3	-831.2	965.8	0.00	0.00	0.00
8,950.0	91.09	269.82	8,150.3	- 1,472.4	- 881.2	1,015.6	0.00	0.00	0.00
9,000.0	91.09	269.82	8,149.3	-1,472.6	-931.2	1,065.3	0.00	0.00	0.00
9,050.0	91.09	269.82	8,148.4	-1,472.8	- 981.2	1,115.1	0.00	0.00	0.00
9,100.0	91.09	269.82	8,147.4	-1,472.9		1,164.9	0.00	0.00	0.00
·				·	-1,031.2				
9,150.0	91.09	269.82	8,146.5	-1,473.1	-1,081.2	1,214.7	0.00	0.00	0.00
9,200.0	91.09	269.82	8,145.5	-1,473.2	-1,131.2	1,264.5	0.00	0.00	0.00
9,250.0	91.09	269.82	8,144.5	-1,473.4	-1,181.2	1,314.3	0.00	0.00	0.00
9,300.0	91.09	269.82	8,143.6	-1,473.6	-1,231.2	1,364.0	0.00	0.00	0.00
9,350.0	91.09	269.82	8,142.6	-1,473.7	-1,281.2	1,413.8	0.00	0.00	0.00
9,400.0	91.09	269.82	8,142.0 8,141.7	-1,473.7	-1,201.2	1,413.6	0.00	0.00	0.00
9,400.0		209.02			-1,331.2	1,403.0		0.00	
9,450.0	91.09	269.82	8,140.7	-1,474.1	-1,381.1	1,513.4	0.00	0.00	0.00
9,500.0	91.09	269.82	8,139.8	-1,474.2	-1,431,1	1,563.2	0.00	0.00	0.00
9,550.0	91.09	269.82	8,138.8	-1,474.4	-1,481.1	1,613.0	0.00	0.00	0.00
9,600.0	91.09	269.82	8,137.9	-1,474.5	-1,531.1	1,662.8	0.00	0.00	0.00
9,650.0	91.09	269.82	8,136.9	-1,474.5 -1,474.7	-1,531.1 -1,581.1	1,712.5	0.00	0.00	
9,000.0	91.09	209.02	0,130.9	-1,4/4./	-1,501.1	1,112.3	0.00	0.00	0.00
9,700.0	91.09	269.82	8,136.0	-1,474.9	-1,631.1	1,762.3	0.00	0.00	0.00
9,750.0	91.09	269.82	8,135.0	-1,475.0	-1,681.1	1,812.1	0.00	0.00	0.00
9,800.0	91.09	269.82	8,134.0	-1,475.2	-1,731.1	1,861.9	0.00	0.00	0.00
9,850.0	91.09	269.82	8,133.1	-1,475.3	-1,781.1	1,911.7	0.00	0.00	0.00
9,900.0	91.09	269.82	8,132.1	-1,475.5 -1,475.5	-1,761.1	1,961.5	0.00	0.00	0.00
	91.09	203.02		-1,473.5	-1,031.1		0.00	0.00	0.00
9,950.0	91.09	269.82	8,131.2	-1,475.7	-1,881.1	2,011.3	0.00	0.00	0.00
10,000.0	91.09	269.82	8,130.2	-1,475.8	-1,931.0	2,061.0	0.00	0.00	0.00
10,050.0	91.09	269.82	8,129.3	-1,476.0	-1,981.0	2,110.8	0.00	0.00	0.00
10,100.0	91.09	269.82	8,128.3	-1,476.1	-2,031.0	2,160.6	0.00	0.00	0.00
10,150.0	91.09	269.82	8,125.3 8,127.4	-1,476.1	-2,031.0 -2,081.0	2,100.6	0.00	0.00	0.00
10, 150.0	91.09	∠05.0∠	0,127.4	-1,4/0.3	- ∠,∪o 1.U	∠,∠10.4	0.00	0.00	0.00
10,200.0	91.09	269.82	8,126.4	-1,476.5	-2,131.0	2,260.2	0.00	0.00	0.00
10,250.0	91.09	269.82	8,125.5	-1,476.6	-2,181.0	2,310.0	0.00	0.00	0.00

Database: Hobbs

Company: Mewbourne Oil Company
Project: Eddy County, New Mexico NAD 83
Site: IOU 19/23 Fed Com #523H

Well: Sec 20, T18S, R30E

Wellbore: BHL: 1900' FNL & 100' FWL (Sec 23)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

Grid

Jesign: 	Design #1								
Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,300.0	91.09	269.82	8,124.5	-1,476.8	-2,231.0	2,359.7	0.00	0.00	0.00
10,350.0	91.09	269.82	8,123.5	-1,476.9	-2,281.0	2,409.5	0.00	0.00	0.00
10,400.0	91.09	269.82	8,122.6	-1,477.1	-2,331.0	2,459.3	0.00	0.00	0.00
10,450.0	91.09	269.82	8,121.6	-1,477.3	-2,381.0	2,509.1	0.00	0.00	0.00
10,500.0	91.09	269.82	8,120.7	-1,477.4	-2,430.9	2,558.9	0.00	0.00	0.00
10,550.0	91.09	269.82	8,119.7	-1,477.6	-2,480.9	2,608.7	0.00	0.00	0.00
10,600.0	91.09	269.82	8,118.8	-1,477.7	-2,530.9	2,658.5	0.00	0.00	0.00
10,650.0	91.09	269.82	8,117.8	-1,477.9	-2,580.9	2,708.2	0.00	0.00	0.00
10,700.0	91.09	269.82	8,116.9	-1,478.1	-2,630.9	2,758.0	0.00	0.00	0.00
10,750.0	91.09	269.82	8,115.9	-1,478.2	-2,680.9	2,807.8	0.00	0.00	0.00
· ·				•					
10,800.0	91.09	269.82	8,115.0	-1,478.4	-2,730.9	2,857.6	0.00	0.00	0.00
10,850.0	91.09	269.82	8,114.0	-1,478.6	-2,780.9	2,907.4	0.00	0.00	0.00
10,900.0	91.09	269.82	8,113.0	-1,478.7	-2,830.9	2,957.2	0.00	0.00	0.00
10,950.0	91.09	269.82	8,112.1	-1,478.9	-2,880.9	3,007.0	0.00	0.00	0.00
11,000.0	91.09	269.82	8,111.1	-1,479.0	-2,930.9	3,056.7	0.00	0.00	0.00
11,050.0	91.09	269.82	8,110.2	-1.479.2	-2,980.8	3,106.5	0.00	0.00	0.00
11,100.0	91.09	269.82	8.109.2	-1,479.4	-3,030.8	3,156.3	0.00	0.00	0.00
11,150.0	91.09	269.82	8,108.3	-1,479.5	-3,080.8	3,206.1	0.00	0.00	0.00
11,130.0	91.09	209.02	0,100.5	-1,479.5	-3,000.0	3,200.1	0.00	0.00	0.00
11,178.5	91.09	269.82	8,107.7	-1,479.6	-3,109.3	3,234.4	0.00	0.00	0.00
PPP2: 1904'	FNL & 2640' FEI	∟ (Sec 19)							
11,200.0	91.09	269.82	8,107.3	- 1,479.7	- 3,130.8	3,255.9	0.00	0.00	0.00
11,250.0	91.09	269.82	8,106.4	-1,479.8	- 3,180.8	3,305.7	0.00	0.00	0.00
11,300.0	91.09	269.82	8,105.4	-1,480.0	- 3,230.8	3,355.4	0.00	0.00	0.00
11,350.0	91.09	269.82	8,104.5	- 1,480.2	- 3,280.8	3,405.2	0.00	0.00	0.00
11 100 0	04.00	260.82	0 100 E	1 490 2	2 220 0	2 455 0	0.00	0.00	0.00
11,400.0	91.09	269.82	8,103.5	-1,480.3	-3,330.8	3,455.0	0.00	0.00	0.00
11,450.0	91.09	269.82	8,102.6	-1,480.5	-3,380.8	3,504.8	0.00	0.00	0.00
11,500.0	91.09	269.82	8,101.6	-1,480.6	-3,430.8	3,554.6	0.00	0.00	0.00
11,550.0	91.09	269.82	8,100.6	-1,480.8	-3,480.8	3,604.4	0.00	0.00	0.00
11,600.0	91.09	269.82	8,099.7	-1,481.0	-3,530.7	3,654.2	0.00	0.00	0.00
11,650.0	91.09	269.82	8,098.7	-1,481.1	-3,580.7	3,703.9	0.00	0.00	0.00
11,700.0	91.09	269.82	8,097.8	-1,481.3	-3,630.7	3,753.7	0.00	0.00	0.00
11,750.0	91.09	269.82	8,096.8	-1,481.4	-3,680.7	3,803.5	0.00	0.00	0.00
11,800.0	91.09	269.82	8,095.9	-1,481.6	-3,730.7	3,853.3	0.00	0.00	0.00
11,850.0	91.09	269.82	8,094.9	-1,481.8	-3,780.7	3,903.1	0.00	0.00	0.00
			,	,					
11,900.0	91.09	269.82	8,094.0	-1,481.9	-3,830.7	3,952.9	0.00	0.00	0.00
11,950.0	91.09	269.82	8,093.0	-1,482.1	-3,880.7	4,002.7	0.00	0.00	0.00
12,000.0	91.09	269.82	8,092.1	-1,482.2	-3,930.7	4,052.4	0.00	0.00	0.00
12,050.0	91.09	269.82	8,091.1	-1,482.4	-3,980.7	4,102.2	0.00	0.00	0.00
12,100.0	91.09	269.82	8,090.1	-1,482.6	-4,030.6	4,152.0	0.00	0.00	0.00
12,150.0	91.09	269.82	8,089.2	-1,482.7	-4,080.6	4,201.8	0.00	0.00	0.00
12,200.0	91.09	269.82	8,088.2	-1,482.9	-4,130.6	4,251.6	0.00	0.00	0.00
12,250.0	91.09	269.82	8,087.3	-1,483.1	-4,180.6	4,301.4	0.00	0.00	0.00
12,300.0	91.09	269.82	8,086.3	-1,483.2	-4,100.6 -4,230.6	4,351.2	0.00	0.00	0.00
12,350.0	91.09	269.82	8,085.4	-1,483.4 -1,483.4	-4,230.6 -4,280.6	4,400.9	0.00	0.00	0.00
12,400.0	91.09	269.82	8,084.4	-1,483.5	-4,330.6	4,450.7	0.00	0.00	0.00
12,450.0	91.09	269.82	8,083.5	-1,483.7	-4,380.6	4,500.5	0.00	0.00	0.00
12,500.0	91.09	269.82	8,082.5	-1,483.9	-4,430.6	4,550.3	0.00	0.00	0.00
12,550.0	91.09	269.82	8,081.6	-1,484.0	-4,480.6	4,600.1	0.00	0.00	0.00
12,600.0	91.09	269.82	8,080.6	-1,484.2	-4,530.6	4,649.9	0.00	0.00	0.00
12,650.0	91.09	269.82	8,079.6	-1,484.3	-4,580.5	4,699.6	0.00	0.00	0.00
12,700.0	91.09	269.82	8,078.7	-1,484.5 -1,484.5	-4,560.5 -4,630.5	4,749.4	0.00	0.00	0.00
12,750.0	91.09	269.82	8,076.7 8,077.7	-1,484.5 -1,484.7	-4,630.5 -4,680.5	4,749.4	0.00	0.00	0.00
12,750.0		269.82 269.82				4,799.2 4,849.0	0.00	0.00	0.00
	91.09		8,076.8	-1,484.8	-4,730.5				
12,850.0	91.09	269.82	8,075.8	-1,485.0	-4,780.5	4,898.8	0.00	0.00	0.00

Database: Hobbs

Company: Mewbourne Oil Company
Project: Eddy County, New Mexico NAD 83
Site: IOU 19/23 Fed Com #523H
Well: Sec 20, T18S, R30E

Wellbore: BHL: 1900' FNL & 100' FWL (Sec 23)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

Grid

Planned Survey									
									_
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,900.0	91.09	269.82	8,074.9	-1,485.1	-4,830.5	4,948.6	0.00	0.00	0.00
12,950.0	91.09	269.82	8,073.9	-1,485.3	-4,880.5	4,998.4	0.00	0.00	0.00
13,000.0	91.09	269.82	8,073.0			5,048.1	0.00	0.00	0.00
				-1,485.5	-4,930.5				
13,050.0	91.09	269.82	8,072.0	-1,485.6	-4,980.5	5,097.9	0.00	0.00	0.00
13,100.0	91.09	269.82	8,071.1	-1,485.8	-5,030.5	5,147.7	0.00	0.00	0.00
13,150.0	91.09	269.82	8,070.1	-1,485.9	-5,080.5	5,197.5	0.00	0.00	0.00
13,200.0	91.09	269.82	8,069.2	-1,486.1	-5,130.4	5,247.3	0.00	0.00	0.00
13,250.0	91.09	269.82	8,068.2	-1,486.3	-5,180.4	5,297.1	0.00	0.00	0.00
13,300.0	91.09	269.82	8,067.2	-1,486.4	-5,230.4	5,346.9	0.00	0.00	0.00
13,350.0	91.09	269.82				5,346.9		0.00	0.00
13,350.0	91.09	209.02	8,066.3	-1,486.6	-5,280.4	5,396.6	0.00	0.00	0.00
13,400.0	91.09	269.82	8,065.3	-1,486.7	-5,330.4	5,446.4	0.00	0.00	0.00
13,450.0	91.09	269.82	8,064.4	-1,486.9	-5,380.4	5,496.2	0.00	0.00	0.00
13,500.0	91.09	269.82	8,063.4	-1,487.1	-5,430.4	5,546.0	0.00	0.00	0.00
13,550.0	91.09	269.82	8,062.5	-1,487.2	-5,480.4	5,595.8	0.00	0.00	0.00
13,600.0	91.09	269.82	8,061.5	-1,487.4	-5,530.4	5,645.6	0.00	0.00	0.00
13,650.0	91.09	269.82	8,060.6	-1,487.6	-5,580.4	5,695.3	0.00	0.00	0.00
13,700.0	91.09	269.82	8,059.6	-1,487.7	-5,630.3	5,745.1	0.00	0.00	0.00
13,750.0	91.09	269.82	8,058.7	-1,487.9	-5,680.3	5,794.9	0.00	0.00	0.00
13,800.0	91.09	269.82	8,057.7	-1,488.0	-5,730.3	5,844.7	0.00	0.00	0.00
13,850.0	91.09	269.82	8,056.7	-1,488.2	-5,780.3	5,894.5	0.00	0.00	0.00
13,900.0	91.09	269.82	8,055.8	-1,488.4	-5,830.3	5,944.3	0.00	0.00	0.00
13,950.0	91.09	269.82	8,054.8	-1,488.5	-5,880.3	5,994.1	0.00	0.00	0.00
14,000.0	91.09	269.82	8,053.9	-1,488.7	-5,930.3	6,043.8	0.00	0.00	0.00
14,050.0	91.09	269.82	8,052.9	-1,488.8	-5,980.3	6,093.6	0.00	0.00	0.00
14,100.0	91.09	269.82	8,052.0	-1,489.0	-6,030.3	6,143.4	0.00	0.00	0.00
								0.00	
14,150.0	91.09	269.82	8,051.0	-1,489.2	-6,080.3	6,193.2	0.00	0.00	0.00
14,200.0	91.09	269.82	8,050.1	-1,489.3	-6,130.3	6,243.0	0.00	0.00	0.00
14,250.0	91.09	269.82	8,049.1	-1,489.5	-6,180.2	6,292.8	0.00	0.00	0.00
14,300.0	91.09	269.82	8,048.2	-1,489.6	-6,230.2	6,342.6	0.00	0.00	0.00
14,350.0	91.09	269.82	8,047.2	-1,489.8	-6,280.2	6,392.3	0.00	0.00	0.00
14 400 0	91.09	260.82	8,046.2	1 400 0	6 220 2	6 440 4	0.00	0.00	0.00
14,400.0		269.82	,	-1,490.0	-6,330.2	6,442.1			
14,450.0	91.09	269.82	8,045.3	-1,490.1	-6,380.2	6,491.9	0.00	0.00	0.00
14,500.0	91.09	269.82	8,044.3	-1,490.3	-6,430.2	6,541.7	0.00	0.00	0.00
14,550.0	91.09	269.82	8,043.4	-1,490.4	-6,480.2	6,591.5	0.00	0.00	0.00
14,600.0	91.09	269.82	8,042.4	-1,490.6	-6,530.2	6,641.3	0.00	0.00	0.00
14,650.0	91.09	269.82	8,041.5	-1,490.8	-6,580.2	6,691.0	0.00	0.00	0.00
	91.09	269.82					0.00	0.00	0.00
14,700.0			8,040.5	-1,490.9	-6,630.2	6,740.8			
14,750.0	91.09	269.82	8,039.6	-1,491.1	-6,680.2	6,790.6	0.00	0.00	0.00
14,800.0	91.09	269.82	8,038.6	-1,491.2	-6,730.1	6,840.4	0.00	0.00	0.00
14,850.0	91.09	269.82	8,037.7	-1,491.4	-6,780.1	6,890.2	0.00	0.00	0.00
14,900.0	91.09	269.82	8,036.7	-1,491.6	-6,830.1	6,940.0	0.00	0.00	0.00
14,950.0	91.09	269.82	8,035.7	-1,491.7	-6,880.1	6,989.8	0.00	0.00	0.00
15,000.0	91.09	269.82	8,034.8	-1,491.9	-6,930.1	7,039.5	0.00	0.00	0.00
15,050.0	91.09	269.82	8,033.8	-1,492.1	-6,980.1	7,089.3	0.00	0.00	0.00
15,100.0	91.09	269.82	8,032.9	-1,492.2	-7,030.1	7,139.1	0.00	0.00	0.00
15,150.0	91.09	269.82	8,031.9	-1,492.4	-7,080.1	7,188.9	0.00	0.00	0.00
15,100.0	91.09	269.82	8,031.0	-1,492.5	-7,000.1 -7,130.1	7,100.3	0.00	0.00	0.00
,									
15,250.0	91.09	269.82	8,030.0	-1,492.7	-7,180.1	7,288.5	0.00	0.00	0.00
15,300.0	91.09	269.82	8,029.1	-1,492.9	-7,230.0	7,338.3	0.00	0.00	0.00
15,350.0	91.09	269.82	8,028.1	-1,493.0	-7,280.0	7,388.0	0.00	0.00	0.00
15,400.0	91.09	269.82	8,027.2	-1,493.2	-7,330.0	7,437.8	0.00	0.00	0.00
15,450.0	91.09	269.82	8,026.2	-1,493.3	-7,380.0 -7,380.0	7,487.6	0.00	0.00	0.00
15,500.0	91.09	269.82	8,025.3	-1,493.5	-7,430.0	7,537.4	0.00	0.00	0.00
15,550.0	91.09	269.82	8,024.3	-1,493.7	-7,480.0	7,587.2	0.00	0.00	0.00

Database: Hobbs

Company: Mewbourne Oil Company
Project: Eddy County, New Mexico NAD 83
Site: IOU 19/23 Fed Com #523H

 Well:
 Sec 20, T18S, R30E

 Wellbore:
 BHL: 1900' FNL & 100' FWL (Sec 23)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

Grid

esign:		Design #1											
Planned Survey													
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)				
15,600.0	91.09	269.82	8,023.3	-1,493.8	-7,530.0	7,637.0	0.00	0.00	0.00				
15,650.0	91.09	269.82	8,022.4	-1,494.0	-7,580.0	7,686.7	0.00	0.00	0.00				
15,700.0	91.09	269.82	8,021.4	-1,494.1	-7,630.0	7,736.5	0.00	0.00	0.00				
15,750.0	91.09	269.82	8,020.5	-1,494.3	-7,680.0	7,786.3	0.00	0.00	0.00				
15,800.0	91.09	269.82	8,019.5	-1,494.5	-7,730.0	7,836.1	0.00	0.00	0.00				
15,850.0	91.09	269.82	8,018.6	-1,494.6	-7,779.9	7,885.9	0.00	0.00	0.00				
15,900.0	91.09	269.82	8,017.6	-1,494.8	-7,829.9	7,935.7	0.00	0.00	0.00				
15,950.0	91.09	269.82	8,016.7	-1,494.9	-7,879.9	7,985.5	0.00	0.00	0.00				
16,000.0	91.09	269.82	8,015.7	-1,495.1	-7,929.9	8,035.2	0.00	0.00	0.00				
16,050.0	91.09	269.82	8,014.8	-1,495.3	-7,979.9	8,085.0	0.00	0.00	0.00				
16,100.0	91.09	269.82	8,013.8	-1,495.4	-8,029.9	8,134.8	0.00	0.00	0.00				
				•	· ·								
16,150.0	91.09	269.82	8,012.8	-1,495.6	-8,079.9	8,184.6	0.00	0.00	0.00				
16,200.0	91.09	269.82	8,011.9	-1,495.7	-8,129.9	8,234.4	0.00	0.00	0.00				
16,250.0	91.09	269.82	8,010.9	-1,495.9	-8,179.9	8,284.2	0.00	0.00	0.00				
16,300.0	91.09	269.82	8,010.0	-1,496.1	-8,229.9	8,334.0	0.00	0.00	0.00				
16,350.0	91.09	269.82	8,009.0	-1,496.2	-8,279.9	8,383.7	0.00	0.00	0.00				
16,400.0	91.09	269.82	8,008.1	-1,496.4	-8,329.8	8,433.5	0.00	0.00	0.00				
16,450.0	91.09	269.82	8,007.1	-1,496.6	-8,379.8	8,483.3	0.00	0.00	0.00				
16,500.0	91.09	269.82	8,006.2	-1,496.7	-8,429.8	8,533.1	0.00	0.00	0.00				
16,550.0	91.09	269.82	8,005.2	-1,496.9	-8,479.8	8,582.9	0.00	0.00	0.00				
16,600.0	91.09	269.82	8,004.3	-1,497.0	-8,529.8	8,632.7	0.00	0.00	0.00				
,													
16,650.0	91.09	269.82	8,003.3	-1,497.2	-8,579.8	8,682.4	0.00	0.00	0.00				
16,700.0	91.09	269.82	8,002.3	-1,497.4	-8,629.8	8,732.2	0.00	0.00	0.00				
16,750.0	91.09	269.82	8,001.4	-1,497.5	-8,679.8	8,782.0	0.00	0.00	0.00				
16,800.0	91.09	269.82	8,000.4	-1,497.7	-8,729.8	8,831.8	0.00	0.00	0.00				
16,850.0	91.09	269.82	7,999.5	-1,497.8	-8,779.8	8,881.6	0.00	0.00	0.00				
16,900.0	91.09	269.82	7,998.5	-1,498.0	-8,829.8	8,931.4	0.00	0.00	0.00				
16,950.0	91.09	269.82	7,997.6	-1,498.2	-8,879.7	8,981.2	0.00	0.00	0.00				
17,000.0	91.09	269.82	7,996.6	-1,498.3	-8,929.7	9,030.9	0.00	0.00	0.00				
17,050.0	91.09	269.82	7,995.7	-1,498.5	-8,979.7	9,080.7	0.00	0.00	0.00				
17,100.0	91.09	269.82	7,994.7	-1,498.6	-9,029.7	9,130.5	0.00	0.00	0.00				
17,150.0	91.09	269.82	7,993.8	-1,498.8	-9,079.7	9,180.3	0.00	0.00	0.00				
17,200.0	91.09	269.82	7,992.8	-1,499.0	-9,129.7	9,230.1	0.00	0.00	0.00				
17,250.0	91.09	269.82	7,991.8	-1,499.1	-9,179.7	9,279.9	0.00	0.00	0.00				
17,300.0	91.09	269.82	7,990.9	-1,499.3	-9,229.7	9,329.7	0.00	0.00	0.00				
17,350.0	91.09	269.82	7,989.9	-1,499.4	-9,279.7	9,379.4	0.00	0.00	0.00				
						,							
17,400.0	91.09	269.82	7,989.0	-1,499.6	-9,329.7	9,429.2	0.00	0.00	0.00				
17,450.0	91.09	269.82	7,988.0	-1,499.8	-9,379.6	9,479.0	0.00	0.00	0.00				
17,500.0	91.09	269.82	7,987.1	-1,499.9	-9,429.6	9,528.8	0.00	0.00	0.00				
17,550.0	91.09	269.82	7,986.1	-1,500.1	-9,479.6	9,578.6	0.00	0.00	0.00				
17,600.0	91.09	269.82	7,985.2	-1,500.2	-9,529.6	9,628.4	0.00	0.00	0.00				
17,650.0	91.09	269.82	7,984.2	-1,500.4	-9,579.6	9,678.1	0.00	0.00	0.00				
17,700.0	91.09	269.82	7,983.3	-1,500.6	-9,629.6	9,727.9	0.00	0.00	0.00				
17,750.0	91.09	269.82	7,982.3	-1,500.7	-9,679.6	9,777.7	0.00	0.00	0.00				
17,800.0	91.09	269.82	7.981.4	-1,500.9	-9,729.6	9,827.5	0.00	0.00	0.00				
17,850.0	91.09	269.82	7,980.4	-1,501.1	-9,779.6	9,877.3	0.00	0.00	0.00				
17,900.0	91.09	269.82	7,979.4	-1,501.2	-9,829.6	9,927.1	0.00	0.00	0.00				
17,950.0	91.09	269.82	7,978.5	-1,501.4	-9,879.6	9,976.9	0.00	0.00	0.00				
18,000.0	91.09	269.82	7,977.5	-1,501.5	-9,929.5	10,026.6	0.00	0.00	0.00				
18,050.0	91.09	269.82	7,976.6	-1,501.7	-9,979.5	10,076.4	0.00	0.00	0.00				
18,100.0	91.09	269.82	7,975.6	-1,501.9	-10,029.5	10,126.2	0.00	0.00	0.00				
18,150.0	91.09	269.82	7,974.7	-1,502.0	-10,079.5	10,176.0	0.00	0.00	0.00				
18,200.0	91.09	269.82	7,973.7	-1,502.2	-10,129.5	10,225.8	0.00	0.00	0.00				
18,250.0	91.09	269.82	7,972.8	-1,502.3	-10,179.5	10,275.6	0.00	0.00	0.00				

Hobbs Database: Company:

Project:

Site:

Mewbourne Oil Company

Eddy County, New Mexico NAD 83 IOU 19/23 Fed Com #523H

Well: Sec 20, T18S, R30E BHL: 1900' FNL & 100' FWL (Sec 23) Wellbore:

Design: Design #1 Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

esign:	Design #1								
lanned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
18,300.0	91.09	269.82	7,971.8	-1,502.5	-10,229.5	10,325.4	0.00	0.00	0.00
18,350.0	91.09	269.82	7,970.9	-1,502.7	-10,279.5	10,375.1	0.00	0.00	0.00
18,400.0	91.09	269.82	7,969.9	-1,502.8	-10,329.5	10,424.9	0.00	0.00	0.00
18,450.0	91.09	269.82	7,968.9	-1,503.0	-10,379.5	10,474.7	0.00	0.00	0.00
18,500.0	91.09	269.82	7,968.0	-1,503.1	-10,429.5	10,524.5	0.00	0.00	0.00
18,550.0	91.09	269.82	7,967.0	-1,503.3	-10,479.4	10,574.3	0.00	0.00	0.00
18,600.0	91.09	269.82	7,966.1	-1,503.5	-10,529.4	10,624.1	0.00	0.00	0.00
18,650.0	91.09	269.82	7,965.1	-1,503.6	-10,579.4	10,673.8	0.00	0.00	0.00
18,700.0	91.09	269.82	7,964.2	-1,503.8	-10,629.4	10,723.6	0.00	0.00	0.00
18,750.0	91.09	269.82	7,963.2	-1,503.9	-10,679.4	10,773.4	0.00	0.00	0.00
18,800.0	91.09	269.82	7,962.3	-1,504.1	-10,729.4	10,823.2	0.00	0.00	0.00
18,850.0	91.09	269.82	7,961.3	-1,504.3	-10,779.4	10,873.0	0.00	0.00	0.00
18,900.0	91.09	269.82	7,960.4	-1,504.4	-10,829.4	10,922.8	0.00	0.00	0.00
18,950.0	91.09	269.82	7,959.4	-1,504.6	-10,879.4	10,972.6	0.00	0.00	0.00
19,000.0	91.09	269.82	7,958.4	-1,504.8 1,504.0	-10,929.4	11,022.3	0.00	0.00	0.00
19,050.0	91.09	269.82	7,957.5	-1,504.9 1,505.1	-10,979.3	11,072.1	0.00	0.00	0.00
19,100.0	91.09	269.82	7,956.5	-1,505.1	-11,029.3	11,121.9	0.00	0.00	0.00
19,150.0	91.09	269.82	7,955.6	-1,505.2	-11,079.3	11,171.7	0.00	0.00	0.00
19,200.0	91.09	269.82	7,954.6	-1,505.4	-11,129.3	11,221.5	0.00	0.00	0.00
19,250.0	91.09	269.82	7,953.7	-1,505.6	-11,179.3	11,271.3	0.00	0.00	0.00
19,300.0	91.09	269.82	7,952.7	-1,505.7	-11,229.3	11,321.1	0.00	0.00	0.00
19,350.0	91.09	269.82	7,951.8	-1,505.9	-11,279.3	11,370.8	0.00	0.00	0.00
19,400.0	91.09	269.82	7,950.8	-1,506.0	-11,329.3	11,420.6	0.00	0.00	0.00
19,450.0	91.09	269.82	7,930.8	-1,506.2	-11,379.3	11,470.4	0.00	0.00	0.00
19,500.0	91.09	269.82	7,948.9	-1,506.4	-11,429.3	11,520.2	0.00	0.00	0.00
19,550.0	91.09	269.82	7,947.9	-1,506.5	-11,479.3	11,570.0	0.00	0.00	0.00
19,600.0	91.09	269.82	7,947.0	-1,506.7	-11,529.2	11,619.8	0.00	0.00	0.00
19,650.0	91.09	269.82	7,946.0	-1,506.8	-11,579.2	11,669.5	0.00	0.00	0.00
19,700.0	91.09	269.82	7,946.0 7,945.1	-1,506.6 -1,507.0	-11,579.2 -11,629.2	11,719.3	0.00	0.00	0.00
19,750.0	91.09	269.82	7,943.1 7,944.1	-1,507.0 -1,507.2	-11,629.2 -11,679.2	11,719.3	0.00	0.00	0.00
19,800.0	91.09	269.82	7,944.1	-1,507.2 -1,507.3	-11,729.2	11,818.9	0.00	0.00	0.00
19,850.0	91.09	269.82	7,943.2 7,942.2	-1,507.5 -1,507.5	-11,729.2 -11,779.2	11,868.7	0.00	0.00	0.00
19,900.0	91.09	269.82	7,941.3	-1,507.6	-11,829.2	11,918.5	0.00	0.00	0.00
19,950.0	91.09	269.82	7,940.3	-1,507.8	-11,879.2	11,968.3	0.00	0.00	0.00
20,000.0	91.09	269.82	7,939.4	-1,508.0	-11,929.2	12,018.0	0.00	0.00	0.00
20,050.0	91.09	269.82	7,938.4	-1,508.1	-11,979.2	12,067.8	0.00	0.00	0.00
20,100.0	91.09	269.82	7,937.5	-1,508.3	-12,029.2	12,117.6	0.00	0.00	0.00
20,150.0	91.09	269.82	7,936.5	-1,508.4	-12,079.1	12,167.4	0.00	0.00	0.00
20,200.0	91.09	269.82	7,935.5	-1,508.6	-12,129.1	12,217.2	0.00	0.00	0.00
20,250.0	91.09	269.82	7,934.6	-1,508.8	-12,179.1	12,267.0	0.00	0.00	0.00
20,300.0	91.09	269.82	7,933.6	-1,508.9	-12,229.1	12,316.8	0.00	0.00	0.00
20,350.0	91.09	269.82	7,932.7	-1,509.1	-12,279.1	12,366.5	0.00	0.00	0.00
20,400.0	91.09	269.82	7,931.7	-1,509.3	-12,329.1	12,416.3	0.00	0.00	0.00
20,450.0	91.09	269.82	7,931.7	-1,509.4	-12,379.1	12,416.3	0.00	0.00	0.00
20,500.0	91.09	269.82	7,929.8	-1,509.6	-12,429.1	12,515.9	0.00	0.00	0.00
20,550.0	91.09	269.82	7,928.9	-1,509.7	-12,479.1	12,565.7	0.00	0.00	0.00
20,600.0	91.09	269.82	7,927.9	-1,509.9	-12,529.1	12,615.5	0.00	0.00	0.00
						,			
20,650.0	91.09	269.82	7,927.0	-1,510.1	-12,579.0	12,665.3	0.00	0.00	0.00
20,700.0	91.09	269.82	7,926.0	-1,510.2 1,510.4	-12,629.0	12,715.0	0.00	0.00	0.00
20,750.0 20,800.0	91.09	269.82	7,925.0	-1,510.4 1,510.5	-12,679.0	12,764.8	0.00	0.00	0.00
	91.09	269.82	7,924.1 7,923.1	-1,510.5 1,510.7	-12,729.0	12,814.6 12,864.4	0.00 0.00	0.00 0.00	0.00 0.00
20,850.0	91.09	269.82	7,923.1	-1,510.7	-12,779.0	12,864.4	0.00	0.00	0.00
20,900.0	91.09	269.82	7,922.2	-1,510.9	-12,829.0	12,914.2	0.00	0.00	0.00
20,950.0	91.09	269.82	7,921.2	-1,511.0	-12,879.0	12,964.0	0.00	0.00	0.00

Database: Hobbs

Company: Mewbourne Oil Company

 Project:
 Eddy County, New Mexico NAD 83

 Site:
 IOU 19/23 Fed Com #523H

 Well:
 Sec 20, T18S, R30E

Wellbore: BHL: 1900' FNL & 100' FWL (Sec 23)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

Grid

sign:	Design #1								
nned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
21,000.0	91.09	269.82	7,920.3	-1,511.2	-12,929.0	13,013.7	0.00	0.00	0.00
21,050.0	91.09	269.82	7,919.3	-1,511.3	-12,979.0	13,063.5	0.00	0.00	0.00
21,100.0	91.09	269.82	7,918.4	-1,511.5	-13,029.0	13,113.3	0.00	0.00	0.00
21,150.0	91.09	269.82	7,917.4	-1,511.7	-13,079,0	13,163.1	0.00	0.00	0.00
21,200.0	91.09	269.82	7,916.5	-1,511.8	-13,128.9	13,212.9	0.00	0.00	0.00
21,250.0	91.09	269.82	7,915.5	-1,512.0	-13,178.9	13,262.7	0.00	0.00	0.00
21,300.0	91.09	269.82	7,914,5	-1,512.1	-13,228.9	13,312.5	0.00	0.00	0.00
21,350.0	91.09	269.82	7,913.6	-1,512.3	-13,278.9	13,362.2	0.00	0.00	0.00
21,400.0	91.09	269.82	7,912.6	-1,512.5	-13,328.9	13,412.0	0.00	0.00	0.00
21,450.0	91.09	269.82	7,911.7	-1,512.6	-13,378.9	13,461.8	0.00	0.00	0.00
21,500.0	91.09	269.82	7,911.7	-1,512.8	-13,428.9	13,511.6	0.00	0.00	0.00
21,550.0	91.09	269.82	7,909.8	-1,512.8 -1,512.9	-13,478.9	13,561.4	0.00	0.00	0.00
			· ·						
21,600.0	91.09	269.82	7,908.8	-1,513.1	-13,528.9	13,611.2	0.00	0.00	0.00
21,650.0	91.09	269.82	7,907.9	-1,513.3	-13,578.9	13,661.0	0.00	0.00	0.00
21,671.2	91.09	269.82	7,907.5	-1,513.3	-13,600.1	13,682.1	0.00	0.00	0.00
PPP3: 1899'	FNL & 2636' FEI	L (Sec 23)							
21,700.0	91.09	269.82	7,906.9	-1,513.4	-13,628.9	13,710.7	0.00	0.00	0.00
21,750.0	91.09	269.82	7,906.0	-1,513.6	-13,678.8	13,760.5	0.00	0.00	0.00
21,800.0	91.09	269.82	7,905.0	-1,513.8	-13,728.8	13,810.3	0.00	0.00	0.00
21,850.0	91.09	269.82	7,904.1	- 1,513.9	- 13,778.8	13,860.1	0.00	0.00	0.00
21,900.0	91.09	269.82	7,903.1	- 1,514.1	- 13,828.8	13,909.9	0.00	0.00	0.00
21,950.0	91.09	269.82	7,902.1	- 1,514.2	- 13,878.8	13,959.7	0.00	0.00	0.00
22,000.0	91.09	269.82	7,901.2	-1,514.4	- 13,928.8	14,009.4	0.00	0.00	0.00
22,050.0	91.09	269.82	7,900.2	- 1,514.6	- 13,978.8	14,059.2	0.00	0.00	0.00
22,100.0	91.09	269.82	7,899.3	-1,514.7	-14,028.8	14,109.0	0.00	0.00	0.00
22,150.0	91.09	269.82	7,898.3	-1,514.9	-14,078.8	14,158.8	0.00	0.00	0.00
22,200.0	91.09	269.82	7,897.4	-1,515.0	-14,128.8	14,208.6	0.00	0.00	0.00
22,250.0	91.09	269.82	7,896.4	-1,515.2	-14,178.7	14,258.4	0.00	0.00	0.00
22,300.0	91.09	269.82	7,895.5	-1,515.4	-14,228.7	14,308.2	0.00	0.00	0.00
22,350.0	91.09	269.82	7,894.5	-1,515.5	-14,278.7	14,357.9	0.00	0.00	0.00
22,400.0	91.09	269.82	7,893.6	-1,515.7	-14,328.7	14,407.7	0.00	0.00	0.00
22,450.0	91.09	269.82	7,892.6	-1,515.8	-14,378.7	14,457.5	0.00	0.00	0.00
22,500.0	91.09	269.82	7,891.6	-1,516.0	-14,428.7	14,507.3	0.00	0.00	0.00
22,550.0	91.09	269.82	7,890.7	-1,516.2	-14,478.7	14,557.1	0.00	0.00	0.00
22,600.0	91.09	269.82	7,889.7	-1,516.3	-14,528.7	14,606.9	0.00	0.00	0.00
22,650.0	91.09	269.82	7,888.8	-1,516.5 -1,516.5	-14,526.7 -14,578.7	14,656.7	0.00	0.00	0.00
22,700.0	91.09	269.82	7,885.8 7,887.8	-1,516.5 -1,516.6	-14,576.7 -14,628.7	14,636.7	0.00	0.00	0.00
22,700.0 22,750.0	91.09	269.82 269.82	7,886.9			14,706.4	0.00	0.00	0.00
22,750.0 22,800.0				-1,516.8 1,517.0	-14,678.7 14.728.6				
	91.09	269.82	7,885.9	-1,517.0	-14,728.6	14,806.0	0.00	0.00	0.00
22,850.0	91.09	269.82	7,885.0	-1,517.1	-14,778.6	14,855.8	0.00	0.00	0.00
22,900.0	91.09	269.82	7,884.0	-1,517.3	-14,828.6	14,905.6	0.00	0.00	0.00
22,950.0	91.09	269.82	7,883.1	-1,517.4	-14,878.6	14,955.4	0.00	0.00	0.00
23,000.0	91.09	269.82	7,882.1	-1,517.6	-14,928.6	15,005.1	0.00	0.00	0.00
23,050.0	91.09	269.82	7,881.1	-1,517.8	-14,978.6	15,054.9	0.00	0.00	0.00
23,100,0	91.09	269.82	7,880.2	-1,517.9	-15,028.6	15,104.7	0.00	0.00	0.00
23,150.0	91.09	269.82	7,879.2	-1,518.1	-15,078.6	15,154.5	0.00	0.00	0.00
23,200.0	91.09	269.82	7,878.3	-1,518.3	-15,128.6	15,204.3	0.00	0.00	0.00
23,250.0	91.09	269.82	7,877.3	-1,518.4	-15,178.6	15,254.1	0.00	0.00	0.00
23,300.0	91.09	269.82	7,876.4	-1,518.6	-15,176.6	15,303.9	0.00	0.00	0.00
•									
23,350.0	91.09	269.82	7,875.4	-1,518.7	-15,278.5	15,353.6	0.00	0.00	0.00
23,400.0	91.09	269.82	7,874.5	-1,518.9	-15,328.5	15,403.4	0.00	0.00	0.00
23,450.0	91.09	269.82	7,873.5	-1,519.1 1,510.2	-15,378.5	15,453.2	0.00	0.00	0.00
23,500.0	91.09	269.82	7,872.6 7,871.6	-1,519.2 -1,519.4	-15,428.5 -15,478.5	15,503.0 15,552.8	0.00 0.00	0.00 0.00	0.00 0.00

Database: Hobbs

Company: Mewbourne Oil Company
Project: Eddy County, New Mexico NAD 83
Site: IOU 19/23 Fed Com #523H
Well: Sec 20, T18S, R30E

Wellbore: BHL: 1900' FNL & 100' FWL (Sec 23)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site IOU 19/23 Fed Com #523H

WELL @ 3523.0usft (Original Well Elev) WELL @ 3523.0usft (Original Well Elev)

Grid

ned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
23,600.0	91.09	269.82	7,870.6	-1,519.5	-15,528.5	15,602.6	0.00	0.00	0.00
23,650.0	91.09	269.82	7,869.7	-1,519.7	-15,578.5	15,652.4	0.00	0.00	0.00
23,700.0	91.09	269.82	7,868.7	-1,519.9	-15,628.5	15,702.1	0.00	0.00	0.00
23,750.0	91.09	269.82	7,867.8	-1,520.0	-15,678.5	15,751.9	0.00	0.00	0.00
23,800.0	91.09	269.82	7,866.8	-1,520.2	-15,728.5	15,801.7	0.00	0.00	0.00
23,850.0	91.09	269.82	7,865.9	-1,520.3	-15,778.4	15,851.5	0.00	0.00	0.00
23,900.0	91.09	269.82	7,864.9	-1,520.5	-15,828.4	15,901.3	0.00	0.00	0.00
23,950.0	91.09	269.82	7,864.0	-1,520.7	-15,878.4	15,951.1	0.00	0.00	0.00
24,000.0	91.09	269.82	7,863.0	-1,520.8	-15,928.4	16,000.8	0.00	0.00	0.00
24,050.0	91.09	269.82	7,862.1	-1,521.0	-15,978.4	16,050.6	0.00	0.00	0.00
24,100.0	91.09	269.82	7,861.1	-1,521.1	-16,028.4	16,100.4	0.00	0.00	0.00
24,150.0	91.09	269.82	7,860.2	-1,521.3	-16,078.4	16,150.2	0.00	0.00	0.00
24,200.0	91.09	269.82	7,859.2	-1,521.5	-16,128.4	16,200.0	0.00	0.00	0.00
24,210.3	91.09	269.82	7,859.0	-1,521.5	-16,138.7	16,210.3	0.00	0.00	0.00
BHL: 1900' F	NL & 100' FWL	(Sec 23)							

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SHL: 430' FNL & 475' F\ - plan hits target cente - Point	0.00 er	0.00	0.0	0.0	0.0	632,766.60	643,468.70	32.7390732	-104.0011739
KOP: 1900' FNL & 473' I - plan hits target cente - Point	0.00 er	0.00	7,583.0	- 1,469.6	3.0	631,297.00	643,471.70	32.7350338	- 104.0011792
BHL: 1900' FNL & 100' F - plan hits target cente - Point	0.00 er	0.00	7,859.0	-1,521.5	-16,138.7	631,245.10	627,330.00	32.7350192	-104.0536740
PPP3: 1899' FNL & 2636 - plan hits target cente - Point	0.00 er	0.00	7,907.5	-1,513.3	-13,600.1	631,253.27	629,868.60	32.7350230	-104.0454181
PPP2: 1904' FNL & 264(- plan hits target cente - Point	0.00 er	0.00	8,107.7	-1,479.6	-3,109.3	631,287.00	640,359.40	32.7350327	-104.0113007
FTP/LP: 1900' FNL & 10 - plan hits target cente - Point	0.00 er	0.00	8,156.1	-1,471.4	-569.9	631,295.16	642,898.80	32.7350336	-104.0030423

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: MEWBOURNE OIL COMPANY
WELL NAME & NO.: IOU 24/19 FED COM 523H
APD ID: 10400101098

LOCATION: Section 13, T.18 S., R.29 E. NMP.

COUNTY: Eddy County, New Mexico

COA

H ₂ S	C	No	Yes		
Potash /	None	Secretary	C R-111-Q	Open Annulus	
WIPP				■ WIPP	
Cave / Karst	Low	Medium	C High	Critical	
Wellhead	Conventional	Multibowl	Both	Diverter	
Cementing	Primary Squeeze	Cont. Squeeze	EchoMeter	DV Tool	
Special Req	Capitan Reef	Water Disposal	▼ COM	Unit	
Waste Prev.	C Self-Certification	Waste Min. Plan	C APD Submitted p	prior to 06/10/2024	
Additional	Flex Hose	Casing Clearance	Pilot Hole	Break Testing	
Language	Four-String	Offline Cementing	Fluid-Filled		

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated **AT SPUD**. As a result, the Hydrogen Sulfide area must meet **43 CFR 3176** requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING DESIGN

Primary Casing Program

- 1. The 13-3/8 inch surface casing shall be set at approximately 400 ft. (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite and above the salt) and cemented to the surface. If salt is encountered, set casing at least 25 ft. above the salt.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of 8

- hours or 500 psi compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The 9-5/8 inch intermediate casing shall be set in a competent bed at approximately 1,275 ft. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to Cave/Karst.

Note: Excess cement is less than 25%, more cement is required if washout occurs. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
- 3. Operator has proposed to set 7 in. production casing at approximately 7,842 ft. (7,785) ft. TVD). The minimum required fill of cement behind the 7 in. production casing is:
 - Option 1 (Single Stage): Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to Cave/Karst.
 - Option 2 (Two-stage): Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.
 - a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
 - b. Second stage above DV tool: Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to Cave/Karst.
- 4. The minimum required fill of cement behind the 4-1/2 in. production liner is:
 - Cement should tie-back at least 100 feet into previous casing string. Operator shall provide method of verification.

Alternate Casing Program

- 1. The 13-3/8 inch surface casing shall be set at approximately 400 ft. (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite and above the salt) and cemented to the surface. If salt is encountered, set casing at least 25 ft. above the salt.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of 8 hours or 500 psi compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The 9-5/8 inch intermediate casing shall be set in a competent bed at approximately 1,275 ft. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to Cave/Karst.

Note: Excess cement is less than 25%, more cement is required if washout occurs. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
- 3. Operator has proposed to set 7 in. production casing at approximately 8,742 ft. (8,037) ft. TVD). The minimum required fill of cement behind the 7 in. production casing is:
 - Option 1 (Single Stage): Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to Cave/Karst.
 - Option 2 (Two-stage): Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. **First stage to DV tool:** Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. **Second stage above DV tool:** Cement should tie-back **at least 200 feet** into previous casing string. Operator shall provide method of verification. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to **Cave/Karst**.
- 4. The minimum required fill of cement behind the 4-1/2 in. production liner is:
 - Cement should tie-back at least 100 feet into previous casing string. Operator shall provide method of verification.

Offline Cementing

Operator has been (**Approved**) to pump the proposed cement program offline in the **Surface and intermediate(s) intervals**. Offline cementing should commence within 24 hours of landing the casing for the interval. Notify the BLM 4hrs prior to the commencement of any offline cementing procedure at **Eddy County:** 575-361-2822.

C. PRESSURE CONTROL

- 1. Variance approved to use **flex line** from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
- 2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi. The BOP/BOPE and annular preventer shall be pressure-tested in accordance with title 43 CFR 3172.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in the title 43 CFR 3172.6(b)(9) must be followed.

BOPE Break Testing Variance

• BOPE Break Testing is ONLY permitted for intervals utilizing a 5M BOPE or

less. (Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP.)

- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (575-706-2779) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-361-2822 Eddy County) 4 hours prior to BOPE tests
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per 43 CFR 3172.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Eddy County Petroleum Engineering Inspection Staff:

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220; **BLM_NM_CFO_DrillingNotifications@BLM.GOV**; (575) 361-2822.

- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the doghouse or stairway area.
- 3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum

- compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least <u>8 hours</u>. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- **4.** Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- **5.** No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- **6.** On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- **8.** Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in 43 CFR 3172.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for

- review. These documents shall be posted in the company man's trailer and on the rig floor.
- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii. Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (Only applies to single stage cement jobs, prior to the cement setting up.)
 - iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent

tester to test without a plug (i.e. against the casing) pursuant to 43 CFR 3172 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).

- iv. The test shall be run on a 5000-psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one-hour chart. A circular chart shall have a maximum 2-hour clock. If a twelve hour or twenty-fourhour chart is used, tester shall make a notation that it is run with a two hour clock.
- v. The results of the test shall be reported to the appropriate BLM office.
- vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- vii. The BOP/BOPE test shall include a low-pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per 43 CFR 3172.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crewintensive operations.

SA 04/10/2025

Hydrogen Sulfide Drilling Operations Plan Mewbourne Oil Company

1. General Requirements

Rule 118 does not apply to this well because MOC has researched this area and no high concentrations of H2S were found. MOC will have on location and working all H2S safety equipment before the Delaware formation for purposes of safety and insurance requirements.

2. Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will have received training from a qualified instructor in the following areas prior to entering the drilling pad area of the well:

- 1. The hazards and characteristics of hydrogen sulfide gas.
- 2. The proper use of personal protective equipment and life support systems.
- 3. The proper use of hydrogen sulfide detectors, alarms, warning systems, briefing areas, evacuation procedures.
- 4. The proper techniques for first aid and rescue operations.

Additionally, supervisory personnel will be trained in the following areas:

- The effects of hydrogen sulfide on metal components. If high tensile tubular systems are utilized, supervisory personnel will be trained in their special maintenance requirements.
- 2 Corrective action and shut in procedures, blowout prevention, and well control procedures while drilling a well.
- The contents of the Hydrogen Sulfide Drilling Operations Plan.

There will be an initial training session prior to encountering a know hydrogen sulfide source. The initial training session shall include a review of the site specific Hydrogen Sulfide Drilling Operations Plan.

3. Hydrogen Sulfide Safety Equipment and Systems

All hydrogen sulfide safety equipment and systems will be installed, tested, and operational prior to drilling below the 9 5/8" intermediate casing.

1. Well Control Equipment

- A. Choke manifold with minimum of one adjustable choke/remote choke.
- B. Blowout preventers equipped with blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- C. Auxiliary equipment including annular type blowout preventer.
- 2. <u>Protective Equipment for Essential Personnel</u>

Thirty minute self contained work unit located in the dog house and at briefing areas.

Additionally: If H2S is encountered in concentrations less than 10 ppm, fans will be placed in work areas to prevent the accumulation of hazardous amounts of poisonous gas. If higher concentrations of H2S are detected the well will be shut in and a rotating head, mud/gas separator, remote choke and flare line with igniter will be installed.

3. <u>Hydrogen Sulfide Protection and Monitoring Equipment</u>

Two portable hydrogen sulfide monitors positioned on location for optimum coverage and detection. The units shall have audible sirens to notify personnel when hydrogen sulfide levels exceed 20 PPM.

4. <u>Visual Warning Systems</u>

- A. Wind direction indicators as indicated on the wellsite diagram.
- B. Caution signs shall be posted on roads providing access to location. Signs shall be painted a high visibility color with lettering of sufficient size to be readable at reasonable distances from potentially contaminated areas.

4. Mud Program

The mud program has been designed to minimize the amount of hydrogen sulfide entrained in the mud system. Proper mud weight, safe drilling practices, and the use of hydrogen sulfide scavengers will minimize hazards while drilling the well.

5. Metallurgy

All tubular systems, wellheads, blowout preventers, drilling spools, kill lines, choke manifolds, and valves shall be suitable for service in a hydrogen sulfide environment when chemically treated.

6. Communications

State & County Officials phone numbers are posted on rig floor and supervisors trailer. Communications in company vehicles and toolpushers are either two way radios or cellular phones.

7. Well Testing

Drill stem testing is not an anticipated requirement for evaluation of this well. If a drill stem test is required, it will be conducted with a minimum number of personnel in the immediate vicinity. The test will be conducted during daylight hours only.

8. Emergency Phone Numbers

Eddy County Sheriff's Office	911 or 575-887-7551
Ambulance Service	911 or 575-885-2111
Carlsbad Fire Dept	911 or 575-885-2111
Loco Hills Volunteer Fire Dept.	911 or 575-677-3266
Closest Medical Facility - Columbia Medical Cer	nter of Carlsbad 575-492-5000

Mewbourne Oil Company	Hobbs District Office Fax 2 nd Fax	575-393-5905 575-397-6252 575-393-7259
District Manager	Robin Terrell	575-390-4816
Drilling Superintendent	Frosty Lathan	575-390-4103
	Bradley Bishop	575-390-6838
Drilling Foreman	Wesley Noseff	575-441-0729

Operator Name: MEWBOURNE OIL COMPANY

Well Name: IOU 24/19 FED COM Well Number: 523H

Waste type: SEWAGE

Waste content description: Human waste & grey water

Amount of waste: 1500 gallons

Waste disposal frequency: Weekly

Safe containment description: 2,000 gallon plastic container

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: PRIVATE

FACILITY

Disposal type description:

Disposal location description: City of Carlsbad Water Treatment facility

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit? NO

Reserve pit length (ft.) Reserve pit width (ft.)

Reserve pit depth (ft.) Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? N

Description of cuttings location

Cuttings area length (ft.) Cuttings area width (ft.)

Cuttings area depth (ft.) Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

Cuttings area liner

Cuttings area liner specifications and installation description

Operator Name: MEWBOURNE OIL COMPANY

Well Name: IOU 24/19 FED COM Well Number: 523H

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N

Ancillary Facilities

Comments:

Section 9 - Well Site

Well Site Layout Diagram:

IOU_24_19_FED_COM_523H_WellSiteLayout_20250715091045.pdf

Comments: NONE

Section 10 - Plans for Surface

Type of disturbance: New Surface Disturbance Multiple Well Pad Name: IOU 24/19 FED COM 521 & 523

Multiple Well Pad Number: 2

Recontouring

IOU_24_19_FED_COM_523H_InterimReclamationMap_20250715091052.pdf

Drainage/Erosion control construction: NONE

Drainage/Erosion control reclamation: NONE

Well pad proposed disturbance Well pad interim reclamation (acres): Well pad long term disturbance

(acres): 5.9 1.4 (acres): 4.5

Road proposed disturbance (acres): Road interim reclamation (acres): 0 Road long term disturbance (acres): 0

1.8

Powerline proposed disturbance Powerline interim reclamation (acres): Powerline long term disturbance

(acres): 0 (acres): 0

Pipeline proposed disturbance Pipeline interim reclamation (acres): 0 Pipeline long term disturbance

(acres): 0

Other proposed disturbance (acres): Other interim reclamation (acres): 0 Other long term disturbance (acres): 0

3.673

Total proposed disturbance: Total interim reclamation: 1.4 Total long term disturbance: 4.5

11.373000000000001

Disturbance Comments: In areas to be heavily disturbed, the top 6 inches of soil material, will be stripped and stockpiled on the perimeter of the well location to keep topsoil viable, and to make redistribution of topsoil more efficient during interim reclamation. Stockpiled topsoil should include vegetative material. Topsoil will be clearly segregated and stored separately from subsoils. Contaminated soil will not be stockpiled, but properly treated and handled prior to topsoil salvaging.

Reconstruction method: The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ration, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 513424

ACKNOWLEDGMENTS

Operator:	OGRID:
MEWBOURNE OIL CO	14744
P.O. Box 5270	Action Number:
Hobbs, NM 88241	513424
	Action Type:
[C-101] BLM - Federal/Indian Land Lease (For	

ACKNOWLEDGMENTS

I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 513424

CONDITIONS

Operator:	OGRID:
MEWBOURNE OIL CO	14744
P.O. Box 5270	Action Number:
Hobbs, NM 88241	513424
	Action Type:
	[C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
mleal	Cement is required to circulate on both surface and intermediate1 strings of casing.	10/8/2025
mleal	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.	10/8/2025
ward.rikala	Notify the OCD 24 hours prior to casing & cement.	10/14/2025
ward.rikala	File As Drilled C-102 and a directional Survey with C-104 completion packet.	10/14/2025
ward.rikala	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	10/14/2025
ward.rikala	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	10/14/2025