

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form C-101  
August 1, 2011

Permit 399309

**APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE**

|                                                                                                            |  |                               |
|------------------------------------------------------------------------------------------------------------|--|-------------------------------|
| 1. Operator Name and Address<br>Tascosa Energy Partners, L.L.C<br>901 W. Missouri Ave<br>Midland, TX 79701 |  | 2. OGRID Number<br>329748     |
| 4. Property Code<br>337206                                                                                 |  | 3. API Number<br>30-015-57372 |
| 5. Property Name<br>CLAIRE 33 34 FEE                                                                       |  | 6. Well No.<br>302H           |

**7. Surface Location**

|          |         |          |       |         |           |          |           |          |        |
|----------|---------|----------|-------|---------|-----------|----------|-----------|----------|--------|
| UL - Lot | Section | Township | Range | Lot Idn | Feet From | N/S Line | Feet From | E/W Line | County |
| A        | 32      | 19S      | 26E   | A       | 517       | N        | 35        | E        | Eddy   |

**8. Proposed Bottom Hole Location**

|          |         |          |       |         |           |          |           |          |        |
|----------|---------|----------|-------|---------|-----------|----------|-----------|----------|--------|
| UL - Lot | Section | Township | Range | Lot Idn | Feet From | N/S Line | Feet From | E/W Line | County |
| E        | 34      | 19S      | 26E   | E       | 1980      | N        | 1229      | W        | Eddy   |

**9. Pool Information**

|                        |       |
|------------------------|-------|
| WC 20S26E6;BONE SPRING | 98380 |
|------------------------|-------|

**Additional Well Information**

|                           |                             |                                        |                           |                                    |
|---------------------------|-----------------------------|----------------------------------------|---------------------------|------------------------------------|
| 11. Work Type<br>New Well | 12. Well Type<br>OIL        | 13. Cable/Rotary                       | 14. Lease Type<br>Private | 15. Ground Level Elevation<br>3310 |
| 16. Multiple<br>N         | 17. Proposed Depth<br>13803 | 18. Formation<br>3rd Bone Spring Sand  | 19. Contractor            | 20. Spud Date<br>10/13/2025        |
| Depth to Ground water     |                             | Distance from nearest fresh water well |                           | Distance to nearest surface water  |

☒ We will be using a closed-loop system in lieu of lined pits

**21. Proposed Casing and Cement Program**

| Type | Hole Size | Casing Size | Casing Weight/ft | Setting Depth | Sacks of Cement | Estimated TOC |
|------|-----------|-------------|------------------|---------------|-----------------|---------------|
| Surf | 17.5      | 13.375      | 54.5             | 1200          | 1500            | 0             |
| Int1 | 12.25     | 9.625       | 36               | 2000          | 750             | 0             |
| Prod | 8.5       | 5.5         | 20               | 13803         | 2900            | 0             |

**Casing/Cement Program: Additional Comments**

|  |
|--|
|  |
|--|

**22. Proposed Blowout Prevention Program**

| Type       | Working Pressure | Test Pressure | Manufacturer |
|------------|------------------|---------------|--------------|
| Double Ram | 3000             | 3000          | Shaffer      |
| Annular    | 3000             | 3000          | Shaffer      |

|                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| 23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.<br>I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.<br>I further certify I have complied with 19.15.14.9 (A) NMAC <input type="checkbox"/> and/or 19.15.14.9 (B) NMAC <input checked="" type="checkbox"/> if applicable. | <b>OIL CONSERVATION DIVISION</b>                           |
| Signature:                                                                                                                                                                                                                                                                                                                                                                                                            |                                                            |
| Printed Name: Electronically filed by Kelly M Hardy                                                                                                                                                                                                                                                                                                                                                                   | Approved By: Jeffrey Harrison                              |
| Title: Land Manager                                                                                                                                                                                                                                                                                                                                                                                                   | Title: Petroleum Specialist III                            |
| Email Address: khardy@tascosaep.com                                                                                                                                                                                                                                                                                                                                                                                   | Approved Date: 10/14/2025      Expiration Date: 10/14/2027 |
| Date: 10/9/2025      Phone: 432-695-6970                                                                                                                                                                                                                                                                                                                                                                              | Conditions of Approval Attached                            |

|                                                                 |  |                                                                                                            |  |  |  |                                     |                                                       |  |  |
|-----------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------|--|--|--|-------------------------------------|-------------------------------------------------------|--|--|
| <b>C-102</b><br><br>Submit Electronically<br>Via OCD Permitting |  | State of New Mexico<br>Energy, Minerals & Natural Resources Department<br><b>OIL CONSERVATION DIVISION</b> |  |  |  | Revised July 9, 2024                |                                                       |  |  |
|                                                                 |  |                                                                                                            |  |  |  | Submittal Type:                     | <input checked="" type="checkbox"/> Initial Submittal |  |  |
|                                                                 |  |                                                                                                            |  |  |  |                                     | <input type="checkbox"/> Amended Report               |  |  |
|                                                                 |  |                                                                                                            |  |  |  | <input type="checkbox"/> As Drilled |                                                       |  |  |

| WELL LOCATION INFORMATION                                                                                                                              |  |                                                      |  |                                             |                                                                                                                                                        |  |  |                                        |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------|--|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|----------------------------------------|--|
| API Number<br><b>30-015-57372</b>                                                                                                                      |  | Pool Code<br><b>98380</b>                            |  | Pool Name<br><b>WC 20S26E6; BONE SPRING</b> |                                                                                                                                                        |  |  |                                        |  |
| Property Code<br><b>337206</b>                                                                                                                         |  | Property Name<br><b>CLAIRE 33-34 FEE</b>             |  |                                             |                                                                                                                                                        |  |  | Well Number<br><b>#302H</b>            |  |
| OGRID No.<br><b>329748</b>                                                                                                                             |  | Operator Name<br><b>TASCOSA ENERGY PARTNERS, LLC</b> |  |                                             |                                                                                                                                                        |  |  | Ground Level Elevation<br><b>3310'</b> |  |
| Surface Owner: <input type="checkbox"/> State <input checked="" type="checkbox"/> Fee <input type="checkbox"/> Tribal <input type="checkbox"/> Federal |  |                                                      |  |                                             | Mineral Owner: <input type="checkbox"/> State <input checked="" type="checkbox"/> Fee <input type="checkbox"/> Tribal <input type="checkbox"/> Federal |  |  |                                        |  |

| Surface Location |                      |                         |                      |     |                                 |                                |                               |                                  |                       |
|------------------|----------------------|-------------------------|----------------------|-----|---------------------------------|--------------------------------|-------------------------------|----------------------------------|-----------------------|
| UL<br><b>A</b>   | Section<br><b>32</b> | Township<br><b>19 S</b> | Range<br><b>26 E</b> | Lot | Ft. from N/S<br><b>517' FNL</b> | Ft. from E/W<br><b>35' FEL</b> | Latitude<br><b>32.622828°</b> | Longitude<br><b>-104.395527°</b> | County<br><b>EDDY</b> |

| Bottom Hole Location |                      |                         |                      |     |                                  |                                  |                               |                                  |                       |
|----------------------|----------------------|-------------------------|----------------------|-----|----------------------------------|----------------------------------|-------------------------------|----------------------------------|-----------------------|
| UL<br><b>E</b>       | Section<br><b>34</b> | Township<br><b>19 S</b> | Range<br><b>26 E</b> | Lot | Ft. from N/S<br><b>1980' FNL</b> | Ft. from E/W<br><b>1229' FWL</b> | Latitude<br><b>32.618720°</b> | Longitude<br><b>-104.374243°</b> | County<br><b>EDDY</b> |

|                                  |                                            |                                 |                                                                                                               |                                  |
|----------------------------------|--------------------------------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------|
| Dedicated Acres<br><b>200.00</b> | Infill or Defining Well<br><b>Defining</b> | Defining Well API<br><b>N/A</b> | Overlapping Spacing Unit (Y/N)<br><b>N</b>                                                                    | Consolidation Code<br><b>N/A</b> |
| Order Numbers.                   |                                            |                                 | Well setbacks are under Common Ownership: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |                                  |

| Kick Off Point (KOP) |                      |                         |                      |     |                                 |                                |                               |                                  |                       |
|----------------------|----------------------|-------------------------|----------------------|-----|---------------------------------|--------------------------------|-------------------------------|----------------------------------|-----------------------|
| UL<br><b>A</b>       | Section<br><b>32</b> | Township<br><b>19 S</b> | Range<br><b>26 E</b> | Lot | Ft. from N/S<br><b>517' FNL</b> | Ft. from E/W<br><b>35' FEL</b> | Latitude<br><b>32.622828°</b> | Longitude<br><b>-104.395527°</b> | County<br><b>EDDY</b> |


| First Take Point (FTP) |                      |                         |                      |     |                                  |                                 |                               |                                  |                       |
|------------------------|----------------------|-------------------------|----------------------|-----|----------------------------------|---------------------------------|-------------------------------|----------------------------------|-----------------------|
| UL<br><b>E</b>         | Section<br><b>33</b> | Township<br><b>19 S</b> | Range<br><b>26 E</b> | Lot | Ft. from N/S<br><b>1980' FNL</b> | Ft. from E/W<br><b>100' FWL</b> | Latitude<br><b>32.618806°</b> | Longitude<br><b>-104.395129°</b> | County<br><b>EDDY</b> |

| Last Take Point (LTP) |                      |                         |                      |     |                                  |                                  |                               |                                  |                       |
|-----------------------|----------------------|-------------------------|----------------------|-----|----------------------------------|----------------------------------|-------------------------------|----------------------------------|-----------------------|
| UL<br><b>E</b>        | Section<br><b>34</b> | Township<br><b>19 S</b> | Range<br><b>26 E</b> | Lot | Ft. from N/S<br><b>1980' FNL</b> | Ft. from E/W<br><b>1229' FWL</b> | Latitude<br><b>32.618720°</b> | Longitude<br><b>-104.374243°</b> | County<br><b>EDDY</b> |

|                                                         |                                                                                                    |                                         |
|---------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------|
| Unitized Area or Area of Uniform Interest<br><b>N/A</b> | Spacing Unit Type <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical | Ground Floor Elevation:<br><b>3310'</b> |
|---------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------|

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                  |                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| <b>OPERATOR CERTIFICATIONS</b><br><br><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i><br><br><i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i><br><br><div style="display: flex; justify-content: space-between;"> <span><i>Alyssa McNear</i></span> <span><b>10/09/2025</b></span> </div> | <b>SURVEYOR CERTIFICATIONS</b><br><br><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i><br><br><div style="text-align: center;">  </div> |                |
| Signature<br><b>Alyssa McNear</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Signature and Seal of Professional Surveyor                                                                                                                                                                                                                                                                                                                                                      |                |
| Printed Name<br><b>adavanzo@tascosaep.com</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 23203      OCTOBER 1, 2025                                                                                                                                                                                                                                                                                                                                                                       |                |
| Email Address                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Certificate Number                                                                                                                                                                                                                                                                                                                                                                               | Date of Survey |


Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

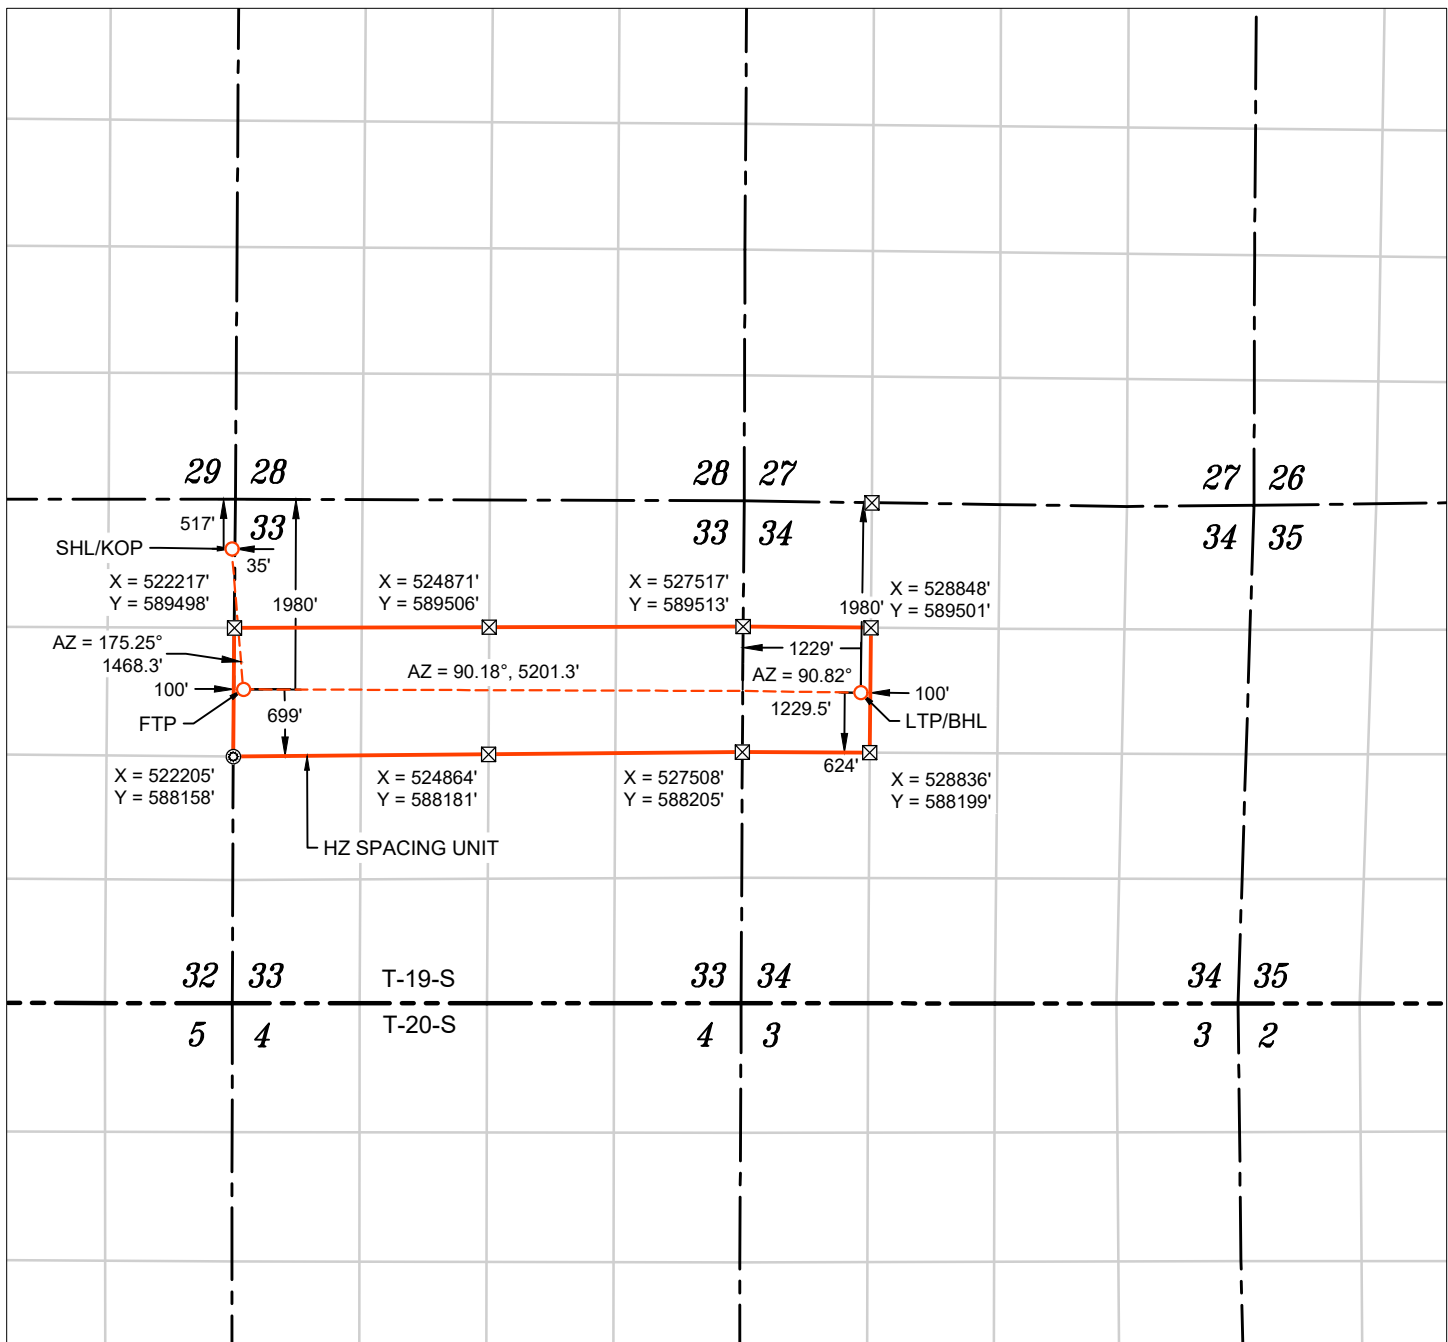

WELL NAME: CLAIRE 33-34 FEE #302H  
 ELEVATION: 3310'

|                                                |
|------------------------------------------------|
| <b>NAD 83 (SHL/KOP) 517' FNL &amp; 35' FEL</b> |
| LATITUDE = 32.622828°                          |
| LONGITUDE = -104.395527°                       |
| <b>NAD 27 (SHL/KOP)</b>                        |
| LATITUDE = 32.622714°                          |
| LONGITUDE = -104.395009°                       |
| <b>STATE PLANE NAD 83 (N.M. EAST)</b>          |
| N: 590321.35' E: 522189.67'                    |
| <b>STATE PLANE NAD 27 (N.M. EAST)</b>          |
| N: 590260.35' E: 481011.08'                    |

|                                              |
|----------------------------------------------|
| <b>NAD 83 (FTP) 1980' FNL &amp; 100' FWL</b> |
| LATITUDE = 32.618806°                        |
| LONGITUDE = -104.395129°                     |
| <b>NAD 27 (FTP)</b>                          |
| LATITUDE = 32.618692°                        |
| LONGITUDE = -104.394612°                     |
| <b>STATE PLANE NAD 83 (N.M. EAST)</b>        |
| N: 588858.05' E: 522311.27'                  |
| <b>STATE PLANE NAD 27 (N.M. EAST)</b>        |
| N: 588797.09' E: 481132.65'                  |



- ⊙ FOUND MONUMENT
- ⊠ CALC. CORNER
- SHL/ KOP/ FTP / PPP/ LTP / BHL
- - - WELLBORE
- - - HORIZONTAL SPACING UNIT
- STATE OIL & GAS LEASE
- BLM OIL & GAS LEASE

|                                                   |
|---------------------------------------------------|
| <b>NAD 83 (LTP/BHL) 1980' FNL &amp; 1229' FWL</b> |
| LATITUDE = 32.618720°                             |
| LONGITUDE = -104.374243°                          |
| <b>NAD 27 (LTP/BHL)</b>                           |
| LATITUDE = 32.618606°                             |
| LONGITUDE = -104.373727°                          |
| <b>STATE PLANE NAD 83 (N.M. EAST)</b>             |
| N: 588823.70' E: 528741.92'                       |
| <b>STATE PLANE NAD 27 (N.M. EAST)</b>             |
| N: 588762.62' E: 487562.97'                       |

| APPROXIMATE WELL BORE DISTANCE FROM FTP TO LTP |          |
|------------------------------------------------|----------|
| SECTION 33                                     | 5201.28' |
| SECTION 34                                     | 1229.53' |
| TOTAL                                          | 6430.81' |

#### NOTES

- ALL COORDINATES, BEARINGS, AND DISTANCES CONTAINED HEREIN ARE GRID, BASED UPON THE NEW MEXICO STATE PLANE COORDINATES SYSTEM, NORTH AMERICAN DATUM 83, NEW MEXICO EAST (3001).
- THIS DOCUMENT IS BASED UPON AN ON THE GROUND SURVEY PERFORMED DURING OCTOBER, 2025. CERTIFICATION OF THIS DOCUMENT IS ONLY TO THE LOCATION OF THIS EASEMENT IN RELATION TO RECORDED MONUMENT OF DEEDS PROVIDED BY THE CLIENT.
- ELEVATIONS MSL, DERIVED FROM G.N.S.S. OBSERVATION AND DERIVED FROM SAID ON-THE-GROUND SURVEY.

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form APD Comments

Permit 399309

**PERMIT COMMENTS**

|                                                                                                                   |                                 |
|-------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Operator Name and Address:<br>Tascosa Energy Partners, L.L.C [329748]<br>901 W. Missouri Ave<br>Midland, TX 79701 | API Number:<br>30-015-57372     |
|                                                                                                                   | Well:<br>CLAIRE 33 34 FEE #302H |

| Created By       | Comment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Comment Date |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| jeffrey.harrison | The intent of all OCD forms is to be completely filled out (and signed) with accurate and relevant information. Surface and mineral owner(s) should be marked as applicable. Should a well be reported as "infill", the API number of the "defining" well must be reported. Should the "defining" well currently be pending and is without an API number please report the well name and number for that "defining" well. Overlapping spacing unit(s) in addition to setbacks under common ownership should always be answered either yes or no. The consolidation code should be filled out appropriately for each well, or marked pending if not received yet. If no order number(s) are available, please report either N/A or pending depending on the circumstance. Any additional sections of the C-102 that are not applicable please report as N/A. | 10/9/2025    |

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form APD Conditions

Permit 399309

**PERMIT CONDITIONS OF APPROVAL**

|                                                                                                                   |                                 |
|-------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Operator Name and Address:<br>Tascosa Energy Partners, L.L.C [329748]<br>901 W. Missouri Ave<br>Midland, TX 79701 | API Number:<br>30-015-57372     |
|                                                                                                                   | Well:<br>CLAIRE 33 34 FEE #302H |

| OCD Reviewer     | Condition                                                                                                                                                                                                                                                             |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| jeffrey.harrison | This well is within the Roswell Artesian Basin. Operator must adhere to all 19.15.39.11 NMAC regulations.                                                                                                                                                             |
| jeffrey.harrison | Brine water shall not be used in the Roswell Artesian Aquifer. Only fresh water shall be utilized until the Roswell Artesian Aquifer is cased and cemented.                                                                                                           |
| jeffrey.harrison | No additives containing PFAS chemicals will be added to the drilling fluids or completion fluids used during drilling, completions, or recompletions operations.                                                                                                      |
| jeffrey.harrison | All logs run on the well must be submitted to NMOCD.                                                                                                                                                                                                                  |
| jeffrey.harrison | Cement is required to circulate on both surface and intermediate1 strings of casing.                                                                                                                                                                                  |
| jeffrey.harrison | If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.                                                                                                                                                            |
| jeffrey.harrison | A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.                                                                                                                                                                                                |
| jeffrey.harrison | Notify the OCD 24 hours prior to casing & cement.                                                                                                                                                                                                                     |
| jeffrey.harrison | File As Drilled C-102 and a directional Survey with C-104 completion packet.                                                                                                                                                                                          |
| jeffrey.harrison | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string. |
| jeffrey.harrison | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.                  |
| jeffrey.harrison | NSL required before production if LTP is < 100' from eastern limit of spacing unit.                                                                                                                                                                                   |







Company: Tascosa Energy Partners  
Site: Claire 33-34 Fee  
Well: Claire 33-34 Fee #302H  
Project: Eddy County, NM (NAD83) NMEZ Grid  
Rig: 26' KB



| ANNOTATIONS |       |        |         |          |         |         |           |                                     |
|-------------|-------|--------|---------|----------|---------|---------|-----------|-------------------------------------|
| MD          | Inc   | Azi    | TVD     | +N/-S    | +E/-W   | Vsect   | Departure | Annotation                          |
| 1300.00     | 0.00  | 0.00   | 1300.00 | 0.00     | 0.00    | 0.00    | 0.00      | Begin 2.00°/100' Build              |
| 1550.00     | 5.00  | 198.74 | 1549.68 | -10.32   | -3.50   | -1.11   | 10.90     | Begin 5.00° Tangent                 |
| 2100.00     | 5.00  | 198.74 | 2097.59 | -55.72   | -18.90  | -6.01   | 58.84     | Begin 2.00°/100' Build              |
| 2768.76     | 18.38 | 198.74 | 2750.99 | -183.72  | -62.32  | -19.82  | 194.00    | Begin 18.38° Tangent                |
| 6427.04     | 18.38 | 198.74 | 6222.76 | -1275.82 | -432.79 | -137.61 | 1347.23   | KOP, Begin 10.00°/100' Build & Turn |
| 7369.63     | 88.47 | 90.31  | 6825.00 | -1463.37 | 121.68  | 444.72  | 1977.62   | Begin 88.47° Lateral                |
| 13802.56    | 88.47 | 90.31  | 6997.00 | -1497.77 | 6552.22 | 6721.23 | 8408.25   | PBHL                                |

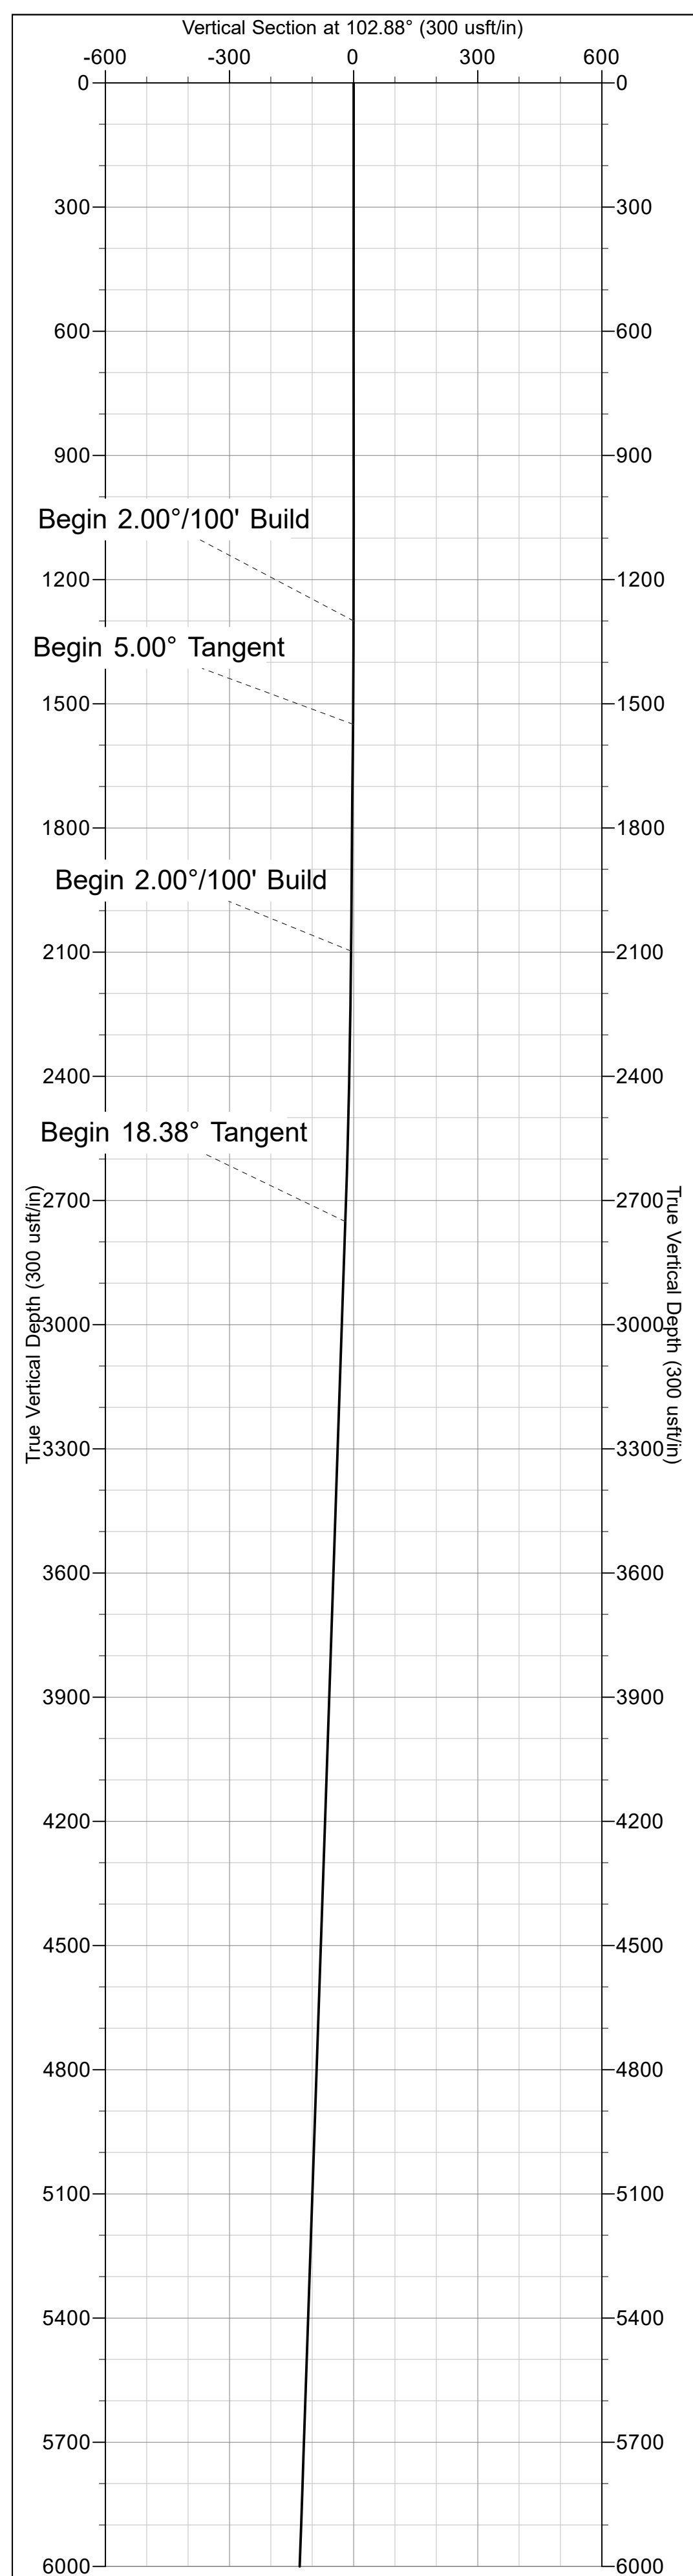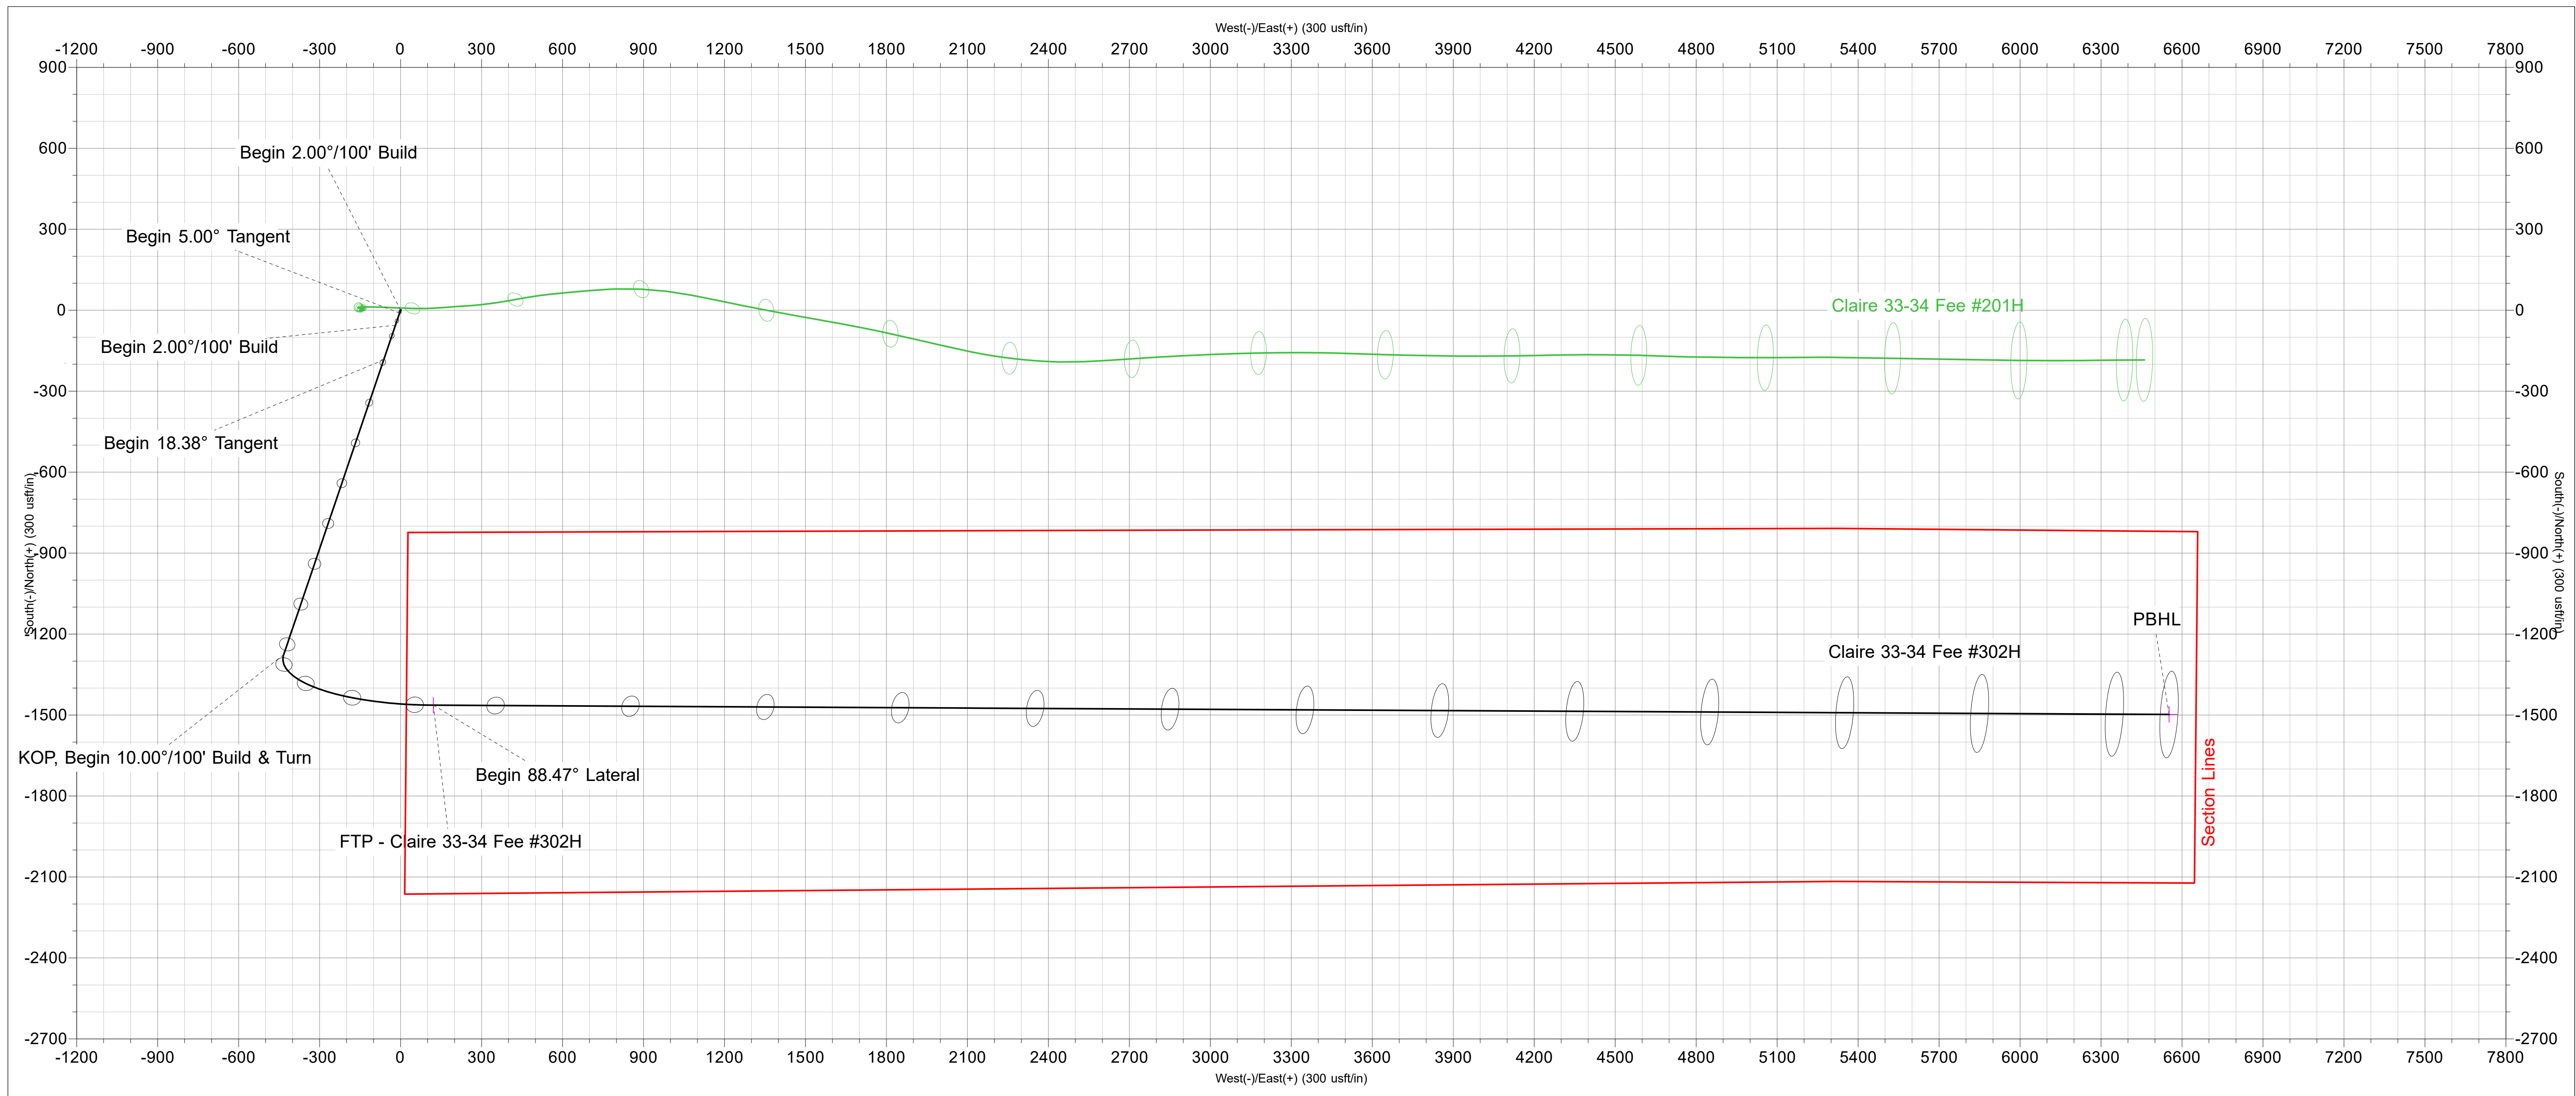

G

T

M



Azimuths to Grid North  
True North: 0.03°  
Magnetic North: 6.49°

Magnetic Field  
Strength: 47199.8nT  
Dip Angle: 60.00°  
Date: 9/30/2025  
Model: IGRF2020

US State Plane 1983  
New Mexico Eastern Zone

Created By: HLH  
Date: 7:26, October 02 2025  
Plan: Design #1

Grid North is 0.03° West of True North (Grid Convergence)  
To convert a Magnetic Direction to a Grid Direction, Add 6.49°  
To convert a Magnetic Direction to a True Direction, Add 6.45° East

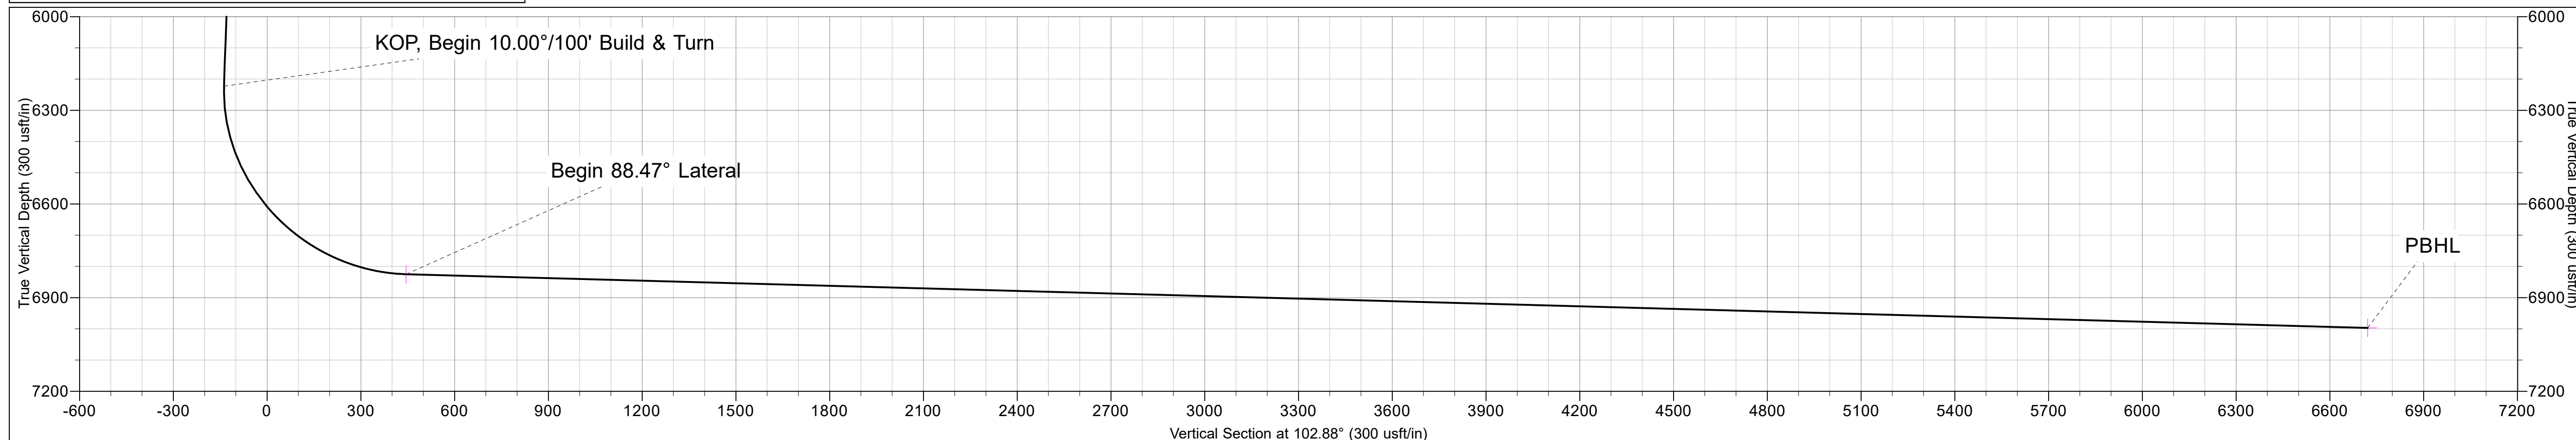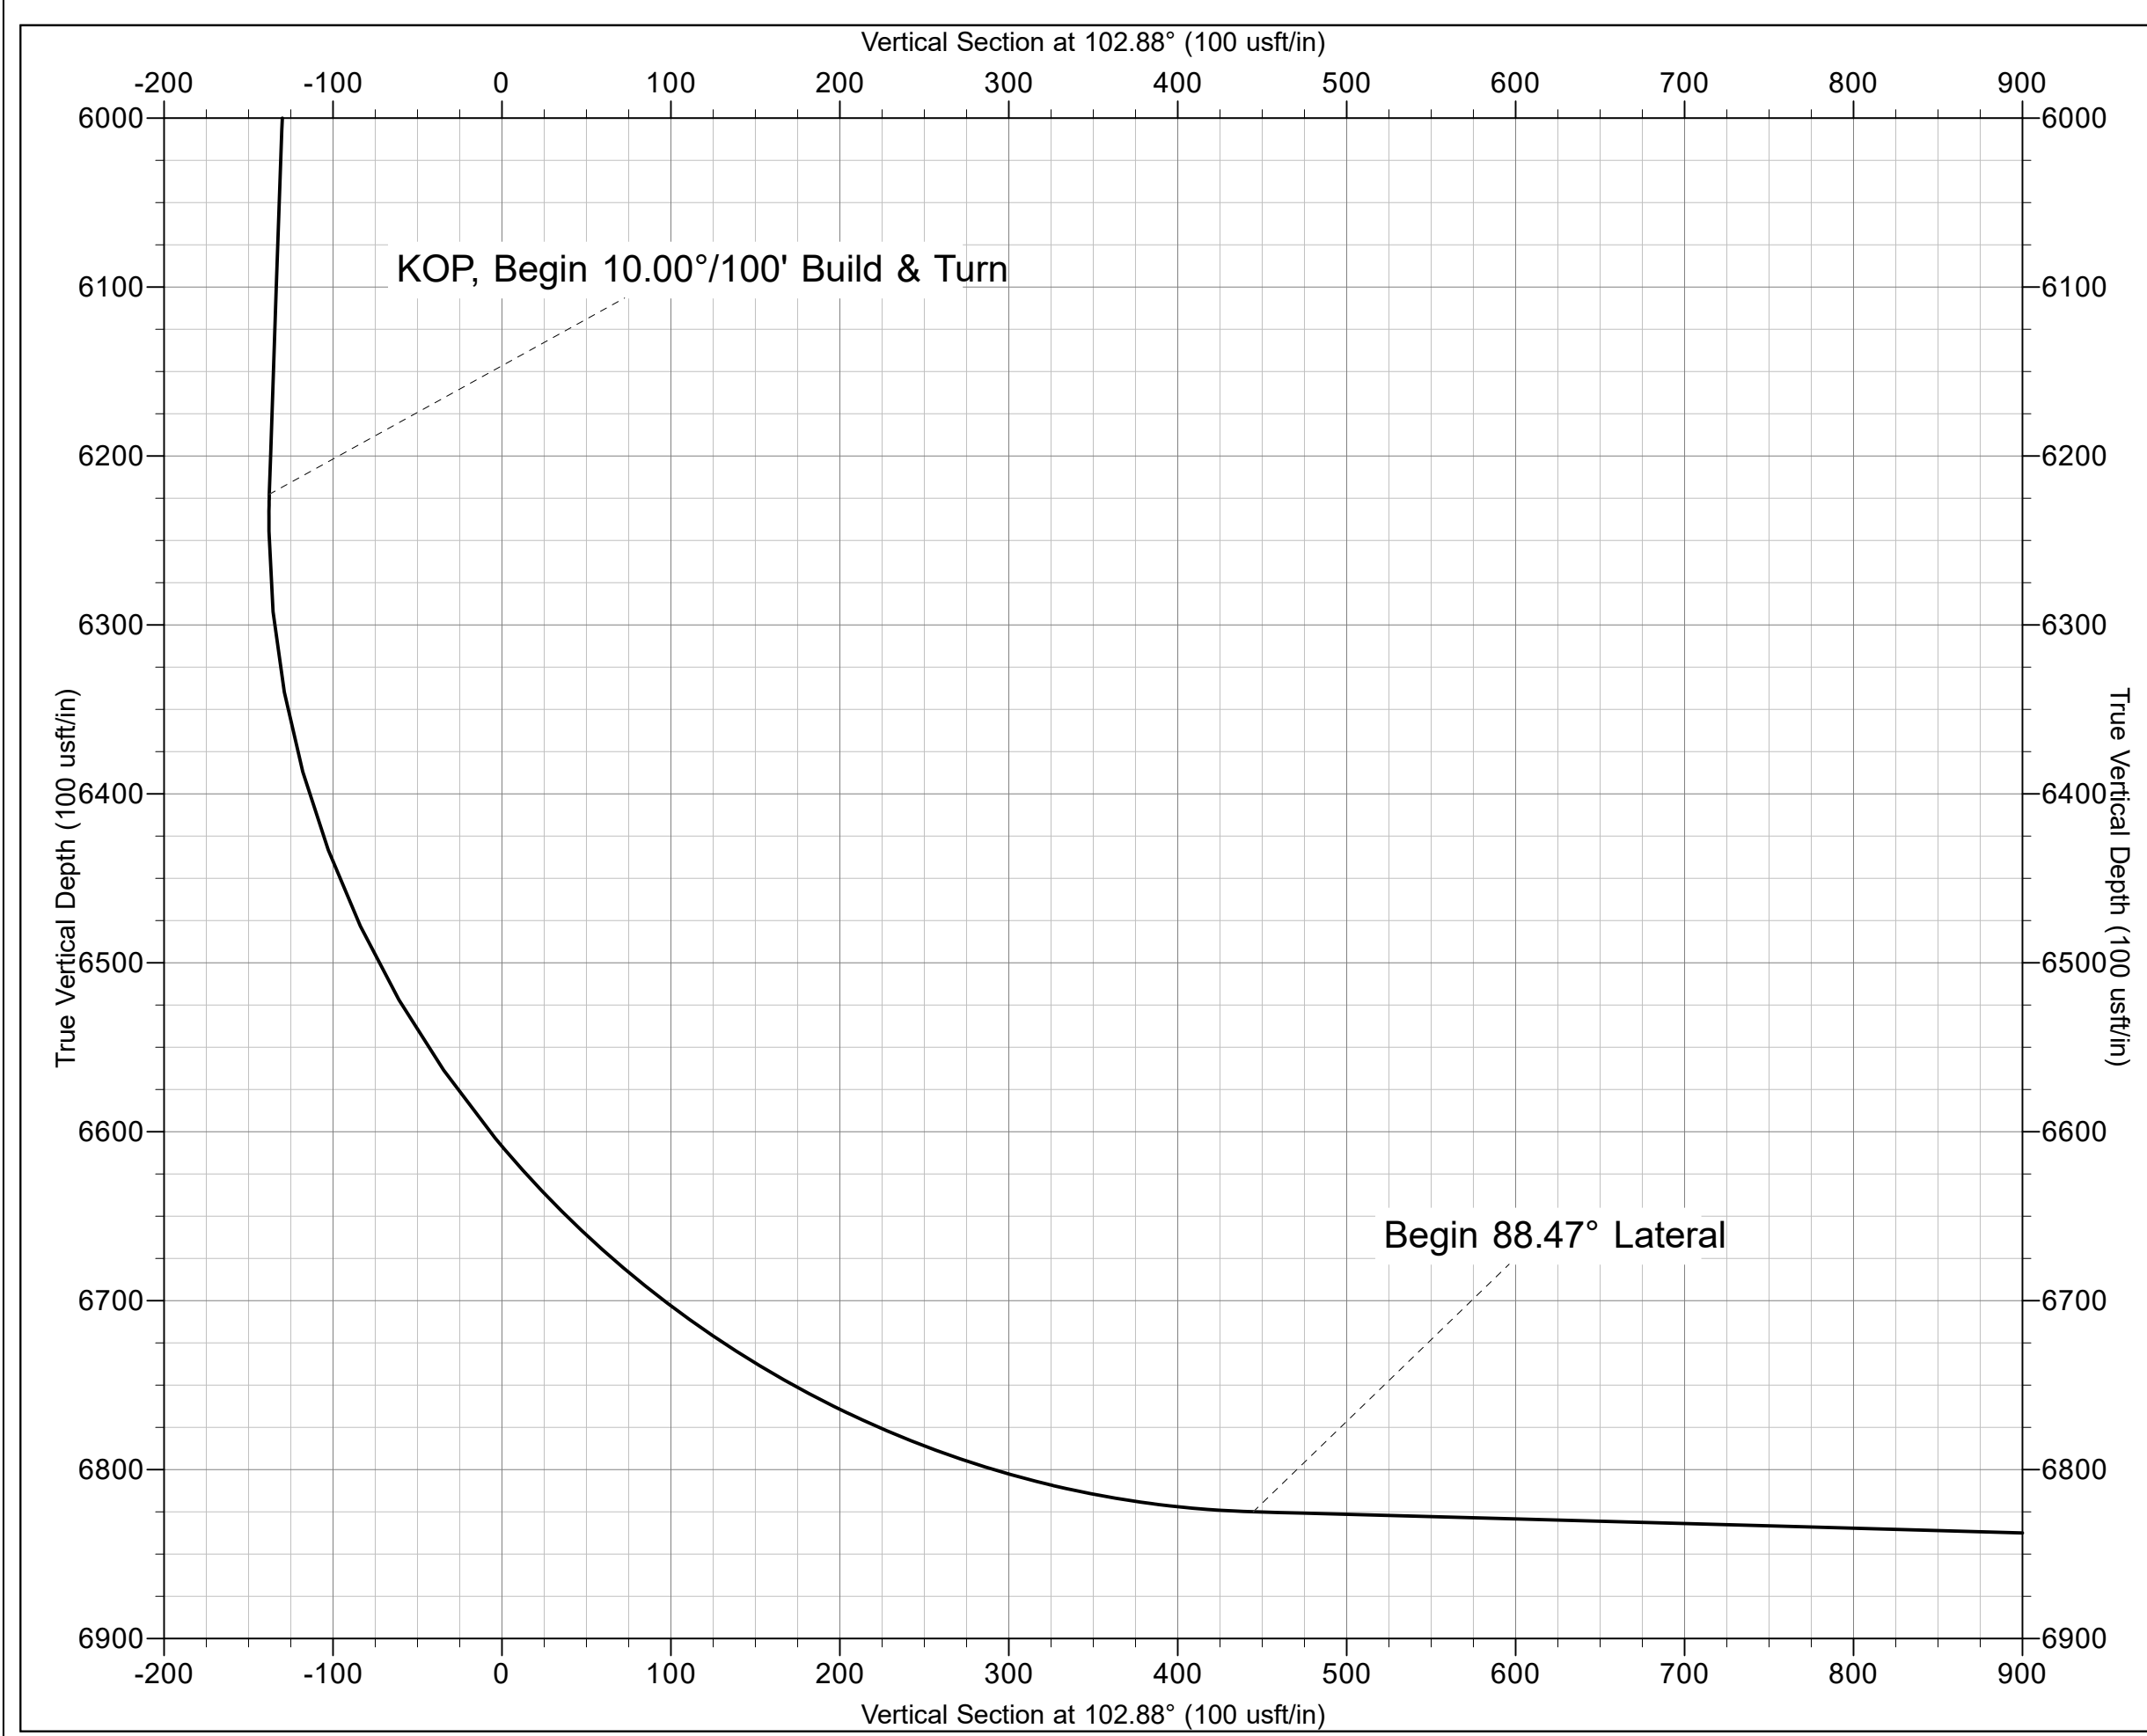





# **Tascosa Energy Partners**

**Eddy County, NM (NAD83) NMEZ Grid**

**Claire 33-34 Fee**

**Claire 33-34 Fee #302H**

**Wellbore #1**

**Plan: Design #1**

## **Standard Planning Report**

**02 October, 2025**





# Stryker Directional Planning Report



|                  |                                   |                                     |                             |
|------------------|-----------------------------------|-------------------------------------|-----------------------------|
| <b>Database:</b> | EDM 5000.1 Server                 | <b>Local Co-ordinate Reference:</b> | Well Claire 33-34 Fee #302H |
| <b>Company:</b>  | Tascosa Energy Partners           | <b>TVD Reference:</b>               | RKB @ 3336.00usft (26' KB)  |
| <b>Project:</b>  | Eddy County, NM (NAD83) NMEZ Grid | <b>MD Reference:</b>                | RKB @ 3336.00usft (26' KB)  |
| <b>Site:</b>     | Claire 33-34 Fee                  | <b>North Reference:</b>             | Grid                        |
| <b>Well:</b>     | Claire 33-34 Fee #302H            | <b>Survey Calculation Method:</b>   | Minimum Curvature           |
| <b>Wellbore:</b> | Wellbore #1                       |                                     |                             |
| <b>Design:</b>   | Design #1                         |                                     |                             |

|                    |                                   |                      |                |
|--------------------|-----------------------------------|----------------------|----------------|
| <b>Project</b>     | Eddy County, NM (NAD83) NMEZ Grid |                      |                |
| <b>Map System:</b> | US State Plane 1983               | <b>System Datum:</b> | Mean Sea Level |
| <b>Geo Datum:</b>  | North American Datum 1983         |                      |                |
| <b>Map Zone:</b>   | New Mexico Eastern Zone           |                      |                |

|                              |                  |                     |                 |                                  |
|------------------------------|------------------|---------------------|-----------------|----------------------------------|
| <b>Site</b>                  | Claire 33-34 Fee |                     |                 |                                  |
| <b>Site Position:</b>        |                  | <b>Northing:</b>    | 590,321.34 usft | <b>Latitude:</b> 32.622828       |
| <b>From:</b>                 | Lat/Long         | <b>Easting:</b>     | 522,039.73 usft | <b>Longitude:</b> -104.396014    |
| <b>Position Uncertainty:</b> | 0.00 usft        | <b>Slot Radius:</b> | 13-3/16 "       | <b>Grid Convergence:</b> -0.03 ° |

|                             |                        |             |                            |                                    |
|-----------------------------|------------------------|-------------|----------------------------|------------------------------------|
| <b>Well</b>                 | Claire 33-34 Fee #302H |             |                            |                                    |
| <b>Well Position</b>        | <b>+N/-S</b>           | 0.00 usft   | <b>Northing:</b>           | 590,321.33 usft                    |
|                             | <b>+E/-W</b>           | 149.93 usft | <b>Easting:</b>            | 522,189.67 usft                    |
| <b>Position Uncertainty</b> | 0.00 usft              |             | <b>Wellhead Elevation:</b> | <b>Ground Level:</b> 3,310.00 usft |

|                  |                   |                    |                        |                      |                            |
|------------------|-------------------|--------------------|------------------------|----------------------|----------------------------|
| <b>Wellbore</b>  | Wellbore #1       |                    |                        |                      |                            |
| <b>Magnetics</b> | <b>Model Name</b> | <b>Sample Date</b> | <b>Declination (°)</b> | <b>Dip Angle (°)</b> | <b>Field Strength (nT)</b> |
|                  | IGRF2020          | 9/30/2025          | 6.45                   | 60.00                | 47,199.77434484            |

|                          |                                |                     |                      |                      |
|--------------------------|--------------------------------|---------------------|----------------------|----------------------|
| <b>Design</b>            | Design #1                      |                     |                      |                      |
| <b>Audit Notes:</b>      |                                |                     |                      |                      |
| <b>Version:</b>          | <b>Phase:</b>                  | PLAN                | <b>Tie On Depth:</b> | 0.00                 |
| <b>Vertical Section:</b> | <b>Depth From (TVD) (usft)</b> | <b>+N/-S (usft)</b> | <b>+E/-W (usft)</b>  | <b>Direction (°)</b> |
|                          | 0.00                           | 0.00                | 0.00                 | 102.88               |

| <b>Plan Sections</b>  |                 |             |                       |              |              |                         |                        |                       |         |                      |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|------------------------|-----------------------|---------|----------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) | TFO (°) | Target               |
| 0.00                  | 0.00            | 0.00        | 0.00                  | 0.00         | 0.00         | 0.00                    | 0.00                   | 0.00                  | 0.00    |                      |
| 1,300.00              | 0.00            | 0.00        | 1,300.00              | 0.00         | 0.00         | 0.00                    | 0.00                   | 0.00                  | 0.00    |                      |
| 1,550.00              | 5.00            | 198.74      | 1,549.68              | -10.32       | -3.50        | 2.00                    | 2.00                   | 0.00                  | 198.74  |                      |
| 2,100.00              | 5.00            | 198.74      | 2,097.59              | -55.72       | -18.90       | 0.00                    | 0.00                   | 0.00                  | 0.00    |                      |
| 2,768.76              | 18.38           | 198.74      | 2,750.99              | -183.72      | -62.32       | 2.00                    | 2.00                   | 0.00                  | 0.00    |                      |
| 6,427.04              | 18.38           | 198.74      | 6,222.76              | -1,275.82    | -432.79      | 0.00                    | 0.00                   | 0.00                  | 0.00    |                      |
| 7,369.63              | 88.47           | 90.31       | 6,825.00              | -1,463.37    | 121.68       | 10.00                   | 7.44                   | -11.50                | -108.01 | FTP - Claire 33-34 I |
| 13,802.56             | 88.47           | 90.31       | 6,997.00              | -1,497.77    | 6,552.22     | 0.00                    | 0.00                   | 0.00                  | 0.00    | PBHL - Claire 33-34  |





# Stryker Directional Planning Report



|                  |                                   |                                     |                             |
|------------------|-----------------------------------|-------------------------------------|-----------------------------|
| <b>Database:</b> | EDM 5000.1 Server                 | <b>Local Co-ordinate Reference:</b> | Well Claire 33-34 Fee #302H |
| <b>Company:</b>  | Tascosa Energy Partners           | <b>TVD Reference:</b>               | RKB @ 3336.00usft (26' KB)  |
| <b>Project:</b>  | Eddy County, NM (NAD83) NMEZ Grid | <b>MD Reference:</b>                | RKB @ 3336.00usft (26' KB)  |
| <b>Site:</b>     | Claire 33-34 Fee                  | <b>North Reference:</b>             | Grid                        |
| <b>Well:</b>     | Claire 33-34 Fee #302H            | <b>Survey Calculation Method:</b>   | Minimum Curvature           |
| <b>Wellbore:</b> | Wellbore #1                       |                                     |                             |
| <b>Design:</b>   | Design #1                         |                                     |                             |

| Planned Survey         |                 |             |                       |              |              |                         |                         |                        |                       |
|------------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|
| Measured Depth (usft)  | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
| 0.00                   | 0.00            | 0.00        | 0.00                  | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 100.00                 | 0.00            | 0.00        | 100.00                | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 200.00                 | 0.00            | 0.00        | 200.00                | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 300.00                 | 0.00            | 0.00        | 300.00                | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 400.00                 | 0.00            | 0.00        | 400.00                | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 500.00                 | 0.00            | 0.00        | 500.00                | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 600.00                 | 0.00            | 0.00        | 600.00                | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 700.00                 | 0.00            | 0.00        | 700.00                | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 800.00                 | 0.00            | 0.00        | 800.00                | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 900.00                 | 0.00            | 0.00        | 900.00                | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 1,000.00               | 0.00            | 0.00        | 1,000.00              | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 1,100.00               | 0.00            | 0.00        | 1,100.00              | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 1,200.00               | 0.00            | 0.00        | 1,200.00              | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| 1,300.00               | 0.00            | 0.00        | 1,300.00              | 0.00         | 0.00         | 0.00                    | 0.00                    | 0.00                   | 0.00                  |
| Begin 2.00°/100' Build |                 |             |                       |              |              |                         |                         |                        |                       |
| 1,400.00               | 2.00            | 198.74      | 1,399.98              | -1.65        | -0.56        | -0.18                   | 2.00                    | 2.00                   | 0.00                  |
| 1,500.00               | 4.00            | 198.74      | 1,499.84              | -6.61        | -2.24        | -0.71                   | 2.00                    | 2.00                   | 0.00                  |
| 1,550.00               | 5.00            | 198.74      | 1,549.68              | -10.32       | -3.50        | -1.11                   | 2.00                    | 2.00                   | 0.00                  |
| Begin 5.00° Tangent    |                 |             |                       |              |              |                         |                         |                        |                       |
| 1,600.00               | 5.00            | 198.74      | 1,599.49              | -14.45       | -4.90        | -1.56                   | 0.00                    | 0.00                   | 0.00                  |
| 1,700.00               | 5.00            | 198.74      | 1,699.11              | -22.70       | -7.70        | -2.45                   | 0.00                    | 0.00                   | 0.00                  |
| 1,800.00               | 5.00            | 198.74      | 1,798.73              | -30.96       | -10.50       | -3.34                   | 0.00                    | 0.00                   | 0.00                  |
| 1,900.00               | 5.00            | 198.74      | 1,898.35              | -39.21       | -13.30       | -4.23                   | 0.00                    | 0.00                   | 0.00                  |
| 2,000.00               | 5.00            | 198.74      | 1,997.97              | -47.46       | -16.10       | -5.12                   | 0.00                    | 0.00                   | 0.00                  |
| 2,100.00               | 5.00            | 198.74      | 2,097.59              | -55.72       | -18.90       | -6.01                   | 0.00                    | 0.00                   | 0.00                  |
| Begin 2.00°/100' Build |                 |             |                       |              |              |                         |                         |                        |                       |
| 2,200.00               | 7.00            | 198.74      | 2,197.04              | -65.62       | -22.26       | -7.08                   | 2.00                    | 2.00                   | 0.00                  |
| 2,300.00               | 9.00            | 198.74      | 2,296.06              | -78.79       | -26.73       | -8.50                   | 2.00                    | 2.00                   | 0.00                  |
| 2,400.00               | 11.00           | 198.74      | 2,394.53              | -95.24       | -32.31       | -10.27                  | 2.00                    | 2.00                   | 0.00                  |
| 2,500.00               | 13.00           | 198.74      | 2,492.34              | -114.93      | -38.99       | -12.40                  | 2.00                    | 2.00                   | 0.00                  |
| 2,600.00               | 15.00           | 198.74      | 2,589.37              | -137.84      | -46.76       | -14.87                  | 2.00                    | 2.00                   | 0.00                  |
| 2,700.00               | 17.00           | 198.74      | 2,685.49              | -163.94      | -55.61       | -17.68                  | 2.00                    | 2.00                   | 0.00                  |
| 2,768.76               | 18.38           | 198.74      | 2,750.99              | -183.72      | -62.32       | -19.82                  | 2.00                    | 2.00                   | 0.00                  |
| Begin 18.38° Tangent   |                 |             |                       |              |              |                         |                         |                        |                       |
| 2,800.00               | 18.38           | 198.74      | 2,780.65              | -193.05      | -65.49       | -20.82                  | 0.00                    | 0.00                   | 0.00                  |
| 2,900.00               | 18.38           | 198.74      | 2,875.55              | -222.90      | -75.62       | -24.04                  | 0.00                    | 0.00                   | 0.00                  |
| 3,000.00               | 18.38           | 198.74      | 2,970.45              | -252.75      | -85.74       | -27.26                  | 0.00                    | 0.00                   | 0.00                  |
| 3,100.00               | 18.38           | 198.74      | 3,065.35              | -282.60      | -95.87       | -30.48                  | 0.00                    | 0.00                   | 0.00                  |
| 3,200.00               | 18.38           | 198.74      | 3,160.25              | -312.46      | -106.00      | -33.70                  | 0.00                    | 0.00                   | 0.00                  |
| 3,300.00               | 18.38           | 198.74      | 3,255.15              | -342.31      | -116.12      | -36.92                  | 0.00                    | 0.00                   | 0.00                  |
| 3,400.00               | 18.38           | 198.74      | 3,350.05              | -372.16      | -126.25      | -40.14                  | 0.00                    | 0.00                   | 0.00                  |
| 3,500.00               | 18.38           | 198.74      | 3,444.95              | -402.02      | -136.38      | -43.36                  | 0.00                    | 0.00                   | 0.00                  |
| 3,600.00               | 18.38           | 198.74      | 3,539.86              | -431.87      | -146.50      | -46.58                  | 0.00                    | 0.00                   | 0.00                  |
| 3,700.00               | 18.38           | 198.74      | 3,634.76              | -461.72      | -156.63      | -49.80                  | 0.00                    | 0.00                   | 0.00                  |
| 3,800.00               | 18.38           | 198.74      | 3,729.66              | -491.57      | -166.76      | -53.02                  | 0.00                    | 0.00                   | 0.00                  |
| 3,900.00               | 18.38           | 198.74      | 3,824.56              | -521.43      | -176.88      | -56.24                  | 0.00                    | 0.00                   | 0.00                  |
| 4,000.00               | 18.38           | 198.74      | 3,919.46              | -551.28      | -187.01      | -59.46                  | 0.00                    | 0.00                   | 0.00                  |
| 4,100.00               | 18.38           | 198.74      | 4,014.36              | -581.13      | -197.14      | -62.68                  | 0.00                    | 0.00                   | 0.00                  |
| 4,200.00               | 18.38           | 198.74      | 4,109.26              | -610.99      | -207.26      | -65.90                  | 0.00                    | 0.00                   | 0.00                  |
| 4,300.00               | 18.38           | 198.74      | 4,204.17              | -640.84      | -217.39      | -69.12                  | 0.00                    | 0.00                   | 0.00                  |
| 4,400.00               | 18.38           | 198.74      | 4,299.07              | -670.69      | -227.52      | -72.34                  | 0.00                    | 0.00                   | 0.00                  |
| 4,500.00               | 18.38           | 198.74      | 4,393.97              | -700.54      | -237.65      | -75.56                  | 0.00                    | 0.00                   | 0.00                  |
| 4,600.00               | 18.38           | 198.74      | 4,488.87              | -730.40      | -247.77      | -78.78                  | 0.00                    | 0.00                   | 0.00                  |
| 4,700.00               | 18.38           | 198.74      | 4,583.77              | -760.25      | -257.90      | -82.00                  | 0.00                    | 0.00                   | 0.00                  |



# Stryker Directional Planning Report



|                  |                                   |                                     |                             |
|------------------|-----------------------------------|-------------------------------------|-----------------------------|
| <b>Database:</b> | EDM 5000.1 Server                 | <b>Local Co-ordinate Reference:</b> | Well Claire 33-34 Fee #302H |
| <b>Company:</b>  | Tascosa Energy Partners           | <b>TVD Reference:</b>               | RKB @ 3336.00usft (26' KB)  |
| <b>Project:</b>  | Eddy County, NM (NAD83) NMEZ Grid | <b>MD Reference:</b>                | RKB @ 3336.00usft (26' KB)  |
| <b>Site:</b>     | Claire 33-34 Fee                  | <b>North Reference:</b>             | Grid                        |
| <b>Well:</b>     | Claire 33-34 Fee #302H            | <b>Survey Calculation Method:</b>   | Minimum Curvature           |
| <b>Wellbore:</b> | Wellbore #1                       |                                     |                             |
| <b>Design:</b>   | Design #1                         |                                     |                             |

| Planned Survey                                 |                 |             |                       |              |              |                         |                         |                        |                       |
|------------------------------------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|
| Measured Depth (usft)                          | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
| 4,800.00                                       | 18.38           | 198.74      | 4,678.67              | -790.10      | -268.03      | -85.22                  | 0.00                    | 0.00                   | 0.00                  |
| 4,900.00                                       | 18.38           | 198.74      | 4,773.57              | -819.95      | -278.15      | -88.44                  | 0.00                    | 0.00                   | 0.00                  |
| 5,000.00                                       | 18.38           | 198.74      | 4,868.47              | -849.81      | -288.28      | -91.66                  | 0.00                    | 0.00                   | 0.00                  |
| 5,100.00                                       | 18.38           | 198.74      | 4,963.38              | -879.66      | -298.41      | -94.88                  | 0.00                    | 0.00                   | 0.00                  |
| 5,200.00                                       | 18.38           | 198.74      | 5,058.28              | -909.51      | -308.53      | -98.10                  | 0.00                    | 0.00                   | 0.00                  |
| 5,300.00                                       | 18.38           | 198.74      | 5,153.18              | -939.37      | -318.66      | -101.32                 | 0.00                    | 0.00                   | 0.00                  |
| 5,400.00                                       | 18.38           | 198.74      | 5,248.08              | -969.22      | -328.79      | -104.54                 | 0.00                    | 0.00                   | 0.00                  |
| 5,500.00                                       | 18.38           | 198.74      | 5,342.98              | -999.07      | -338.91      | -107.76                 | 0.00                    | 0.00                   | 0.00                  |
| 5,600.00                                       | 18.38           | 198.74      | 5,437.88              | -1,028.92    | -349.04      | -110.98                 | 0.00                    | 0.00                   | 0.00                  |
| 5,700.00                                       | 18.38           | 198.74      | 5,532.78              | -1,058.78    | -359.17      | -114.20                 | 0.00                    | 0.00                   | 0.00                  |
| 5,800.00                                       | 18.38           | 198.74      | 5,627.68              | -1,088.63    | -369.29      | -117.42                 | 0.00                    | 0.00                   | 0.00                  |
| 5,900.00                                       | 18.38           | 198.74      | 5,722.59              | -1,118.48    | -379.42      | -120.64                 | 0.00                    | 0.00                   | 0.00                  |
| 6,000.00                                       | 18.38           | 198.74      | 5,817.49              | -1,148.34    | -389.55      | -123.86                 | 0.00                    | 0.00                   | 0.00                  |
| 6,100.00                                       | 18.38           | 198.74      | 5,912.39              | -1,178.19    | -399.67      | -127.08                 | 0.00                    | 0.00                   | 0.00                  |
| 6,200.00                                       | 18.38           | 198.74      | 6,007.29              | -1,208.04    | -409.80      | -130.30                 | 0.00                    | 0.00                   | 0.00                  |
| 6,300.00                                       | 18.38           | 198.74      | 6,102.19              | -1,237.89    | -419.93      | -133.51                 | 0.00                    | 0.00                   | 0.00                  |
| 6,400.00                                       | 18.38           | 198.74      | 6,197.09              | -1,267.75    | -430.05      | -136.73                 | 0.00                    | 0.00                   | 0.00                  |
| 6,427.04                                       | 18.38           | 198.74      | 6,222.76              | -1,275.82    | -432.79      | -137.61                 | 0.00                    | 0.00                   | 0.00                  |
| <b>KOP, Begin 10.00°/100' Build &amp; Turn</b> |                 |             |                       |              |              |                         |                         |                        |                       |
| 6,450.00                                       | 17.79           | 191.58      | 6,244.58              | -1,282.68    | -434.66      | -137.90                 | 10.00                   | -2.53                  | -31.19                |
| 6,500.00                                       | 17.50           | 175.06      | 6,292.26              | -1,297.67    | -435.55      | -135.42                 | 10.00                   | -0.59                  | -33.03                |
| 6,550.00                                       | 18.56           | 159.22      | 6,339.83              | -1,312.61    | -432.07      | -128.71                 | 10.00                   | 2.11                   | -31.68                |
| 6,600.00                                       | 20.76           | 145.83      | 6,386.94              | -1,327.39    | -424.27      | -117.80                 | 10.00                   | 4.40                   | -26.79                |
| 6,650.00                                       | 23.79           | 135.30      | 6,433.22              | -1,341.89    | -412.19      | -102.80                 | 10.00                   | 6.06                   | -21.06                |
| 6,700.00                                       | 27.37           | 127.20      | 6,478.33              | -1,356.02    | -395.93      | -83.80                  | 10.00                   | 7.17                   | -16.20                |
| 6,750.00                                       | 31.32           | 120.92      | 6,521.91              | -1,369.65    | -375.62      | -60.95                  | 10.00                   | 7.90                   | -12.55                |
| 6,800.00                                       | 35.51           | 115.95      | 6,563.65              | -1,382.69    | -351.40      | -34.44                  | 10.00                   | 8.38                   | -9.93                 |
| 6,850.00                                       | 39.86           | 111.93      | 6,603.21              | -1,395.04    | -323.46      | -4.45                   | 10.00                   | 8.71                   | -8.05                 |
| 6,900.00                                       | 44.33           | 108.59      | 6,640.31              | -1,406.60    | -292.01      | 28.78                   | 10.00                   | 8.94                   | -6.69                 |
| 6,950.00                                       | 48.89           | 105.74      | 6,674.65              | -1,417.29    | -257.30      | 65.00                   | 10.00                   | 9.11                   | -5.69                 |
| 7,000.00                                       | 53.50           | 103.27      | 6,705.98              | -1,427.02    | -219.59      | 103.93                  | 10.00                   | 9.23                   | -4.94                 |
| 7,050.00                                       | 58.16           | 101.08      | 6,734.05              | -1,435.71    | -179.16      | 145.28                  | 10.00                   | 9.32                   | -4.39                 |
| 7,100.00                                       | 62.86           | 99.10       | 6,758.66              | -1,443.32    | -136.32      | 188.74                  | 10.00                   | 9.39                   | -3.96                 |
| 7,150.00                                       | 67.58           | 97.28       | 6,779.62              | -1,449.76    | -91.40       | 233.96                  | 10.00                   | 9.44                   | -3.64                 |
| 7,200.00                                       | 72.31           | 95.58       | 6,796.76              | -1,455.01    | -44.74       | 280.62                  | 10.00                   | 9.48                   | -3.40                 |
| 7,250.00                                       | 77.07           | 93.96       | 6,809.96              | -1,459.01    | 3.30         | 328.35                  | 10.00                   | 9.50                   | -3.22                 |
| 7,300.00                                       | 81.83           | 92.41       | 6,819.11              | -1,461.74    | 52.36        | 376.78                  | 10.00                   | 9.52                   | -3.10                 |
| 7,350.00                                       | 86.60           | 90.90       | 6,824.15              | -1,463.17    | 102.07       | 425.56                  | 10.00                   | 9.53                   | -3.03                 |
| 7,369.63                                       | 88.47           | 90.31       | 6,825.00              | -1,463.37    | 121.68       | 444.72                  | 10.00                   | 9.54                   | -3.00                 |
| <b>Begin 88.47° Lateral</b>                    |                 |             |                       |              |              |                         |                         |                        |                       |
| 7,400.00                                       | 88.47           | 90.31       | 6,825.81              | -1,463.54    | 152.04       | 474.35                  | 0.00                    | 0.00                   | 0.00                  |
| 7,500.00                                       | 88.47           | 90.31       | 6,828.49              | -1,464.07    | 252.00       | 571.92                  | 0.00                    | 0.00                   | 0.00                  |
| 7,600.00                                       | 88.47           | 90.31       | 6,831.16              | -1,464.61    | 351.97       | 669.49                  | 0.00                    | 0.00                   | 0.00                  |
| 7,700.00                                       | 88.47           | 90.31       | 6,833.83              | -1,465.14    | 451.93       | 767.06                  | 0.00                    | 0.00                   | 0.00                  |
| 7,800.00                                       | 88.47           | 90.31       | 6,836.51              | -1,465.68    | 551.89       | 864.63                  | 0.00                    | 0.00                   | 0.00                  |
| 7,900.00                                       | 88.47           | 90.31       | 6,839.18              | -1,466.21    | 651.86       | 962.20                  | 0.00                    | 0.00                   | 0.00                  |
| 8,000.00                                       | 88.47           | 90.31       | 6,841.85              | -1,466.74    | 751.82       | 1,059.76                | 0.00                    | 0.00                   | 0.00                  |
| 8,100.00                                       | 88.47           | 90.31       | 6,844.53              | -1,467.28    | 851.78       | 1,157.33                | 0.00                    | 0.00                   | 0.00                  |
| 8,200.00                                       | 88.47           | 90.31       | 6,847.20              | -1,467.81    | 951.74       | 1,254.90                | 0.00                    | 0.00                   | 0.00                  |
| 8,300.00                                       | 88.47           | 90.31       | 6,849.88              | -1,468.35    | 1,051.71     | 1,352.47                | 0.00                    | 0.00                   | 0.00                  |
| 8,400.00                                       | 88.47           | 90.31       | 6,852.55              | -1,468.88    | 1,151.67     | 1,450.04                | 0.00                    | 0.00                   | 0.00                  |
| 8,500.00                                       | 88.47           | 90.31       | 6,855.22              | -1,469.42    | 1,251.63     | 1,547.61                | 0.00                    | 0.00                   | 0.00                  |
| 8,600.00                                       | 88.47           | 90.31       | 6,857.90              | -1,469.95    | 1,351.59     | 1,645.18                | 0.00                    | 0.00                   | 0.00                  |



# Stryker Directional Planning Report



|                  |                                   |                                     |                             |
|------------------|-----------------------------------|-------------------------------------|-----------------------------|
| <b>Database:</b> | EDM 5000.1 Server                 | <b>Local Co-ordinate Reference:</b> | Well Claire 33-34 Fee #302H |
| <b>Company:</b>  | Tascosa Energy Partners           | <b>TVD Reference:</b>               | RKB @ 3336.00usft (26' KB)  |
| <b>Project:</b>  | Eddy County, NM (NAD83) NMEZ Grid | <b>MD Reference:</b>                | RKB @ 3336.00usft (26' KB)  |
| <b>Site:</b>     | Claire 33-34 Fee                  | <b>North Reference:</b>             | Grid                        |
| <b>Well:</b>     | Claire 33-34 Fee #302H            | <b>Survey Calculation Method:</b>   | Minimum Curvature           |
| <b>Wellbore:</b> | Wellbore #1                       |                                     |                             |
| <b>Design:</b>   | Design #1                         |                                     |                             |

| Planned Survey        |                 |             |                       |              |              |                         |                         |                        |                       |  |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |  |
| 8,700.00              | 88.47           | 90.31       | 6,860.57              | -1,470.49    | 1,451.56     | 1,742.74                | 0.00                    | 0.00                   | 0.00                  |  |
| 8,800.00              | 88.47           | 90.31       | 6,863.24              | -1,471.02    | 1,551.52     | 1,840.31                | 0.00                    | 0.00                   | 0.00                  |  |
| 8,900.00              | 88.47           | 90.31       | 6,865.92              | -1,471.56    | 1,651.48     | 1,937.88                | 0.00                    | 0.00                   | 0.00                  |  |
| 9,000.00              | 88.47           | 90.31       | 6,868.59              | -1,472.09    | 1,751.45     | 2,035.45                | 0.00                    | 0.00                   | 0.00                  |  |
| 9,100.00              | 88.47           | 90.31       | 6,871.27              | -1,472.63    | 1,851.41     | 2,133.02                | 0.00                    | 0.00                   | 0.00                  |  |
| 9,200.00              | 88.47           | 90.31       | 6,873.94              | -1,473.16    | 1,951.37     | 2,230.59                | 0.00                    | 0.00                   | 0.00                  |  |
| 9,300.00              | 88.47           | 90.31       | 6,876.61              | -1,473.70    | 2,051.33     | 2,328.15                | 0.00                    | 0.00                   | 0.00                  |  |
| 9,400.00              | 88.47           | 90.31       | 6,879.29              | -1,474.23    | 2,151.30     | 2,425.72                | 0.00                    | 0.00                   | 0.00                  |  |
| 9,500.00              | 88.47           | 90.31       | 6,881.96              | -1,474.76    | 2,251.26     | 2,523.29                | 0.00                    | 0.00                   | 0.00                  |  |
| 9,600.00              | 88.47           | 90.31       | 6,884.63              | -1,475.30    | 2,351.22     | 2,620.86                | 0.00                    | 0.00                   | 0.00                  |  |
| 9,700.00              | 88.47           | 90.31       | 6,887.31              | -1,475.83    | 2,451.19     | 2,718.43                | 0.00                    | 0.00                   | 0.00                  |  |
| 9,800.00              | 88.47           | 90.31       | 6,889.98              | -1,476.37    | 2,551.15     | 2,816.00                | 0.00                    | 0.00                   | 0.00                  |  |
| 9,900.00              | 88.47           | 90.31       | 6,892.66              | -1,476.90    | 2,651.11     | 2,913.56                | 0.00                    | 0.00                   | 0.00                  |  |
| 10,000.00             | 88.47           | 90.31       | 6,895.33              | -1,477.44    | 2,751.07     | 3,011.13                | 0.00                    | 0.00                   | 0.00                  |  |
| 10,100.00             | 88.47           | 90.31       | 6,898.00              | -1,477.97    | 2,851.04     | 3,108.70                | 0.00                    | 0.00                   | 0.00                  |  |
| 10,200.00             | 88.47           | 90.31       | 6,900.68              | -1,478.51    | 2,951.00     | 3,206.27                | 0.00                    | 0.00                   | 0.00                  |  |
| 10,300.00             | 88.47           | 90.31       | 6,903.35              | -1,479.04    | 3,050.96     | 3,303.84                | 0.00                    | 0.00                   | 0.00                  |  |
| 10,400.00             | 88.47           | 90.31       | 6,906.02              | -1,479.58    | 3,150.93     | 3,401.41                | 0.00                    | 0.00                   | 0.00                  |  |
| 10,500.00             | 88.47           | 90.31       | 6,908.70              | -1,480.11    | 3,250.89     | 3,498.97                | 0.00                    | 0.00                   | 0.00                  |  |
| 10,600.00             | 88.47           | 90.31       | 6,911.37              | -1,480.65    | 3,350.85     | 3,596.54                | 0.00                    | 0.00                   | 0.00                  |  |
| 10,700.00             | 88.47           | 90.31       | 6,914.05              | -1,481.18    | 3,450.81     | 3,694.11                | 0.00                    | 0.00                   | 0.00                  |  |
| 10,800.00             | 88.47           | 90.31       | 6,916.72              | -1,481.72    | 3,550.78     | 3,791.68                | 0.00                    | 0.00                   | 0.00                  |  |
| 10,900.00             | 88.47           | 90.31       | 6,919.39              | -1,482.25    | 3,650.74     | 3,889.25                | 0.00                    | 0.00                   | 0.00                  |  |
| 11,000.00             | 88.47           | 90.31       | 6,922.07              | -1,482.78    | 3,750.70     | 3,986.82                | 0.00                    | 0.00                   | 0.00                  |  |
| 11,100.00             | 88.47           | 90.31       | 6,924.74              | -1,483.32    | 3,850.67     | 4,084.38                | 0.00                    | 0.00                   | 0.00                  |  |
| 11,200.00             | 88.47           | 90.31       | 6,927.41              | -1,483.85    | 3,950.63     | 4,181.95                | 0.00                    | 0.00                   | 0.00                  |  |
| 11,300.00             | 88.47           | 90.31       | 6,930.09              | -1,484.39    | 4,050.59     | 4,279.52                | 0.00                    | 0.00                   | 0.00                  |  |
| 11,400.00             | 88.47           | 90.31       | 6,932.76              | -1,484.92    | 4,150.55     | 4,377.09                | 0.00                    | 0.00                   | 0.00                  |  |
| 11,500.00             | 88.47           | 90.31       | 6,935.44              | -1,485.46    | 4,250.52     | 4,474.66                | 0.00                    | 0.00                   | 0.00                  |  |
| 11,600.00             | 88.47           | 90.31       | 6,938.11              | -1,485.99    | 4,350.48     | 4,572.23                | 0.00                    | 0.00                   | 0.00                  |  |
| 11,700.00             | 88.47           | 90.31       | 6,940.78              | -1,486.53    | 4,450.44     | 4,669.79                | 0.00                    | 0.00                   | 0.00                  |  |
| 11,800.00             | 88.47           | 90.31       | 6,943.46              | -1,487.06    | 4,550.41     | 4,767.36                | 0.00                    | 0.00                   | 0.00                  |  |
| 11,900.00             | 88.47           | 90.31       | 6,946.13              | -1,487.60    | 4,650.37     | 4,864.93                | 0.00                    | 0.00                   | 0.00                  |  |
| 12,000.00             | 88.47           | 90.31       | 6,948.80              | -1,488.13    | 4,750.33     | 4,962.50                | 0.00                    | 0.00                   | 0.00                  |  |
| 12,100.00             | 88.47           | 90.31       | 6,951.48              | -1,488.67    | 4,850.29     | 5,060.07                | 0.00                    | 0.00                   | 0.00                  |  |
| 12,200.00             | 88.47           | 90.31       | 6,954.15              | -1,489.20    | 4,950.26     | 5,157.64                | 0.00                    | 0.00                   | 0.00                  |  |
| 12,300.00             | 88.47           | 90.31       | 6,956.83              | -1,489.74    | 5,050.22     | 5,255.20                | 0.00                    | 0.00                   | 0.00                  |  |
| 12,400.00             | 88.47           | 90.31       | 6,959.50              | -1,490.27    | 5,150.18     | 5,352.77                | 0.00                    | 0.00                   | 0.00                  |  |
| 12,500.00             | 88.47           | 90.31       | 6,962.17              | -1,490.80    | 5,250.15     | 5,450.34                | 0.00                    | 0.00                   | 0.00                  |  |
| 12,600.00             | 88.47           | 90.31       | 6,964.85              | -1,491.34    | 5,350.11     | 5,547.91                | 0.00                    | 0.00                   | 0.00                  |  |
| 12,700.00             | 88.47           | 90.31       | 6,967.52              | -1,491.87    | 5,450.07     | 5,645.48                | 0.00                    | 0.00                   | 0.00                  |  |
| 12,800.00             | 88.47           | 90.31       | 6,970.19              | -1,492.41    | 5,550.03     | 5,743.05                | 0.00                    | 0.00                   | 0.00                  |  |
| 12,900.00             | 88.47           | 90.31       | 6,972.87              | -1,492.94    | 5,650.00     | 5,840.62                | 0.00                    | 0.00                   | 0.00                  |  |
| 13,000.00             | 88.47           | 90.31       | 6,975.54              | -1,493.48    | 5,749.96     | 5,938.18                | 0.00                    | 0.00                   | 0.00                  |  |
| 13,100.00             | 88.47           | 90.31       | 6,978.22              | -1,494.01    | 5,849.92     | 6,035.75                | 0.00                    | 0.00                   | 0.00                  |  |
| 13,200.00             | 88.47           | 90.31       | 6,980.89              | -1,494.55    | 5,949.88     | 6,133.32                | 0.00                    | 0.00                   | 0.00                  |  |
| 13,300.00             | 88.47           | 90.31       | 6,983.56              | -1,495.08    | 6,049.85     | 6,230.89                | 0.00                    | 0.00                   | 0.00                  |  |
| 13,400.00             | 88.47           | 90.31       | 6,986.24              | -1,495.62    | 6,149.81     | 6,328.46                | 0.00                    | 0.00                   | 0.00                  |  |
| 13,500.00             | 88.47           | 90.31       | 6,988.91              | -1,496.15    | 6,249.77     | 6,426.03                | 0.00                    | 0.00                   | 0.00                  |  |
| 13,600.00             | 88.47           | 90.31       | 6,991.58              | -1,496.69    | 6,349.74     | 6,523.59                | 0.00                    | 0.00                   | 0.00                  |  |
| 13,700.00             | 88.47           | 90.31       | 6,994.26              | -1,497.22    | 6,449.70     | 6,621.16                | 0.00                    | 0.00                   | 0.00                  |  |
| 13,802.56             | 88.47           | 90.31       | 6,997.00              | -1,497.77    | 6,552.22     | 6,721.23                | 0.00                    | 0.00                   | 0.00                  |  |
| PBHL                  |                 |             |                       |              |              |                         |                         |                        |                       |  |



# Stryker Directional Planning Report



|                  |                                   |                                     |                             |
|------------------|-----------------------------------|-------------------------------------|-----------------------------|
| <b>Database:</b> | EDM 5000.1 Server                 | <b>Local Co-ordinate Reference:</b> | Well Claire 33-34 Fee #302H |
| <b>Company:</b>  | Tascosa Energy Partners           | <b>TVD Reference:</b>               | RKB @ 3336.00usft (26' KB)  |
| <b>Project:</b>  | Eddy County, NM (NAD83) NMEZ Grid | <b>MD Reference:</b>                | RKB @ 3336.00usft (26' KB)  |
| <b>Site:</b>     | Claire 33-34 Fee                  | <b>North Reference:</b>             | Grid                        |
| <b>Well:</b>     | Claire 33-34 Fee #302H            | <b>Survey Calculation Method:</b>   | Minimum Curvature           |
| <b>Wellbore:</b> | Wellbore #1                       |                                     |                             |
| <b>Design:</b>   | Design #1                         |                                     |                             |

## Design Targets

| Target Name                                                   | Dip Angle<br>(°) | Dip Dir.<br>(°) | TVD<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Northing<br>(usft) | Easting<br>(usft) | Latitude  | Longitude   |
|---------------------------------------------------------------|------------------|-----------------|---------------|-----------------|-----------------|--------------------|-------------------|-----------|-------------|
| FTP - Claire 33-34 Fe<br>- hit/miss target<br>- Shape         | 0.00             | 360.00          | 6,825.00      | -1,463.37       | 121.68          | 588,857.96         | 522,311.35        | 32.618806 | -104.395129 |
| PBHL - Claire 33-34 F<br>- plan hits target center<br>- Point | 0.00             | 0.00            | 6,997.00      | -1,497.77       | 6,552.22        | 588,823.56         | 528,741.89        | 32.618720 | -104.374243 |

## Plan Annotations

| Measured<br>Depth<br>(usft) | Vertical<br>Depth<br>(usft) | Local Coordinates |                 | Comment                             |
|-----------------------------|-----------------------------|-------------------|-----------------|-------------------------------------|
|                             |                             | +N/-S<br>(usft)   | +E/-W<br>(usft) |                                     |
| 1,300.00                    | 1,300.00                    | 0.00              | 0.00            | Begin 2.00°/100' Build              |
| 1,550.00                    | 1,549.68                    | -10.32            | -3.50           | Begin 5.00° Tangent                 |
| 2,100.00                    | 2,097.59                    | -55.72            | -18.90          | Begin 2.00°/100' Build              |
| 2,768.76                    | 2,750.99                    | -183.72           | -62.32          | Begin 18.38° Tangent                |
| 6,427.04                    | 6,222.76                    | -1,275.82         | -432.79         | KOP, Begin 10.00°/100' Build & Turn |
| 7,369.63                    | 6,825.00                    | -1,463.37         | 121.68          | Begin 88.47° Lateral                |
| 13,802.56                   | 6,997.00                    | -1,497.77         | 6,552.22        | PBHL                                |

Well name:

Claire 33 34 Fee #302H

Operator:

Tascosa Energy Partners, LLC

String type:

Surface Casing (500')

| Design parameters:                 |      |     | Minimum design factors: |       |  | Environment:         |               |
|------------------------------------|------|-----|-------------------------|-------|--|----------------------|---------------|
| <u>Collapse</u>                    |      |     | <u>Collapse:</u>        |       |  | H2S considered?      | No            |
| Mud weight:                        | 8.34 | ppg | DF                      | 1.125 |  | Surface temperature: | 75.00 °F      |
| Design is based on evacuated pipe. |      |     |                         |       |  | BHTemp               | 79 °F         |
|                                    |      |     |                         |       |  | Temp gradient:       | 0.80 °F/100ft |
|                                    |      |     |                         |       |  | Minimum sec length:  | 400 ft        |
|                                    |      |     | <u>Burst:</u>           |       |  | Minimum Drift:       | 12.25 in      |
|                                    |      |     | DF                      | 1.10  |  | Cement top:          | Surface       |

**Burst**

|                                  |   |        |        |
|----------------------------------|---|--------|--------|
| Max anticipated surface pressure | = | 202.00 | psi    |
| Internal gradient:               | = | 0.12   | psi/ft |
| Calculated BHP                   | = | 250.00 | psi    |

No backup mud specified.

|                 |                         |
|-----------------|-------------------------|
| <u>Tension:</u> | Non-directional string. |
| 8 Rd STC:       | 1.80 (J)                |
| 8 Rd LTC:       | 1.80 (J)                |
| Buttress:       | 1.60 (J)                |
| Premium:        | 1.50 (J)                |
| Body yield:     | 1.50 (B)                |

**Re subsequent strings:**

|                         |          |     |
|-------------------------|----------|-----|
| Next setting depth:     | 1,800    | ft  |
| Next mud weight:        | 8.70     | ppg |
| Next setting BHP:       | 1,086.00 | psi |
| Fracture mud wt:        | 11.00    | ppg |
| Safety Factor Injection | 1.00     | ppg |
| Fracture depth:         | 500.00   | ft  |
| Injection pressure      | 250.00   | psi |

Tension is based on buoyed wgt.  
Neutral pt: 349.00 ft

Maximum Lift using 14.8 ppg cmt to surface with 8.7 ppg mud filled csg=  
17,827 lbs lift. String wgt = 19,200 lbs in air. Chain down casing prior to cmt job  
for Safety.

| Run Seq | Segment Length (ft) | Size (in) | Nominal Weight (lbs/ft) | Grade | End Finish | True Vert Depth (ft) | Measured Depth (ft) | Drift Diameter (in) | Pipe ID (in) | Internal Capacity (bbls) |
|---------|---------------------|-----------|-------------------------|-------|------------|----------------------|---------------------|---------------------|--------------|--------------------------|
| 1       | 1200                | 13.375    | 54.5                    | J-55  | LTC        | 1200                 | 1200                | 12.459              | 12.615       | 185.52                   |

| Run Seq | Collapse Load (psi) | Collapse Strength (psi) | Collapse Design Factor | Burst Load (psi) | Burst Strength (psi) | Burst Design Factor | Tension Load (Kips) | Tension Strength (Kips) | Tension Design Factor |
|---------|---------------------|-------------------------|------------------------|------------------|----------------------|---------------------|---------------------|-------------------------|-----------------------|
| 1       | 208                 | 1130                    | 5.43                   | 500              | 2730                 | 5.46                | 38.4<br>19.2        | 322<br>541 body         | 8.39                  |

Remarks:

Collapse is based on a vertical depth of 400 ft, a mud weight of 10.0 ppg The casing is considered to be evacuated for collapse purposes.

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Tension based on string weight in air + 100% over pull.

Burst strength is not adjusted for tension.

Well name:

Claire 33 34 Fee #302H

Operator: Tascosa Energy Partners, LLC

String type: Intermediate Casing (2,000')

Design parameters:

Collapse

Mud weight: 8.70 ppg

Design is based on evacuated pipe.

Minimum design factors:

Collapse:

DF 1.125

Burst:

DF 1.15

Environment:

H2S considered? No

Surface temperature: 75.00 °F

BH Temp 99 °F

Temp Gradient 0.80 °F/100ft

Minimum Sec Length 2400 ft

Minimum Drift: 8.75 in

Cement top: Surface

**Burst**

Max anticipated surface pressure: 1,522.00 psi

Internal gradient: 0.12 psi/ft

Calculated BHP 1,810.00 psi

No backup mud specified.

**Tension:**

8 Rd STC: 1.80 (J)

8 Rd LTC: 1.80 (J)

Buttress: 1.60 (J)

Premium: 1.50 (J)

Body yield: 1.50 (B)

**Re subsequent strings:**

Next setting depth: 12,032 ft MD

Next setting depth: 5,700 ft TVD

Next mud weight: 8.7 ppg

Next setting BHP: 3,272 psi

Fracture mud wt: 13.5 ppg

Safety Factor-Injection 1 ppg

Fracture depth: 2,400 ft

Injection pressure 1,810 psi

Tension is based on buoyed wgt.

Neutral pt: ± 2,111 ft

| Run Seq | Segment Length (ft) | Size (in)               | Nominal Weight (lbs/ft) | Grade            | End Finish           | True Vert Depth (ft) | Measured Depth (ft) | Drift Diameter (in)      | ID Diameter (in)      | Internal Capacity (bbls) |
|---------|---------------------|-------------------------|-------------------------|------------------|----------------------|----------------------|---------------------|--------------------------|-----------------------|--------------------------|
| 1       | 2000                | 9.625                   | 36                      | J-55             | LT&C                 | 2000                 | 2000                | 8.796                    | 8.921                 | 154.6                    |
| Run Seq | Collapse Load (psi) | Collapse Strength (psi) | Collapse Design Factor  | Burst Load (psi) | Burst Strength (psi) | Burst Design Factor  | Tension Load (Kips) | Tension Strength (Kips)J | Tension Design Factor |                          |
| 1       | 1000                | 2020                    | 2.02                    | 1500             | 3520                 | 2.35                 | 172.8<br>86.4       | 564<br>639 jt            | 3.26                  |                          |

Remarks:

Collapse is based on a vertical depth of 2,400 ft, a mud weight of 10 ppg The casing is considered to be evacuated for collapse purposes.

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Tension based on string weight in air + 100% over pull.

Burst strength is not adjusted for tension.



Well name: Claire 33 34 Fee #302H

Operator: Tascosa Energy Partners, LLC

String type: Production Casing (± 13,800 ft MD) "FRAC"

Location: 517 FNL & 185 FEL, Sec 32, T19S, R26E, Eddy County, NM

BHL Planned 660 FNL & 1232 FWL, Sec 34, T19S, R26E, Eddy County, NM

|                                    |  |               |                         |               |         |                       |  |               |
|------------------------------------|--|---------------|-------------------------|---------------|---------|-----------------------|--|---------------|
| Design parameters:                 |  |               | Minimum design factors: |               |         | Environment:          |  |               |
| <u>Collapse</u>                    |  |               | <u>Collapse:</u>        |               |         | H2S considered?       |  |               |
| Mud weight:                        |  | 8.90 ppg      |                         | DF            | 1.125   | Surface temperature:  |  | No            |
| Design is based on evacuated pipe. |  |               |                         |               |         | Bottom hole temp:     |  | 75.00 °F      |
|                                    |  |               |                         |               |         | Temperature gradient: |  | 141 °F        |
|                                    |  |               |                         |               |         | Minimum section lgth: |  | 0.80 °F/100ft |
|                                    |  |               |                         | <u>Burst:</u> |         | Minimum Drift:        |  | 1,500 ft      |
|                                    |  |               |                         |               | DF 1.12 | Cement top:           |  | 4.65 in       |
|                                    |  |               |                         |               |         |                       |  | Surface ft    |
| <u>Burst</u>                       |  |               |                         |               |         |                       |  |               |
| Max anticipated surface            |  |               |                         |               |         |                       |  |               |
| pressure FRAC @ RATE:              |  | 10,000.00 psi |                         |               |         |                       |  |               |
| Internal gradient:                 |  | 0.434 psi/ft  | <u>Tension:</u>         |               |         |                       |  |               |
| Calculated BHP                     |  | 3,038.00 psi  | 8 Rd STC:               | 1.80          | (J)     |                       |  |               |
| backup mud specified.              |  | 0.452 psi/ft  | 8 Rd LTC:               | 1.80          | (J)     |                       |  |               |
| Net Injection Pressure Surface     |  | 10,000.00 psi | Buttress:               | 1.60          | (J)     |                       |  |               |
| Net Injection Pressure TVD         |  | 5,052.00 psi  | Premium:                | 1.50          | (J)     |                       |  |               |
| Annular surface PSI                |  | 0 psi         | Body yield:             | 1.50          | (B)     |                       |  |               |
| Frac Gradient                      |  | 12.50 ppg     |                         |               |         |                       |  |               |
| Frac Gradient                      |  | 0.65 psi/ft   |                         |               |         |                       |  |               |

Intent ☐ As Drilled ☐

|                |                |
|----------------|----------------|
| API #          |                |
| Operator Name: | Property Name: |
| Well Number    |                |

Kick Off Point (KOP)

|          |         |          |       |     |           |          |      |          |        |
|----------|---------|----------|-------|-----|-----------|----------|------|----------|--------|
| UL       | Section | Township | Range | Lot | Feet      | From N/S | Feet | From E/W | County |
| Latitude |         |          |       |     | Longitude |          |      |          | NAD    |

First Take Point (FTP)

|          |         |          |       |     |           |          |      |          |        |
|----------|---------|----------|-------|-----|-----------|----------|------|----------|--------|
| UL       | Section | Township | Range | Lot | Feet      | From N/S | Feet | From E/W | County |
| Latitude |         |          |       |     | Longitude |          |      |          | NAD    |

Last Take Point (LTP)

|          |         |          |       |     |           |          |      |          |        |
|----------|---------|----------|-------|-----|-----------|----------|------|----------|--------|
| UL       | Section | Township | Range | Lot | Feet      | From N/S | Feet | From E/W | County |
| Latitude |         |          |       |     | Longitude |          |      |          | NAD    |

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

|                |                |
|----------------|----------------|
| API #          |                |
| Operator Name: | Property Name: |
| Well Number    |                |

Estimated Formation Tops

|            |      |            |      |
|------------|------|------------|------|
| Formation: | Top: | Formation: | Top: |
|            |      |            |      |
|            |      |            |      |
|            |      |            |      |
|            |      |            |      |
|            |      |            |      |
|            |      |            |      |
|            |      |            |      |
|            |      |            |      |
|            |      |            |      |
|            |      |            |      |

**Tascosa Energy Partners, LLC  
Claire 33 34 DSU  
Hydrogen Sulfide Contingency Plan For  
Drilling/Workover/Facility  
SEC 32, T19S, R26E, Eddy County, New Mexico**

Shake 'n Bake wells and their anticipated facility are not expected to have Hydrogen Sulfide releases. However, there may be Hydrogen Sulfide production in the nearby area. There are no occupied dwellings within a mile of the area but a contingency plan has been orchestrated. Tascosa Energy Partners, LLC will have a Company Representative living on location throughout the drilling and completion of this well. If Hydrogen Sulfide is detected or suspected, monitoring equipment will be available for monitoring and/or testing. An un-manned H<sub>2</sub>S safety trailer and monitoring equipment will also be station on location during the drilling operation below the Surface Casing depth of  $\pm 500$  ft. to total drilling depth of  $\pm 13,000$  ft.

Tascosa Energy Partners, LLC  
 Claire 33 34 DSU  
 Hydrogen Sulfide Contingency Plan For Drilling/  
 Workover/Facility  
 SEC 32, T19S, R26E, Eddy County, New  
 Mexico

**EMERGENCY CALL LIST: (Start and continue until ONE of these people have been contacted)**

|                             | <b>OFFICE</b>       | <b>MOBILE</b>       | <b>HOME</b> |
|-----------------------------|---------------------|---------------------|-------------|
| <b>Tascosa Energy ,LLC.</b> | <b>432 695-6970</b> |                     |             |
| <b>Alyssa McNear</b>        |                     | <b>720 244 4417</b> |             |
| <b>Jeff Birkelbach</b>      | <b>432 695-6970</b> | <b>432 553 0391</b> |             |
| <b>Brian Kirkland</b>       |                     | <b>432 770-2325</b> |             |
| <b>Kevin Herrmann</b>       | <b>432 695-6970</b> | <b>432 254-9106</b> |             |

**EMERGENCY RESPONSE NUMBERS:**

|                               |                         |               |                            |
|-------------------------------|-------------------------|---------------|----------------------------|
| <b>State Police:</b>          | <b>Eddy County</b>      |               | <b>575 748 9718</b>        |
| <b>State Police:</b>          | <b>Lea County</b>       |               | <b>575 392 5588</b>        |
| <b>Sheriff</b>                | <b>Eddy County</b>      |               | <b>575 746 2701</b>        |
| <b>Sheriff</b>                | <b>Lea County</b>       |               |                            |
| <b>Emergency Medical Ser</b>  | <b>Eddy County</b>      |               | <b>911 or 575 746 2701</b> |
| <b>(Ambulance)</b>            | <b>Lea County</b>       | <b>Eunice</b> | <b>911 or 575 394 3258</b> |
| <b>Emergency Response</b>     | <b>Eddy County SERC</b> |               | <b>575 476 9620</b>        |
| <b>Artesia Police Dept</b>    |                         |               | <b>575 746 5001</b>        |
| <b>Artesia Fire Dept</b>      |                         |               | <b>575 746 5001</b>        |
| <b>Carlsbad Police Dept</b>   |                         |               | <b>575 885 2111</b>        |
| <b>Carlsbad Fire Dept</b>     |                         |               | <b>575 885 3125</b>        |
| <b>Loco Hills Police Dept</b> |                         |               | <b>575 677 2349</b>        |
| <b>Jal Police Dept</b>        |                         |               | <b>575 395 2501</b>        |
| <b>Jal Fire Dept</b>          |                         |               | <b>575 395 2221</b>        |
| <b>Jal ambulance</b>          |                         |               | <b>575 395 2221</b>        |
| <b>Eunice Police Dept</b>     |                         |               | <b>575 394 0112</b>        |
| <b>Eunice Fire Dept</b>       |                         |               | <b>575 394 3258</b>        |

Tascosa Energy Partners, LLC  
Claire 33 34 DSU  
Hydrogen Sulfide Contingency Plan For Drilling/  
Workover/Facility  
SEC 32, T19S, R26E, Eddy County, New  
Mexico

|                               |                                           |                                            |
|-------------------------------|-------------------------------------------|--------------------------------------------|
| <b>Eunice Ambulance</b>       |                                           | <b>575 394 3258</b>                        |
| <b>Hobbs Police Dept</b>      |                                           |                                            |
| <b>NMOCD</b>                  | <b>District 1 (Lea, Roosevelt, Curry)</b> | <b>575 393 6161</b>                        |
|                               | <b>District 2 ( Eddy Chavez)</b>          | <b>575 748 1283</b>                        |
| <b>BLM Carlsbad</b>           |                                           | <b>575 234 5972</b>                        |
| <b>BLM Hobbs</b>              |                                           | <b>575 393 3612</b>                        |
| <b>Lea County Information</b> |                                           | <b>575 393 8203</b>                        |
| <b>Midland Safety</b>         | <b>Lea/Eddy County</b>                    | <b>432 520 3838</b><br><b>888 262 4964</b> |
| <b>American Safety</b>        | <b>Lea/Eddy County</b>                    | <b>575 746 1096</b><br><b>575 393 3093</b> |
| <b>Halliburton</b>            | <b>Artesia</b>                            | <b>800 844 8451</b>                        |
|                               | <b>Hobbs</b>                              | <b>800 844 8451</b>                        |
|                               | <b>Midland</b>                            | <b>800 844 8451</b>                        |
| <b>Wild Well Control</b>      | <b>Midland</b>                            | <b>281 784 4700</b><br><b>281 443 4873</b> |

Tascosa Energy Partners, LLC  
Claire 33 34 DSU  
Hydrogen Sulfide Contingency Plan For Drilling/  
Workover/Facility  
SEC 32, T19S, R26E, Eddy County, New  
Mexico

**HYDROGEN SULFIDE TRAINING**

**H2S SAFETY EQUIPMENT AND SYSTEMS**

|                                                                                   |                   |
|-----------------------------------------------------------------------------------|-------------------|
| <b>GENERAL EMERGENCY PLAN</b>                                                     | <b>page 7</b>     |
| <b>EMERGENCY PROCEDURE FOR UNCONTROLLED RELEASES OF H2S</b>                       | <b>page 7</b>     |
| <b>CALCULATIONS OF THE GENERAL RADIUS OF EXPOSURE (ROE)</b>                       | <b>page 8</b>     |
| <b>PUBLIC EVACUATION PLAN</b>                                                     | <b>page 8</b>     |
| <b>PROCEDURE FOR IGNITING AN UNCONTROLLABLE CONDITION:</b>                        |                   |
| <b>PROCEDURE FOR IGNITION</b>                                                     | <b>page 9</b>     |
| <b>REQUIRED EMERGENCY EQUIPMENT</b>                                               | <b>page 8</b>     |
| <b>USING SELF CONTAINED BREATHING AIR EQUIPMENT ( SCBA)</b>                       | <b>page 9</b>     |
| <b>RESCUE &amp; FIRST AID FOR VICTIMS OF HYDROGEN SULFIDE<br/>(H2S) POISONING</b> | <b>page 10</b>    |
| <b>H2S TOXIC EFFECTS</b>                                                          | <b>page 11</b>    |
| <b>H2S PHYSICAL EFFECTS</b>                                                       | <b>page 11</b>    |
| <b>LOCATION MAP</b>                                                               | <b>page 12-13</b> |



Tascosa Energy Partners, LLC  
Claire 33 34 DSU  
Hydrogen Sulfide Contingency Plan For Drilling/  
Workover/Facility  
SEC 32, T19S, R26E, Eddy County, New  
Mexico

## **1. Hydrogen Sulfide Training**

**All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well**

- 1. The hazards and characteristics of hydrogen sulfide (H<sub>2</sub>S)**
- 2. The proper use and maintenance of personal protective equipment and life support systems.**
- 3. The proper use of H<sub>2</sub>S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.**
- 4. The proper techniques for first aid and rescue procedures**

**In addition, supervisory personnel will be trained in the following areas:**

- 1. The effects of H<sub>2</sub>S on metal components. If high tensile tubulars are to be used, personnel will be trained in the special maintenance requirements.**
- 2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.**
- 3. The contents and requirements of H<sub>2</sub>S Drilling Operations Plan and the Public Protection plan.**

**There will be an initial training session just prior to encountering a known or probable H<sub>2</sub>S zone (within 3 days or 500 feet) and weekly H<sub>2</sub>S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H<sub>2</sub>S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.**

## **2. H<sub>2</sub>S Safety Equipment and Systems**

**Note: All H<sub>2</sub>S safety equipment and systems will be installed, tested and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H<sub>2</sub>S. If H<sub>2</sub>S greater than 100 ppm is encountered in the gas stream we will shut-in and install H<sub>2</sub>S equipment.**

- 1. Well Control Equipment:**
  - a. Flare Line**
  - b. Choke manifold with remotely operated choke**
  - c. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.**

Tascosa Energy Partners, LLC  
Claire 33 34 DSU  
Hydrogen Sulfide Contingency Plan For Drilling/  
Workover/Facility  
SEC 32, T19S, R26E, Eddy County, New  
Mexico

- d. Auxiliary equipment to include; annular preventer, mud gas separator, rotating head.
2. Protective equipment for essential personnel:
  - a. Mark II Survive air 30 minute units located in the dog house and at the briefing areas.
3. H2S detection and monitoring equipment:
  - a. 2-portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
4. Visual warning systems:
  - a. Caution/Danger signs shall be posted on roads providing direct access to the location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate.
5. Mud Program:
  - a. The mud program has been designed to minimize the volume of H2S circulated to the surface.
6. Metallurgy:
  - a. All drill strings, casing, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
7. Communications:
  - a. Company vehicles equipped with cellular telephone.

Tascosa Energy Partners, LLC has conducted a review to determine if an H2S contingency plan is required for the subject well. We were able to conclude that any potential hazardous volume would be minimal. H2S concentrations of wells in this area from surface to TD are low enough; therefore, **we do not believe that an H2S contingency plan is necessary**

**General H2S Emergency Actions:**

1. All personnel will immediately evacuate to an up-wind and if possible up-hill "safe area"
2. If for any reason a person must enter the hazardous area, they must wear a SCBA (Self Contained Breathing Apparatus)
3. Always use the "buddy system"
4. Isolate the well/problem if possible
5. Account for all personnel
6. Display the proper colors warning all unsuspecting personnel of the danger at hand.
7. Contact the Company personnel as soon as possible if not at the location. ( use the enclosed call list as instructed

Tascosa Energy Partners, LLC  
Claire 33 34 DSU  
Hydrogen Sulfide Contingency Plan For Drilling/  
Workover/Facility  
SEC 32, T19S, R26E, Eddy County, New  
Mexico

**At this point the company representative will evaluate the situation and coordinate the necessary duties to bring the situation under control, and if necessary, the notification of the emergency response agencies and nearby residents.**

### **EMERGENCY PROCEDURES FOR AN UNCONTROLLABLE RELEASE OF H2S**

1. All personnel will wear the self-contained breathing apparatus.
2. Remove all personnel to the "safe area". (always use the buddy system).
3. Contact company personnel if not on location.
4. Set in motion the steps to protect and or remove the general public to an upwind "safe area". Maintain strict security & safety procedures while dealing with the source.
5. No entry to any unauthorized personnel.
6. Notify the appropriate agencies: City Police-City Street (s)  
State Police- State Rd  
County Sheriff – County Rd.
7. Call the BLM &/or NMOCD

### **PROTECTION OF THE GENERAL PUBLIC ( Radius of Exposure):**

- 100 ppm at any public area ( any place not associated with this site)
- 500 ppm at any public road ( any road which the general public may travel)
- 100 ppm radius of ¼ mile in New Mexico will be assumed if there is insufficient data to do the calculations, and there is a reasonable expectation that H2S could be present in concentrations greater than 100 ppm in the gas mixture

### **CALCULATIONS FOR THE 100 PPM (ROE) "Pasquill-Gifford equation"**

**X = [(1.589) (mole fraction) (Q- volume in std cu ft)] to the power of (0.6258)**

### **CALCULATION FOR THE 500 PPM ROE:**

Tascosa Energy Partners, LLC  
 Claire 33 34 DSU  
 Hydrogen Sulfide Contingency Plan For Drilling/  
 Workover/Facility  
 SEC 32, T19S, R26E, Eddy County, New Mexico

**$X = [(.4546) (\text{mole fraction}) (Q - \text{volume in std cu ft}) \text{ to the power of } (0.6258)]$**

**Example:**

If a well/facility has been determined to have 150 / 500 ppm H<sub>2</sub>S in the gas mixture and the well/facility is producing at a gas rate of 100 MCFPD then:

150 ppm  $X = [(1.589) (.00015) (100,000 \text{ cfd}) \text{ to the power of } (.6258)]$   
 $X = 7 \text{ ft}$

500 ppm  $X = [(.4546) (.0005) (100,000 \text{ cfd}) \text{ to the power of } (.6258)]$   
 $X = 3.3 \text{ ft.}$

**( These calculations will be forwarded to the appropriate District NMOCD office when Applicable)**

**PUBLIC EVACUATION PLAN:**

- 1. Notification of the emergency response agencies of the hazardous condition and implement evacuation procedures.
- A trained person in H<sub>2</sub>S safety, shall monitor with detection equipment the H<sub>2</sub>S concentration, wind and area exposure (ROE). This person will determine the outer perimeter of the hazardous area. The extent of the evacuation area will be determined from the data being collected. Monitoring shall continue until the situation has been resolved. **(All monitoring equipment shall be UL approved, for use in class 1 groups A,B,C & D, Division 1, hazardous locations. All monitor will have a minimum capability of measuring H<sub>2</sub>S, oxygen, and flammable values).**
- Law enforcement shall be notified to set up necessary barriers and maintain such for the duration of the situation as well as aid in the evacuation procedure.
- The company supervising personnel shall stay in communication with all agencies throughout the duration of the situation and inform such agencies when the situation has been contained and the affected area(s) is safe to enter.

**PROCEDURE FOR IGNITING AN UNCONTROLLABLE CONDITION:**

- 1. Human life and/or property are in danger
- 2. There is no hope of bringing the situation under control with the prevailing conditions at the site.

**INSTRUCTION FOR IGNITION:**

- 1. Two people are required. They must be equipped with positive pressure, "self - contained breathing apparatus" and a "D" ring style full body, OSHA approved safety harness. Nonflammable rope will be attached.

Tascosa Energy Partners, LLC  
Claire 33 34 DSU  
Hydrogen Sulfide Contingency Plan For Drilling/  
Workover/Facility  
SEC 32, T19S, R26E, Eddy County, New  
Mexico

- 2. One of the people will be qualified safety person who will test the atmosphere for H<sub>2</sub>S, Oxygen & LFL. The other person will be the company supervisor; he is responsible for igniting the well.
- 3. Ignite up wind from a distance no closer than necessary. Make sure that where you ignite from has the maximum escape avenue available. A 25 mm flare gun shall be used, with a  $\pm$  500 ft. range to ignite the gas.
- 4. Prior to ignition, make a final check for combustible gases.
- 5. Following ignition, continue with the emergency actions & procedures as before.

**A. All personnel shall receive proper H<sub>2</sub>S training in accordance with Onshore Order III.C.3.a.**

B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.

C. Required Emergency Equipment:

- Well control equipment
  - a. Flare line 100' from wellhead to be ignited by flare gun or automatic striker.
  - b. Choke manifold with a remotely operated choke.
  - c. Mud/gas separator
- Protective equipment for essential personnel.

Breathing apparatus:

- a. Rescue Packs (SCBA) — 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
- b. Work/Escapes packs — 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
- c. Emergency Escape Packs — 4 packs shall be stored in the doghouse for emergency evacuation.

Auxiliary Rescue Equipment:

- a. Stretcher
- b. Two OSHA full body harness
- c. 100 ft 5/8inch OSHA approved rope
- d. 1-20# class ABC fire extinguisher

- H<sub>2</sub>S detection and monitoring equipment:

Tascosa Energy Partners, LLC  
Claire 33 34 DSU  
Hydrogen Sulfide Contingency Plan For Drilling/  
Workover/Facility  
SEC 32, T19S, R26E, Eddy County, New  
Mexico

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged.

(Gas sample tubes will be stored in the safety trailer)

- Visual warning systems.
  - a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
  - b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
  - c. Two wind socks will be placed in strategic locations, visible from all angles.
- Mud program: **Only utilized if H2S has been detected**  
The mud program has been designed to minimize the volume of H2S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H2S bearing zones.
- Metallurgy: **Only utilized if H2S has been detected**
  - a. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
  - b. All elastomers used for packing and seals shall be H2S trim.
- Communication: **Only utilized if H2S has been detected**  
Communication will be via two way radio in emergency and company vehicles. Cell phones and land lines where available.

**USING SELF CONTAINED BREATHING AIR EQUIPMENT (SCBA):**

- (SCBA) SHOULD BE WORN WHEN ANY OF THE FOLLOWING ARE PERFORMED: **Only utilized if H2S has been detected**
  - Working near the top or on top of a tank
  - Disconnecting any line where H2S can reasonably be expected
  - Sampling air in the area to determine if toxic concentrations of H2S exist.
  - Working in areas where over 10 ppm on H2S has been detected.
  - At any time there is a doubt as the level of H2S in the area.
- All personnel shall be trained in the use of SCBA prior to working in a potentially hazardous location.
- Facial hair and standard eyeglasses are not allowed with SCBA.
- Contact lenses are never allowed with SCBA.

Tascosa Energy Partners, LLC  
Claire 33 34 DSU  
Hydrogen Sulfide Contingency Plan For Drilling/  
Workover/Facility  
SEC 32, T19S, R26E, Eddy County, New  
Mexico

- Air quality shall be continuously be checked during the entire operation.
- After each use, the SCBA unit shall be cleaned, disinfected, serviced and inspected
- All SCBA shall be inspected monthly.

**RESCUE AND FIRST AID FOR VICTIMS OF HYDROGEN SULFIDE (H<sub>2</sub>S) POISONING:**

- Do not panic
- Remain Calm & think
- Get on the breathing apparatus
- Remove the victim to the safe breathing area as quickly as possible. Up wind an uphill from source or cross wind to achieve upwind.
- Notify emergency response personnel.
- Provide artificial respiration and or CPR, as necessary
- Remove all contaminated clothing to avoid further exposure.
- A minimum of two personnel on location shall be trained in CPR and First Aid.

Tascosa Energy Partners, LLC  
 Claire 33 34 DSU  
 Hydrogen Sulfide Contingency Plan For Drilling/  
 Workover/Facility  
 SEC 32, T19S, R26E, Eddy County, New  
 Mexico

### Hydrogen Sulfide (H<sub>2</sub>S) Toxic Effects

H<sub>2</sub>S is extremely toxic. The acceptable ceiling for eight hours of exposure is 10 ppm, which is .001% by volume. H<sub>2</sub>S is approximately 20% heavier than air (Sp. Gr= 1.19)(Air = 1) and H<sub>2</sub>S is colorless. It forms an explosive mixture with air between 4.3% and 46%. By volume hydrogen sulfide is almost as toxic as hydrogen cyanide and 5-6 times more toxic than carbon monoxide.

**Various Gases**

| COMMON NAME      | CHEMICAL ABBREV. | SPECIFIC GRVTY. | THRESHOLD LIMITS | HAZARDOUS LIMITS | LETHAL CONCENTRATIONS |
|------------------|------------------|-----------------|------------------|------------------|-----------------------|
| Hydrogen Sulfide | H <sub>2</sub> S | 1.19            | 10ppm 15 ppm     | 100 ppm/hr       | 600 ppm               |
| Hydrogen Cyanide | HCN              | 0.94            | 10 ppm           | 150 ppm/hr       | 300 ppm               |
| Sulfur Dioxide   | SO <sub>2</sub>  | 2.21            | 2 ppm            | N/A              | 1000 ppm              |
| Chlorine         | CL <sub>2</sub>  | 2.45            | 1 ppm            | 4 ppm/hr         | 1000 ppm              |
| Carbon Monoxide  | CO               | 0.97            | 50 ppm           | 400 ppm/hr       | 1000 ppm              |
| Carbon Dioxide   | CO <sub>2</sub>  | 1.52            | 5000 ppm         | 5%               | 10%                   |
| Methane          | CH <sub>4</sub>  | 0.55            | 90,000           | Combustible@ 5%  | N/A                   |

**Threshold Limit:** Concentrations at which it is believed that all workers may be repeatedly exposed, day after day without adverse effects.

**Hazardous Limit:** Concentrations that may cause death.

**Lethal Concentrations:** Concentrations that will cause death with short term exposure.

**Threshold Limit-** 10 ppm: NIOSH guide to chemical hazards.

#### PHYSICAL EFFECTS OF HYDROGEN SULFIDE:

| CONCENTRATION | PHYSICAL EFFECTS                                                                                                                                             |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| .001% 10 PPM  | Obvious and unpleasant odor. Safe for 8 hour exposure                                                                                                        |
| .005% 50 ppm  | Can cause some flu like symptoms and can cause pneumonia                                                                                                     |
| .01% 100 ppm  | Kills the sense of smell in 3-15 minutes. May irritate the eyes and throat.                                                                                  |
| .02% 200 ppm  | Kills the sense of smell rapidly. Severly irritates the eyes and throat. Severe flu like symptoms after 4 or more hours. May cause lung damage and or death. |
| .06% 600 ppm  | Loss of consciousness quickly, death will result if not rescued promptly.                                                                                    |





## **Claire 33 34 Fee DSU – Natural Gas Management Plan**

### **VI. Separation Equipment:**

Tascosa has sized a FWKO and a high pressure, 3-phase separator to allow for complete separation at our anticipated rates, with adequate retention times. Tank vapors will also be captured through a vapor recovery unit and sent to the Kinetik sales line.

### **VII. Operational Practices:**

- a. Drilling Operations – Tascosa will ensure that a flare stack is set at least 100' from the wellbore during drilling operations. This flare stack will be properly sized to handle the maximum expected release, ensuring that all natural gas produced during drilling operations can be flared (unless there is an equipment malfunction or if venting is necessary for safety reasons).
- b. Completion Operations – Prior to flowback, Tascosa will ensure that the well is connected to a gathering system that can handle the expected gas volumes. During flowback, natural gas will be separated and flared until it is within the specs of the contracted gathering system (Kinetik).
- c. Production Operations – Tascosa will conduct weekly AVO inspections and tackle equipment failures with haste. The emergency flare on location will be equipped with an auto-ignition, capable of handling the maximum expected release. Sight glasses and automation will be installed on all tanks to eliminate gas releases due to gauging through thief hatches. A VRU will also be installed to capture tank vapors and reduce waste.
- d. Performance Standards –
  - a. Tascosa will design completion and production equipment for maximum expected output and pressure to eliminate venting.
  - b. A properly sized flare stack will be placed at the facility with an automatic ignitor.
  - c. AVO inspections will be conducted at least once a week to prevent releases due to equipment failure. These inspections will be recorded for future review.
  - d. Tascosa is obligated to eliminate waste and will repair equipment failures as soon as possible.
- e. Measurement and Estimation – A meter will be placed on the flare stack to ensure combusted gas readings are accurate during a release event. If for any reason a meter reading is unavailable, released volumes will be estimated and reported.

### **VIII. Best Management Practices:**



Tascosa will aim to conduct surface maintenance without venting or flaring as much as possible. If planned maintenance is prolonged due to wait times for labor and equipment, Tascosa will shut in the producing well to prevent excess emissions. Tascosa will also minimized venting during downhole operations.

### **XI. Map:**





### **XIII. Line Pressure:**

Tascosa will be tying into an active sales line from the nearby Mia 64 #2H well. This Kinetik sales line is low pressure, which will not exceed 100 psi, per the contractual agreement. Tascosa will ensure that all produced gas can enter this line pressure, boosting with compression, if necessary.

State of New Mexico  
Energy, Minerals and Natural Resources Department

Submit Electronically  
Via E-permitting

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

## NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

### Section 1 – Plan Description

Effective May 25, 2021

**I. Operator:** Tascosa Energy Partners, LLC. **OGRID:** 329748 **Date:** 4/7/2025

**II. Type:** ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: \_\_\_\_\_

**III. Well(s):** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name              | API | ULSTR        | Footages              | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
|------------------------|-----|--------------|-----------------------|-----------------------|-----------------------|----------------------------------|
| Claire 33 34 Fee #201H |     | A 32-19S-26E | 517' FNL,<br>185' FEL | 850                   | 2000                  | 1700                             |
|                        |     |              |                       |                       |                       |                                  |

**IV. Central Delivery Point Name:** Mia Battery GM [See 19.15.27.9(D)(1) NMAC]

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name              | API | Spud Date | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|------------------------|-----|-----------|-----------------|------------------------------|------------------------|-----------------------|
| Claire 33 34 Fee #201H |     | 5/1/2025  | 6/21/2025       | 8/15/2025                    | 9/15/2025              | 10/01/2025            |
|                        |     |           |                 |                              |                        |                       |

**VI. Separation Equipment:** ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

**VII. Operational Practices:** ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

**VIII. Best Management Practices:** ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

## **Section 2 – Enhanced Plan**

### **EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☐ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

#### **IX. Anticipated Natural Gas Production:**

| Well                   | API | Anticipated Average Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|------------------------|-----|--------------------------------------------|----------------------------------------------------------|
| Claire 33 34 Fee #201H |     | 2000                                       | 445,000                                                  |
|                        |     |                                            |                                                          |

#### **X. Natural Gas Gathering System (NGGS):**

| Operator | System            | ULSTR of Tie-in | Anticipated Gathering Start Date | Available Maximum Daily Capacity of System Segment Tie-in |
|----------|-------------------|-----------------|----------------------------------|-----------------------------------------------------------|
| Kinetik  | Northern Delaware | 32-19S-26E      | 09/15/2025                       | 2.5 MMCFPD                                                |
|          |                   |                 |                                  |                                                           |

**XI. Map.** ☒ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

**XII. Line Capacity.** The natural gas gathering system ☒ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

**XIII. Line Pressure.** Operator ☒ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☒ Attach Operator's plan to manage production in response to the increased line pressure.

**XIV. Confidentiality:** ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.



### **Section 3 - Certifications**

**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

***If Operator checks this box, Operator will select one of the following:***

**Well Shut-In.** ☒ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

**Venting and Flaring Plan.** ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

### **Section 4 - Notices**

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

|                                                                                                  |
|--------------------------------------------------------------------------------------------------|
| Signature: <i>Alyssa McNear</i>                                                                  |
| Printed Name: Alyssa McNear                                                                      |
| Title: Engineering Manager                                                                       |
| E-mail Address: adavanzo@tascosaep.com                                                           |
| Date: 04/08/2025                                                                                 |
| Phone: 720-244-4417                                                                              |
| <b>OIL CONSERVATION DIVISION</b><br><b>(Only applicable when submitted as a standalone form)</b> |
| Approved By:                                                                                     |
| Title:                                                                                           |
| Approval Date:                                                                                   |
| Conditions of Approval:                                                                          |