

DISTRICT I

1625 N. French Dr., Hobbs, NM 88240

District II

811 S. First St., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural ResourcesForm C-104
Revised August 1, 2011Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT**I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT**

¹ Operator name and Address XTO Energy, Inc. 6401 HOLIDAY HILL ROAD BLDG 5 MIDLAND, TX 79707		² OGRID Number 373075
		³ Reason for Filing Code/ Effective Date NW
⁴ API Number 30 - 015-45401	⁵ Pool Name LOS MEDANOS;BONE SPRING	⁶ Pool Code 40295
⁷ Property Code 325550	⁸ Property Name JAMES RANCH UNIT DI 2 BS2A 2W	⁹ Well Number 228H

II. ¹⁰ Surface Location

UI or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
K	25	22S	30E		2500	South	2050	West	EDDY

¹¹ Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
J	28	22S	30E		1305	South	2633	East	Eddy
¹² Lse Code F	¹³ Producing Method Code F	¹⁴ Gas Connection Date	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
373073	XTO Permian Midstream	O/G/W

IV. Well Completion Data

²¹ Spud Date 9/17/21	²² Ready Date 7/14/22	²³ TD 23833 MD 9687 TVD	²⁴ PBDT 23820 MD 9687 TVD	²⁵ Perforations 10,623 TO 23,732	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
17.5	13.375 K55 54.5#	644	805		
12.25	9.625 J55 40#	3,680	1,375		
8.75	7.625 HCL80 29.7#	9,631	885		
6.75	5 P110 18# 2 7/8 L80 6.5#	23,822 9,693	1,305		

V. Well Test Data

³¹ Date New Oil 7/15/22	³² Gas Delivery Date 7/18/22	³³ Test Date 7/18/22	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure 446	³⁶ Csg. Pressure 414
³⁷ Choke Size	³⁸ Oil 579	³⁹ Water 5105	⁴⁰ Gas 811		⁴¹ Test Method Flowing

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature:

Amanda Thames

Printed name:

Amanda Thames

Title:

Regulatory Analyst

E-mail Address:

amanda.thames@exxonmobil.com

Date:

8/15/2022

Phone:

432.221.7340

OIL CONSERVATION DIVISION

Approved by:

Title:

Approval Date:

District I

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III

1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

AS-DRILL PLAT

¹ API Number 30-015-45401	² Pool Code 96830	³ Pool Name ARTESIA; GLORIETA-YESO (O)
⁴ Property Code 308712	⁵ Property Name JAMES RANCH UNIT DI 2	⁶ Well Number 707H
⁷ OGRID No. 373075	⁸ Operator Name XTO PERMIAN OPERATING, LLC.	⁹ Elevation 3,343'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	25	22 S	30 E		2,500	SOUTH	2,050	WEST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
J	28	22 S	30 E		1,305	SOUTH	2,633	EAST	EDDY

¹² Dedicated Acres 400	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--------------------------------------	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division. NOTE: AS-DRILLED BOTTOM HOLE PLOTTED FROM DATA FURNISHED BY XTO ENERGY.

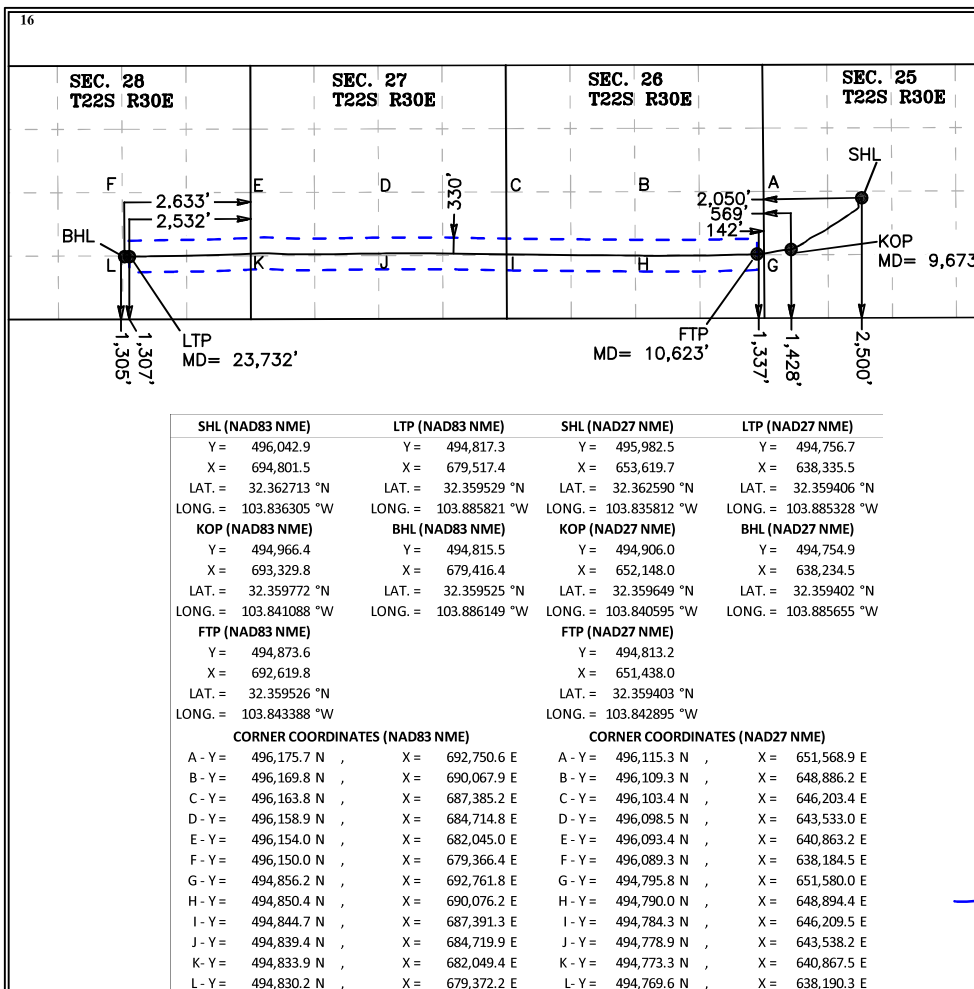¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Amanda Thames 8/15/2022
Signature Date

Amanda Thames
Printed Name

amanda.thames@exxonmobil.com
E-mail Address

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

05-16-2022

Date of Survey

Signature and Seal of
Professional Surveyor:

MARK DILLON HARP 23786

Certificate Number



LS

2019051251

Intent ☐ As Drilled ☒

API # 30-015-45401		
Operator Name: XTO PERMIAN OPERATING, LLC.	Property Name: JAMES RANCH UNIT DI 2	Well Number 707H

Kick Off Point (KOP)

UL L	Section 25	Township 22S	Range 30E	Lot	Feet 1,428	From N/S FSL	Feet 569	From E/W FWL	County EDDY
Latitude 32.359772					Longitude 103.841088				NAD 83

First Take Point (FTP)

UL I	Section 26	Township 22S	Range 30E	Lot	Feet 1,337	From N/S FSL	Feet 142	From E/W FEL	County EDDY
Latitude 32.359526					Longitude 103.843388				NAD 83

Last Take Point (LTP)

UL O	Section 28	Township 22S	Range 30E	Lot	Feet 1,307	From N/S FSL	Feet 2,532	From E/W FEL	County EDDY
Latitude 32.359529					Longitude 103.885821				NAD 83

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Oilfield Services, Central U.S. Land

Schlumberger Drilling and Measurements

Drilling Group

Geo Market Area: South West Texas Basin

7220 W I-H 20

Midland, Texas 79706

Phone : (432) 742-5400 (Main)

Fax : (432) 742-5606 (Shared)

Schlumberger

November 11, 2021

XTO Permian Operating LLC

6410 Holiday Hill Road

Midland, TX 79707

Re:

CLIENT: XTO Permian Operating LLC

WELL: James Ranch Unit DI2 707H

FIELD: Los Medanos, Bone Spring

RIG: Nabors X34

COUNTY: Eddy

API NO: 30-015-45401

JOB NO: 21MLE0155

25 22S 30E Eddy NM
N 32.362590 W -103.835812

Enclosed, please find the original copy of the survey performed on the referenced well by Drilling & Measurements, a division of Schlumberger Technology Corporation (P-5 No. 754900).

Other information required by your office is as follows.

<u>Name & Title of Surveyor</u>	<u>Drainhole Number</u>	<u>Surveyed Depths</u>	<u>Dates Performed</u>	<u>Type of Survey</u>
Anabel Lopez	James Ranch Unit DI2	129.00 Ft	September 17, 2021	XBOLT
FE	707H Original Hole	23833.00 Ft	November 4, 2021	Third Party Corrected

Schlumberger-Private

Oilfield Services, Central U.S. Land
Schlumberger Drilling and Measurements
Drilling Group
Geo Market Area: South West Texas Basin
7220 W I-H 20
Midland, Texas 79706
Phone : (432) 742-5400 (Main)
Fax : (432) 742-5606 (Shared)

Schlumberger

Well Reference:

25 22S 30E Eddy NM
N 32.362590 W -103.835812

I, Anabel Lopez certify that; I am employed by Drilling & Measurements, a division of Schlumberger Technology Corporation; that I did on the day(s) of September 17, 2021 through November 04, 2021, conduct or supervise the taking of the XBOLT & Third Party Corrected surveys from a depth of 129.00 feet to a depth of 23833.00 feet referenced to driller's depth; that the data is true, correct, complete and within the limitations of the tool as set forth by Drilling & Measurements, a division of Schlumberger Technology Corporation; that I am authorized and qualified to make this report; that this survey was conducted at the request of XTO Permian Operating LLC for the James Ranch Unit D12 707H Well (Original Hole) API No. 30-015-45401 in New Mexico; and that I have reviewed this report and find that it conforms to the principals and procedures as set forth by Drilling & Measurements, a division of Schlumberger Technology Corporation.


By
Anabel Lopez
FE

Subscribed and Sworn to before me this _____ day of _____ (month) _____ (yr)

My Commission expires:

Notary Public - (signature)

(County State)

Schlumberger

XTO James Ranch Unit DI 2 707H 0' to 23833' MD Survey Geodetic Report



(Def Survey)

Report Date: November 05, 2021 - 07:59 AM
Client: XTO Energy
Field: NM Eddy County (NAD 27)
Structure / Slot: XTO James Ranch Unit DI 2 707H / James Ranch Unit DI 2 707H
Well: James Ranch Unit DI 2 707H
Borehole: James Ranch Unit DI 2 707H
UWI / API#: Unknown / 30-015-45401
Survey Name: XTO James Ranch Unit DI 2 707H 0' to 23833' MD
Survey Date: September 14, 2021
Tort / AHD / DDI / ERD Ratio: 319.925' / 15628.535 ft / 7.089 / 1.610
Coordinate Reference System: NAD27 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 21' 45.32316", W 103° 50' 8.92435"
Location Grid N/E Y/X: N 495982.500 ftUS, E 653619.700 ftUS
CRS Grid Convergence Angle: 0.2663 °
Grid Scale Factor: 0.99993612
Version / Patch: 2.10.826.8

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 233.576 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3375.000 ft above MSL
Seabed / Ground Elevation: 3343.000 ft above MSL
Magnetic Declination: 6.709 °
Total Gravity Field Strength: 998.4601mgn (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47764.981 nT
Magnetic Dip Angle: 60.041 °
Declination Date: September 26, 2021
Magnetic Declination Model: IFR1+MS
North Reference: Grid North
Grid Convergence Used: 0.2663 °
Total Corr Mag North->Grid North: 6.4424 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (ft/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (°)	Longitude (°)	Closure (ft)	Closure Azimuth (°)
SHL	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	495982.50	653619.70	32.362590	-103.835812	0.00	0.00
	129.00	0.60	252.30	129.00	0.64	-0.21	-0.64	0.47	495982.29	653619.06	32.362589	-103.835814	0.68	252.30
	219.00	0.64	252.83	218.99	1.56	-0.50	-1.57	0.04	495982.00	653618.13	32.362588	-103.835817	1.65	252.46
	312.00	0.49	250.31	311.99	2.43	-0.78	-2.44	0.16	495981.72	653617.26	32.362588	-103.835820	2.57	252.20
	404.00	0.35	243.79	403.99	3.08	-1.04	-3.07	0.16	495981.46	653616.63	32.362587	-103.835822	3.24	251.25
	496.00	0.16	242.46	495.98	3.49	-1.22	-3.43	0.21	495981.28	653616.27	32.362586	-103.835823	3.64	250.36
	560.00	0.32	235.90	559.98	3.76	-1.37	-3.66	0.25	495981.13	653616.04	32.362586	-103.835824	3.91	249.53
13-3/8" Casing	654.00	0.36	242.21	653.98	4.31	-1.65	-4.14	0.06	495980.85	653615.56	32.362585	-103.835826	4.45	248.25
	676.00	0.37	243.49	675.98	4.45	-1.71	-4.26	0.06	495980.79	653615.44	32.362585	-103.835826	4.59	248.08
	768.00	0.73	240.41	767.98	5.32	-2.14	-5.04	0.39	495980.36	653614.66	32.362584	-103.835829	5.47	247.02
	860.00	0.69	218.77	859.97	6.44	-2.86	-5.89	0.29	495979.64	653613.81	32.362582	-103.835831	6.55	244.13
	952.00	0.34	227.75	951.97	7.25	-3.47	-6.44	0.39	495979.03	653613.26	32.362580	-103.835833	7.32	241.67
	1044.00	0.22	110.07	1043.97	7.42	-3.72	-6.48	0.53	495978.78	653613.22	32.362580	-103.835833	7.47	240.15
	1136.00	0.07	192.95	1135.97	7.37	-3.83	-6.33	0.24	495978.67	653613.37	32.362579	-103.835833	7.40	238.79
	1229.00	0.03	324.74	1228.97	7.41	-3.87	-6.35	0.10	495978.63	653613.35	32.362579	-103.835833	7.44	238.66
	1324.00	0.09	124.49	1323.97	7.38	-3.89	-6.31	0.12	495978.61	653613.39	32.362579	-103.835833	7.41	238.33
	1418.00	0.15	124.07	1417.97	7.32	-4.00	-6.14	0.06	495978.50	653613.56	32.362579	-103.835832	7.33	236.92
	1513.00	0.14	116.75	1512.97	7.22	-4.12	-5.94	0.02	495978.38	653613.76	32.362579	-103.835832	7.23	235.22
	1701.00	0.31	114.48	1700.96	6.87	-4.44	-5.27	0.09	495978.06	653614.43	32.362578	-103.835829	6.89	229.89
	1796.00	0.13	97.81	1795.96	6.67	-4.56	-4.93	0.20	495977.94	653614.77	32.362577	-103.835828	6.71	227.23
	1890.00	0.21	61.66	1889.96	6.42	-4.49	-4.67	0.14	495978.01	653615.03	32.362577	-103.835828	6.48	226.12
	1984.00	0.18	121.05	1983.96	6.20	-4.49	-4.39	0.21	495978.01	653615.31	32.362577	-103.835827	6.28	224.40
	2078.00	0.23	52.71	2077.96	5.95	-4.45	-4.12	0.25	495978.05	653615.58	32.362578	-103.835826	6.06	222.78
	2173.00	0.22	66.22	2172.96	5.58	-4.26	-3.80	0.06	495978.24	653615.90	32.362578	-103.835825	5.71	221.72
	2267.00	0.13	354.49	2266.96	5.35	-4.08	-3.64	0.23	495978.42	653616.06	32.362579	-103.835824	5.47	221.76
	2361.00	0.10	348.55	2360.96	5.26	-3.89	-3.67	0.03	495978.61	653616.03	32.362579	-103.835824	5.35	223.30
	2456.00	0.11	122.53	2455.96	5.20	-3.86	-3.61	0.20	495978.64	653616.09	32.362579	-103.835824	5.28	223.07
	2550.00	0.23	64.17	2549.96	4.98	-3.83	-3.36	0.21	495978.67	653616.34	32.362579	-103.835823	5.09	221.30
	2644.00	0.20	41.88	2643.96	4.63	-3.62	-3.08	0.09	495978.88	653616.62	32.362580	-103.835822	4.76	220.40
	2739.00	0.12	333.02	2738.96	4.45	-3.41	-3.02	0.20	495979.09	653616.68	32.362580	-103.835822	4.55	221.50
	2833.00	0.09	181.30	2832.96	4.48	-3.40	-3.00	0.22	495979.10	653616.64	32.362580	-103.835822	4.57	222.05
	2927.00	0.36	221.79	2926.96	4.82	-3.69	-3.26	0.32	495978.81	653616.44	32.362580	-103.835823	4.93	221.48
	3021.00	0.55	165.56	3020.86	5.27	-4.35	-3.35	0.49	495978.15	653616.35	32.362578	-103.835823	5.49	217.59
	3115.00	1.26	152.78	3114.84	5.61	-5.70	-2.76	0.78	495976.80	653616.94	32.362574	-103.835821	6.34	205.83
	3209.00	1.34	151.84	3208.92	5.93	-7.59	-1.77	0.09	495974.91	653617.93	32.362569	-103.835818	7.80	193.12
	3303.00	1.20	176.09	3302.90	6.62	-9.54	-1.18	0.59	495972.96	653618.52	32.362564	-103.835816	9.62	187.07
	3397.00	1.54	162.16	3396.87	7.55	-11.73	-0.73	0.50	495970.77	653618.97	32.362558	-103.835815	11.75	183.56
	3492.00	1.78	154.88	3491.83	8.25	-14.28	0.29	0.34	495968.22	653619.99	32.362551	-103.835812	14.28	178.85
	3586.00	1.86	154.74	3585.78	8.83	-16.98	1.56	0.09	495965.52	653621.26	32.362543	-103.835808	17.05	174.76
	3766.00	0.87	152.42	3765.73	9.60	-20.83	3.44	0.55	495961.67	653623.14	32.362532	-103.835802	21.11	170.63
	3860.00	0.07	306.17	3859.73	9.73	-21.43	3.72	0.99	495961.07	653623.42	32.362531	-103.835801	21.75	170.15
	3954.00	0.07	336.73	3953.73	9.73	-21.34	3.65	0.04	495961.16	653623.35	32.362531	-103.835801	21.66	170.29
9-5/8" Casing	3961.00	0.08	293.68	3960.73	9.74	-21.34	3.65	0.76	495961.16	653623.35	32.362531	-103.835801	21.65	170.30
	4049.00	0.71	235.90	4048.72	10.31	-21.62	3.14	0.76	495960.88	653622.84	32.362530	-103.835802	21.85	171.73
	4143.00	3.39	231.02	4142.65	13.67	-23.70	0.50	2.85	495958.80	653620.20	32.362525	-103.835811	23.70	178.79
	4237.00	6.14	231.57	4236.32	21.47	-28.57	-5.60	2.93	495953.93	653614.10	32.362511	-103.835831	29.11	191.09
	4331.00	8.64	228.56	4329.53	33.53	-36.37	-14.83	2.69	495946.13	653604.87	32.362490	-103.835861	39.28	202.19
	4426.00	8.57	231.43	4423.46	47.71	-45.51	-25.72	0.46	495937.00	653593.98	32.362465	-103.835896	52.27	209.47
	4520.00	5.85	246.79	4516.72	59.38	-51.76	-35.60	3.52	495930.74	653594.10	32.362448	-103.835928	62.82	214.52
	4614.00	7.63	235.99	4610.07	70.28	-57.14	-45.68	4.02	495925.36	653574.53	32.362433	-103.835959	72.94	218.33
	4709.00	9.76	214.25	4704.00	84.18	-67.33	-54.94	4.08	495915.18	653564.76	32.362405	-103.835991	86.90	219.21
	4803.00	11.29	204.07	4796.42	99.71	-82.32	-63.18	2.56	495900.19	653556.53	32.362364	-103.836018	103.77	217.51
	4834.00	11.99	198.67	4826.79	104.99	-88.14	-65.45	4.18	495894.37	653554.26	32.362348	-103.836026	109.78	216.59
	4865.00	12.25	196.66	4857.09	110.26	-94.34	-67.42	1.60	495888.17	653552.29	32.362331	-103.836032	115.95	215.55
	4898.00	12.45	192.31	4889.33	115.74	-101.17	-69.18	2.88	495881.34	653550.52	32.362313	-103.836038	122.56	214.36
	4939.00	12.78	186.41	4929.34	122.14	-109.99	-70.63	3.24	495872.51	653549.07	32.362288	-103.836043	130.72	212.71
	4991.00	13.15	184.68	4980.02	129.94	-121.61	-71.75	1.03	495860.90	653547.95	32.362256	-103.836047	141.20	210.54
	5086.00	14.12	167.12	5072.38	141.68	-143.68	-70.05	4.46	495838.83	653549.65	32.362196	-103.836041	159.85	205.99
	5180.00	14.50	173.01	5163.47	152.04	-166.54	-66.06	1.60	495815.97	653553.64	32.362133	-103.836029	179.17	201.64
	5213.00	14.26	179.81	5195.44	156.48	-174.71	-65.55	5.17	495807.81	653554.16	32.362110	-103.836027	186.60	200.57
	5275.00	14.05	190.38	5255.56	166.48	-189.75	-66.88	4.18	495792.76	653552.83	32.362099	-103.836032	201.19	199.42
	5370.00	13.49	208.71	5347.88	184.95	-210.82	-74.28	4.61	495771.69	653545.42	32.362011	-103.836056	223.52	199.41
	5464.00	13.54	232.11	5439.34	205.91	-227.21	-88.24	5.78	495755.31	653531.46	32.361966	-103.836102	243.74	201.23
	5558.00	13.40	236.08	5530.76	227.79	-240.04	-105.97	0.99	495742.47	653513.74	32.361931	-103.836159	262.39	203.82
	5653.00	13.48	235.69	5623.16	249.86	-252.43	-124.25	0.13	495730.09	653495.46	32.361898	-103.836218	281.35	206.21
	5747.00	14.35	236.44	5714.40	272.44	-265.04	-143.00	0.95	495717.04	653476.70	32.361863	-103.836279	301.16	208.35
	5841.00	15.35	236.46	5805.26	296.51	-278.48	-163.00	1.08	495704.48	653456.71</				

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (ft/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (°)	Longitude (°)	Closure (ft)	Closure Azimuth (°)
7-5/8" Casing	8390.00	20.63	230.38	8054.89	1464.48	-902.27	-1154.24	2.54	495080.29	652465.54	32.360124	-103.839564	1465.04	231.99
	8484.00	20.86	234.83	8142.80	1497.75	-922.47	-1180.68	1.69	495060.09	652439.10	32.360099	-103.839650	1498.31	232.00
	8579.00	22.88	236.91	8230.96	1533.10	-942.30	-1209.98	2.28	495040.27	652409.80	32.360015	-103.839745	1533.61	232.09
	8673.00	20.90	240.35	8318.18	1568.00	-960.57	-1239.87	2.51	495021.99	652379.92	32.359965	-103.839842	1568.43	232.23
	8768.00	19.35	239.97	8407.38	1600.47	-976.83	-1268.22	1.64	495005.73	652351.56	32.359921	-103.839934	1600.81	232.40
	8862.00	18.79	241.78	8496.22	1630.93	-991.78	-1295.04	0.87	494990.78	652324.74	32.359880	-103.840021	1631.19	232.55
	8956.00	14.70	245.50	8586.22	1657.59	-1003.89	-1319.25	4.50	494978.67	652300.54	32.359847	-103.840099	1657.77	232.73
	9051.00	15.06	240.34	8678.04	1681.64	-1015.00	-1340.94	1.44	494967.57	652278.85	32.359817	-103.840170	1681.77	232.88
	9145.00	12.99	239.37	8769.23	1704.28	-1026.43	-1360.64	2.22	494956.14	652259.15	32.359786	-103.840234	1704.38	232.97
	9240.00	15.32	244.45	8861.35	1727.23	-1037.28	-1381.16	2.78	494945.29	652238.63	32.359756	-103.840300	1727.29	233.09
9334.00	15.13	244.85	8952.05	1751.46	-1047.85	-1403.47	0.23	494934.72	652216.33	32.359727	-103.840373	1751.49	233.25	
9429.00	12.13	245.46	9044.36	1773.39	-1057.27	-1423.77	3.16	494925.30	652196.02	32.359702	-103.840439	1773.40	233.40	
9523.00	11.83	245.74	9136.31	1792.47	-1065.33	-1441.54	0.33	494917.24	652178.25	32.359680	-103.840496	1792.47	233.53	
9552.00	11.45	246.76	9164.72	1798.18	-1067.68	-1446.90	1.49	494914.89	652172.90	32.359673	-103.840514	1798.18	233.58	
9641.00	13.02	246.80	9251.70	1816.30	-1074.30	-1464.54	2.13	494908.27	652155.26	32.359656	-103.840571	1816.31	233.74	
9691.00	13.93	254.13	9300.32	1827.29	-1077.71	-1475.67	2.13	494904.87	652144.12	32.359646	-103.840607	1827.31	233.86	
9786.00	22.55	264.38	9390.48	1853.70	-1082.63	-1504.86	9.65	494899.94	652114.94	32.359633	-103.840702	1853.83	234.27	
9880.00	32.60	269.60	9473.71	1889.76	-1084.57	-1548.24	10.99	494898.00	652071.56	32.359628	-103.840842	1890.33	234.99	
9975.00	42.53	265.45	9548.93	1937.85	-1087.31	-1605.99	10.78	494895.26	652013.81	32.359622	-103.841029	1939.44	235.90	
10070.00	52.51	261.05	9613.02	1998.72	-1095.74	-1675.42	11.04	494886.83	651944.39	32.359599	-103.841254	2001.92	236.81	
10164.00	62.32	259.65	9663.59	2069.37	-1109.05	-1753.40	10.51	494873.52	651866.42	32.359564	-103.841507	2074.71	237.69	
10258.00	64.30	259.55	9705.81	2144.84	-1124.21	-1836.00	2.11	494858.36	651783.82	32.359523	-103.841775	2152.85	238.52	
10353.00	66.07	258.95	9745.68	2222.55	-1140.30	-1920.71	1.95	494842.27	651699.12	32.359480	-103.842049	2233.70	239.30	
10447.00	75.85	260.70	9776.31	2302.13	-1155.94	-2008.07	10.55	494826.64	651611.76	32.359438	-103.842332	2317.01	240.07	
10541.00	85.84	268.41	9791.27	2381.48	-1164.64	-2100.27	13.35	494817.94	651519.57	32.359415	-103.842631	2401.57	240.99	
FTP [1299° FNL, 100° FEL]	10582.00	84.50	266.88	9794.72	2415.32	-1166.32	-2141.09	4.96	494816.26	651478.75	32.359411	-103.842763	2438.14	241.42
	10636.00	82.73	264.85	9800.73	2460.68	-1170.19	-2194.61	4.96	494812.39	651425.24	32.359401	-103.842937	2487.09	241.93
	10731.00	82.24	266.63	9813.15	2540.41	-1177.18	-2288.53	1.93	494805.40	651331.32	32.359383	-103.843241	2573.54	242.78
	10825.00	85.24	267.10	9823.40	2618.51	-1182.29	-2381.82	3.23	494800.29	651238.04	32.359370	-103.843543	2659.11	243.60
	10920.00	89.26	267.78	9827.96	2697.33	-1186.61	-2476.59	4.28	494795.97	651143.28	32.359360	-103.843850	2746.19	244.40
	11014.00	90.69	273.75	9828.00	2772.23	-1185.44	-2570.53	6.63	494797.14	651049.33	32.359364	-103.844154	2830.71	245.24
	11108.00	90.25	267.78	9827.23	2847.08	-1184.18	-2664.48	6.37	494796.39	650955.40	32.359369	-103.844458	2915.78	246.04
	11203.00	90.28	267.76	9826.79	2925.65	-1187.88	-2759.41	0.04	494794.70	650860.47	32.359360	-103.844766	3004.23	246.71
	11297.00	90.27	268.03	9826.34	3003.29	-1191.33	-2853.34	0.29	494791.25	650766.55	32.359351	-103.845070	3092.06	247.34
	11392.00	90.39	267.73	9825.79	3081.76	-1194.85	-2948.28	0.34	494787.73	650671.62	32.359343	-103.845377	3181.19	247.94
	11486.00	90.63	269.25	9824.95	3158.84	-1197.32	-3042.24	1.64	494785.26	650577.67	32.359337	-103.845682	3269.37	248.52
	11580.00	90.22	268.82	9824.26	3235.40	-1198.91	-3136.22	0.63	494783.67	650483.69	32.359334	-103.845986	3357.57	249.08
	11675.00	91.54	269.67	9822.80	3312.57	-1200.16	-3231.20	1.65	494782.42	650388.72	32.359332	-103.846294	3446.89	249.62
	11769.00	90.56	269.08	9821.07	3388.79	-1201.18	-3325.17	1.22	494781.40	650294.74	32.359330	-103.846598	3535.48	250.14
	11863.00	90.10	268.95	9820.53	3465.38	-1202.80	-3419.16	0.51	494779.78	650200.77	32.359327	-103.846902	3624.55	250.62
	11957.00	89.97	270.11	9820.48	3541.47	-1203.57	-3513.15	1.24	494779.01	650106.78	32.359326	-103.847207	3713.60	251.09
	12052.00	90.52	270.21	9820.07	3617.75	-1203.31	-3608.15	0.59	494779.27	650011.78	32.359328	-103.847514	3803.51	251.56
	12146.00	90.25	269.61	9819.44	3693.47	-1203.45	-3702.15	0.70	494779.13	649917.79	32.359329	-103.847819	3892.84	251.99
	12240.00	89.88	269.79	9819.33	3769.40	-1203.95	-3796.15	0.44	494778.63	649823.80	32.359328	-103.848123	3982.49	252.40
	12335.00	90.25	269.68	9819.22	3846.10	-1204.38	-3891.15	0.41	494778.19	649728.81	32.359328	-103.848431	4073.27	252.80
	12429.00	89.62	270.00	9819.33	3921.89	-1204.65	-3985.15	0.75	494777.93	649634.82	32.359329	-103.848735	4163.24	253.18
	12523.00	89.42	269.83	9820.12	3997.61	-1204.79	-4079.14	0.28	494777.79	649540.83	32.359330	-103.849040	4253.24	253.55
	12617.00	88.81	269.83	9821.57	4073.40	-1205.07	-4173.13	0.65	494777.51	649446.84	32.359330	-103.849344	4343.64	253.89
	12712.00	88.97	269.95	9823.41	4149.94	-1205.25	-4268.11	0.21	494777.33	649351.87	32.359331	-103.849652	4435.02	254.23
	12807.00	88.60	269.85	9825.42	4226.46	-1205.41	-4363.09	0.40	494777.17	649256.90	32.359331	-103.849959	4526.54	254.56
	12901.00	88.67	270.38	9827.66	4301.96	-1205.22	-4457.06	0.57	494777.35	649162.93	32.359333	-103.850263	4617.14	254.87
	12996.00	90.31	270.56	9828.51	4377.93	-1204.45	-4552.05	1.74	494778.13	649067.95	32.359336	-103.850571	4708.70	255.18
	13090.00	90.08	270.37	9828.19	4453.11	-1203.68	-4646.05	0.32	494778.90	648973.96	32.359340	-103.850875	4799.44	255.48
	13185.00	90.22	270.29	9827.94	4529.23	-1203.14	-4741.05	0.17	494779.44	648878.96	32.359342	-103.851183	4891.33	255.76
	13279.00	91.03	270.58	9826.92	4604.43	-1202.42	-4835.04	0.92	494780.16	648784.96	32.359346	-103.851487	4982.31	256.03
	13374.00	89.94	270.45	9826.11	4680.36	-1201.57	-4930.03	1.16	494781.01	648689.99	32.359349	-103.851795	5074.34	256.30
	13468.00	90.12	270.32	9826.06	4755.62	-1200.94	-5024.03	0.24	494781.64	648596.00	32.359352	-103.852099	5165.57	256.56
	13563.00	91.19	270.											

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (°)	Longitude (°)	Closure (ft)	Closure Azimuth (°)
	19598.00	90.75	268.91	9771.78	9671.42	-1174.38	-11152.92	0.36	494808.20	642467.52	32.359499	-103.871946	11214.58	263.99
	19692.00	90.44	269.18	9770.80	9747.98	-1175.94	-11246.90	0.44	494806.64	642373.54	32.359496	-103.872250	11308.21	264.03
	19786.00	90.55	269.18	9769.99	9824.40	-1177.29	-11340.89	0.12	494805.29	642279.56	32.359493	-103.872554	11401.83	264.07
	19881.00	90.75	269.16	9768.91	9901.65	-1178.66	-11435.87	0.21	494803.91	642184.58	32.359491	-103.872862	11496.45	264.12
	19975.00	90.88	269.06	9767.58	9978.13	-1180.12	-11529.85	0.17	494802.45	642090.61	32.359488	-103.873166	11590.09	264.16
	20070.00	91.44	269.84	9765.65	10055.09	-1181.04	-11624.83	1.01	494801.54	641995.64	32.359486	-103.873474	11684.67	264.20
	20164.00	91.74	270.65	9763.04	10130.46	-1180.63	-11718.79	0.92	494801.94	641901.68	32.359489	-103.873778	11778.11	264.25
	20259.00	91.74	271.33	9760.16	10205.88	-1178.99	-11813.73	0.72	494803.59	641806.75	32.359494	-103.874086	11872.41	264.30
	20353.00	92.03	271.84	9757.07	10279.91	-1176.39	-11907.64	0.62	494806.18	641712.84	32.359502	-103.874390	11965.61	264.36
	20447.00	92.10	272.19	9753.68	10353.48	-1173.09	-12001.52	0.38	494809.49	641618.97	32.359513	-103.874694	12058.72	264.42
	20541.00	92.30	272.44	9750.07	10426.75	-1169.30	-12095.38	0.34	494813.28	641525.12	32.359524	-103.874998	12151.76	264.48
	20636.00	92.77	273.09	9745.87	10500.31	-1164.72	-12190.17	0.84	494817.86	641430.33	32.359538	-103.875304	12245.69	264.54
	20731.00	92.29	272.63	9741.68	10573.77	-1159.98	-12284.96	0.70	494822.59	641335.55	32.359552	-103.875611	12339.60	264.61
	20825.00	91.15	272.88	9738.85	10646.60	-1155.47	-12378.81	1.24	494827.11	641241.71	32.359566	-103.875915	12432.62	264.67
	20919.00	90.99	269.44	9737.10	10721.07	-1153.57	-12472.76	3.66	494829.01	641147.76	32.359572	-103.876219	12525.99	264.72
	21012.00	91.06	267.53	9735.44	10797.32	-1156.02	-12565.71	2.05	494826.55	641054.82	32.359566	-103.876520	12618.77	264.74
	21107.00	91.38	267.55	9733.41	10876.09	-1160.10	-12660.60	0.34	494822.48	640959.94	32.359556	-103.876828	12713.64	264.76
	21201.00	91.09	267.41	9731.39	10954.09	-1164.23	-12754.48	0.34	494818.34	640866.06	32.359546	-103.877132	12807.51	264.78
	21296.00	91.42	267.53	9729.31	11032.93	-1168.42	-12849.37	0.37	494814.15	640771.18	32.359535	-103.877439	12902.38	264.80
	21390.00	91.18	267.52	9727.17	11110.89	-1172.48	-12943.26	0.26	494810.09	640677.30	32.359525	-103.877743	12996.25	264.82
	21484.00	90.86	267.53	9725.50	11188.85	-1176.54	-13037.15	0.34	494806.04	640583.40	32.359515	-103.878047	13090.14	264.84
	21578.00	91.09	267.45	9723.90	11266.85	-1180.66	-13131.05	0.26	494801.92	640489.51	32.359505	-103.878351	13184.02	264.86
	21673.00	90.79	267.17	9722.34	11345.84	-1185.12	-13225.93	0.43	494797.46	640394.64	32.359494	-103.878655	13278.92	264.88
	21767.00	91.05	267.29	9720.83	11424.07	-1189.66	-13319.81	0.30	494792.92	640300.77	32.359483	-103.878963	13372.83	264.90
	21862.00	91.24	267.70	9718.93	11502.89	-1193.81	-13414.70	0.48	494788.77	640205.88	32.359472	-103.879270	13467.72	264.91
	21956.00	91.38	268.79	9716.79	11580.18	-1196.69	-13508.63	1.17	494785.89	640111.96	32.359465	-103.879574	13561.53	264.94
	22051.00	91.12	268.61	9714.71	11657.86	-1198.84	-13603.58	0.33	494783.74	640017.01	32.359461	-103.879882	13656.31	264.96
	22146.00	91.39	269.27	9712.63	11735.32	-1200.60	-13698.54	0.75	494781.98	639922.06	32.359457	-103.880189	13751.06	264.99
	22240.00	91.22	269.24	9710.49	11811.65	-1201.82	-13792.51	0.18	494780.76	639828.10	32.359455	-103.880494	13844.77	265.02
	22335.00	91.79	269.51	9708.00	11888.68	-1202.86	-13887.47	0.86	494779.72	639733.14	32.359453	-103.880801	13939.47	265.05
	22429.00	91.36	269.79	9705.41	11964.62	-1203.43	-13981.43	0.55	494779.15	639639.19	32.359452	-103.881106	14033.13	265.08
	22524.00	91.58	270.14	9702.98	12041.07	-1203.49	-14076.40	0.44	494779.09	639544.22	32.359453	-103.881413	14127.76	265.11
	22618.00	90.99	268.93	9700.87	12117.14	-1204.25	-14170.37	1.43	494778.33	639450.26	32.359452	-103.881717	14221.45	265.14
	22712.00	90.62	268.64	9699.55	12193.94	-1206.24	-14264.34	0.50	494776.34	639356.30	32.359448	-103.882022	14315.26	265.17
	22806.00	90.81	269.22	9698.37	12270.60	-1208.00	-14358.32	0.65	494774.58	639262.33	32.359444	-103.882326	14409.05	265.19
	22901.00	90.65	268.41	9697.16	12348.18	-1209.96	-14453.29	0.87	494772.62	639167.36	32.359440	-103.882634	14503.85	265.21
	22996.00	90.55	269.07	9696.17	12425.84	-1212.05	-14548.26	0.70	494770.53	639072.40	32.359435	-103.882941	14598.66	265.24
	23090.00	90.73	268.97	9695.12	12502.41	-1213.66	-14642.24	0.22	494768.92	638978.42	32.359432	-103.883246	14692.46	265.26
	23184.00	90.89	268.88	9693.79	12579.08	-1215.42	-14736.22	0.20	494767.16	638884.45	32.359428	-103.883550	14786.25	265.28
	23278.00	90.52	268.84	9692.63	12655.80	-1217.29	-14830.19	0.40	494765.29	638790.49	32.359424	-103.883854	14880.07	265.31
	23372.00	90.49	268.86	9691.80	12732.54	-1219.18	-14924.17	0.04	494763.40	638696.52	32.359420	-103.884159	14973.88	265.33
	23466.00	90.70	269.42	9690.83	12809.00	-1220.59	-15018.15	0.64	494761.99	638602.54	32.359417	-103.884463	15067.67	265.35
	23560.00	90.46	268.88	9689.88	12885.45	-1221.99	-15112.14	0.63	494760.60	638508.56	32.359415	-103.884767	15161.46	265.38
LTP [1330' FNL, 135' FWL]	23739.00	90.70	268.73	9688.07	13031.66	-1225.72	-15291.09	0.16	494756.86	638329.62	32.359406	-103.885347	15340.14	265.42
	23749.00	90.71	268.72	9687.95	13039.84	-1225.94	-15301.08	0.16	494756.64	638319.62	32.359406	-103.885379	15350.12	265.42
	23805.00	90.89	269.16	9687.17	13085.50	-1226.98	-15357.07	0.85	494755.60	638263.64	32.359404	-103.885561	15406.01	265.43
	23833.00	90.89	269.16	9686.73	13108.27	-1227.39	-15385.06	0.00	494755.19	638235.65	32.359403	-103.885651	15433.94	265.44

Survey Type: Def Survey

Survey Error Model: ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
Schlumberger / xBolt	1	0.000	32.000	1/98.425	17.500	13.325	A008Mb_MWD+IFR1+MS-Depth Only	James Ranch Unit DI 2 707H / XTO James Ranch Unit DI 2 707H 0' to 23833' MD
Schlumberger / xBolt	1	32.000	32.000	Act Stns	17.500	13.325	A008Mb_MWD+IFR1+MS-Depth Only	James Ranch Unit DI 2 707H / XTO James Ranch Unit DI 2 707H 0' to 23833' MD
Schlumberger / xBolt	1	32.000	645.000	Act Stns	17.500	13.325	A008Mb_MWD+IFR1+MS	James Ranch Unit DI 2 707H / XTO James Ranch Unit DI 2 707H
Schlumberger / xBolt	1	645.000	3691.000	Act Stns	12.250	9.625	A008Mb_MWD+IFR1+MS	James Ranch Unit DI 2 707H / XTO James Ranch Unit DI 2 707H
Schlumberger / xBolt	1	3691.000	9641.000	Act Stns	8.750	7.625	A008Mb_MWD+IFR1+MS	James Ranch Unit DI 2 707H / XTO James Ranch Unit DI 2 707H
Schlumberger / xBolt	1	9641.000	23833.000	Act Stns	6.750	5.500	A008Mb_MWD+IFR1+MS	James Ranch Unit DI 2 707H / XTO James Ranch Unit DI 2 707H

Submit a Copy To Appropriate District
Office
District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (575) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-45401
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☐ FEE ☐ FED X
2. Name of Operator XTO Permian Operating LLC		6. State Oil & Gas Lease No.
3. Address of Operator 6401 Holiday Hill Rd Bldg 5 Midland, Texas 79707		7. Lease Name or Unit Agreement Name James Ranch Unit DI 2
4. Well Location Unit Letter <u>K</u> : <u>2500</u> feet from the <u>South</u> line and <u>2050</u> feet from the <u>West</u> line Section <u>25</u> Township <u>22S</u> Range <u>30E</u> NMPM County <u>Eddy</u>		8. Well Number <u>707H</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3344 GL		9. OGRID Number <u>373075</u>
		10. Pool name or Wildcat Los Medanos; Bone Spring (Oil)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐	ALTERING CASING ☐
PULL OR ALTER CASING ☐	COMMENCE DRILLING OPNS. ☐
DOWNHOLE COMMINGLE ☐	P AND A ☐
CLOSED-LOOP SYSTEM ☐	CASING/CEMENT JOB ☐
OTHER: ☐	OTHER: Completion Sundry ☒

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

XTO Permian Operating LLC respectfully submits this sundry to report the completion operation of the above well.

KOP @ depth 9,673 ft.PBTD = 23,820 ft.12/2/21 Run RCB/GR/CCL 1/29/22 Pressure test 5 in csg to 8,000 psi for 30min test good, open sleeve. 3/26/22 Perf and frac 65 stages, 1,564 total shots, from 10,623 to 23,732 using 679,984 bbls of fluid and 32,500,112 lbs Proppant.Tag and drill out plugs.6/22/22 Run 2-7/8 L80 6.5# tubing set at 9,693 ft.6/22/22 Packer setting depth 9,677 ft. Ready Date: 7/14/2022 First Production: 7/15/2022

Spud Date:

9/17/2021

Rig Release Date:

11/6/2021

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Amanda Thames TITLE Regulatory Analyst DATE 8/15/2022

Type or print name Amanda Thames E-mail address: amanda.thames@exxonmobil.com PHONE: 432.221.7340

For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____

Conditions of Approval (if any):

Submit To Appropriate District Office Two Copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505				Form C-105 Revised April 3, 2017												
WELL COMPLETION OR RECOMPLETION REPORT AND LOG																		
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								5. Lease Name or Unit Agreement Name JAMES RANCH UNIT DI 2										
								6. Well Number: 707H										
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER																		
8. Name of Operator XTO PERMIAN OPERATING LLC.						9. OGRID 373075												
10. Address of Operator 6401 HOLIDAY HILL RD BLDG #5, MIDLAND TX 79707						11. Pool name or Wildcat LOS MEDANOS;BONE SPRING (OIL)												
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County								
Surface:	K	25	22S	30E		2500	South	2050	West	Eddy								
BH:	J	28	22S	30E		1305	South	2633	East	Eddy								
13. Date Spudded 9/17/2021	14. Date T.D. Reached 11/4/2021		15. Date Rig Released 11/6/2021		16. Date Completed (Ready to Produce) 7/14/2022			17. Elevations (DF and RKB, RT, GR, etc.) 3344' GL										
18. Total Measured Depth of Well 23,833			19. Plug Back Measured Depth 23,820		20. Was Directional Survey Made? Yes			21. Type Electric and Other Logs Run CBL										
22. Producing Interval(s), of this completion - Top, Bottom, Name 10,623 TO 23,732 LOS MEDANOS;BONE SPRING (OIL)																		
23. CASING RECORD (Report all strings set in well)																		
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED								
13 3/8"		54.5		644'		17 1/2"		805										
9 5/8"		40.0		3,680'		12 1/4"		1,375										
7 5/8"		29.7		9,631'		8 3/4"		885										
5"		18.0		23,822'		6 3/4"		1,305										
24. LINER RECORD						25. TUBING RECORD												
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET	PACKER SET											
					2 7/8"	9,693	9,677											
26. Perforation record (interval, size, and number) 10,623 TO 23,732 4spf, 1,564 Total Shots 65 stages					27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>DEPTH INTERVAL</th> <th>AMOUNT AND KIND MATERIAL USED</th> </tr> <tr> <td>10,623 TO 23,732</td> <td>679,985 bbl fluid + 32,500,112 lbs proppant</td> </tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </table>						DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED	10,623 TO 23,732	679,985 bbl fluid + 32,500,112 lbs proppant				
DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED																	
10,623 TO 23,732	679,985 bbl fluid + 32,500,112 lbs proppant																	
28. PRODUCTION																		
Date First Production 7/15/22		Production Method (<i>Flowing, gas lift, pumping - Size and type pump</i>) Flowing				Well Status (<i>Prod. or Shut-in</i>) Producing												
Date of Test 7/18/22	Hours Tested 24	Choke Size	Prod'n For Test Period	Oil - Bbl 579	Gas - MCF 811	Water - Bbl. 5105	Gas - Oil Ratio 1,401											
Flow Tubing Press. 446	Casing Pressure 414	Calculated 24-Hour Rate	Oil - Bbl. 579	Gas - MCF 811	Water - Bbl. 5105	Oil Gravity - API - (<i>Corr.</i>)												
29. Disposition of Gas (<i>Sold, used for fuel, vented, etc.</i>) Sold							30. Test Witnessed By											
31. List Attachments C-104 NW, C-102 & Supplement , Directional Survey (Log uploaded to NMOCD)																		
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:											
34. If an on-site burial was used at the well, report the exact location of the on-site burial:																		
Latitude			Longitude			NAD83												
<i>I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief</i>																		
Signature <i>Amanda Thames</i>			Printed Name Amanda Thames			Title Regulatory Analyst			Date 8/15/2022									
E-mail Address amanda.thames@exxonmobil.com																		

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn A"
T. Salt 670'	T. Strawn	T. Kirtland	T. Penn. "B"
B. Salt 3,850'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Yates	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. 7 Rivers	T. Devonian	T. Cliff House	T. Leadville
T. Queen	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand 3,880'	T. Morrison	
T. Drinkard	T. Bone Springs 7,700'	T. Todilto	
T. Abo	T. Rustler 370'	T. Entrada	
T. Wolfcamp	T. 2nd Bone Spring 9,560'	T. Wingate	
T. Penn	T.	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....
No. 2, from.....to.....
No. 3, from.....to.....
No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....


From	To	Thickness In Feet	Lithology



Schematic - Wellbore - Horizontal

Well Name: JAMES RANCH UNIT DI 2 707H

API/UWI 3001545401	SAP Cost Center ID 1632561001	Permit Number BLM	State/Province New Mexico	County Eddy	Ground Elevation (ft) 3,344.00	KB-Ground Distance (ft) 32.00	Surface Casing Flange Elevatio...
Surface Location T22S-R30E-S25	Spud Date 9/17/2021 15:30	Original KB Elevation (ft) 3,376.00					

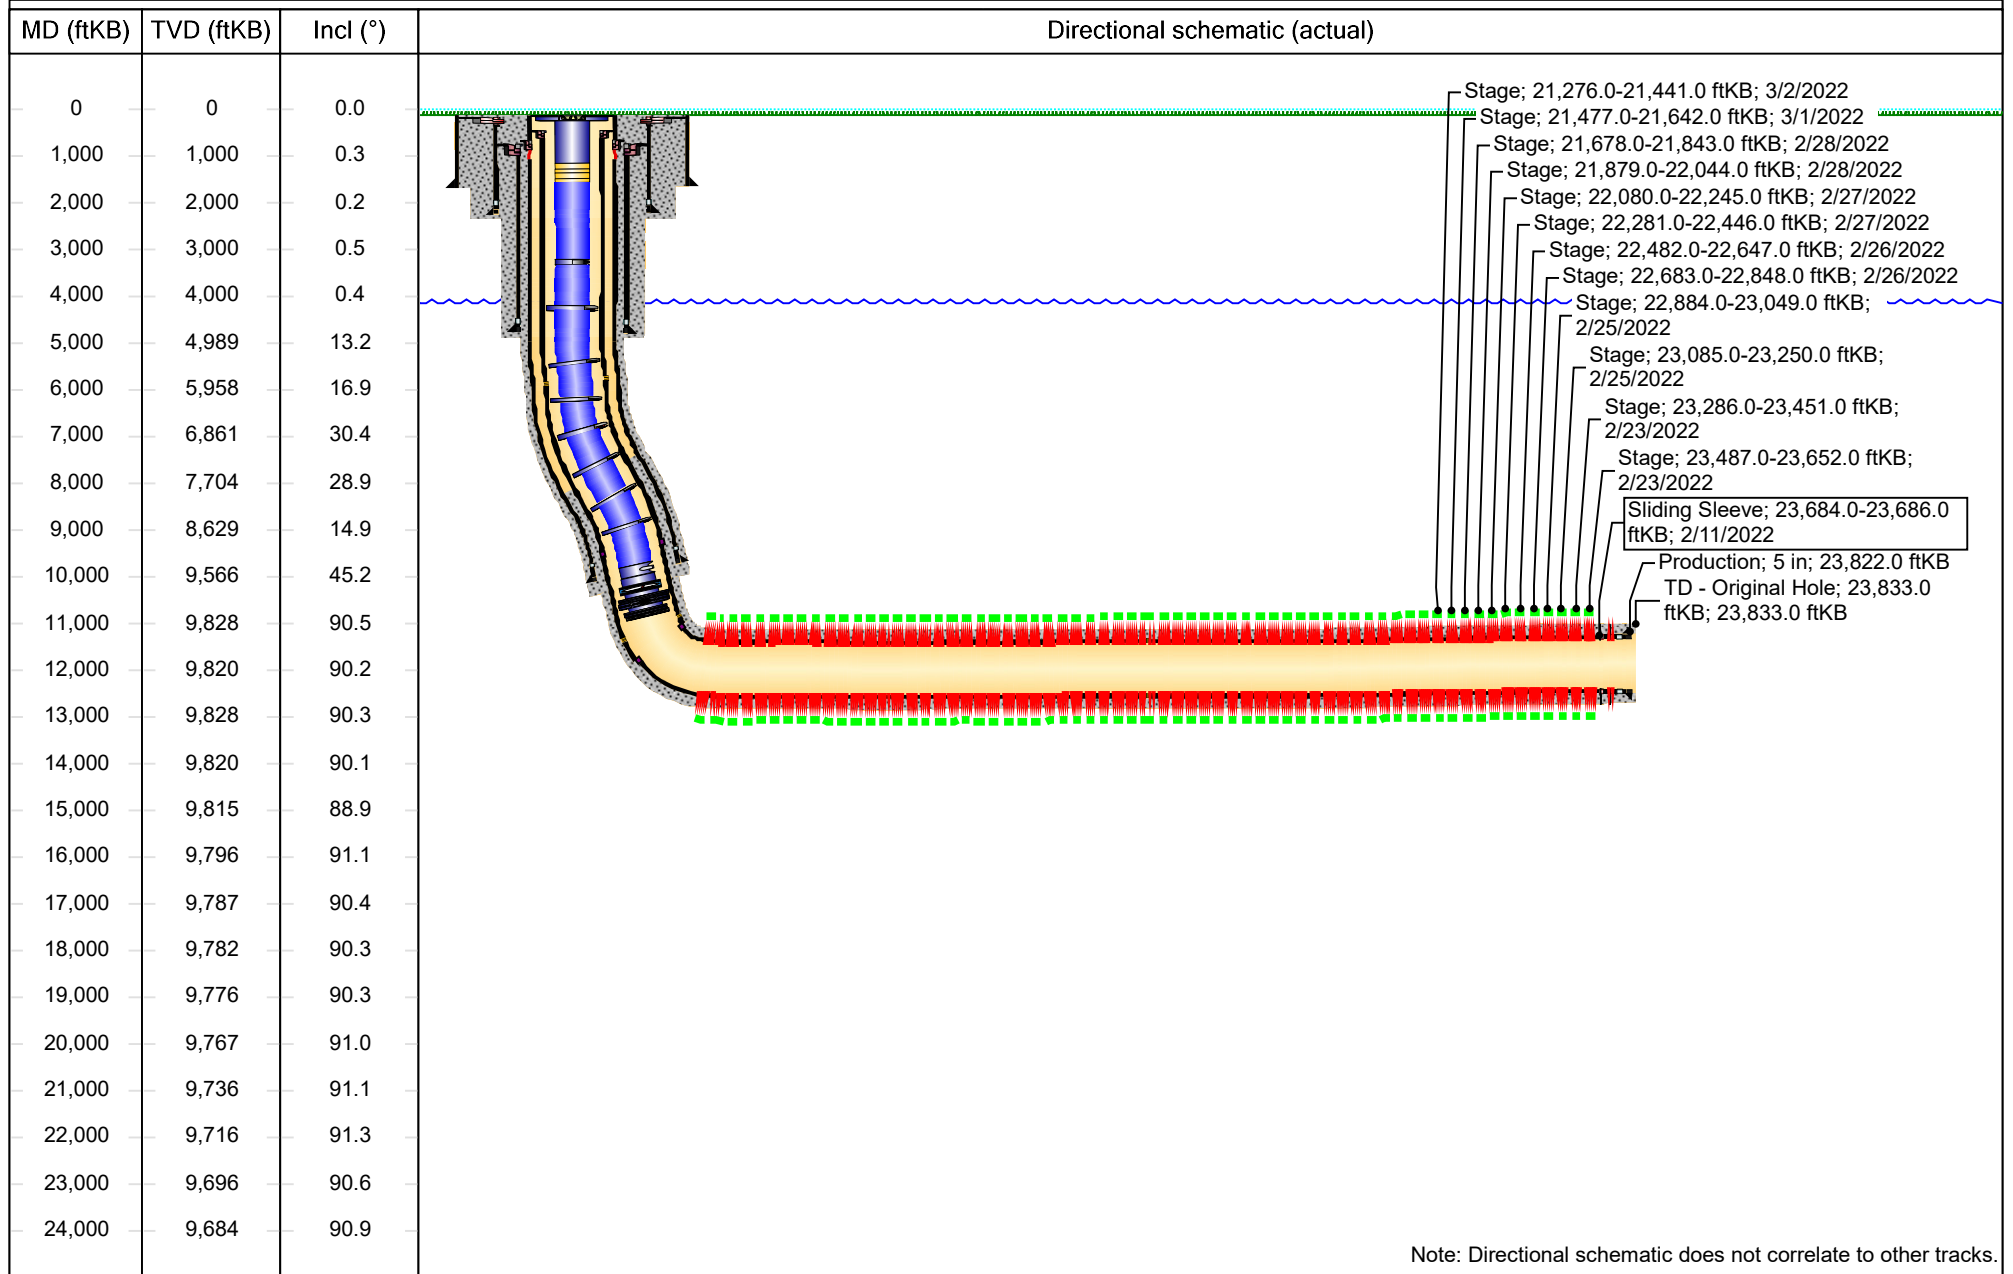

Note: Directional schematic does not correlate to other tracks.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 133945

ACKNOWLEDGMENTS

Operator: XTO PERMIAN OPERATING LLC. 6401 HOLIDAY HILL ROAD MIDLAND, TX 79707	OGRID: 373075
	Action Number: 133945
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 133945

CONDITIONS

Operator: XTO PERMIAN OPERATING LLC. 6401 HOLIDAY HILL ROAD MIDLAND, TX 79707	OGRID: 373075
	Action Number: 133945
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
crystal.walker	None	10/16/2025