eined by Opp Po Appropriate 5 stroi 25:34	State of New Mexico	Form C-103 <sup>1</sup> of
Office District I – (575) 393-6161	Energy, Minerals and Natural Resource	
1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> – (575) 748-1283	OIL CONSERVATION DIVISION	30-025-00291
811 S. First St., Artesia, NM 88210 District III – (505) 334-6178	1220 South St. Francis Dr.	5. Indicate Type of Lease
1000 Rio Brazos Rd., Aztec, NM 87410	Santa Fe, NM 87505	STATE FEE
<u>District IV</u> – (505) 476-3460 1220 S. St. Francis Dr., Santa Fe, NM	Santa Pe, NWI 87303	6. State Oil & Gas Lease No.
87505	EG AND DEDODES ON WELLS	
	ES AND REPORTS ON WELLS ALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A	7. Lease Name or Unit Agreement Name
DIFFERENT RESERVOIR. USE "APPLICA	ATION FOR PERMIT" (FORM C-101) FOR SUCH	Rock Queen Unit
PROPOSALS.) 1. Type of Well: Oil Well 🔲 🤇 C	Gas Well Other	8. Well Number <sub>004</sub>
2. Name of Operator		9. OGRID Number
Acacia Operating Company, L	<u>.LC</u>	330522
. Address of Operator		10. Pool name or Wildcat
505 N Big Spring St., Ste. 303 . Well Location	, Midland, TX 79701	Caprock; Queen
Unit Letter K:	1980 feet from the South line at	nd 1980 feet from the West line
Section 19	Township 13S Range 32E	NMPM County LEA
Section 10	11. Elevation (Show whether DR, RKB, RT, G	<i>3</i> 227 t
	,,,,,	
of starting any proposed work proposed completion or record Energy Inc, submits this NOI to	k). SEE RULE 19.15.7.14 NMAC. For Multipup mpletion.	ails, and give pertinent dates, including estimated date ple Completions: Attach wellbore diagram of for operator Acacia Operating Company, LLC. your review.
oud Date: 04/16/1955	Rig Release Date:	
iereby certify that the information al	pove is true and complete to the best of my known	owledge and belief.
###	Chapter 7 Trustee	e 10/13/25
GNATURE/	TITLE	DATE
/pe or print name <u>Ron Satija</u> or State Use Only	E-mail address: rsatija	@satijatrustee.com PHONE: (737 881-7102
	TITLE	D. L. TILL
PPROVED BY:	TITLE	DATE

## PLUG AND ABANDON WELLBORE ROCK QUEEN UNIT 004 EDDY COUNTY, NEW MEXICO Class II


MASIP	MAOP	MAWP	Surface Csg Yield
1,000 psi	1,000 psi	3,000 psi	2270 PSI

**SUMMARY:** Plug and abandon wellbore according to BLM regulations.


- 1) MIRU plugging company. Set open top steel pit for plugging.
- 2) POOH LD rods and pump.
- 3) ND WH and NU 3K manual BOP. Function test BOP.
- 4) Unset packer at 3,008'. POOH 2-3/8" tbg.
- 5) MIRU WLU, RIH GR sized for 7" to 3,060';RIH set CIBP at 3,035', run CBL to surface; pressure test to 500 PSI for 30 minutes.
- 6) Run CBL from 3,000' to surface. Send CBL results to engineering and OCD.
- 7) ND BOP and NU Wellhead, RDMO.

Steps 8 and forward will be completed with P&A rig within 90 days from RDMO.

- 8) MIRU plugging unit company. Set open Steel Pit for plugging
- 9) ND WH and NU 3K manual BOP. Function test BOP.
- 10) Dump bail 35'Class C cement from 3,035' to 3,000'. WOC and tag to verify TOC. (T/Perf, T/Queen)
- 11) Perf at 2,330' (or TOC) and squeeze 250 SKS cement Class C from 2,330' to 1,550'. WOC and tag to verify TOC. (T/Yates, B/Salt).
- 12) MIRU WLU, perforate at 410′. Establish circulation down casing and up 9-5/8″ x 7″ annulus. Circulate ~130 SKS Class C cement to surface. (Surface Casing Shoe)
- 13) ND BOP and cut off wellhead 5' below surface. RDMO PU, transport trucks, and pump truck.
- 14) Set P&A marker.
- 15) Pull fluid from steel tank and haul to disposal. Release steel tank.

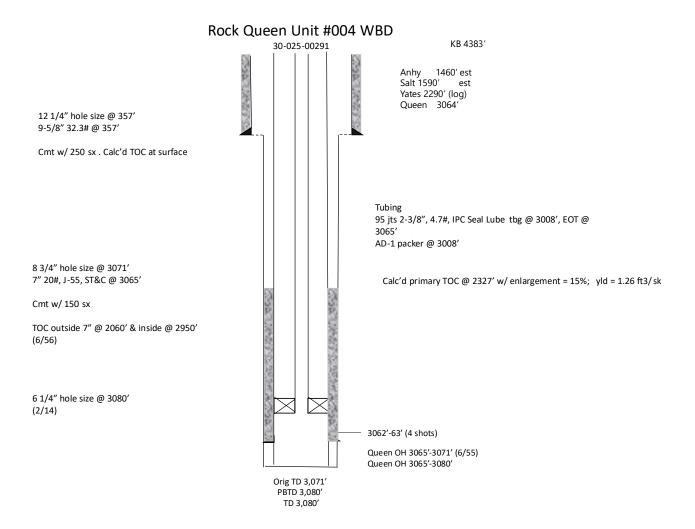

# Rock Queen Unit #004 Proposed WBD

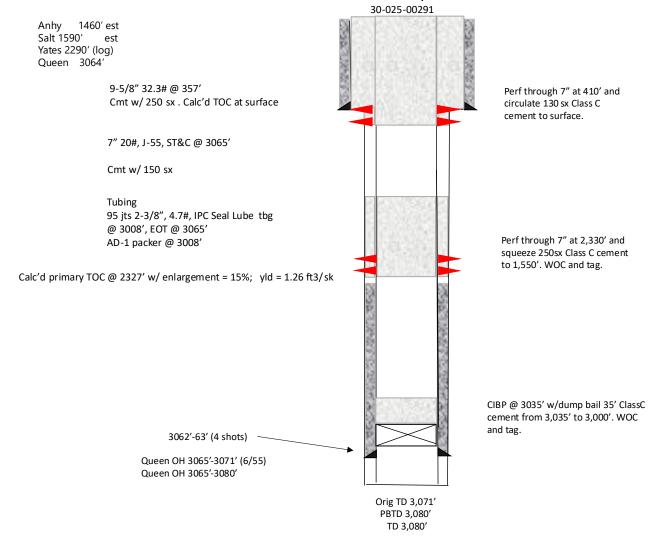

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

# State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 516592

### **CONDITIONS**

Operator:	OGRID:
XTO ENERGY, INC	5380
6401 Holiday Hill Road	Action Number:
Midland, TX 79707	516592
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

## CONDITIONS

Created By	Condition	Condition Date
loren.diede	Notify the OCD inspection supervisor via email 24 hours prior to beginning Plug & Abandon (P&A) operations.	10/20/2025
loren.diede	NMOCD COAs state that 35' of cement is not adequate to isolate a formation top. Revise by placing at least 50' of cement above the CIBP.	10/20/2025
loren.diede	NMOCD does not consider this well to be within the LPCH restricted area and an above ground P&A marker is required. The API # on the marker is to be clearly legible.	10/20/2025
loren.diede	Submit the CBL tif file to NMOCD for upload into the Well Log file.	10/20/2025