

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011
Permit 411802

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Texas Standard Operating NM LLC 3300 North A Street Midland, TX 79705		2. OGRID Number 329818
		3. API Number 30-025-56083
4. Property Code 337375	5. Property Name BULLDOG STATE COM	6. Well No. 102H

7. Surface Location

UL - Lot I	Section 34	Township 16S	Range 36E	Lot Idn I	Feet From 2215	N/S Line S	Feet From 1210	E/W Line E	County Lea
---------------	---------------	-----------------	--------------	--------------	-------------------	---------------	-------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot P	Section 3	Township 17S	Range 36E	Lot Idn P	Feet From 100	N/S Line S	Feet From 1210	E/W Line E	County Lea
---------------	--------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

9. Pool Information

WC-025 G-09 S173615C;UPPER PENN	98333
---------------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3870
16. Multiple N	17. Proposed Depth 18572	18. Formation Pennsylvanian Shale	19. Contractor	20. Spud Date 4/30/2026
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	2050	1180	0
Int1	9.875	8.625	32	10500	555	0
Prod	7.875	5.5	23	18572	2345	0

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Annular	2500	2500	
Double Ram	5000	5000	
Pipe	5000	5000	

<p>23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well. I further certify I have complied with 19.15.14.9 (A) NMAC <input checked="" type="checkbox"/> and/or 19.15.14.9 (B) NMAC <input checked="" type="checkbox"/> if applicable.</p> <p>Signature:</p> <p>Printed Name: Electronically filed by Murray Dinghans</p> <p>Title:</p> <p>Email Address: murray@txsoil.com</p> <p>Date: 3/20/2026</p> <p>Phone: 406-939-0852</p>	<p>OIL CONSERVATION DIVISION</p> <p>Approved By: Jeffrey Harrison</p> <p>Title: Petroleum Specialist III</p> <p>Approved Date: 3/26/2026</p> <p>Expiration Date: 3/26/2028</p> <p>Conditions of Approval Attached</p>
---	--

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024
		Submittal Type:
	<input checked="" type="checkbox"/> Initial Submittal <input type="checkbox"/> Amended Report <input type="checkbox"/> As Drilled	

WELL LOCATION INFORMATION

API Number 30-025-56083	Pool Code 98333	Pool Name WC-025 G-09 S173615C; UPPER PENN
Property Code 337375	Property Name BULLDOG STATE COM	Well Number 102H
OGRID No. 329818	Operator Name TEXAS STANDARD OPERATING NM LLC	Ground Level Elevation 3870'
Surface Owner: <input checked="" type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input type="checkbox"/> Federal		Mineral Owner: <input checked="" type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input type="checkbox"/> Federal

Surface Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	34	16S	36E		2215 FSL	1210 FEL	32.8773988°N	103.3377156°W	LEA

Bottom Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
P	3	17S	36E		100 FSL	1210 FEL	32.8571271°N	103.3377374°W	LEA

Dedicated Acres 478.99	Infill or Defining Well Infill	Defining Well API Bulldog State Com 101H	Overlapping Spacing Unit (Y/N) N	Consolidation Code C
Order Numbers. C: Pending			Well setbacks are under Common Ownership: <input type="checkbox"/> Yes <input type="checkbox"/> No N/A	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	34	16S	36E		2215 FSL	1210 FEL	32.8773988 N	103.3377256 W	LEA




First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	34	16S	36E		2543 FSL	1210 FEL	32.8783009°N	103.3377117°W	LEA

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
P	3	17S	36E		100 FSL	1210 FEL	32.8571271°N	103.3377374°W	LEA

Unitized Area or Area of Uniform Interest N/A	Spacing Unit Type <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical	Ground Floor Elevation:
--	--	-------------------------

<p>OPERATOR CERTIFICATIONS</p> <p><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i></p> <p><i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or drilled, or a compulsory pooling order from the division.</i></p> <p style="text-align: right;">  Date 3/20/2026 </p>	<p>SURVEYOR CERTIFICATIONS</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me under my supervision, and that the same is true and correct to the best of my belief.</i></p> <div style="text-align: right;">  </div> <p style="text-align: center;"> Signature and Seal of Professional Surveyor  </p>	
Printed Name JENNIFER ELROD	Certificate Number 14400	Date of Survey 02/24/2026
Email Address jelrod@ntglobal.com		


Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is a directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

BULLDOG STATE COM #102H

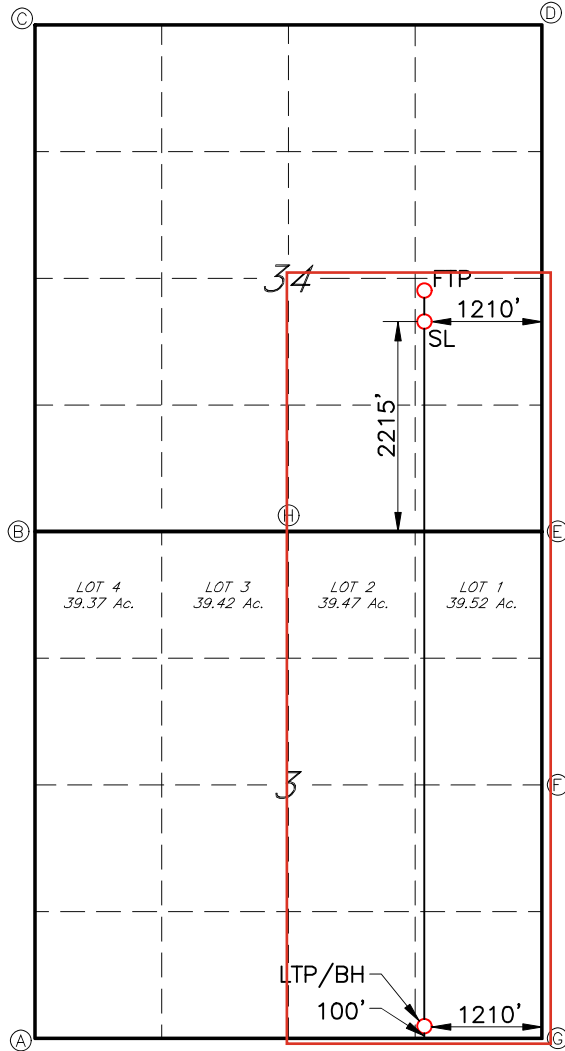

GEODETIC DATA
NAD 83 GRID - NM EAST

SURFACE LOCATION (SL)
2215' FSL & 1210' FEL SEC.34
N: 684373.1 - E: 846998.4

LAT: 32.8773988° N
LONG: 103.3377156° W

FIRST TAKE POINT (FTP)
2543' FSL & 1210' FEL SEC.34
N: 684701.4 - E: 846996.5

LAT: 32.8783009° N
LONG: 103.3377117° W

LAST TAKE POINT/BOTTOM HOLE (LTP/BH)
100' FSL & 1210' FEL SEC.3
N: 676997.4 - E: 847061.2

LAT: 32.8571271° N
LONG: 103.3377374° W

CORNER DATA
NAD 83 GRID - NM EAST

A: FOUND SPIKE NAIL
N: 676847.9 - E: 842973.0

B: FOUND 1/2" REBAR
N: 682125.8 - E: 842948.9

C: CALCULATED CORNER
N: 687412.3 - E: 842905.1

D: FOUND 1/2" REBAR
N: 687454.4 - E: 848190.0

E: FOUND 3/8" REBAR
N: 682167.4 - E: 848221.2

F: FOUND 1/2" REBAR
N: 679546.0 - E: 848254.6

G: FOUND 1/2" REBAR
N: 676912.1 - E: 848271.6

H: FOUND 1/2" REBAR
N: 682148.1 - E: 845597.7



Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Comments

Permit 411802

PERMIT COMMENTS

Operator Name and Address: Texas Standard Operating NM LLC [329818] 3300 North A Street Midland, TX 79705		API Number: 30-025-56083
		Well: BULLDOG STATE COM #102H
Created By	Comment	Comment Date
jeffrey.harrison	Infill to 30-025-56081 BULLDOG STATE COM #101H [337375]	3/26/2026

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 411802

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: Texas Standard Operating NM LLC [329818] 3300 North A Street Midland, TX 79705	API Number: 30-025-56083
	Well: BULLDOG STATE COM #102H

OCD Reviewer	Condition
jeffrey.harrison	No additives containing PFAS chemicals will be added to the drilling fluids or completion fluids used during drilling, completions, or recompletions operations.
jeffrey.harrison	NSP required if not included in an existing order or not an infill to an appropriate defining well in the same pool and spacing unit.
jeffrey.harrison	Cement is required to circulate on both surface and intermediate1 strings of casing.
jeffrey.harrison	If the method of isolation was not by circulation, a CBL must be performed; if strata isolation is not achieved, then remediation will be required before further operations.
jeffrey.harrison	File As Drilled C-102 and a directional Survey with C-104 completion packet.
jeffrey.harrison	A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.
jeffrey.harrison	Notify the OCD 24 hours prior to casing & cement.
jeffrey.harrison	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
jeffrey.harrison	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.



BULLDOG STATE COM 102H PLAN 1

WELL DETAILS: BULLDOG STATE COM 102H

ELEVATION: 3870' GL + 30' KB @ 3900.00usft (Original Well Elev)


+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	684373.10	846998.40	32.87739873	-103.33771549

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2150.00	0.00	0.00	2150.00	0.00	0.00	0.00	0.00	0.00	START NUDDGE: 2°/100'
2400.19	5.00	359.67	2399.87	10.92	-0.06	2.00	359.67	-10.92	
5913.83	5.00	359.67	5900.13	317.38	-1.84	0.00	0.00	-317.39	START DROP: 2°/100'
6164.03	0.00	0.00	6150.00	328.30	-1.90	2.00	180.00	-328.30	BACK TO VERTICAL
10541.07	0.00	0.00	10527.04	328.30	-1.90	0.00	0.00	-328.30	KOP: 10°/100'
11441.07	90.00	179.52	11100.00	-244.64	2.91	10.00	179.52	244.65	EOC; HOLD TO TD
18572.38	90.00	179.52	11100.00	-7375.70	62.80	0.00	0.00	7375.97	TD at 18572.38




Project: LEA CO., NM (NAD83 - NME)
 Site: SEC 34-T16S-R36E
 Well: BULLDOG STATE COM 102H
 Wellbore: ORIGINAL WELLPATH
 Design: PLAN 1
 Depths: 3870' GL + 30' KB @ 3900.00usft (Original Well Elev)

Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Eastern Zone
 System Datum: Mean Sea Level

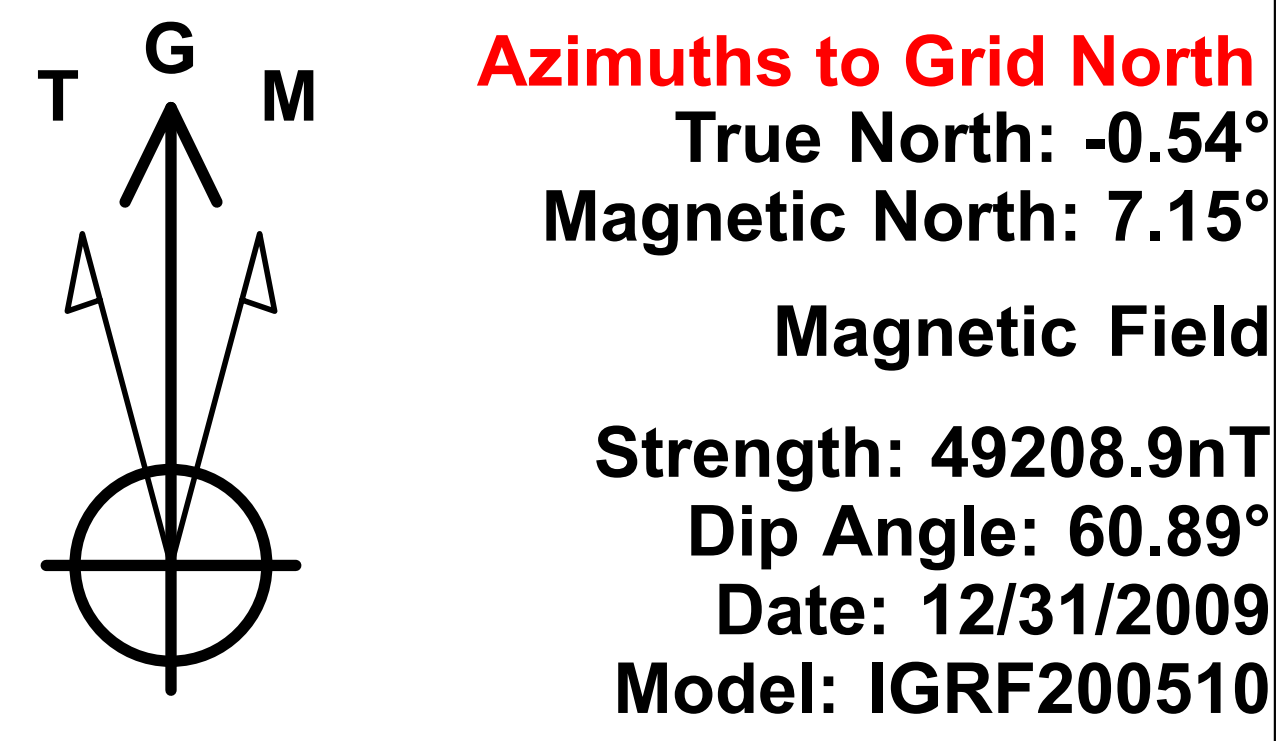

Grid North is 0.54° East of True North (Grid Convergence)
 Magnetic North is 7.69° East of True North (Magnetic Declination)
 Magnetic North is 7.15° East of Grid North (Magnetic Convergence)

To convert a True Direction to a Grid Direction, Subtract 0.54°
 To convert a Magnetic Direction to a True Direction, Add 7.69° East
 To convert a Magnetic Direction to a Grid Direction, Add 7.15°

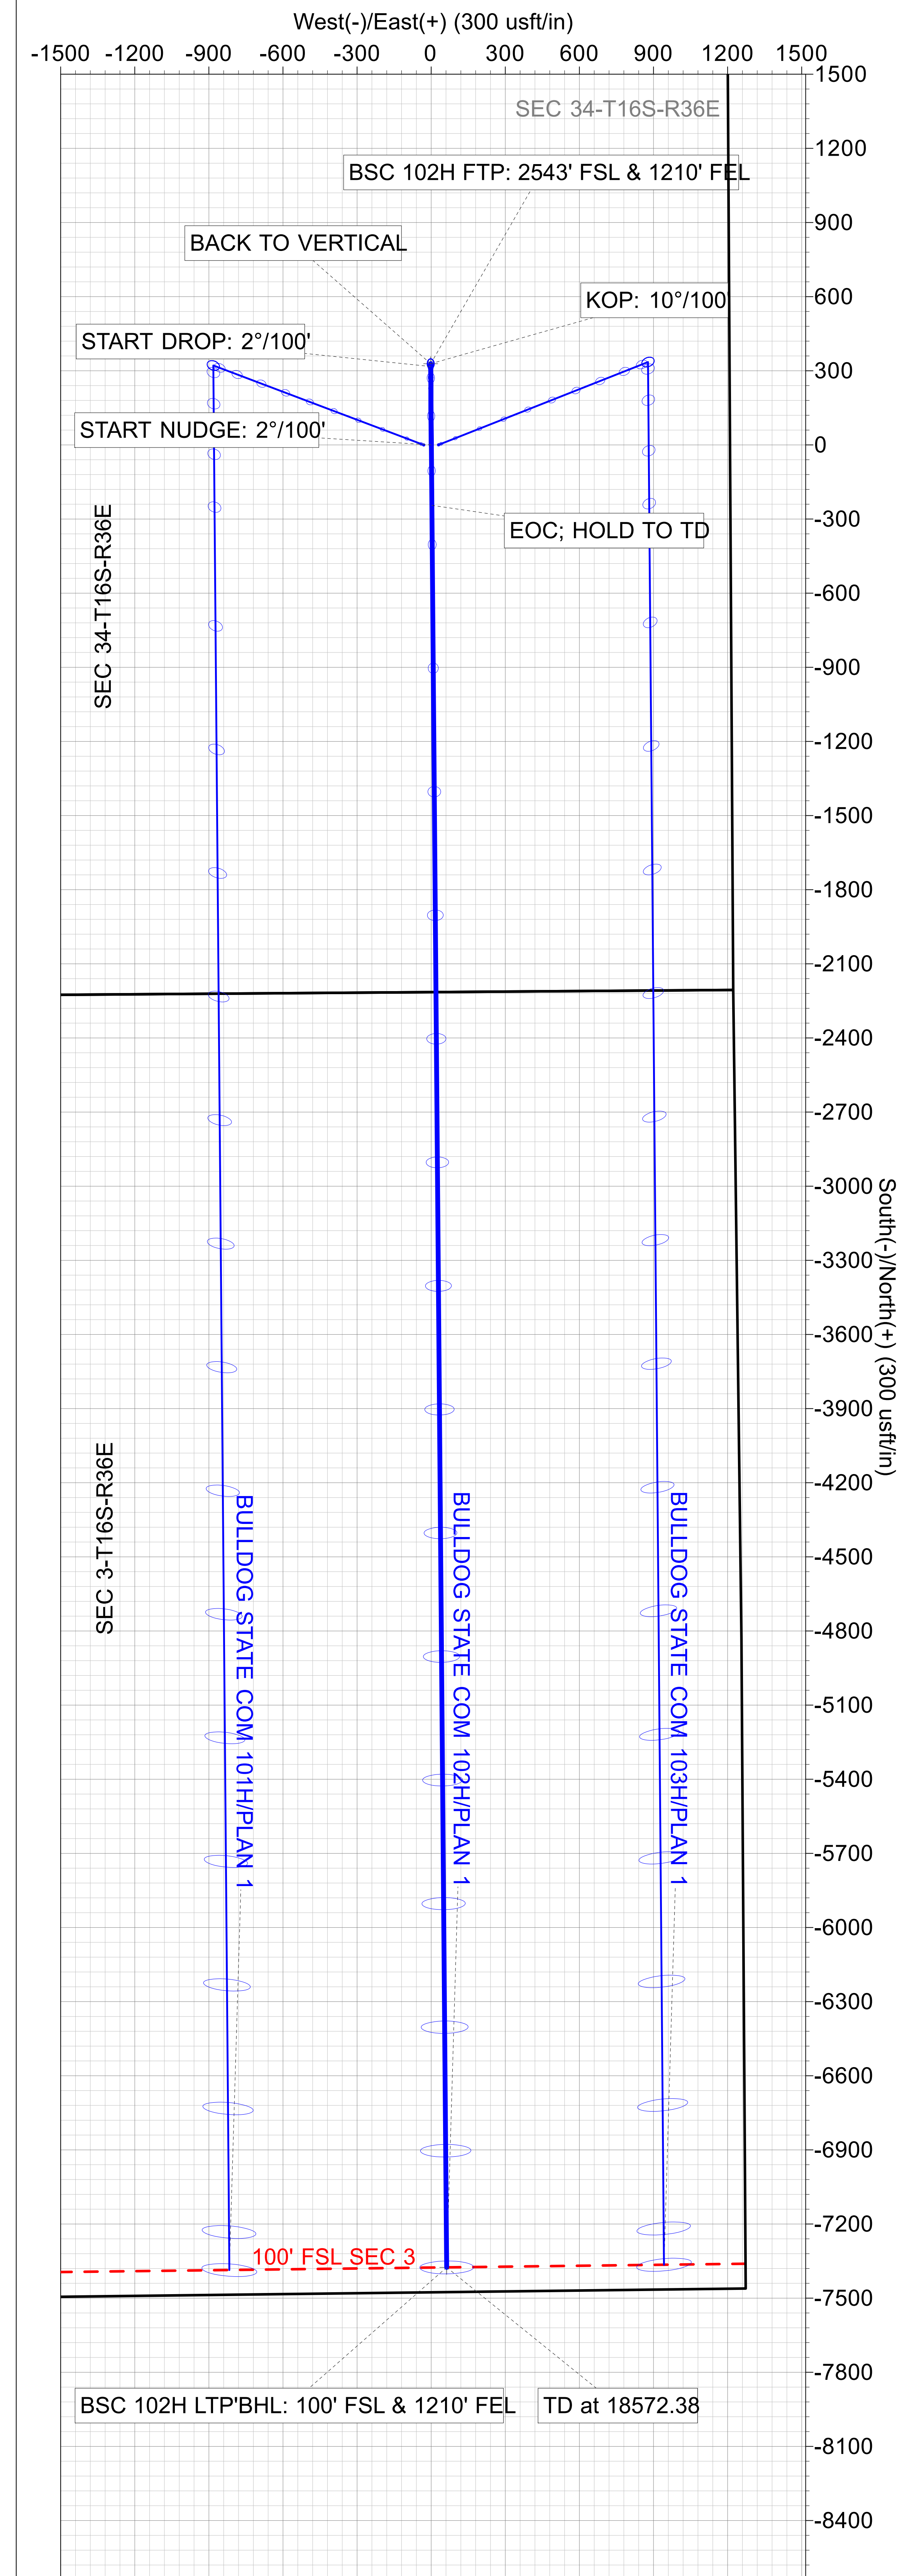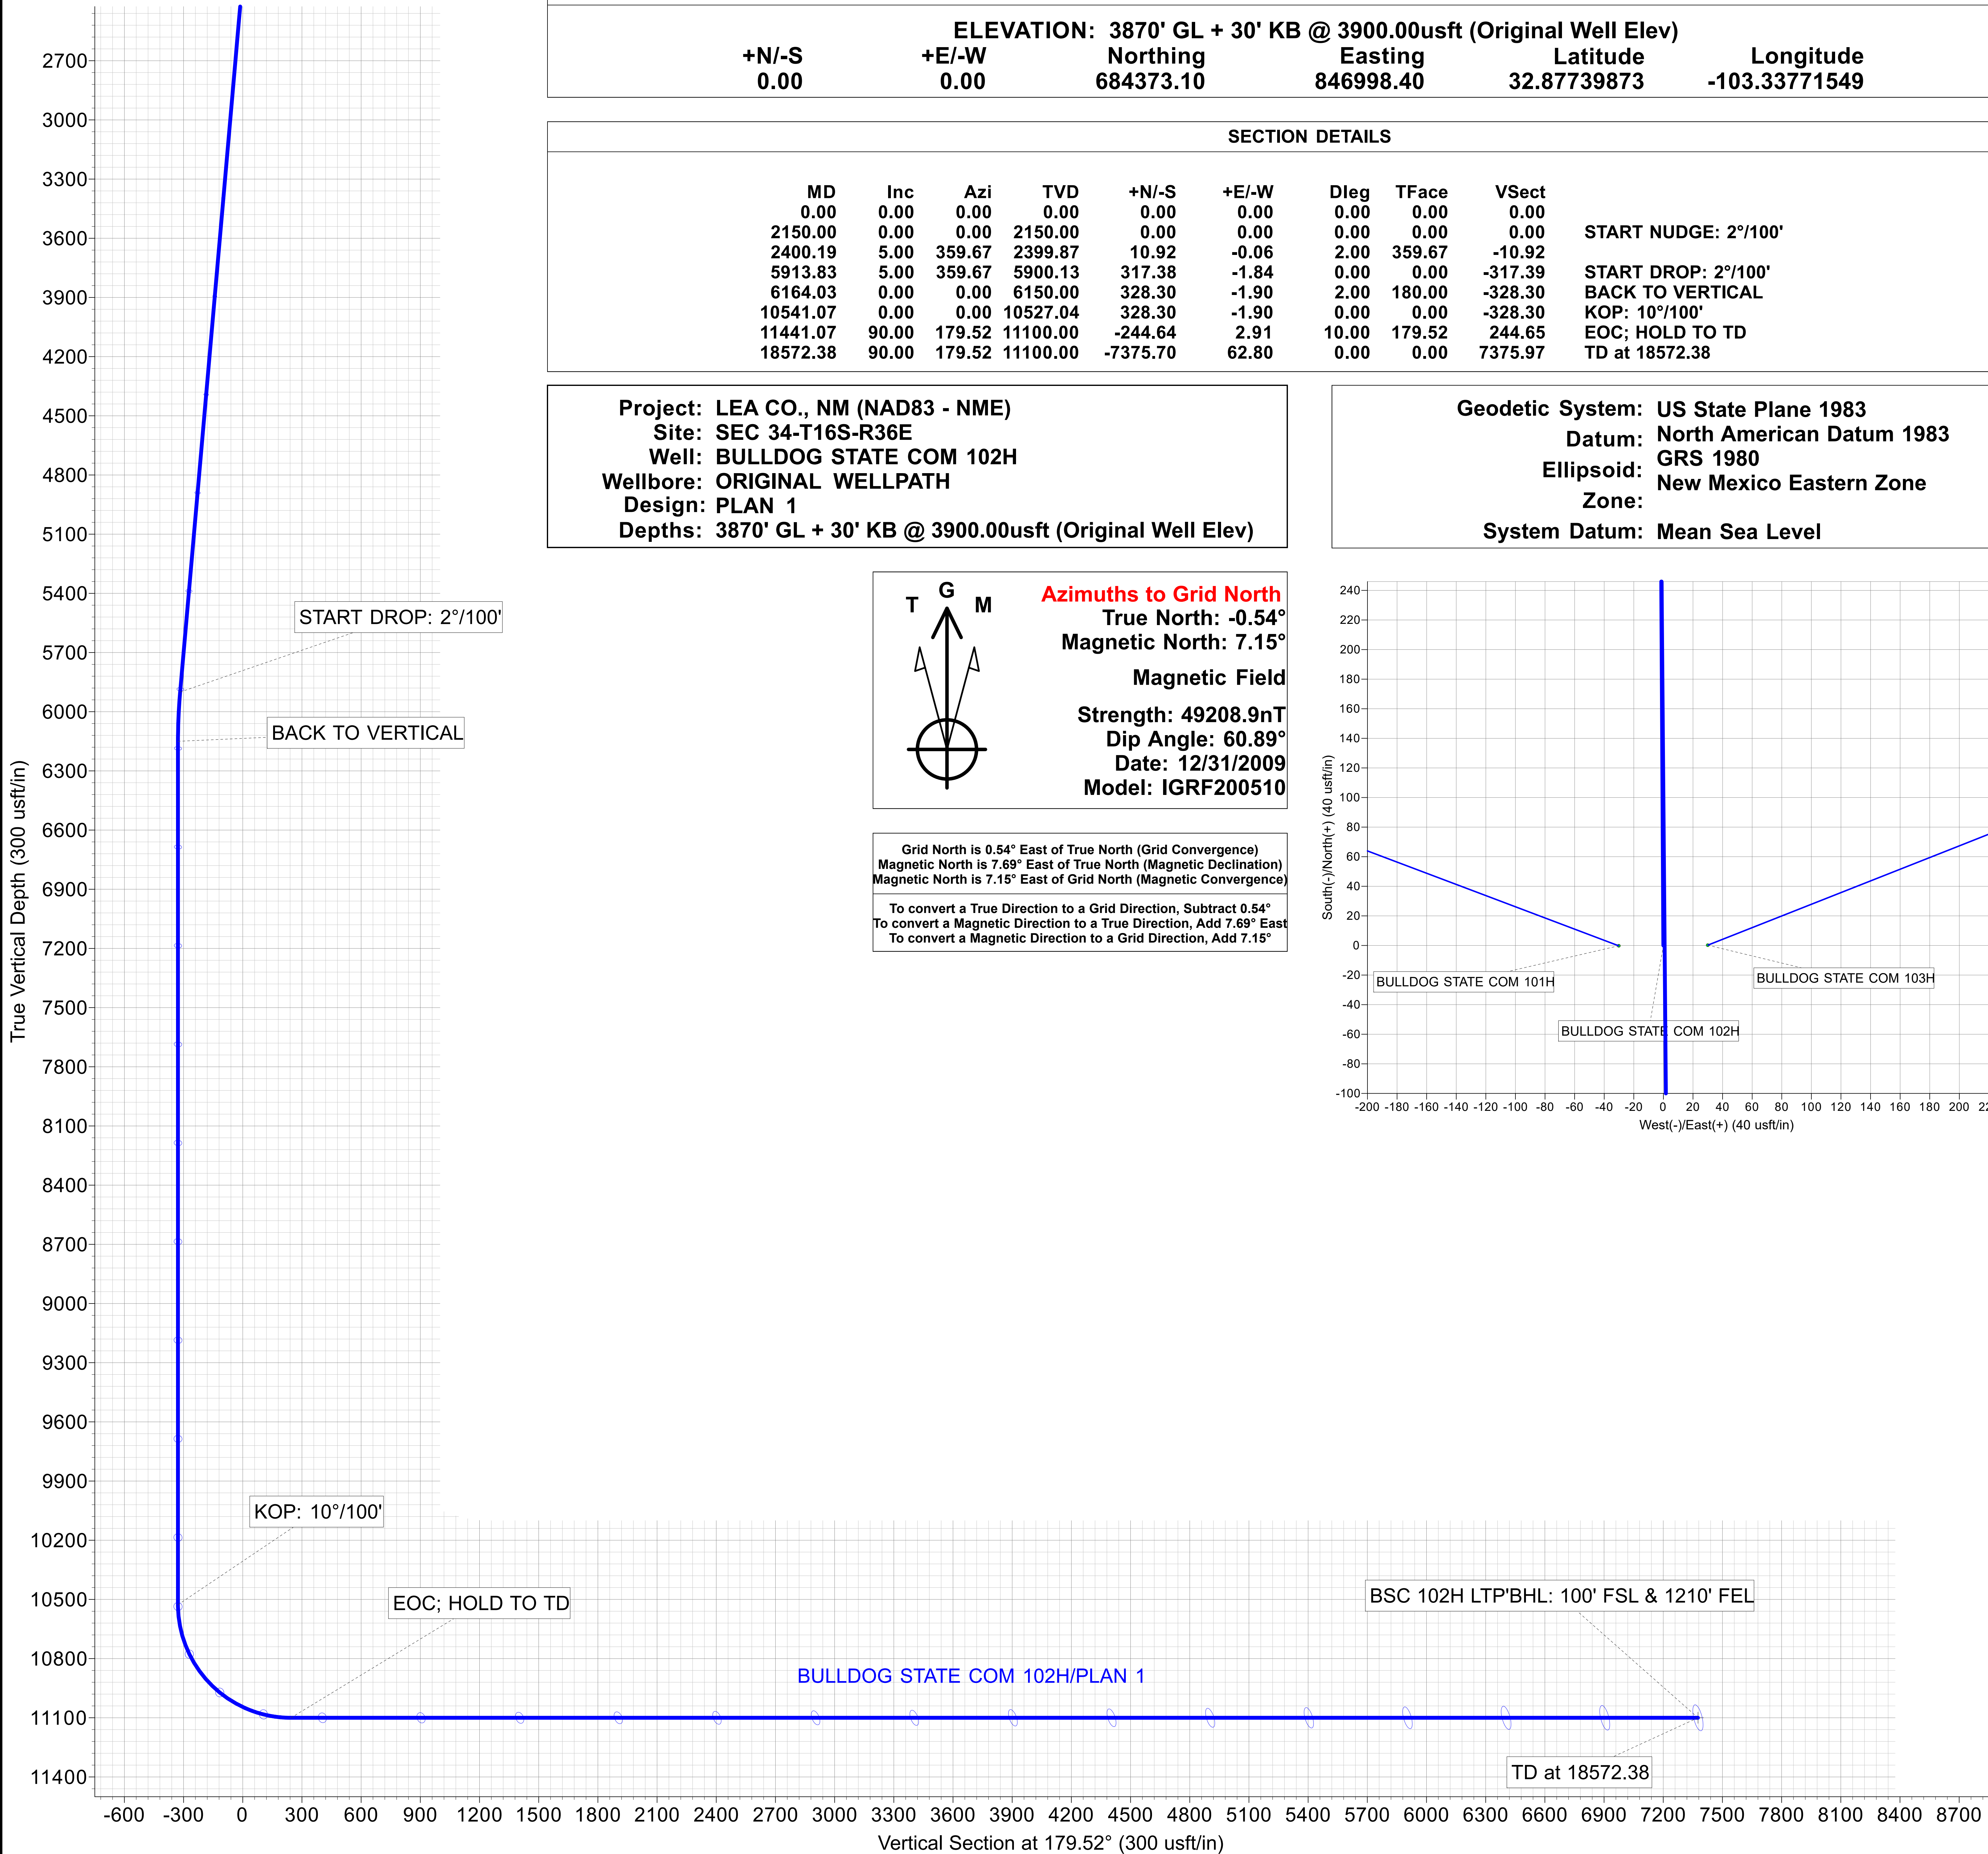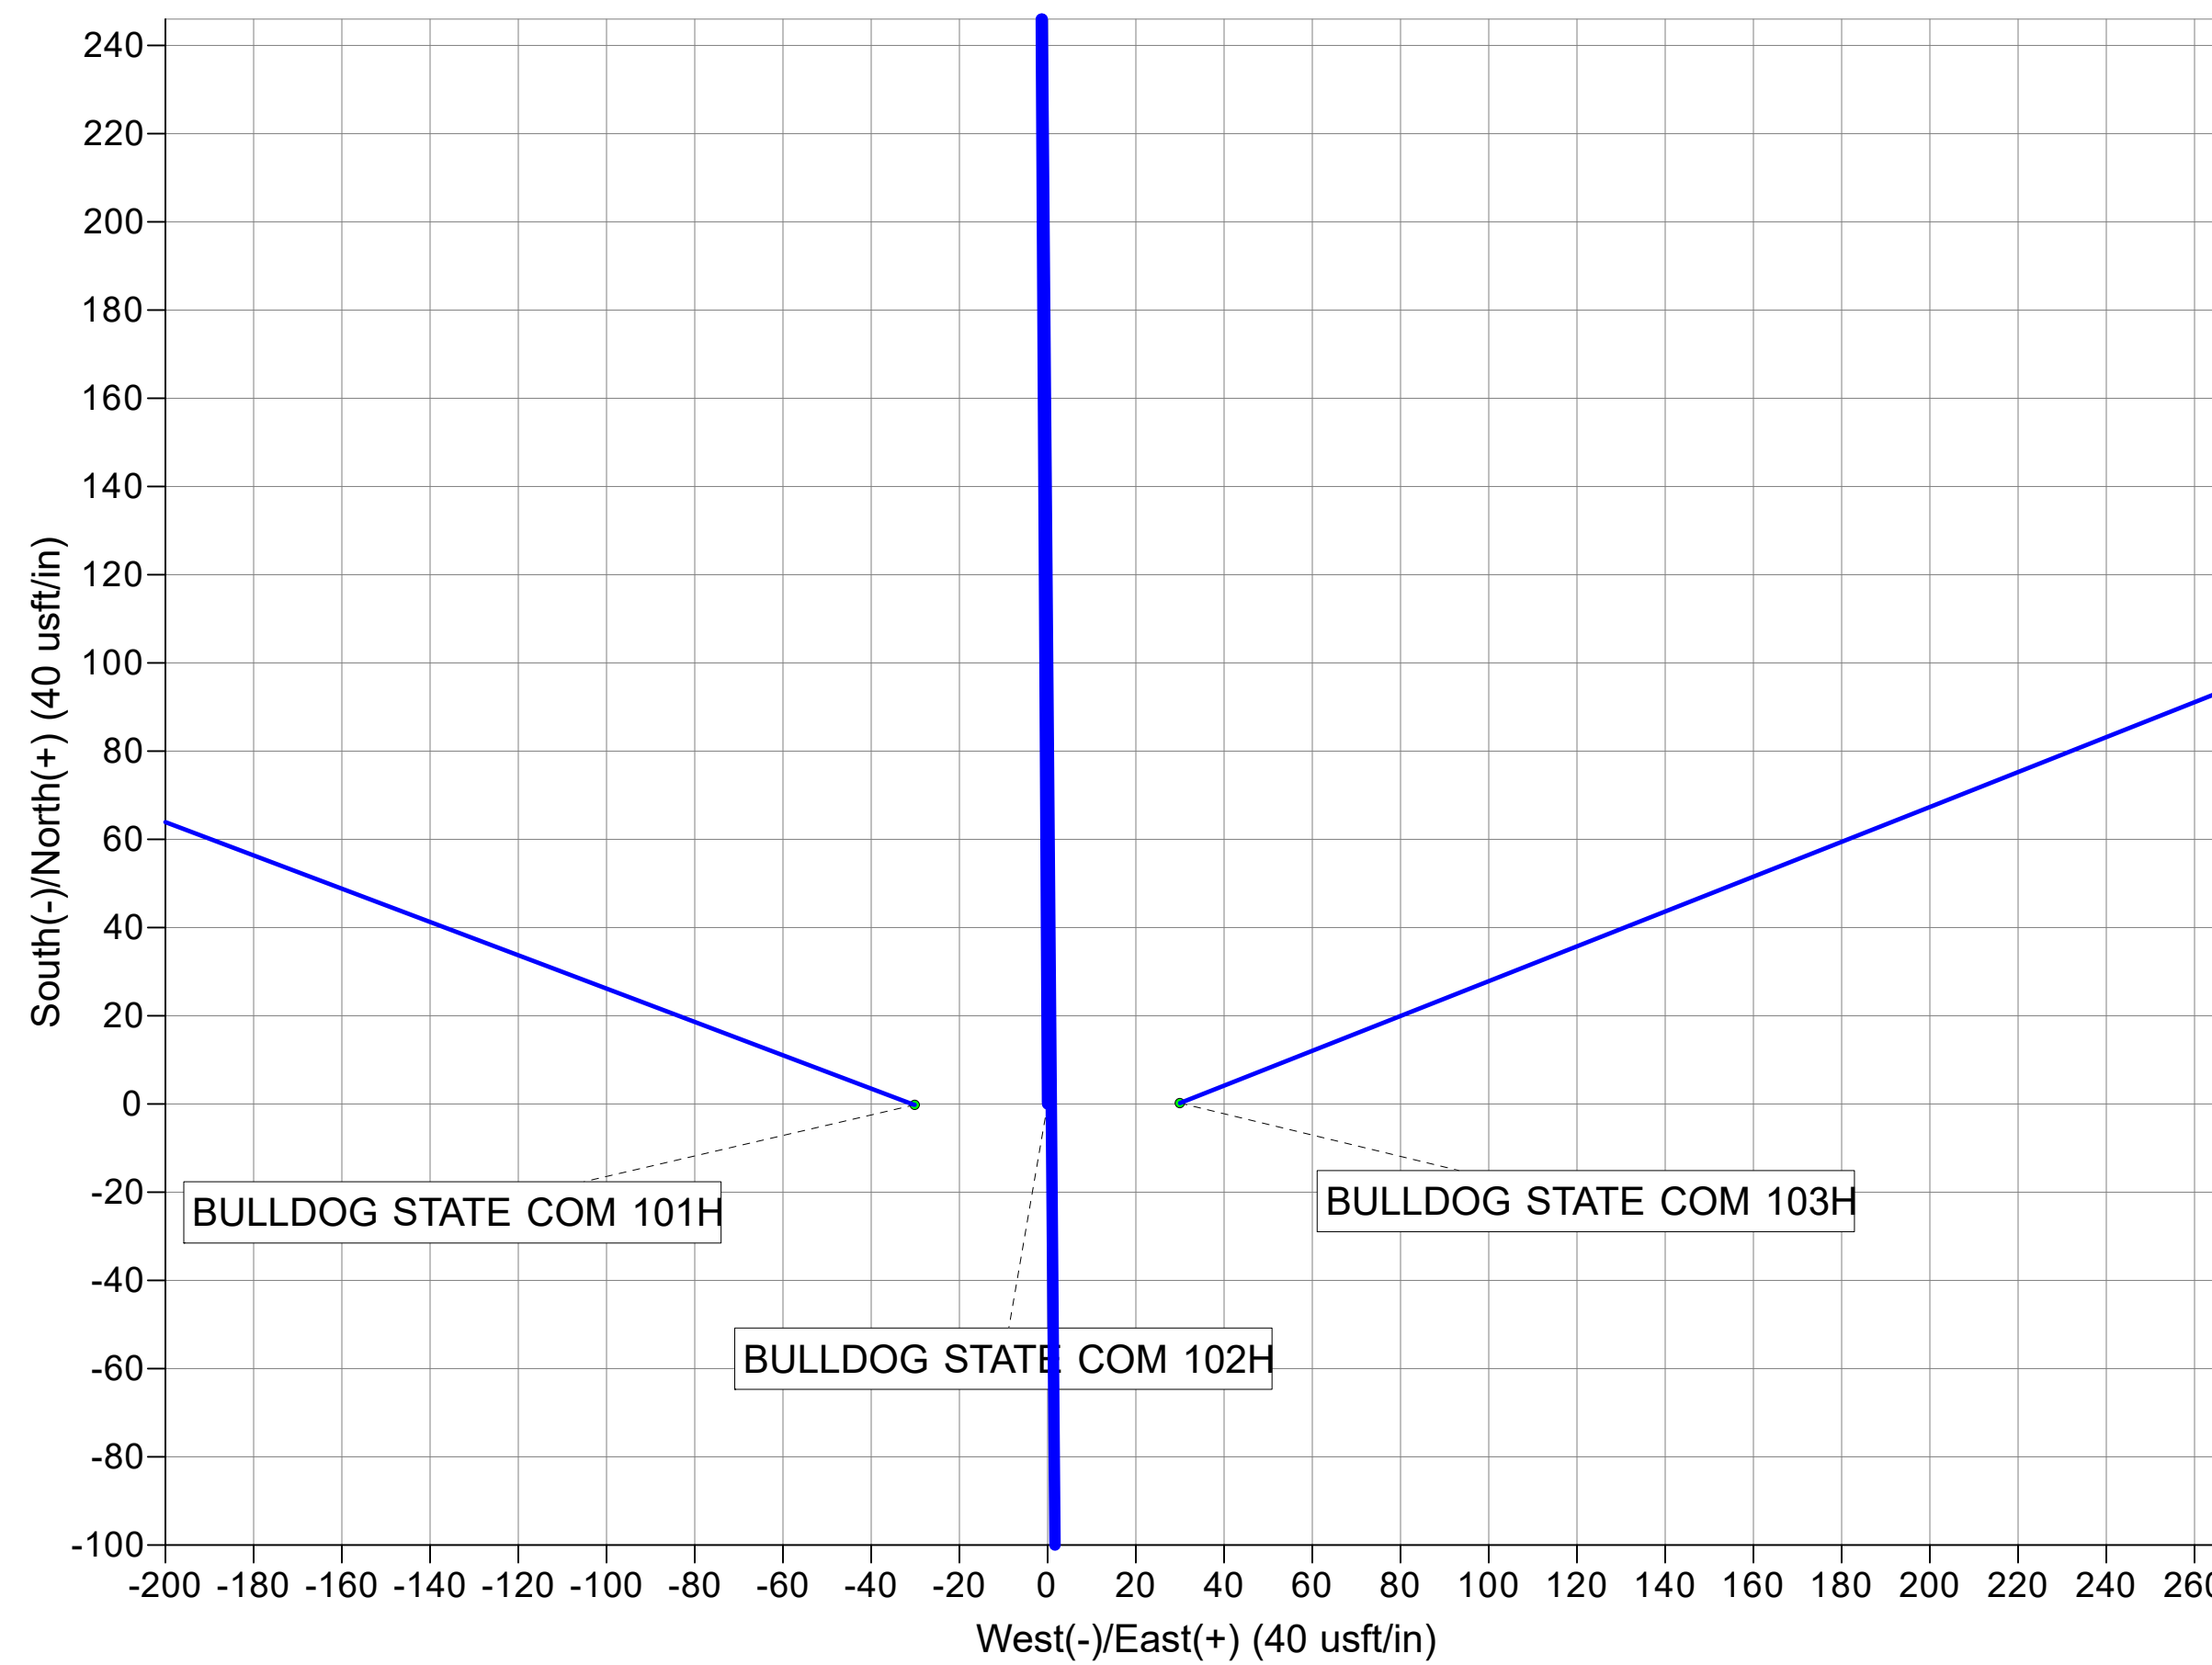



TEXAS STANDARD OP NM LLC

LEA CO., NM (NAD83 - NME)

SEC 34-T16S-R36E

BULLDOG STATE COM 102H

ORIGINAL WELLPATH

Plan: PLAN 1

Standard Planning Report

17 March, 2026



Planning Report

Database:	1 - EDM Production	Local Co-ordinate Reference:	Well BULLDOG STATE COM 102H
Company:	TEXAS STANDARD OP NM LLC	TVD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Project:	LEA CO., NM (NAD83 - NME)	MD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Site:	SEC 34-T16S-R36E	North Reference:	Grid
Well:	BULLDOG STATE COM 102H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLPATH		
Design:	PLAN 1		

Project	LEA CO., NM (NAD83 - NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	SEC 34-T16S-R36E				
Site Position:		Northing:	684,372.90 usft	Latitude:	32.87739896
From:	Map	Easting:	846,968.30 usft	Longitude:	-103.33781353
Position Uncertainty:	0.50 usft	Slot Radius:	13-3/16 "		

Well	BULLDOG STATE COM 102H					
Well Position	+N/-S	0.00 usft	Northing:	684,373.10 usft	Latitude:	32.87739873
	+E/-W	0.00 usft	Easting:	846,998.40 usft	Longitude:	-103.33771549
Position Uncertainty	0.50 usft		Wellhead Elevation:	usft	Ground Level:	3,870.00 usft
Grid Convergence:	0.54 °					

Wellbore	ORIGINAL WELLPATH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	7.69	60.89	49,208.87257315

Design	PLAN 1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	179.52

Plan Survey Tool Program	Date	3/17/2026		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	18,572.34	PLAN 1 (ORIGINAL WELLPATH)	MWD+HRGM OWSG MWD + HRGM



Planning Report

Database:	1 - EDM Production	Local Co-ordinate Reference:	Well BULLDOG STATE COM 102H
Company:	TEXAS STANDARD OP NM LLC	TVD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Project:	LEA CO., NM (NAD83 - NME)	MD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Site:	SEC 34-T16S-R36E	North Reference:	Grid
Well:	BULLDOG STATE COM 102H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLPATH		
Design:	PLAN 1		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,150.00	0.00	0.00	2,150.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,400.19	5.00	359.67	2,399.87	10.92	-0.06	2.00	2.00	0.00	359.67	
5,913.83	5.00	359.67	5,900.13	317.38	-1.84	0.00	0.00	0.00	0.00	
6,164.03	0.00	0.00	6,150.00	328.30	-1.90	2.00	-2.00	0.00	180.00	
10,541.07	0.00	0.00	10,527.04	328.30	-1.90	0.00	0.00	0.00	0.00	
11,441.07	90.00	179.52	11,100.00	-244.64	2.91	10.00	10.00	19.95	179.52	
18,572.38	90.00	179.52	11,100.00	-7,375.70	62.80	0.00	0.00	0.00	0.00	BSC 102H LTP'BHL:



Planning Report

Database:	1 - EDM Production	Local Co-ordinate Reference:	Well BULLDOG STATE COM 102H
Company:	TEXAS STANDARD OP NM LLC	TVD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Project:	LEA CO., NM (NAD83 - NME)	MD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Site:	SEC 34-T16S-R36E	North Reference:	Grid
Well:	BULLDOG STATE COM 102H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLPATH		
Design:	PLAN 1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00	
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00	
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,150.00	0.00	0.00	2,150.00	0.00	0.00	0.00	0.00	0.00	0.00	
START NUDGE: 2°/100'										
2,200.00	1.00	359.67	2,200.00	0.44	0.00	-0.44	2.00	2.00	0.00	
2,300.00	3.00	359.67	2,299.93	3.93	-0.02	-3.93	2.00	2.00	0.00	
2,400.19	5.00	359.67	2,399.87	10.92	-0.06	-10.92	2.00	2.00	0.00	
2,500.00	5.00	359.67	2,499.30	19.62	-0.11	-19.62	0.00	0.00	0.00	
2,600.00	5.00	359.67	2,598.92	28.35	-0.16	-28.35	0.00	0.00	0.00	
2,700.00	5.00	359.67	2,698.54	37.07	-0.21	-37.07	0.00	0.00	0.00	
2,800.00	5.00	359.67	2,798.16	45.79	-0.27	-45.79	0.00	0.00	0.00	
2,900.00	5.00	359.67	2,897.78	54.51	-0.32	-54.51	0.00	0.00	0.00	
3,000.00	5.00	359.67	2,997.40	63.23	-0.37	-63.23	0.00	0.00	0.00	
3,100.00	5.00	359.67	3,097.02	71.96	-0.42	-71.96	0.00	0.00	0.00	
3,200.00	5.00	359.67	3,196.63	80.68	-0.47	-80.68	0.00	0.00	0.00	
3,300.00	5.00	359.67	3,296.25	89.40	-0.52	-89.40	0.00	0.00	0.00	
3,400.00	5.00	359.67	3,395.87	98.12	-0.57	-98.12	0.00	0.00	0.00	
3,500.00	5.00	359.67	3,495.49	106.84	-0.62	-106.85	0.00	0.00	0.00	
3,600.00	5.00	359.67	3,595.11	115.57	-0.67	-115.57	0.00	0.00	0.00	
3,700.00	5.00	359.67	3,694.73	124.29	-0.72	-124.29	0.00	0.00	0.00	
3,800.00	5.00	359.67	3,794.35	133.01	-0.77	-133.01	0.00	0.00	0.00	
3,900.00	5.00	359.67	3,893.97	141.73	-0.82	-141.73	0.00	0.00	0.00	
4,000.00	5.00	359.67	3,993.59	150.46	-0.87	-150.46	0.00	0.00	0.00	
4,100.00	5.00	359.67	4,093.20	159.18	-0.92	-159.18	0.00	0.00	0.00	
4,200.00	5.00	359.67	4,192.82	167.90	-0.97	-167.90	0.00	0.00	0.00	
4,300.00	5.00	359.67	4,292.44	176.62	-1.02	-176.62	0.00	0.00	0.00	
4,400.00	5.00	359.67	4,392.06	185.34	-1.07	-185.35	0.00	0.00	0.00	
4,500.00	5.00	359.67	4,491.68	194.07	-1.12	-194.07	0.00	0.00	0.00	
4,600.00	5.00	359.67	4,591.30	202.79	-1.17	-202.79	0.00	0.00	0.00	
4,700.00	5.00	359.67	4,690.92	211.51	-1.22	-211.51	0.00	0.00	0.00	
4,800.00	5.00	359.67	4,790.54	220.23	-1.27	-220.24	0.00	0.00	0.00	
4,900.00	5.00	359.67	4,890.16	228.95	-1.33	-228.96	0.00	0.00	0.00	



Planning Report

Database:	1 - EDM Production	Local Co-ordinate Reference:	Well BULLDOG STATE COM 102H
Company:	TEXAS STANDARD OP NM LLC	TVD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Project:	LEA CO., NM (NAD83 - NME)	MD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Site:	SEC 34-T16S-R36E	North Reference:	Grid
Well:	BULLDOG STATE COM 102H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLPATH		
Design:	PLAN 1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
5,000.00	5.00	359.67	4,989.77	237.68	-1.38	-237.68	0.00	0.00	0.00	
5,100.00	5.00	359.67	5,089.39	246.40	-1.43	-246.40	0.00	0.00	0.00	
5,200.00	5.00	359.67	5,189.01	255.12	-1.48	-255.12	0.00	0.00	0.00	
5,300.00	5.00	359.67	5,288.63	263.84	-1.53	-263.85	0.00	0.00	0.00	
5,400.00	5.00	359.67	5,388.25	272.56	-1.58	-272.57	0.00	0.00	0.00	
5,500.00	5.00	359.67	5,487.87	281.29	-1.63	-281.29	0.00	0.00	0.00	
5,600.00	5.00	359.67	5,587.49	290.01	-1.68	-290.01	0.00	0.00	0.00	
5,700.00	5.00	359.67	5,687.11	298.73	-1.73	-298.74	0.00	0.00	0.00	
5,800.00	5.00	359.67	5,786.73	307.45	-1.78	-307.46	0.00	0.00	0.00	
5,900.00	5.00	359.67	5,886.34	316.18	-1.83	-316.18	0.00	0.00	0.00	
5,913.83	5.00	359.67	5,900.12	317.38	-1.84	-317.39	0.00	0.00	0.00	
START DROP: 2°/100'										
6,000.00	3.28	359.67	5,986.06	323.61	-1.87	-323.61	2.00	-2.00	0.00	
6,100.00	1.28	359.67	6,085.98	327.58	-1.90	-327.59	2.00	-2.00	0.00	
6,164.03	0.00	0.00	6,150.00	328.30	-1.90	-328.30	2.00	-2.00	0.00	
BACK TO VERTICAL										
6,200.00	0.00	0.00	6,185.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
6,300.00	0.00	0.00	6,285.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
6,400.00	0.00	0.00	6,385.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
6,500.00	0.00	0.00	6,485.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
6,600.00	0.00	0.00	6,585.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
6,700.00	0.00	0.00	6,685.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
6,800.00	0.00	0.00	6,785.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
6,900.00	0.00	0.00	6,885.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
7,000.00	0.00	0.00	6,985.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
7,100.00	0.00	0.00	7,085.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
7,200.00	0.00	0.00	7,185.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
7,300.00	0.00	0.00	7,285.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
7,400.00	0.00	0.00	7,385.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
7,500.00	0.00	0.00	7,485.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
7,600.00	0.00	0.00	7,585.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
7,700.00	0.00	0.00	7,685.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
7,800.00	0.00	0.00	7,785.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
7,900.00	0.00	0.00	7,885.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
8,000.00	0.00	0.00	7,985.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
8,100.00	0.00	0.00	8,085.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
8,200.00	0.00	0.00	8,185.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
8,300.00	0.00	0.00	8,285.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
8,400.00	0.00	0.00	8,385.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
8,500.00	0.00	0.00	8,485.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
8,600.00	0.00	0.00	8,585.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
8,700.00	0.00	0.00	8,685.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
8,800.00	0.00	0.00	8,785.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
8,900.00	0.00	0.00	8,885.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
9,000.00	0.00	0.00	8,985.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
9,100.00	0.00	0.00	9,085.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
9,200.00	0.00	0.00	9,185.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
9,300.00	0.00	0.00	9,285.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
9,400.00	0.00	0.00	9,385.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
9,500.00	0.00	0.00	9,485.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
9,600.00	0.00	0.00	9,585.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
9,700.00	0.00	0.00	9,685.97	328.30	-1.90	-328.30	0.00	0.00	0.00	



Planning Report

Database:	1 - EDM Production	Local Co-ordinate Reference:	Well BULLDOG STATE COM 102H
Company:	TEXAS STANDARD OP NM LLC	TVD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Project:	LEA CO., NM (NAD83 - NME)	MD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Site:	SEC 34-T16S-R36E	North Reference:	Grid
Well:	BULLDOG STATE COM 102H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLPATH		
Design:	PLAN 1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
9,800.00	0.00	0.00	9,785.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
9,900.00	0.00	0.00	9,885.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
10,000.00	0.00	0.00	9,985.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
10,100.00	0.00	0.00	10,085.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
10,200.00	0.00	0.00	10,185.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
10,300.00	0.00	0.00	10,285.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
10,400.00	0.00	0.00	10,385.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
10,500.00	0.00	0.00	10,485.97	328.30	-1.90	-328.30	0.00	0.00	0.00	
10,541.07	0.00	0.00	10,527.04	328.30	-1.90	-328.30	0.00	0.00	0.00	
KOP: 10°/100'										
10,550.00	0.89	179.52	10,535.97	328.23	-1.90	-328.23	10.00	10.00	0.00	
10,600.00	5.89	179.52	10,585.87	325.27	-1.87	-325.28	10.00	10.00	0.00	
10,650.00	10.89	179.52	10,635.32	317.98	-1.81	-317.98	10.00	10.00	0.00	
10,700.00	15.89	179.52	10,683.94	306.40	-1.72	-306.40	10.00	10.00	0.00	
10,750.00	20.89	179.52	10,731.37	290.63	-1.58	-290.63	10.00	10.00	0.00	
10,800.00	25.89	179.52	10,777.25	270.78	-1.42	-270.78	10.00	10.00	0.00	
10,850.00	30.89	179.52	10,821.22	247.01	-1.22	-247.02	10.00	10.00	0.00	
10,900.00	35.89	179.52	10,862.95	219.50	-0.99	-219.51	10.00	10.00	0.00	
10,950.00	40.89	179.52	10,902.13	188.46	-0.73	-188.46	10.00	10.00	0.00	
11,000.00	45.89	179.52	10,938.45	154.13	-0.44	-154.12	10.00	10.00	0.00	
11,050.00	50.89	179.52	10,971.64	116.75	-0.12	-116.75	10.00	10.00	0.00	
11,100.00	55.89	179.52	11,001.45	76.63	0.21	-76.62	10.00	10.00	0.00	
11,150.00	60.89	179.52	11,027.64	34.06	0.57	-34.05	10.00	10.00	0.00	
11,200.00	65.89	179.52	11,050.03	-10.63	0.95	10.64	10.00	10.00	0.00	
11,250.00	70.89	179.52	11,068.43	-57.10	1.34	57.11	10.00	10.00	0.00	
11,300.00	75.89	179.52	11,082.72	-105.00	1.74	105.01	10.00	10.00	0.00	
11,350.00	80.89	179.52	11,092.78	-153.96	2.15	153.97	10.00	10.00	0.00	
11,400.00	85.89	179.52	11,098.53	-203.61	2.57	203.62	10.00	10.00	0.00	
11,441.07	90.00	179.52	11,100.00	-244.64	2.91	244.66	10.00	10.00	0.00	
EOC; HOLD TO TD										
11,500.00	90.00	179.52	11,100.00	-303.57	3.41	303.59	0.00	0.00	0.00	
11,600.00	90.00	179.52	11,100.00	-403.57	4.25	403.59	0.00	0.00	0.00	
11,700.00	90.00	179.52	11,100.00	-503.56	5.09	503.59	0.00	0.00	0.00	
11,800.00	90.00	179.52	11,100.00	-603.56	5.93	603.59	0.00	0.00	0.00	
11,900.00	90.00	179.52	11,100.00	-703.55	6.77	703.59	0.00	0.00	0.00	
12,000.00	90.00	179.52	11,100.00	-803.55	7.61	803.59	0.00	0.00	0.00	
12,100.00	90.00	179.52	11,100.00	-903.55	8.45	903.59	0.00	0.00	0.00	
12,200.00	90.00	179.52	11,100.00	-1,003.54	9.29	1,003.59	0.00	0.00	0.00	
12,300.00	90.00	179.52	11,100.00	-1,103.54	10.12	1,103.59	0.00	0.00	0.00	
12,400.00	90.00	179.52	11,100.00	-1,203.54	10.96	1,203.59	0.00	0.00	0.00	
12,500.00	90.00	179.52	11,100.00	-1,303.53	11.80	1,303.59	0.00	0.00	0.00	
12,600.00	90.00	179.52	11,100.00	-1,403.53	12.64	1,403.59	0.00	0.00	0.00	
12,700.00	90.00	179.52	11,100.00	-1,503.53	13.48	1,503.59	0.00	0.00	0.00	
12,800.00	90.00	179.52	11,100.00	-1,603.52	14.32	1,603.59	0.00	0.00	0.00	
12,900.00	90.00	179.52	11,100.00	-1,703.52	15.16	1,703.59	0.00	0.00	0.00	
13,000.00	90.00	179.52	11,100.00	-1,803.52	16.00	1,803.59	0.00	0.00	0.00	
13,100.00	90.00	179.52	11,100.00	-1,903.51	16.84	1,903.59	0.00	0.00	0.00	
13,200.00	90.00	179.52	11,100.00	-2,003.51	17.68	2,003.59	0.00	0.00	0.00	
13,300.00	90.00	179.52	11,100.00	-2,103.51	18.52	2,103.59	0.00	0.00	0.00	
13,400.00	90.00	179.52	11,100.00	-2,203.50	19.36	2,203.59	0.00	0.00	0.00	
13,500.00	90.00	179.52	11,100.00	-2,303.50	20.20	2,303.59	0.00	0.00	0.00	
13,600.00	90.00	179.52	11,100.00	-2,403.49	21.04	2,403.59	0.00	0.00	0.00	



Planning Report

Database:	1 - EDM Production	Local Co-ordinate Reference:	Well BULLDOG STATE COM 102H
Company:	TEXAS STANDARD OP NM LLC	TVD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Project:	LEA CO., NM (NAD83 - NME)	MD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Site:	SEC 34-T16S-R36E	North Reference:	Grid
Well:	BULLDOG STATE COM 102H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLPATH		
Design:	PLAN 1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
13,700.00	90.00	179.52	11,100.00	-2,503.49	21.88	2,503.59	0.00	0.00	0.00	
13,800.00	90.00	179.52	11,100.00	-2,603.49	22.72	2,603.59	0.00	0.00	0.00	
13,900.00	90.00	179.52	11,100.00	-2,703.48	23.56	2,703.59	0.00	0.00	0.00	
14,000.00	90.00	179.52	11,100.00	-2,803.48	24.40	2,803.59	0.00	0.00	0.00	
14,100.00	90.00	179.52	11,100.00	-2,903.48	25.24	2,903.59	0.00	0.00	0.00	
14,200.00	90.00	179.52	11,100.00	-3,003.47	26.08	3,003.59	0.00	0.00	0.00	
14,300.00	90.00	179.52	11,100.00	-3,103.47	26.92	3,103.59	0.00	0.00	0.00	
14,400.00	90.00	179.52	11,100.00	-3,203.47	27.76	3,203.59	0.00	0.00	0.00	
14,500.00	90.00	179.52	11,100.00	-3,303.46	28.60	3,303.59	0.00	0.00	0.00	
14,600.00	90.00	179.52	11,100.00	-3,403.46	29.44	3,403.59	0.00	0.00	0.00	
14,700.00	90.00	179.52	11,100.00	-3,503.46	30.28	3,503.59	0.00	0.00	0.00	
14,800.00	90.00	179.52	11,100.00	-3,603.45	31.12	3,603.59	0.00	0.00	0.00	
14,900.00	90.00	179.52	11,100.00	-3,703.45	31.96	3,703.59	0.00	0.00	0.00	
15,000.00	90.00	179.52	11,100.00	-3,803.45	32.80	3,803.59	0.00	0.00	0.00	
15,100.00	90.00	179.52	11,100.00	-3,903.44	33.64	3,903.59	0.00	0.00	0.00	
15,200.00	90.00	179.52	11,100.00	-4,003.44	34.48	4,003.59	0.00	0.00	0.00	
15,300.00	90.00	179.52	11,100.00	-4,103.43	35.32	4,103.59	0.00	0.00	0.00	
15,400.00	90.00	179.52	11,100.00	-4,203.43	36.16	4,203.59	0.00	0.00	0.00	
15,500.00	90.00	179.52	11,100.00	-4,303.43	37.00	4,303.59	0.00	0.00	0.00	
15,600.00	90.00	179.52	11,100.00	-4,403.42	37.84	4,403.59	0.00	0.00	0.00	
15,700.00	90.00	179.52	11,100.00	-4,503.42	38.68	4,503.59	0.00	0.00	0.00	
15,800.00	90.00	179.52	11,100.00	-4,603.42	39.52	4,603.59	0.00	0.00	0.00	
15,900.00	90.00	179.52	11,100.00	-4,703.41	40.36	4,703.59	0.00	0.00	0.00	
16,000.00	90.00	179.52	11,100.00	-4,803.41	41.20	4,803.59	0.00	0.00	0.00	
16,100.00	90.00	179.52	11,100.00	-4,903.41	42.04	4,903.59	0.00	0.00	0.00	
16,200.00	90.00	179.52	11,100.00	-5,003.40	42.88	5,003.59	0.00	0.00	0.00	
16,300.00	90.00	179.52	11,100.00	-5,103.40	43.72	5,103.59	0.00	0.00	0.00	
16,400.00	90.00	179.52	11,100.00	-5,203.40	44.56	5,203.59	0.00	0.00	0.00	
16,500.00	90.00	179.52	11,100.00	-5,303.39	45.40	5,303.59	0.00	0.00	0.00	
16,600.00	90.00	179.52	11,100.00	-5,403.39	46.24	5,403.59	0.00	0.00	0.00	
16,700.00	90.00	179.52	11,100.00	-5,503.39	47.08	5,503.59	0.00	0.00	0.00	
16,800.00	90.00	179.52	11,100.00	-5,603.38	47.92	5,603.59	0.00	0.00	0.00	
16,900.00	90.00	179.52	11,100.00	-5,703.38	48.76	5,703.59	0.00	0.00	0.00	
17,000.00	90.00	179.52	11,100.00	-5,803.37	49.60	5,803.59	0.00	0.00	0.00	
17,100.00	90.00	179.52	11,100.00	-5,903.37	50.44	5,903.59	0.00	0.00	0.00	
17,200.00	90.00	179.52	11,100.00	-6,003.37	51.27	6,003.59	0.00	0.00	0.00	
17,300.00	90.00	179.52	11,100.00	-6,103.36	52.11	6,103.59	0.00	0.00	0.00	
17,400.00	90.00	179.52	11,100.00	-6,203.36	52.95	6,203.59	0.00	0.00	0.00	
17,500.00	90.00	179.52	11,100.00	-6,303.36	53.79	6,303.59	0.00	0.00	0.00	
17,600.00	90.00	179.52	11,100.00	-6,403.35	54.63	6,403.59	0.00	0.00	0.00	
17,700.00	90.00	179.52	11,100.00	-6,503.35	55.47	6,503.59	0.00	0.00	0.00	
17,800.00	90.00	179.52	11,100.00	-6,603.35	56.31	6,603.59	0.00	0.00	0.00	
17,900.00	90.00	179.52	11,100.00	-6,703.34	57.15	6,703.59	0.00	0.00	0.00	
18,000.00	90.00	179.52	11,100.00	-6,803.34	57.99	6,803.59	0.00	0.00	0.00	
18,100.00	90.00	179.52	11,100.00	-6,903.34	58.83	6,903.59	0.00	0.00	0.00	
18,200.00	90.00	179.52	11,100.00	-7,003.33	59.67	7,003.59	0.00	0.00	0.00	
18,300.00	90.00	179.52	11,100.00	-7,103.33	60.51	7,103.59	0.00	0.00	0.00	
18,400.00	90.00	179.52	11,100.00	-7,203.33	61.35	7,203.59	0.00	0.00	0.00	
18,500.00	90.00	179.52	11,100.00	-7,303.32	62.19	7,303.59	0.00	0.00	0.00	
18,572.38	90.00	179.52	11,100.00	-7,375.70	62.80	7,375.97	0.00	0.00	0.00	
TD at 18572.38										



Planning Report

Database:	1 - EDM Production	Local Co-ordinate Reference:	Well BULLDOG STATE COM 102H
Company:	TEXAS STANDARD OP NM LLC	TVD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Project:	LEA CO., NM (NAD83 - NME)	MD Reference:	3870' GL + 30' KB @ 3900.00usft (Original Well Elev)
Site:	SEC 34-T16S-R36E	North Reference:	Grid
Well:	BULLDOG STATE COM 102H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLPATH		
Design:	PLAN 1		

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
- Shape									
BSC 102H FTP: 2543' F	0.00	0.00	0.00	328.30	-1.90	684,701.40	846,996.50	32.87830102	-103.33771159
- plan misses target center by 328.31usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Point									
BSC 102H LTP'BHL: 100'	0.00	0.00	11,100.00	-7,375.70	62.80	676,997.40	847,061.20	32.85712714	-103.33773751
- plan hits target center									
- Point									

Casing Points					
Measured Depth	Vertical Depth	Name	Casing Diameter	Hole Diameter	
(usft)	(usft)		(")	(")	
18,572.38	11,100.00	20" Casing	20	24	

Plan Annotations					
Measured Depth	Vertical Depth	Local Coordinates		Comment	
(usft)	(usft)	+N/-S	+E/-W		
(usft)	(usft)	(usft)	(usft)		
2,150.00	2,150.00	0.00	0.00	START NUDGE: 2°/100'	
5,913.83	5,900.12	317.38	-1.84	START DROP: 2°/100'	
6,164.03	6,150.00	328.30	-1.90	BACK TO VERTICAL	
10,541.07	10,527.04	328.30	-1.90	KOP: 10°/100'	
11,441.07	11,100.00	-244.64	2.91	EOC; HOLD TO TD	
18,572.38	11,100.00	-7,375.70	62.80	TD at 18572.38	

State of New Mexico
 Energy, Minerals and Natural Resources Department

Submit Electronically
 Via E-permitting

Oil Conservation Division
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: Texas Standard Operating NM, LLC **OGRID:** 329818 **Date:** 03 / 20 / 2026

II. Type: Original Amendment due to 19.15.27.9.D(6)(a) NMAC 19.15.27.9.D(6)(b) NMAC Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Bulldog State Com 101H	NA	SEC 34-T16S-R36E	2,215' FSL 1240' FEL	770	705	1105

IV. Central Delivery Point Name: Bulldog SC CTB Sales [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Bulldog State Com 101H	NA	NA	NA	NA	NA	NA

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system will will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator does does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

Attach Operator’s plan to manage production in response to the increased line pressure.

XIV. Confidentiality: Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 
Printed Name: JENNIFER ELROD
Title: SR. REGULATORY ANALYST
E-mail Address: JELROD@NTGGLOBAL.COM
Date: 3/20/2026
Phone: 940-452-6214
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

VI. Separation Equipment

Operator will install and operate separation equipment designed to handle combined production from a **multi-well facility consisting of up to three (3) gas lift wells.**

Equipment will be sized based on aggregate peak and average liquid and gas production rates, including returned gas lift injection volumes.

The facility will utilize staged separation to optimize hydrocarbon recovery and maximize gas capture, including:

- **Three (3) 8' x 15' 3-phase inlet separators (250 PSIG design, ~75 PSIG operating, one per well)**
- **One (1) 8' x 15' 3-phase FWKO (250 PSIG design, ~50 PSIG operating)**
- **One (1) 8' x 20' heater treater (250 PSIG design, ~45 PSIG operating)**
- **One (1) 48" x 45" vertical vapor recovery tower (VRT) (125 PSIG design, ~5 PSIG operating)**

This pressure cascade (higher-pressure separation followed by intermediate-pressure treating and controlled pressure reduction to near-atmospheric conditions prior to storage) is designed to maximize gas recovery upstream and minimize flash gas losses to tanks.

Storage and vapor handling and control equipment will include:

- **Three (3) 30' 1000 bbl oil tanks**
- **Three (3) 30' 1000 bbl produced water tanks**
- **One (1) high-pressure (HP) VRU (heater treater / VRT vapors)**
- **One (1) low-pressure (LP) VRU (tank vapors)**
- **One (1) combination LP/HP combustor (flare)**

All separator, FWKO, heater treater, VRT, and tank vapors will be routed through a **closed vent system** to VRUs, field compression, sales, or the combustor (flare) as a backup control device.

Separation equipment is designed in accordance with API 12J and Permian Basin practices to:

- Provide adequate retention time and vapor disengagement
- Handle variable gas lift conditions, including surging and fluctuating GLR

- Prevent liquid carryover and gas blowby

This configuration ensures that **flash gas is recovered upstream of storage tanks via the VRT operating at approximately 5 PSIG and routed to the HP VRU**, minimizing emissions and maximizing beneficial gas use.

VII. Operational Practices

Operator will conduct operations in accordance with 19.15.27.8 NMAC and standard Permian Basin practices to minimize venting and ensure proper equipment performance at a multi-well gas lift facility.

Operational practices include:

- Monitoring and adjusting **gas lift injection rates** via the **500 HP gas lift compressor** to maintain stable production and minimize excess gas production to surface
- Operating individual inlet separators per well to stabilize flow prior to commingling and reduce facility upsets
- Coordinating production across all three wells to maintain stable separator conditions and avoid overloading equipment
- Maintaining proper pressure and liquid levels across inlet separators (~75 PSIG), FWKO (~75 PSIG), heater treater (~45 PSIG), and VRT (~5 PSIG) to optimize staged separation and flash gas recovery
- Routing all produced gas and vapors through closed vent systems to **VRUs, field compression, sales, or combustor (flare)**
- Utilizing the **HP VRU** to capture vapors from pressurized and intermediate/low-pressure vessels (heater treater and VRT) and the **LP VRU** to capture tank vapors
- Utilizing the **combustor (flare)** during upset conditions, maintenance, or when gas cannot be routed to sales or VRU systems
- Performing routine inspections of all wells, flowlines, separators, tanks, VRUs, compressor systems, and associated equipment to identify and repair leaks or malfunctions
- Maintaining all control and emissions equipment, including VRUs and combustor, in proper working condition

Operator will maintain records of inspections, operational adjustments, and maintenance activities as required to demonstrate compliance with 19.15.27 NMAC.

VIII. Best Management Practices

Operator will implement the following best management practices (BMPs), consistent with Permian Basin multi-well facility operations, to minimize venting during maintenance and upset conditions:

- Schedule maintenance, when practical, during periods of reduced production and lower gas lift injection rates across the facility
- Reduce or temporarily shut in gas lift injection from the **500 HP compressor** prior to opening equipment to minimize gas volumes
- Utilize both **HP and LP VRUs** to capture vapors during normal operations and, where feasible, during maintenance activities
- Utilize the **combustor (flare)** as a backup control device to minimize venting when gas cannot be captured
- Depressurize inlet separators (~75 PSIG), FWKO (~75 PSIG), heater treater (~45 PSIG), and VRT (~5 PSIG) in a controlled manner and route gas to **sales, compression, VRUs, or combustor** when available
- Isolate only the necessary wells or equipment to minimize total gas release across the facility
- Coordinate maintenance activities across all three wells to avoid repeated or unnecessary blowdowns
- Maintain VRU operation and proper tank pressure management to minimize tank venting
- Complete maintenance activities efficiently and return wells and equipment to service promptly

Operator will continuously evaluate facility operations and implement improvements to reduce emissions and maximize gas capture in compliance with 19.15.27 NMAC.

IX. Process Flow Description

Production from each of the three (3) gas lift wells is routed individually to a dedicated **8' x 15' 3-phase inlet separator**, where initial separation of oil, water, and gas occurs at approximately 75 PSIG.

From the inlet separators:

- **Produced water** is routed to the central **8' x 15' 3-phase FWKO** for further separation and treatment
- **Oil** is routed directly to the **8' x 20' heater treater**, operating at approximately 45 PSIG, for emulsion breaking and final oil treating
- **Gas** is routed to field compression, sales, or used for gas lift injection via the **500 HP gas lift compressor**

Within the FWKO, produced water is further separated from any remaining hydrocarbons and routed to the **produced water storage tanks** for transfer via the water transfer pump.

Oil from the heater treater flows to the **48" x 45" vertical vapor recovery tower (VRT)**, where pressure is reduced to approximately 5 PSIG to allow controlled flash gas separation prior to storage. Oil from the VRT is then routed to the **oil storage tanks** and subsequently transferred to sales through the **LACT unit**.

Gas and vapors from each stage are handled as follows:

- Gas from the **inlet separators and FWKO** is routed to compression and/or sales
- Flash gas from the **heater treater and VRT** is routed to the **high-pressure (HP) VRU** for recovery
- Vapors from the **oil and water storage tanks** are routed to the **low-pressure (LP) VRU**

All vapor streams are routed through a **closed vent system** designed to maximize gas capture. When gas cannot be routed to sales or VRU systems due to operational constraints, maintenance, or upset conditions, vapors will be directed to the **combination LP/HP combustor (flare)** for controlled combustion.

This process configuration provides staged separation and **controlled flash gas recovery upstream of atmospheric storage via the VRT operating at approximately 5 PSIG**, maximizing hydrocarbon recovery, maintaining stable facility operation, and minimizing emissions.

Final Statement

Operator does not intend to conduct routine venting. All produced gas will be routed to sales, compression, VRU systems, or an approved combustor (flare), with the objective of maximizing gas capture and minimizing emissions.